


CSE 3318

Week of 07/18/2022

Instructor : Donna French

Coding Assignment 4

n	VM tics			Omega tics		
	QSR	QSM	QSRND	QSR	QSM	QSRND
1,024	1XX	1XX	1XX	1XX	1XX	2XX
10,000	2XXX	2XXX	3XXX	1XXX	2XXX	1XXX
50,000	11XXX	14XXX	18XXX	8XXX	9XXX	9XXX
100,000	23XXX	23XXX	25XXX	18XXX	19XXX	19XXX
500,000	92XXX	90XXX	11X,XXX	10X,XXX	11X.XXX	11X,XXX
1,000,000	33X,XXX	28X,XXX	29X,XXX	31X,XXX	31X,XXX	33X,XXX
2,000,000	4XX,XXX	42X,XXX	49X,XXX	47X,XXX	47X,XXX	49X,XXX

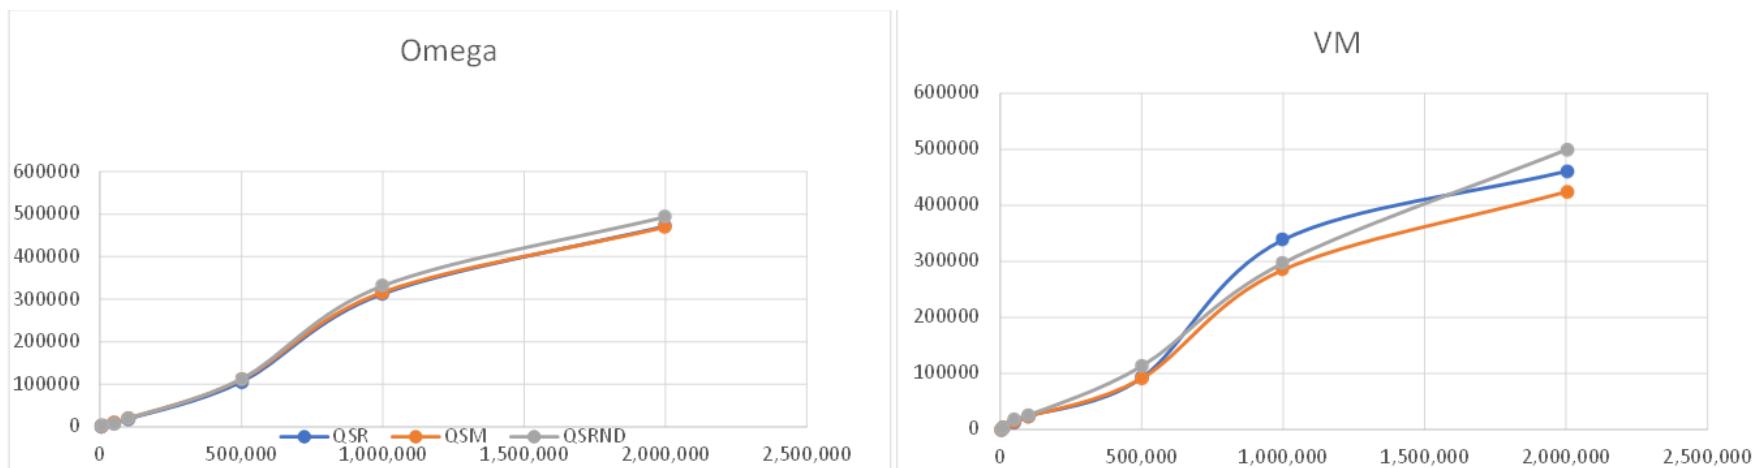

Coding Assignment 4


	VM tics - 100,000					Omega tics - 100,000				
	T1	T2 1/4 ordered 3/4 random	T3 1/2 ordered 1/2 random	T4 3/4 ordered 1/4 random	T5 Ordered	T1	T2 1/4 ordered 3/4 random	T3 1/2 ordered 1/2 random	T4 3/4 ordered 1/4 random	T5 Ordered
QSR	23XXX	22XXX	70XXXX	32,XXX,XXX	36,XXX,XXX	18XXX	18XXX	7XXXXX	31,XXX,XXX	33,XXX,XXX
QSM	25XXXX	24XXX	24XXX	13XXX	12XXX	18XXX	18XXX	19XXX	10XXX	9XXX
QRND	26XXX	26XXX	24XXX	15XXX	18XXX	20XXX	19XXX	17XXX	15XXX	14XXX
qsort()	35XXX	30XXX	22XXX	18XXX	14XXX					

The more sorted our data, the worse our quick sort with right pivot did.

Middle and random pivot were still OK.

Demonstration of why quick sort has a worst case run time and a best/average run time.

"Sortedness" of the data can matter GREATLY!!

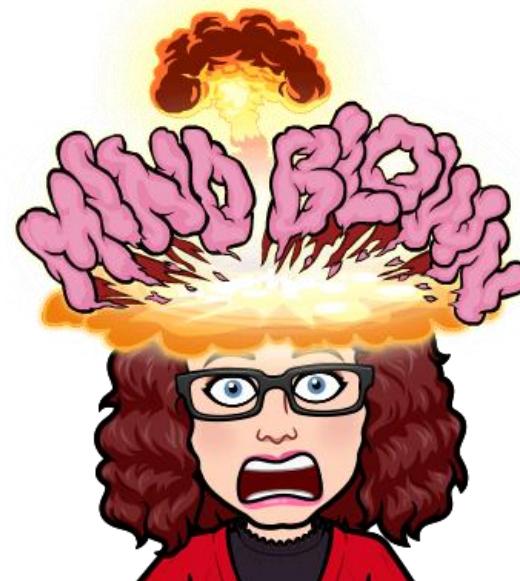

Coding Assignment 4



How would the `qsort()` function built into C do on this data?

Would it experience the same issues?

It is supposed to be generic and work for everything.

Coding Assignment 4

n	VM tics				Omega tics		
	QSR	QSM	QSRND	qsort()	QSR	QSM	QSRND
1,024	1XX	1XX	1XX	797	1XX	1XX	2XX
10,000	2XXX	2XXX	3XXX	7071	1XXX	2XXX	1XXX
50,000	11XXX	14XXX	18XXX	27253	8XXX	9XXX	9XXX
100,000	23XXX	23XXX	25XXX	35726	18XXX	19XXX	19XXX
500,000	92XXX	90XXX	11X,XXX	218709	10X,XXX	11X,XXX	11X,XXX
1,000,000	33X,XXX	28X,XXX	29X,XXX	390949	31X,XXX	31X,XXX	33X,XXX
2,000,000	4XX,XXX	42X,XXX	49X,XXX	846861	47X,XXX	47X,XXX	49X,XXX

	VM tics - 100,000					Omega tics - 100,000				
	T1	T2 1/4 ordered 3/4 random	T3 1/2 ordered 1/2 random	T4 3/4 ordered 1/4 random	T5	T1	T2 1/4 ordered 3/4 random	T3 1/2 ordered 1/2 random	T4 3/4 ordered 1/4 random	T5
	Random	Ordered	Random	Ordered	Random	Random	Ordered	Random	Ordered	Ordered
QSR	23XXX	22XXX	70XXXX	32,XXX,XXX	36,XXX,XXX	18XXX	18XXX	7XXXXX	31,XXX,XXX	33,XXX,XXX
QSM	25XXXX	24XXX	24XXX	13XXX	12XXX	18XXX	18XXX	19XXX	10XXX	9XXX
QSRND	26XXX	26XXX	24XXX	15XXX	18XXX	20XXX	19XXX	17XXX	15XXX	14XXX
qsort()	35562	30007	22866	18876	14476					

Coding Assignment 3

How does `qsort()` in C pick a pivot?

Choose the pivot element using a median-of-three decision tree.

This reduces the probability of selecting a bad pivot value and eliminates certain extraneous comparisons.

Select median value from among LO, MID, and HI. Rearrange LO and HI so the three values are sorted.

This lowers the probability of picking a pathological pivot value and skips a comparison for both the LEFT_PTR and RIGHT_PTR in the while loops.




Coding Assignment 4

Only quicksorts `TOTAL_ELEMS / MAX_THRESH` partitions, leaving **insertion sort** to order the `MAX_THRESH` items within each partition.

```
#define MAX_THRESH 4
```

This is a big win, since insertion sort is faster for small, mostly sorted array segments.

Once the `BASE_PTR` array is partially sorted by quicksort, the rest is completely sorted using insertion sort, since this is efficient for partitions below `MAX_THRESH` size. `BASE_PTR` points to the beginning of the array to sort, and `END_PTR` points at the very last element in the array (*not* one beyond it!).

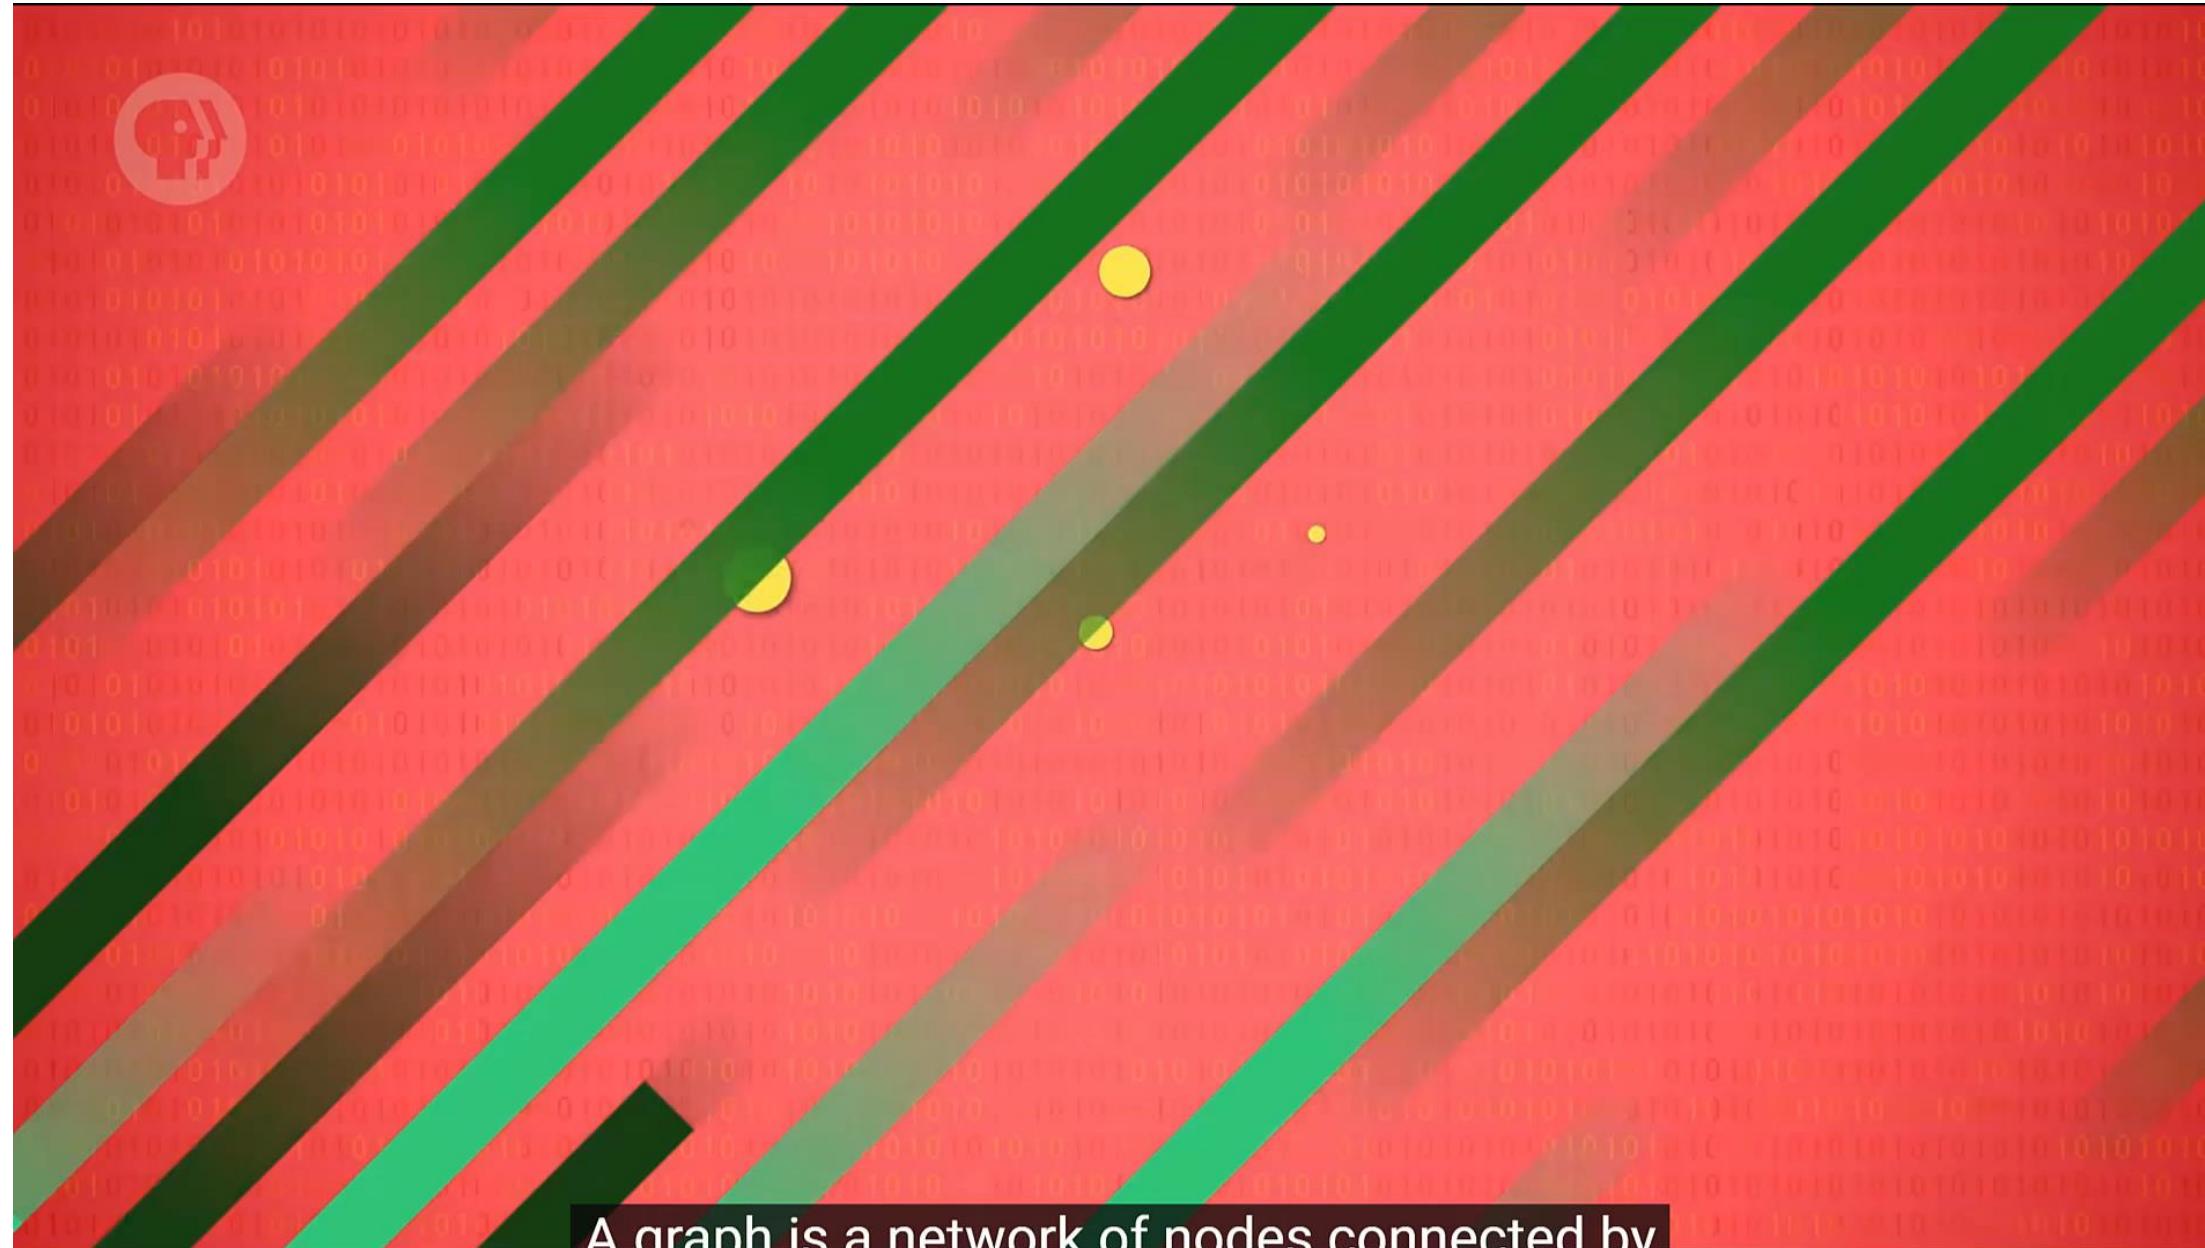

A graph is a network of nodes connected by

Dijkstra's Algorithm

Dijkstra's Shortest Path First Algorithm (SPF)


Works on a weighted graph.

Starts with an initial vertex and has a goal vertex.


Finds the path with the lowest cost where the cost is based on the weights assigned to edges.

Path may not be unique.

Dijkstra's Algorithm

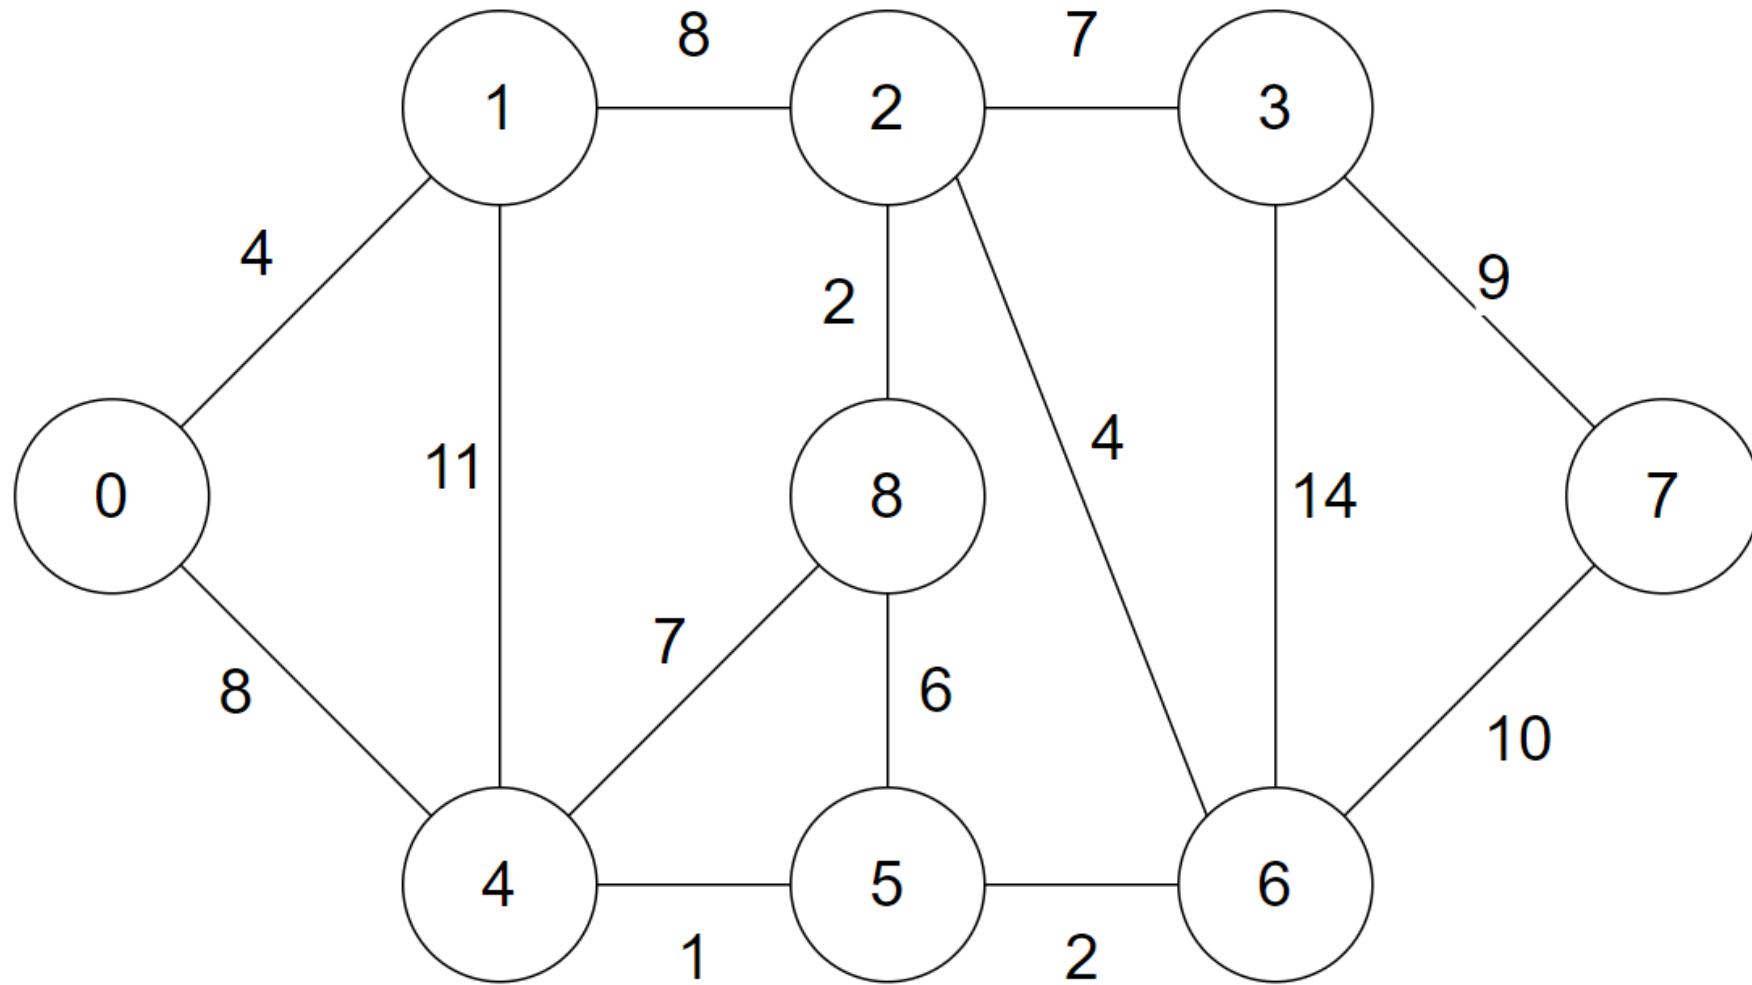

Dijkstra's Algorithm

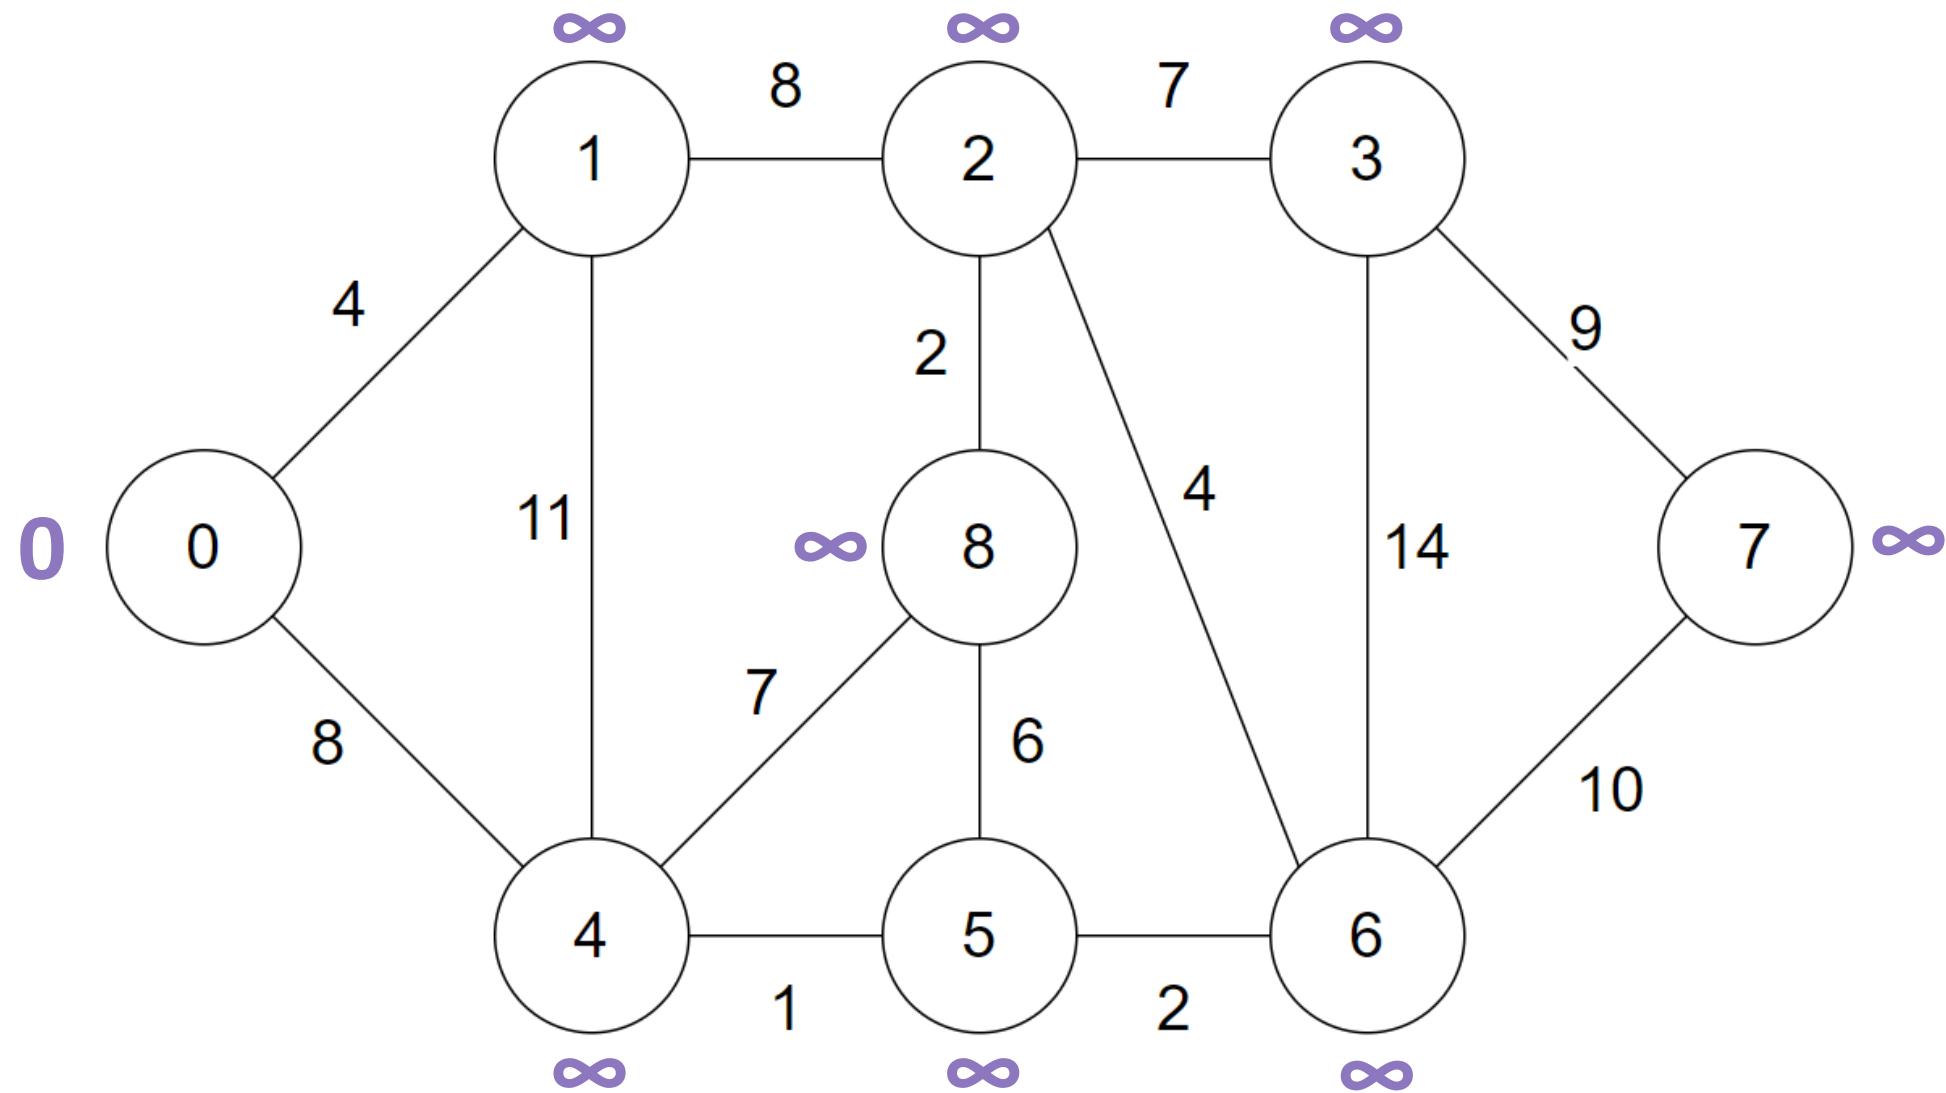


$$d(u) + c(u,v) < d(v)$$

Dijkstra's Algorithm

$$0 + 4 < \infty$$


if $(d(u) + c(u,v) < d(v))$
 $d(v) = d(u) + c(u,v)$

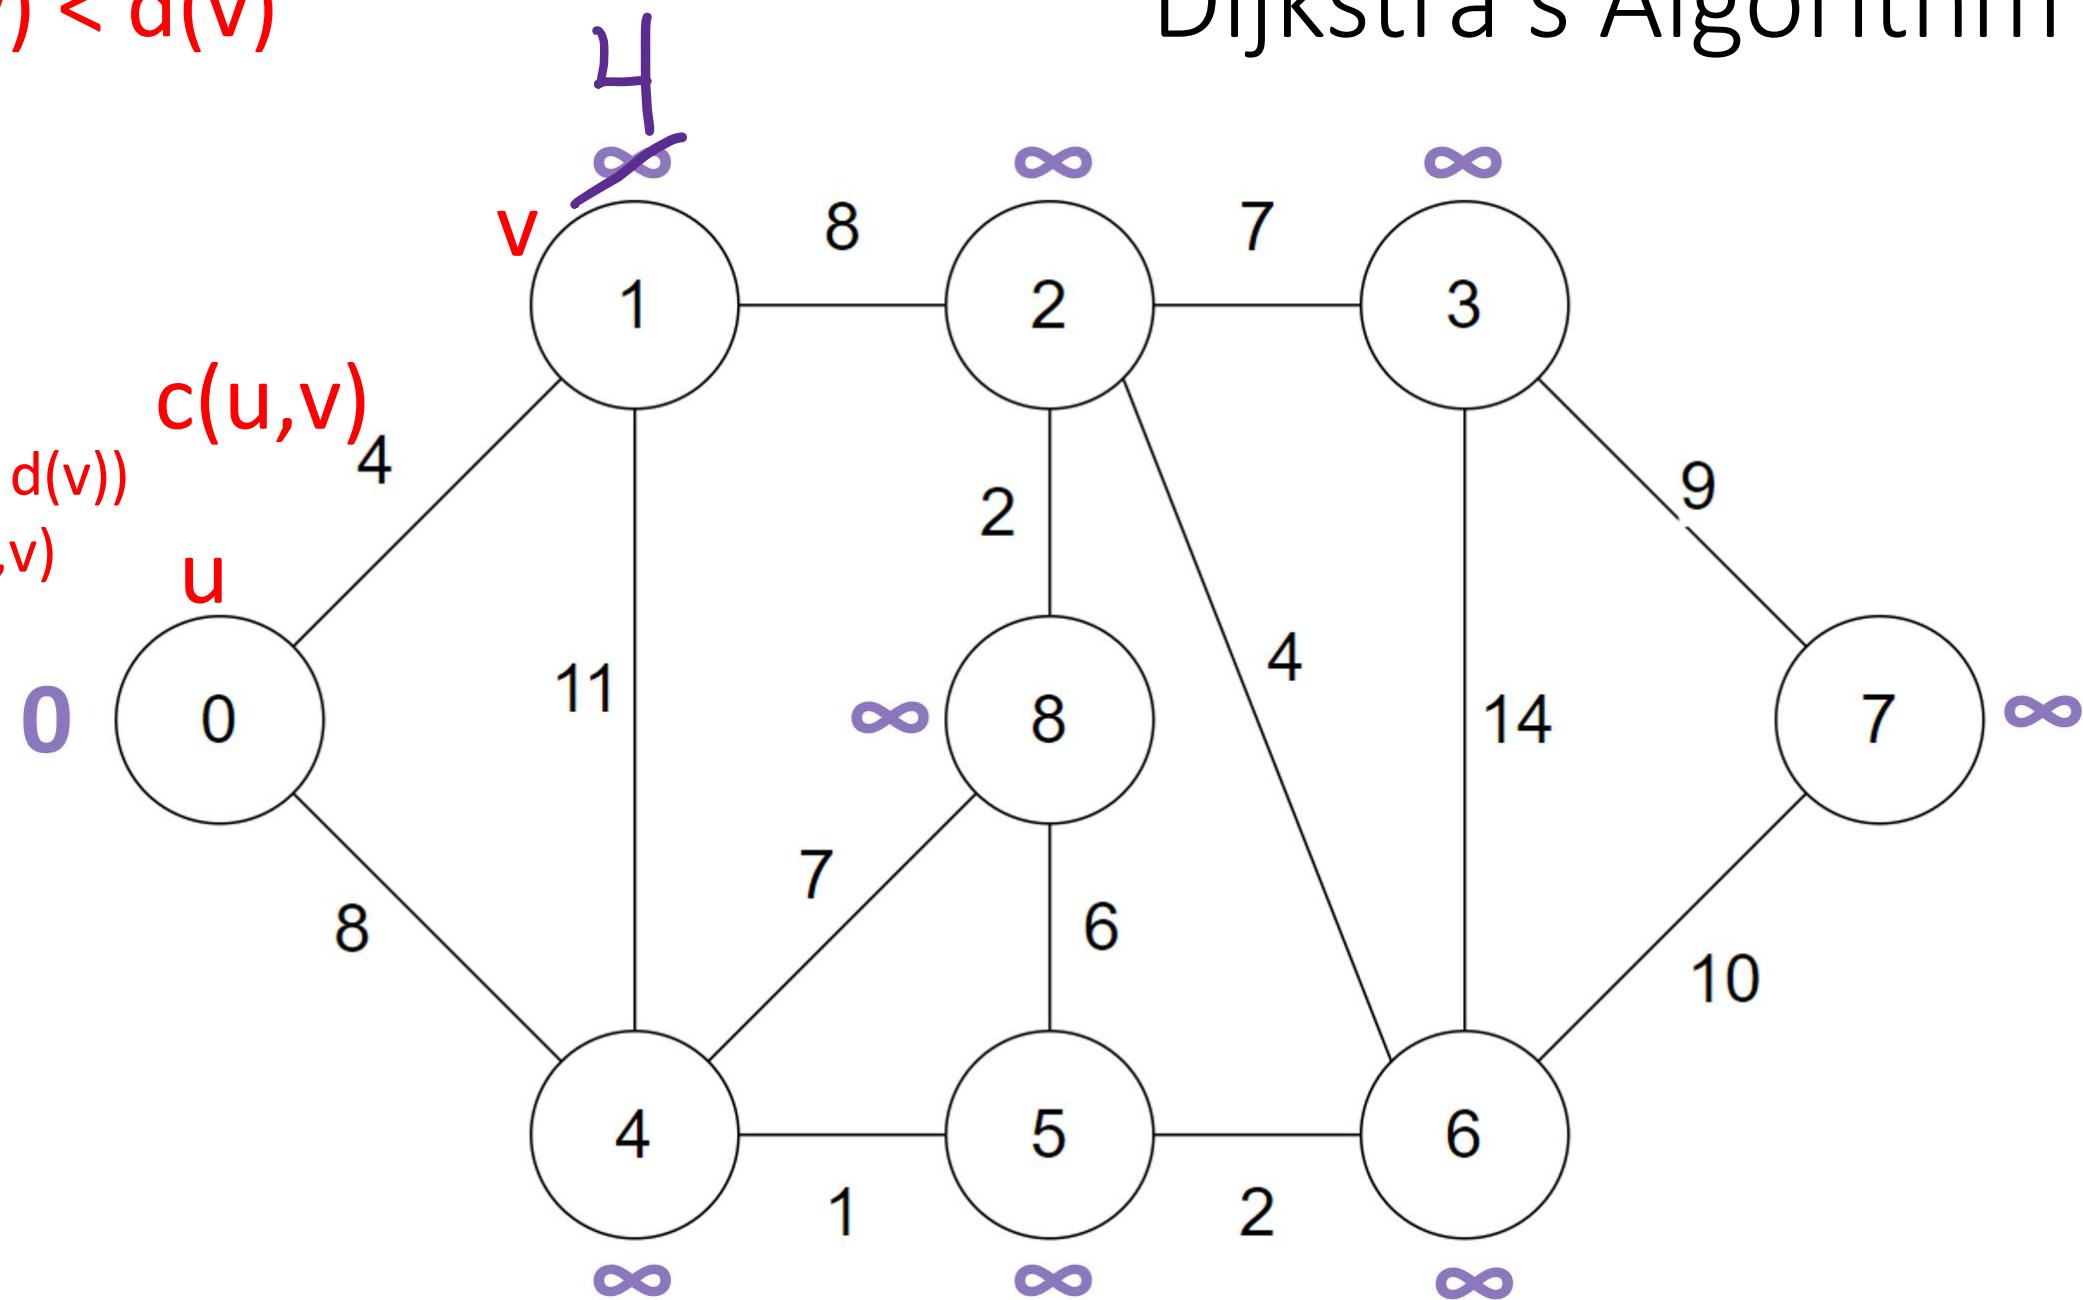

Dijkstra's Algorithm


if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$

if ($0 + 8 < \infty$)
 $d(v) = 0 + 8$
 $d(v) = 8$

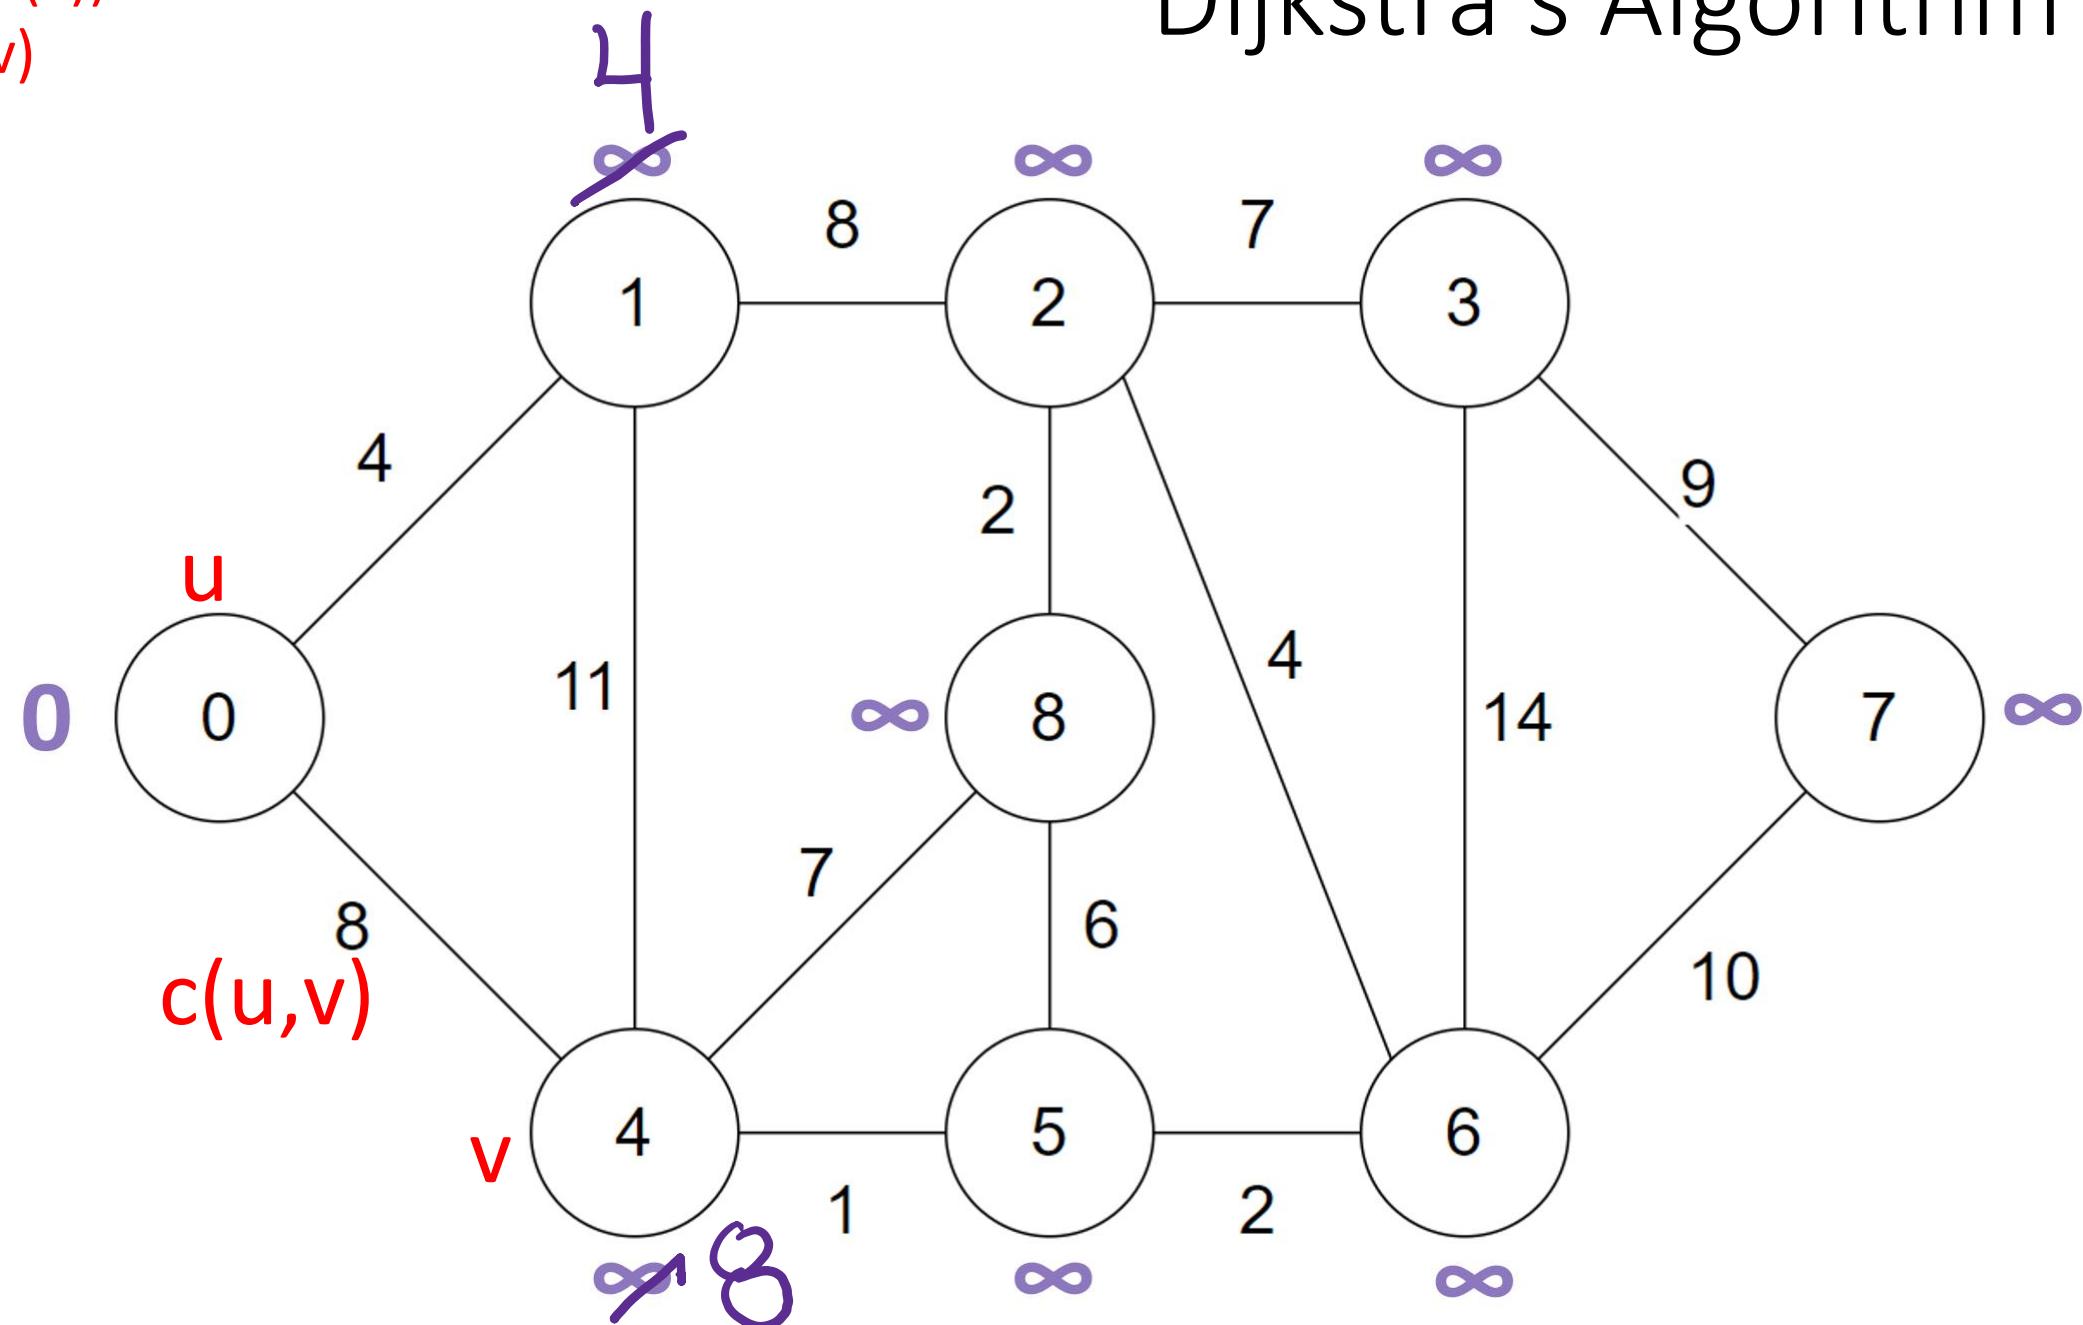

Dijkstra's Algorithm


Now we mark Vertex 0 as "visited"
meaning that we have explored all incident edges.

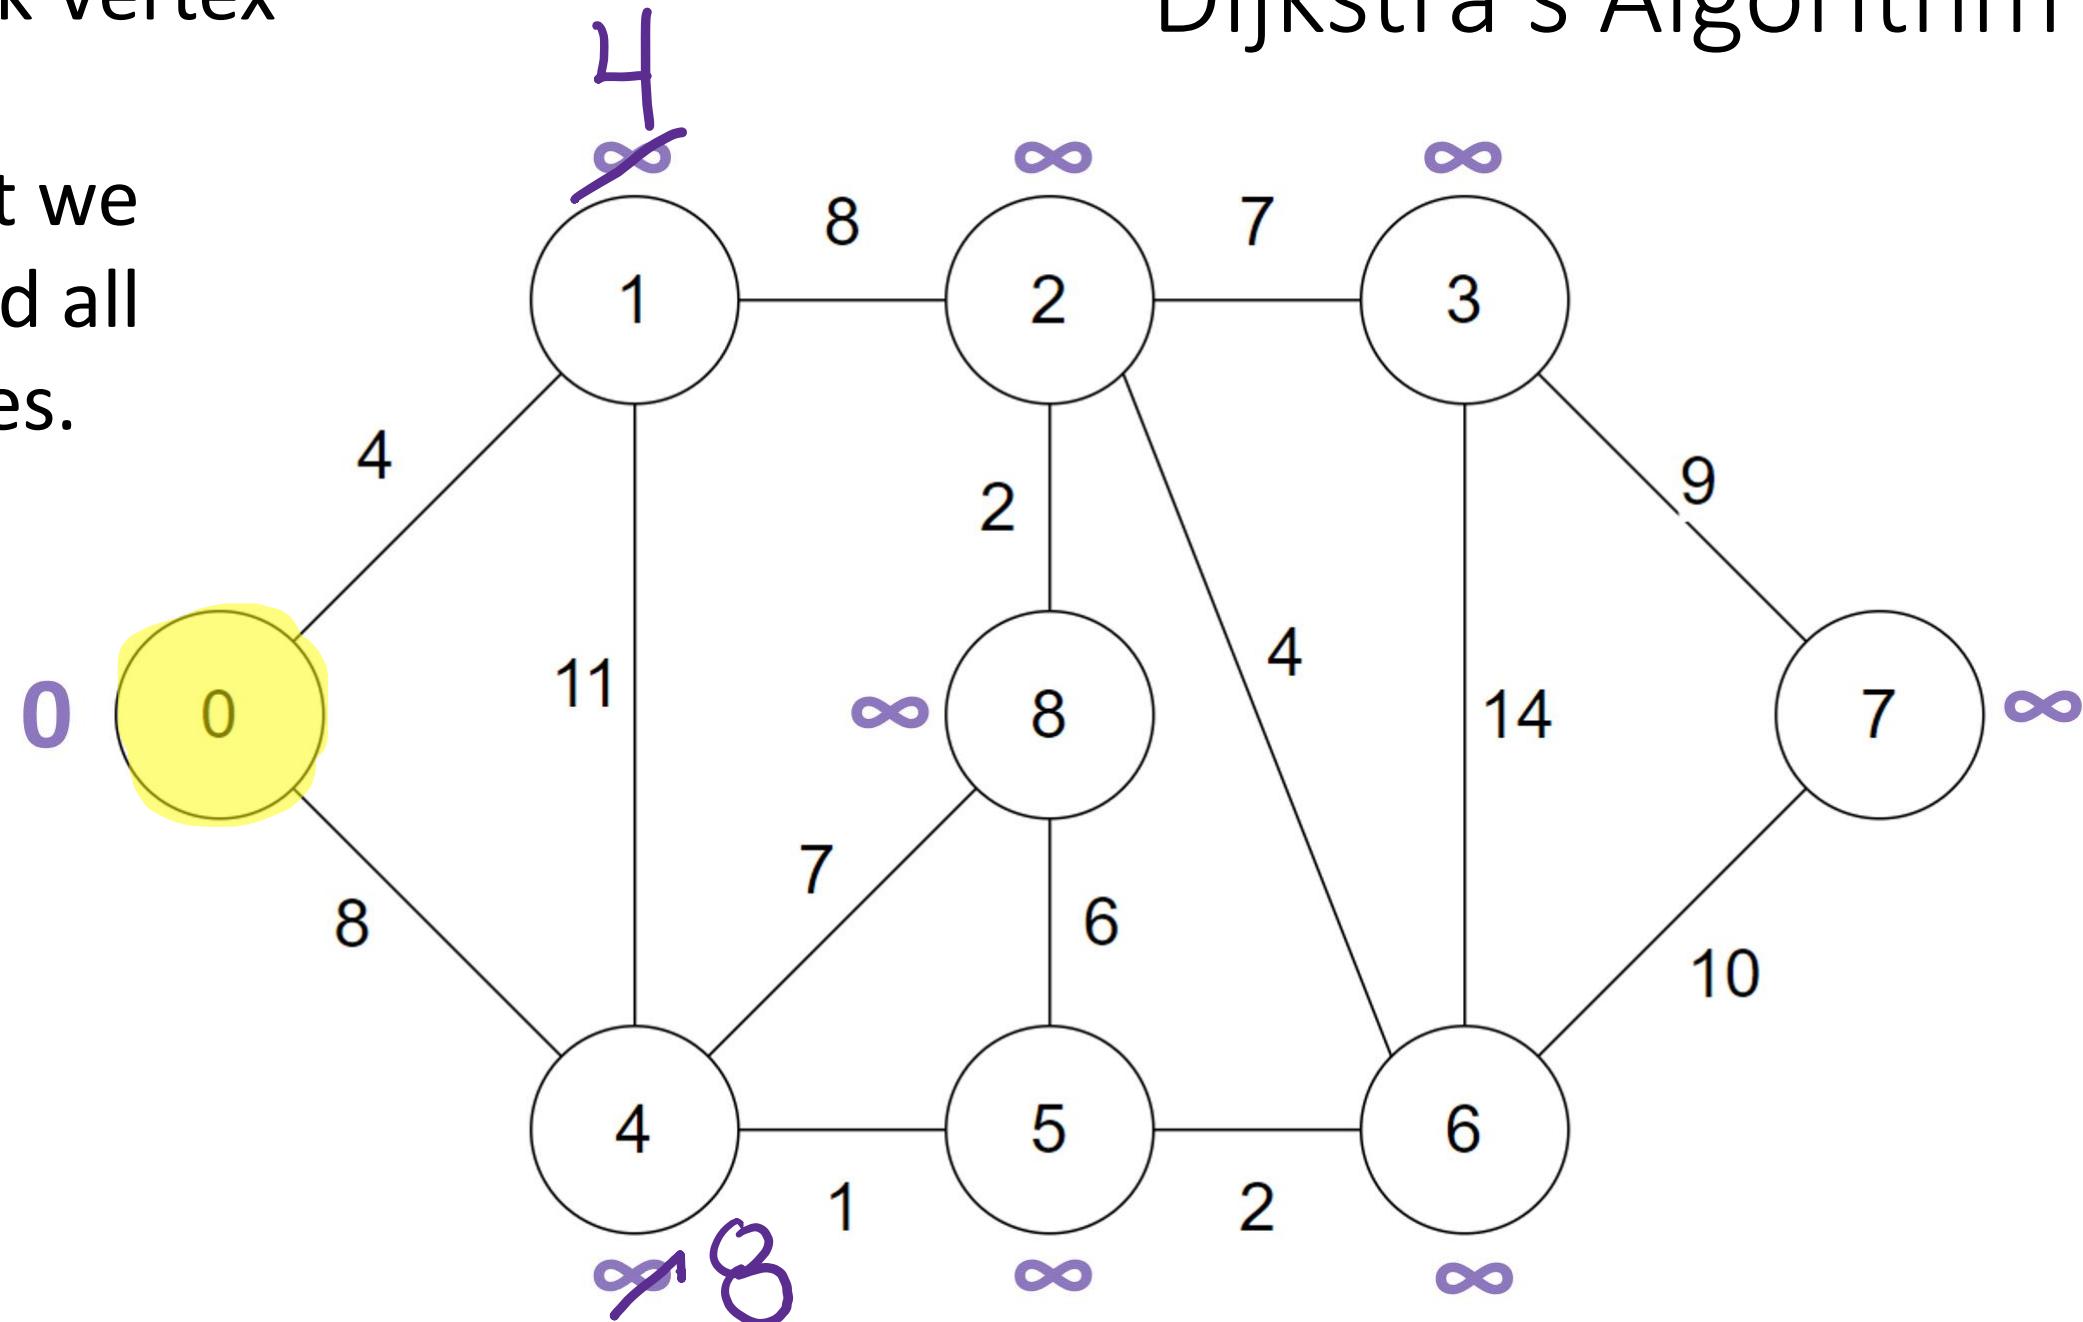

Now we pick the Vertex with the **smallest** distance value – the smallest $d(u)$

- 0 – already visited
- 1 – $d(u)$ of 4
- 2 – $d(u)$ of ∞
- 3 – $d(u)$ of ∞
- 4 – $d(u)$ of 8
- 5 – $d(u)$ of ∞
- 6 – $d(u)$ of ∞
- 7 – $d(u)$ of ∞
- 8 – $d(u)$ of ∞


Dijkstra's Algorithm

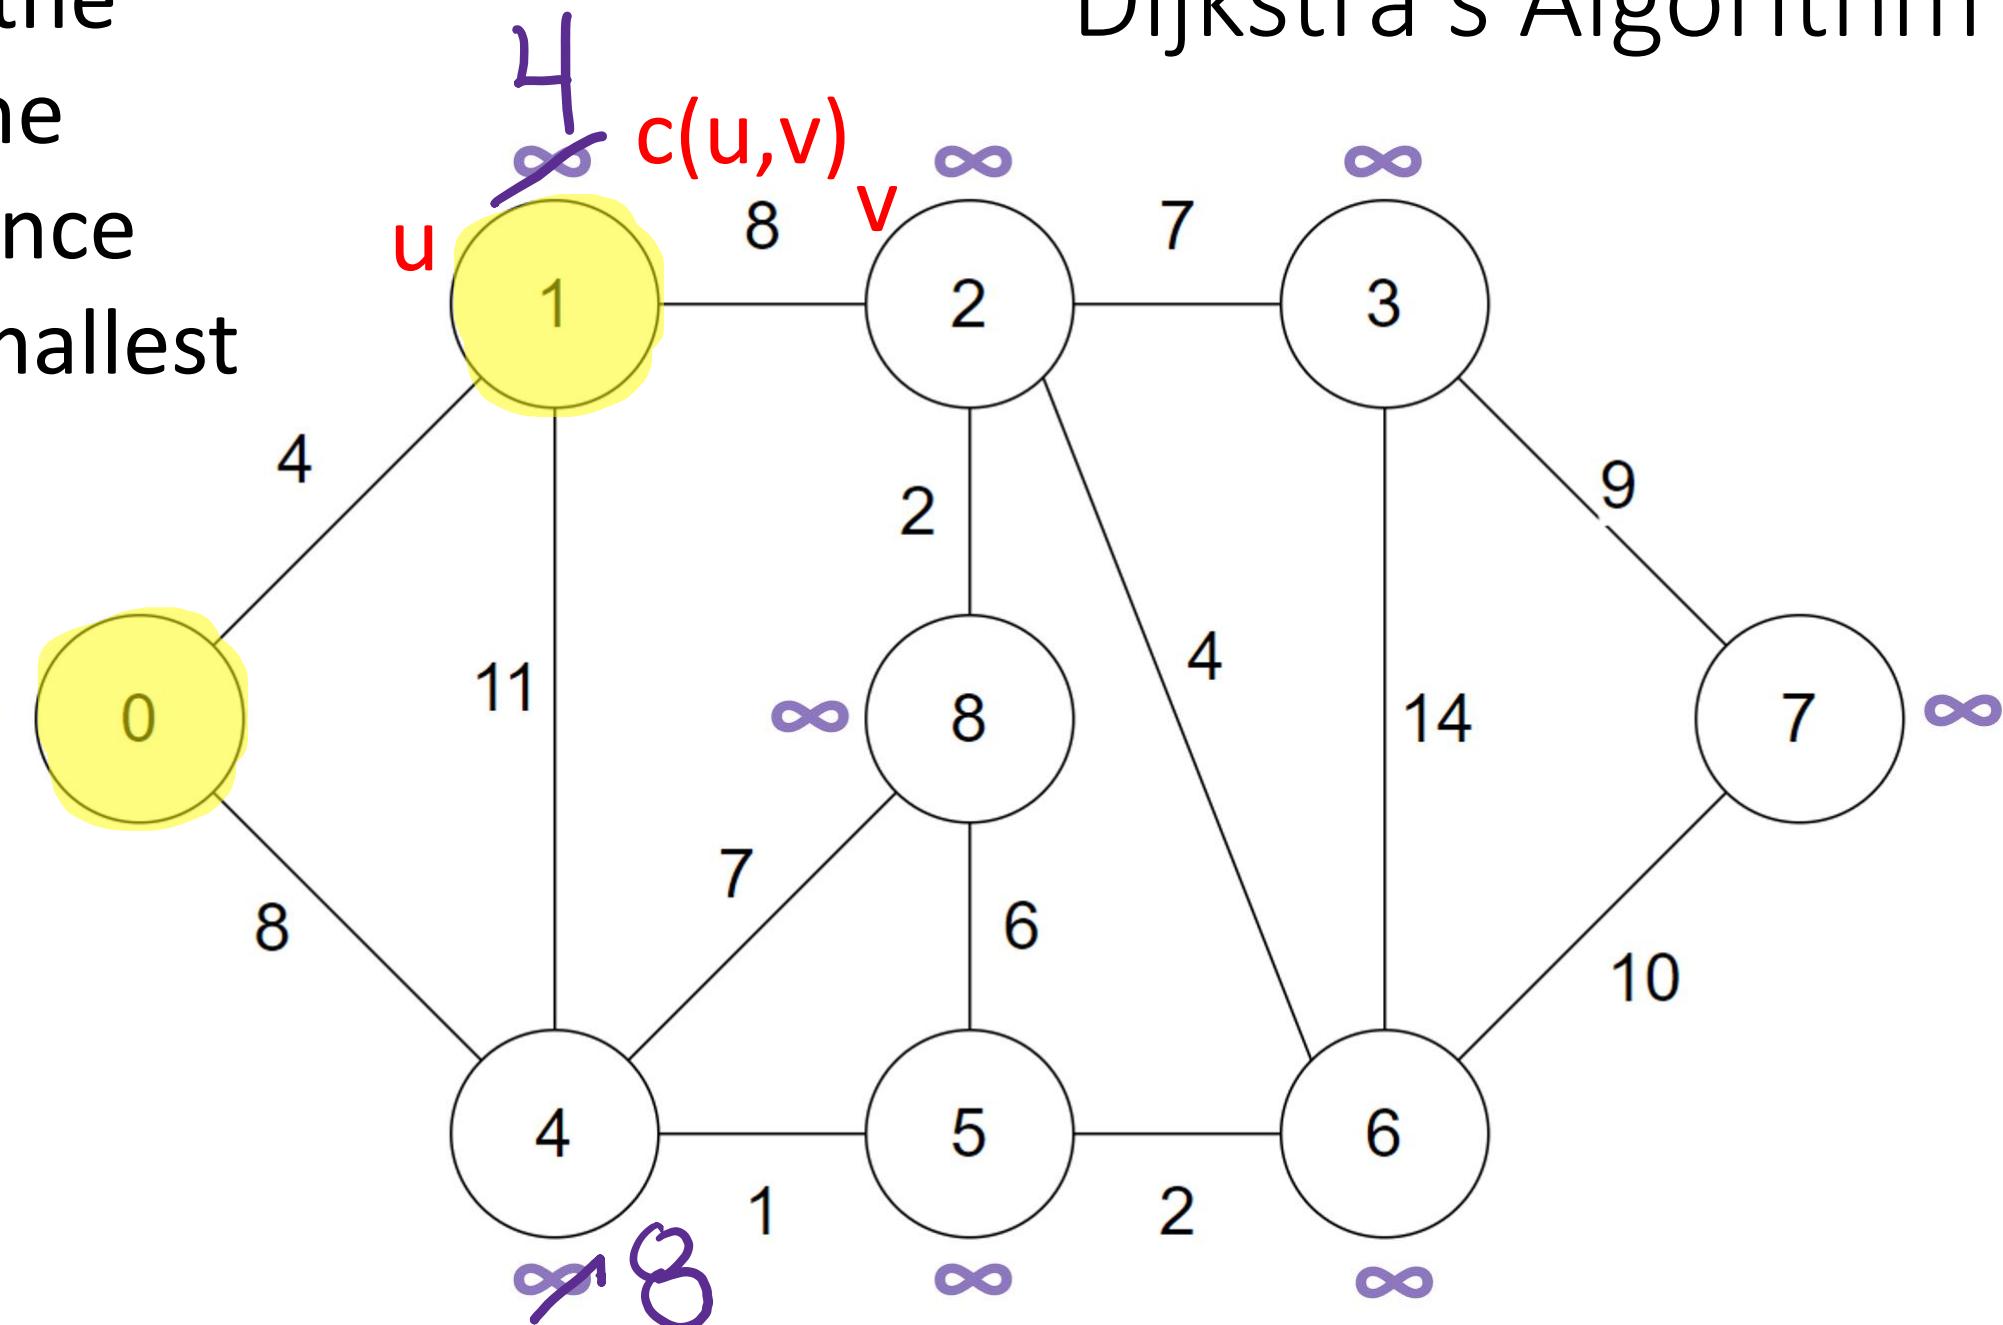

Dijkstra's Algorithm

if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$

if ($4 + 8 < \infty$)
 $d(v) = 4 + 8$
 $d(v) = 12$

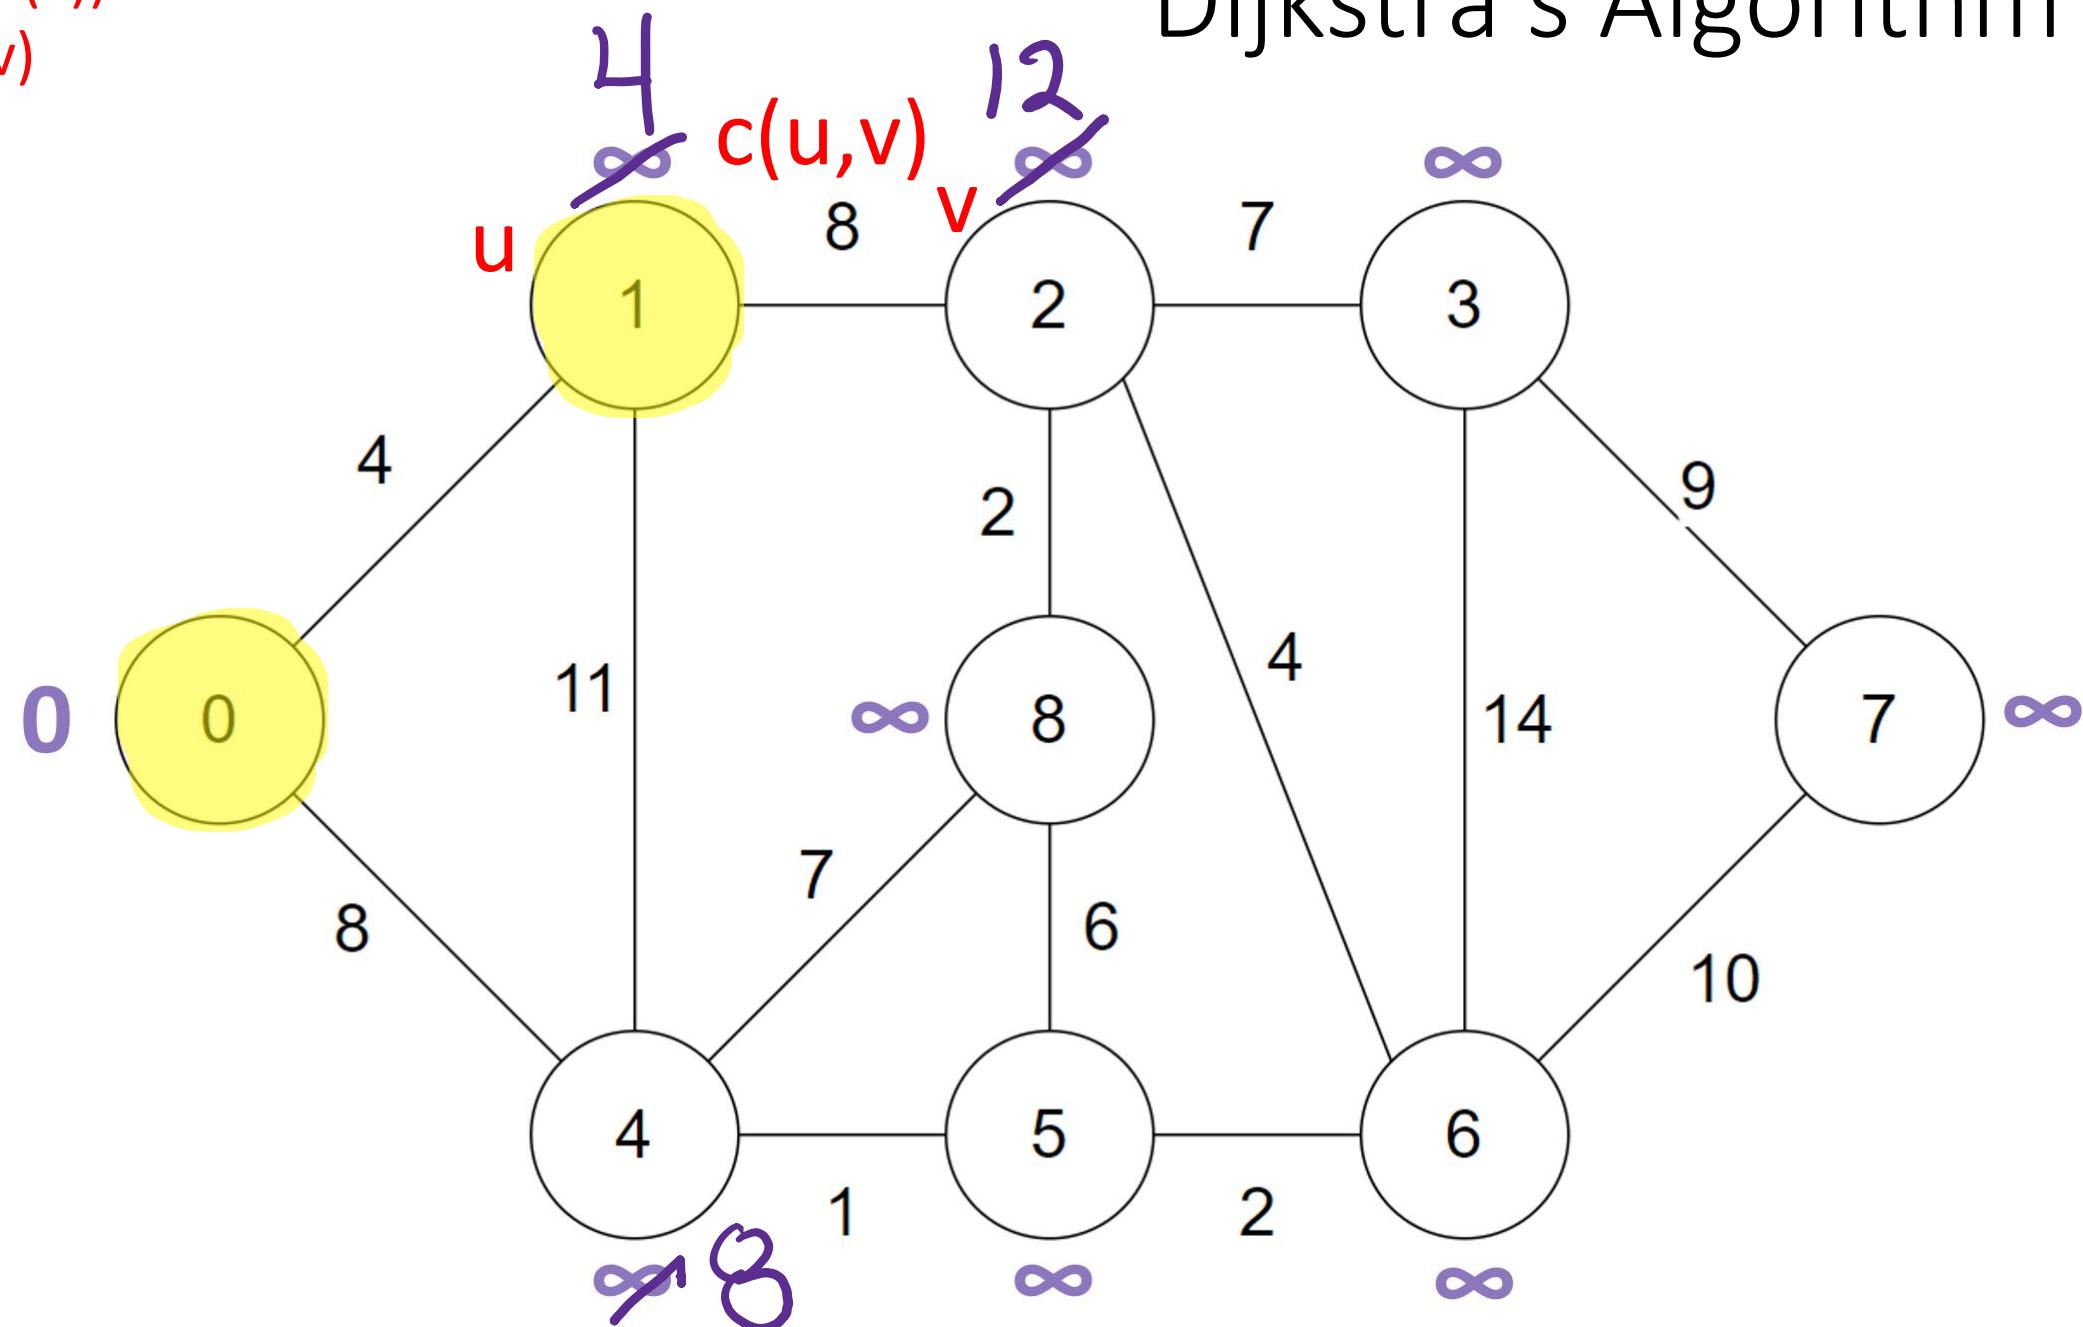


Dijkstra's Algorithm

if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$

if ($4 + 11 < 8$)

15 is greater than **0**
the existing value of
Vertex 4 (which is 8).
If the existing value is
less than our new
calculation, then we
keep the original
value.

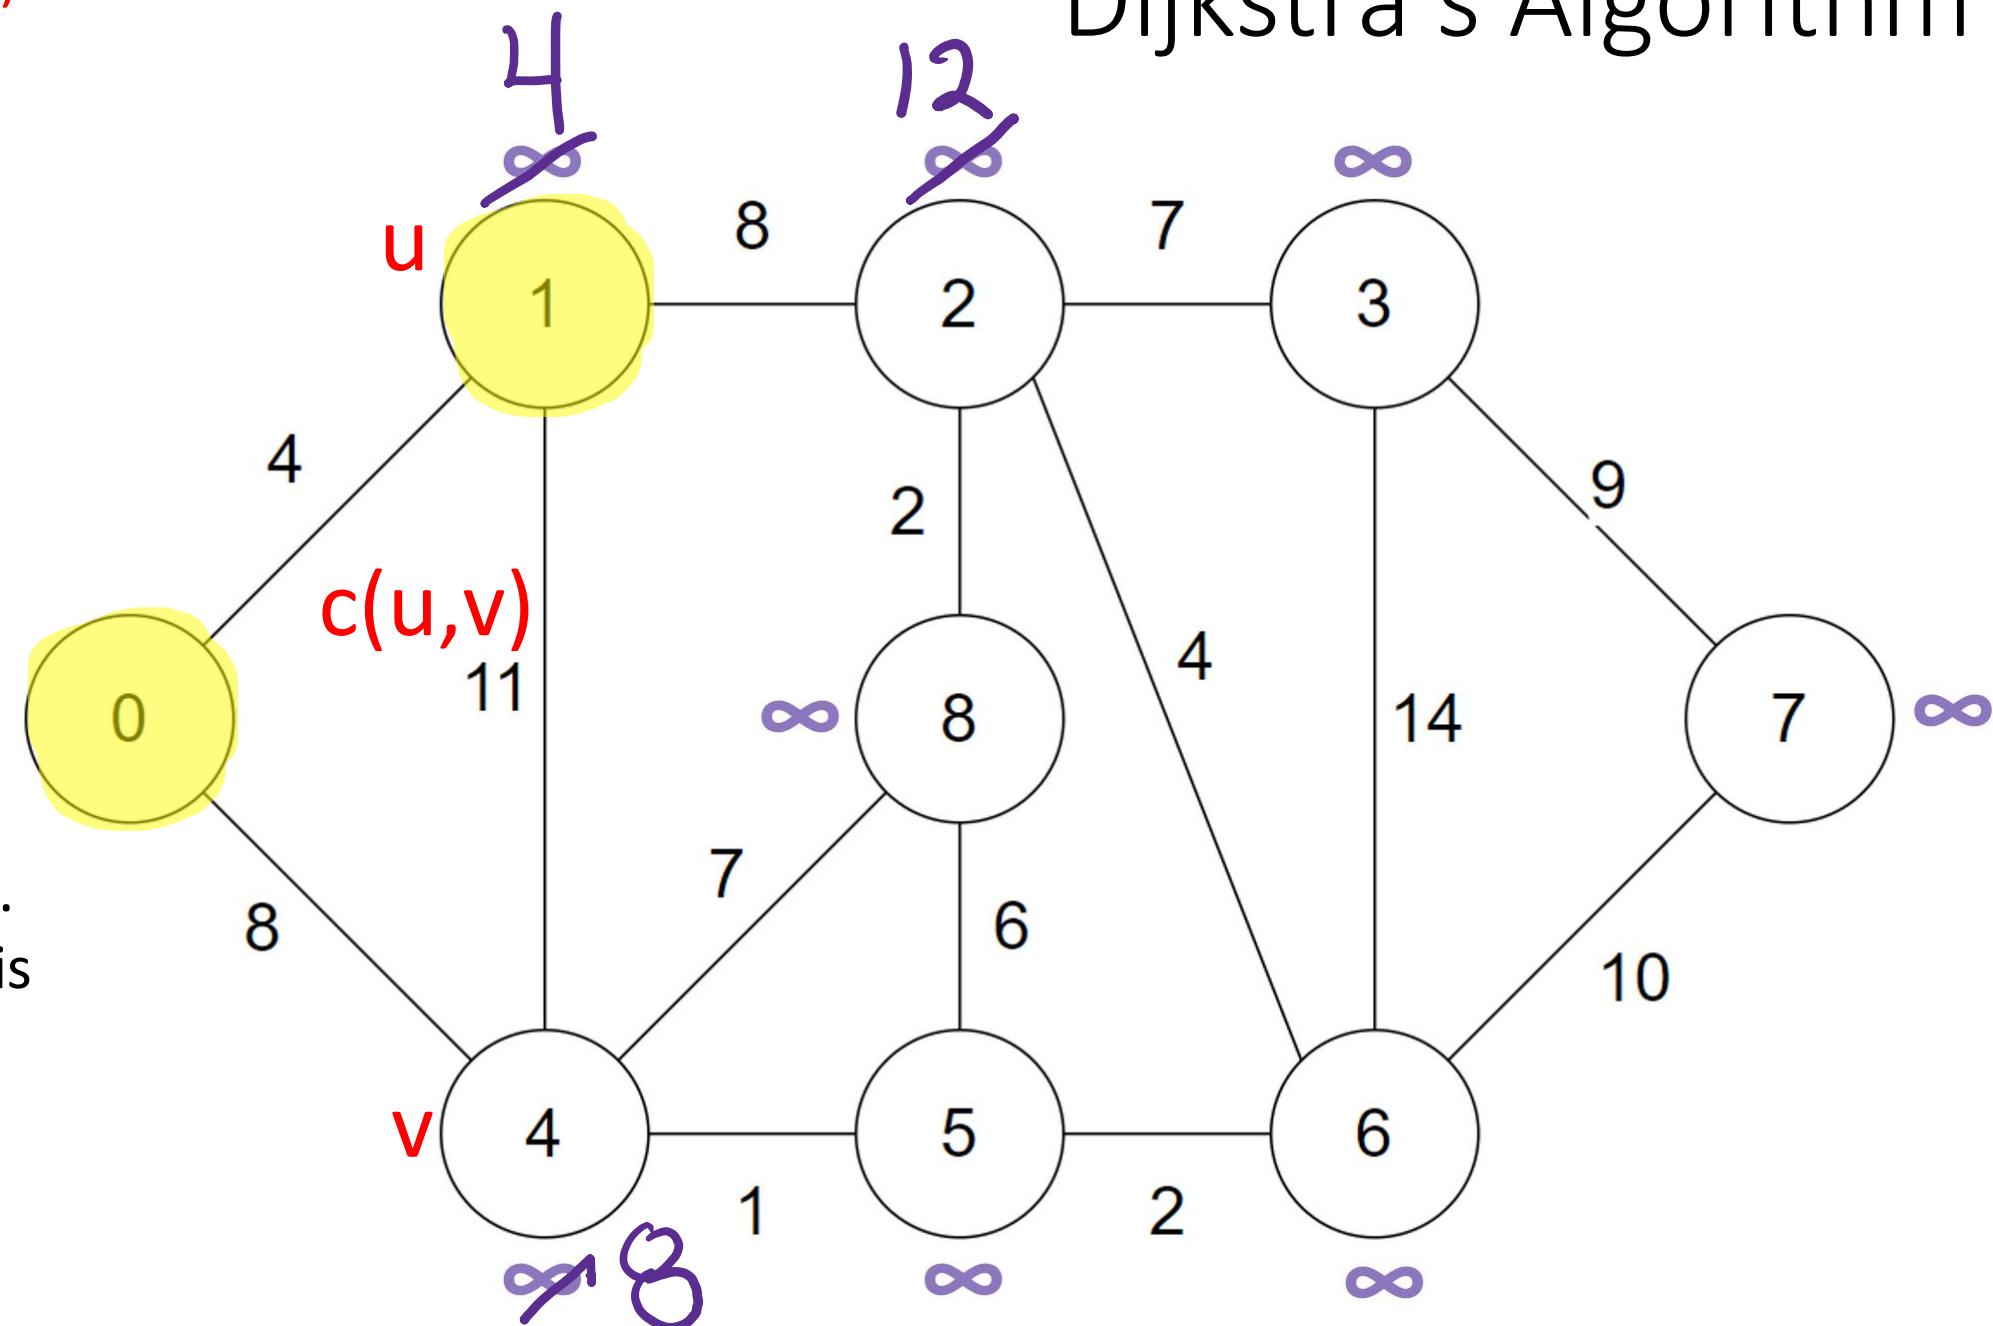

Now we pick the Vertex with the **smallest** distance value – the smallest $d(u)$

0 – already visited

1 – already visited 0

2 – $d(u)$ of 12

3 – $d(u)$ of ∞

4 – $d(u)$ of 8


5 – $d(u)$ of ∞

6 – $d(u)$ of ∞

7 – $d(u)$ of ∞

8 – $d(u)$ of ∞


Dijkstra's Algorithm

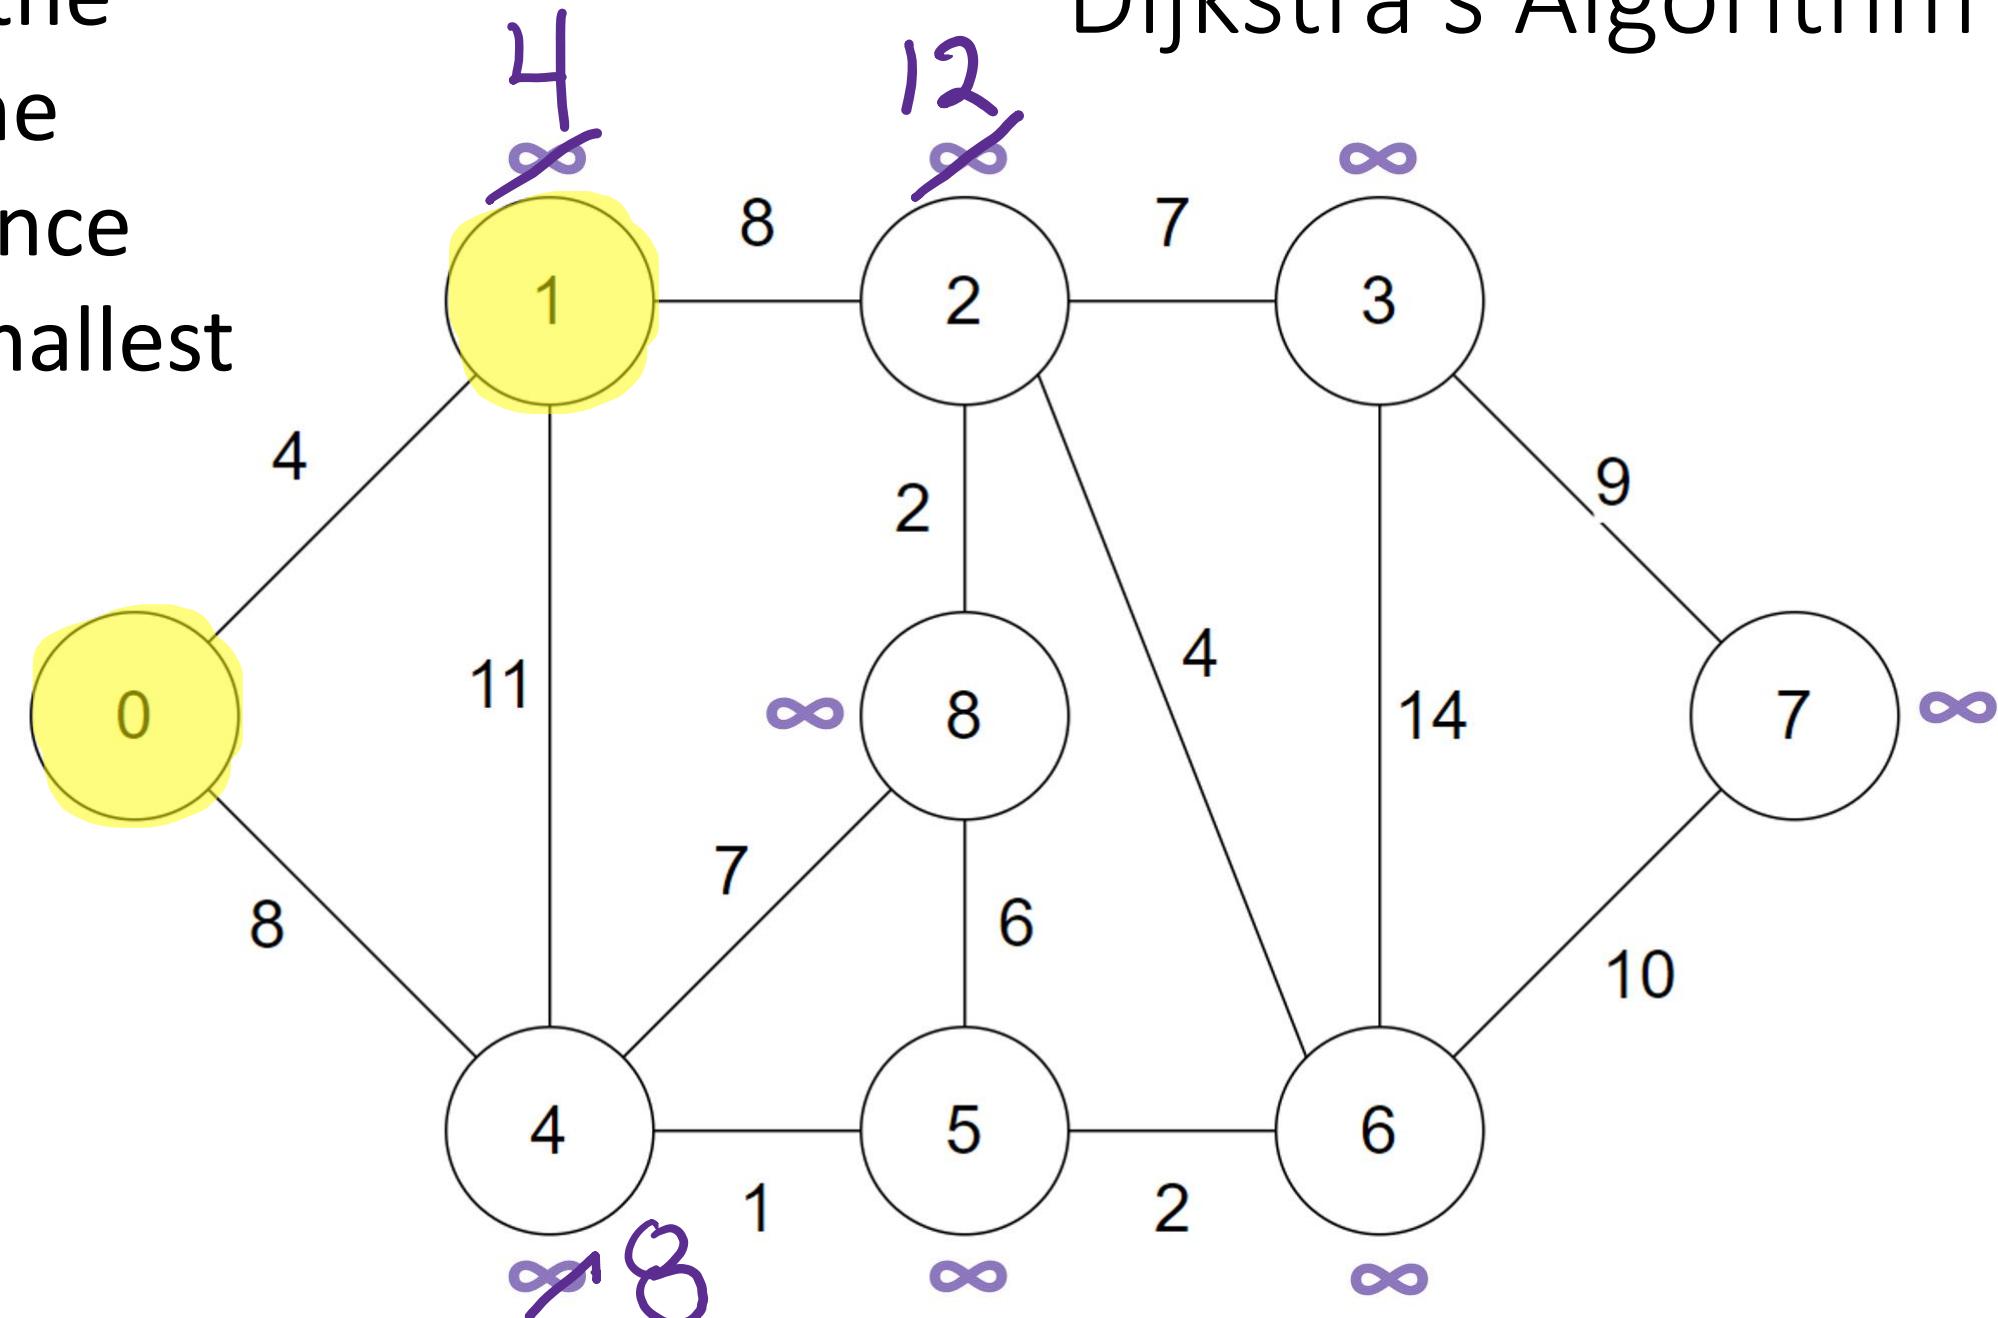

Dijkstra's Algorithm

if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$


if ($8 + 1 < \infty$)
 $d(v) = 8 + 1$
 $d(v) = 9$

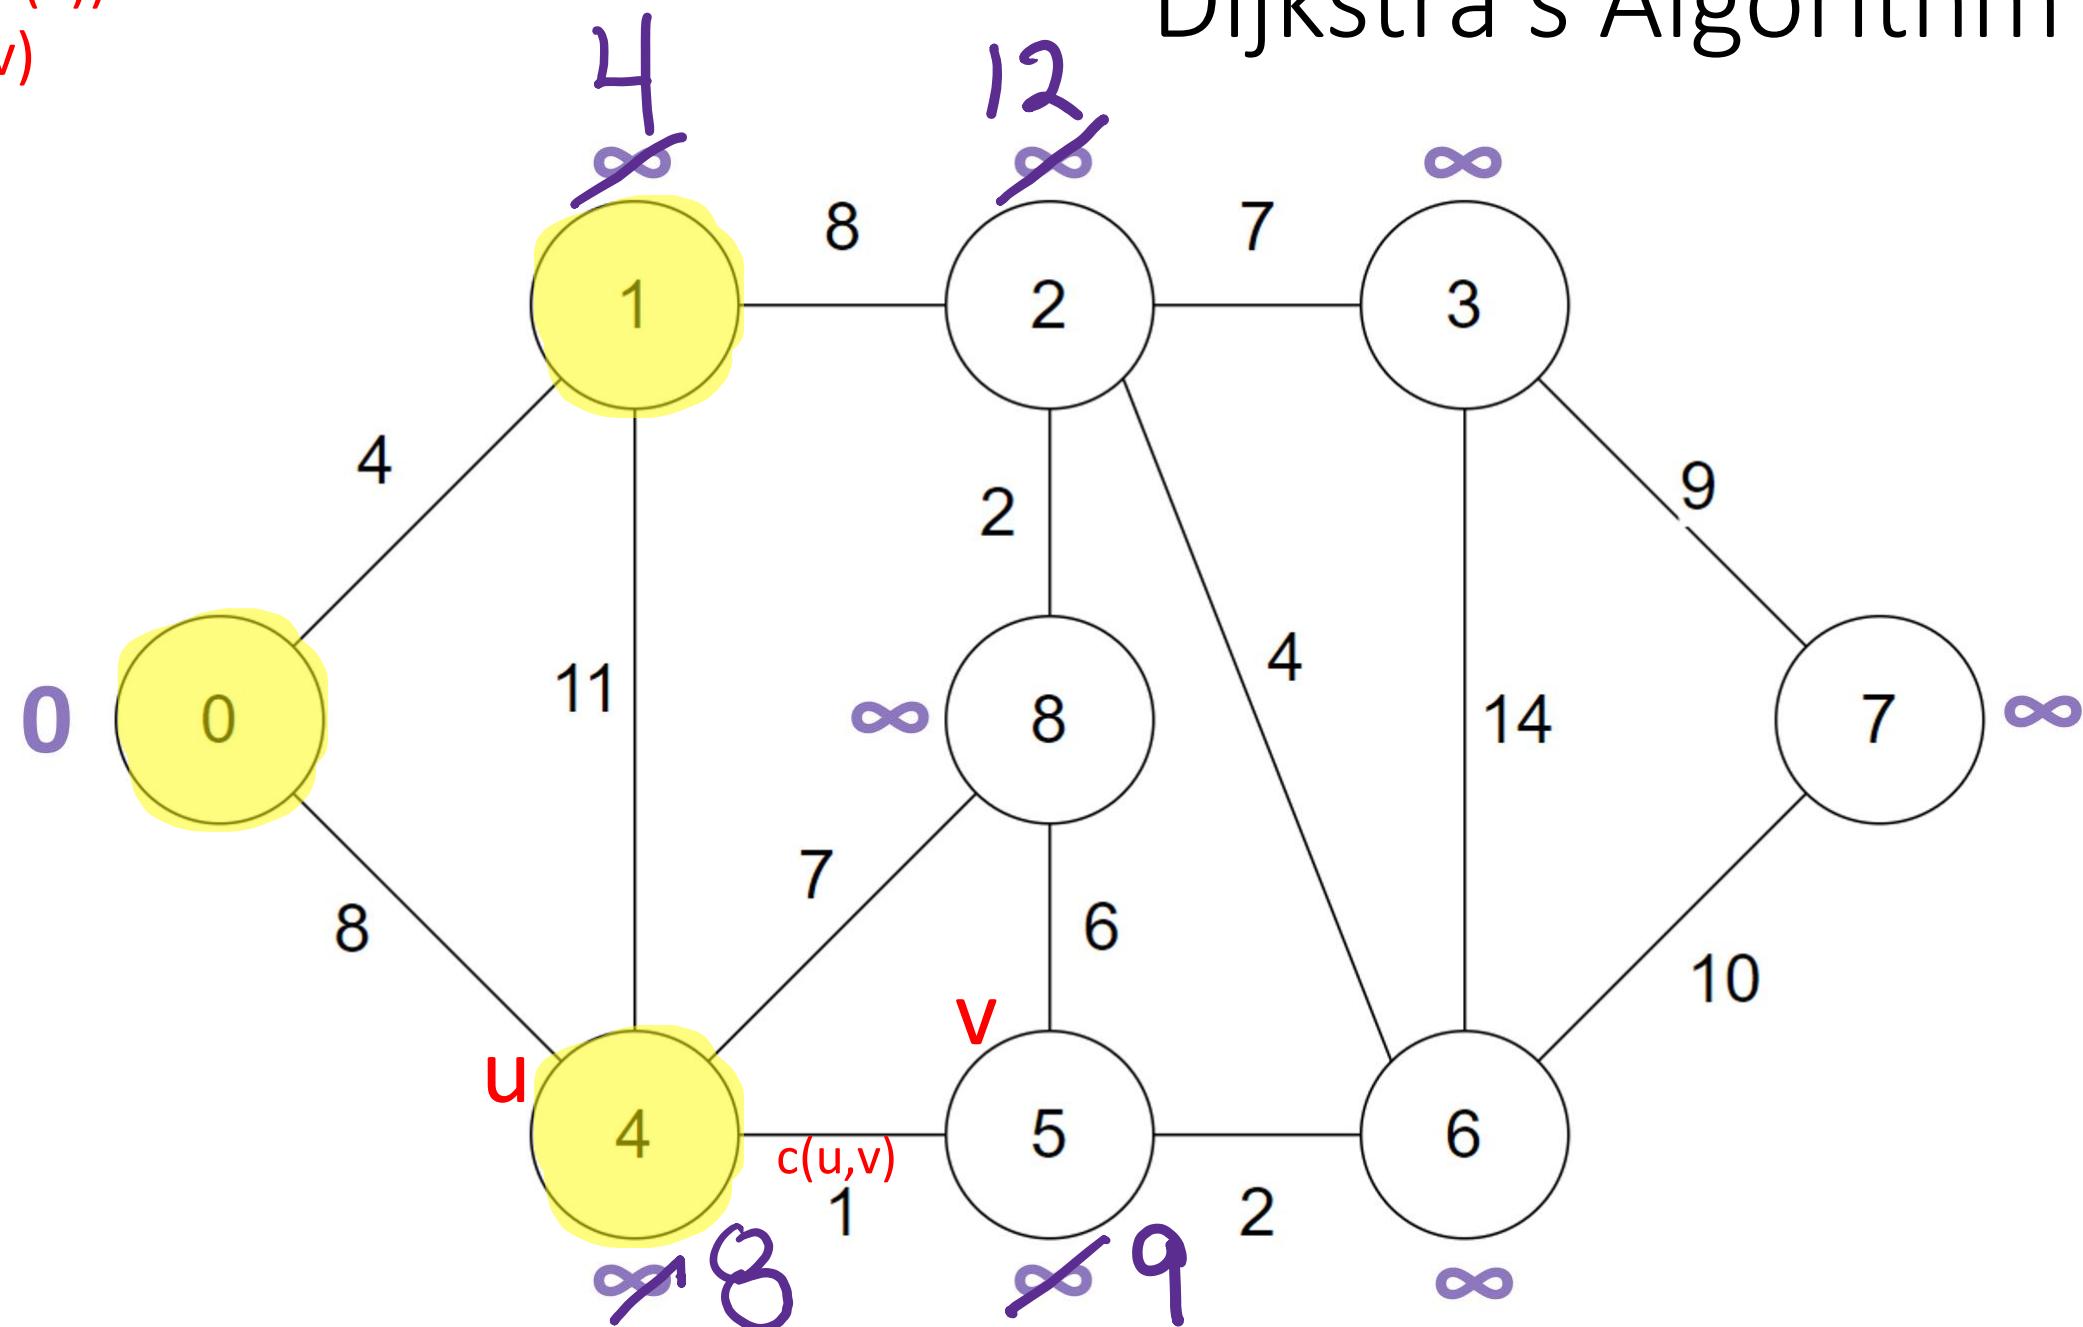

Dijkstra's Algorithm

if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$


if $(8 + 7) < \infty$
 $d(v) = 8 + 7$
 $d(v) = 15$

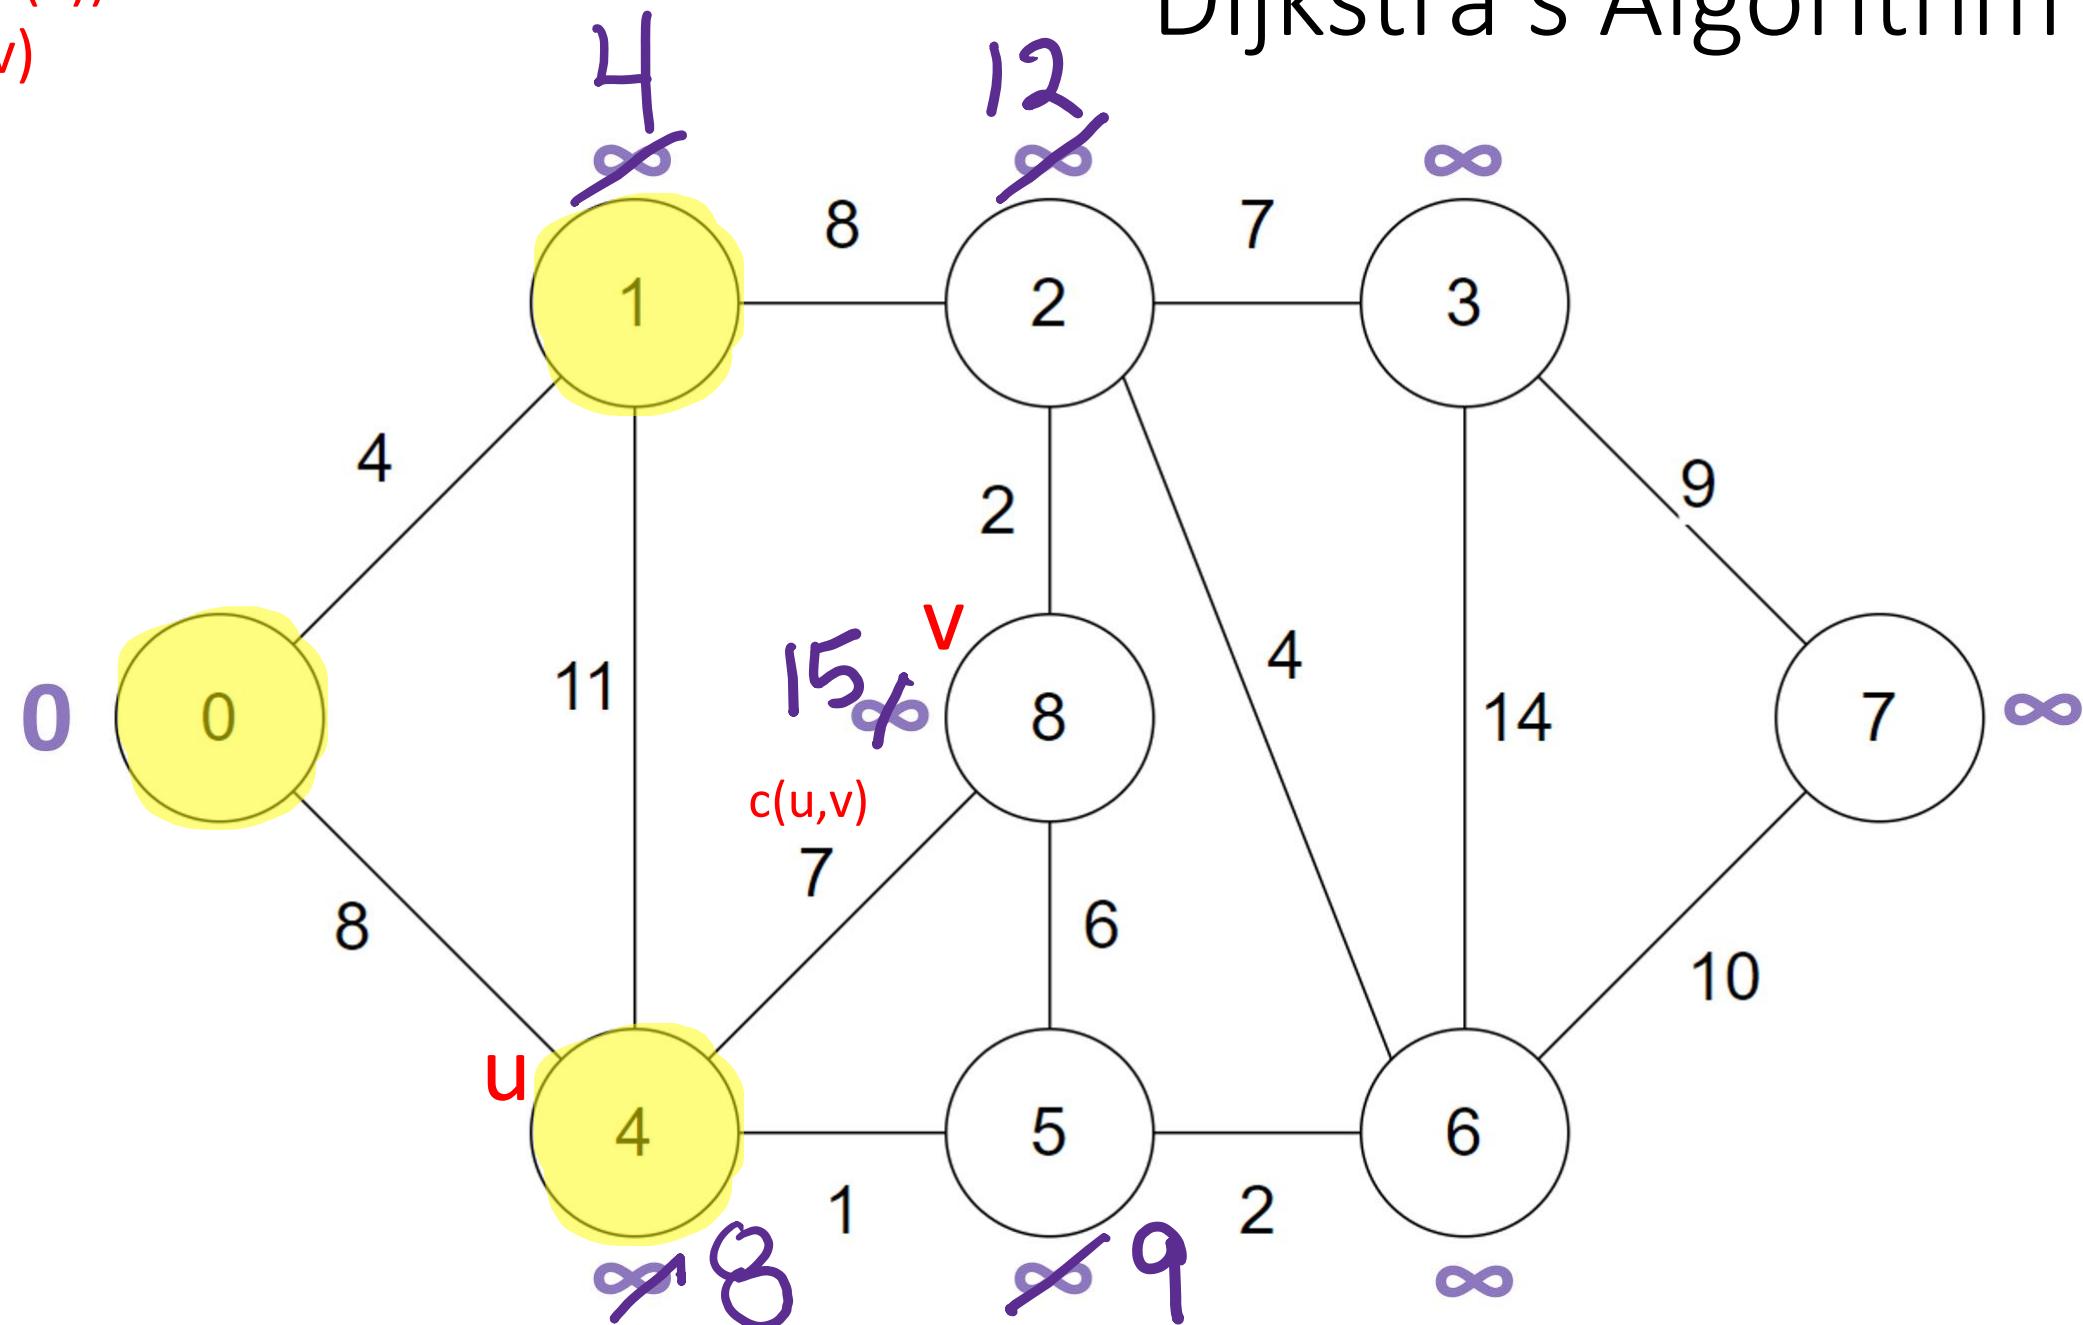

Dijkstra's Algorithm

Now we pick the vertex with the **smallest** distance value – the smallest $d(u)$


- 0 – already visited
- 1 – already visited
- 2 – $d(u)$ of 12
- 3 – $d(u)$ of ∞
- 4 – already visited
- 5 – $d(u)$ of 9
- 6 – $d(u)$ of ∞
- 7 – $d(u)$ of ∞
- 8 – $d(u)$ of 15

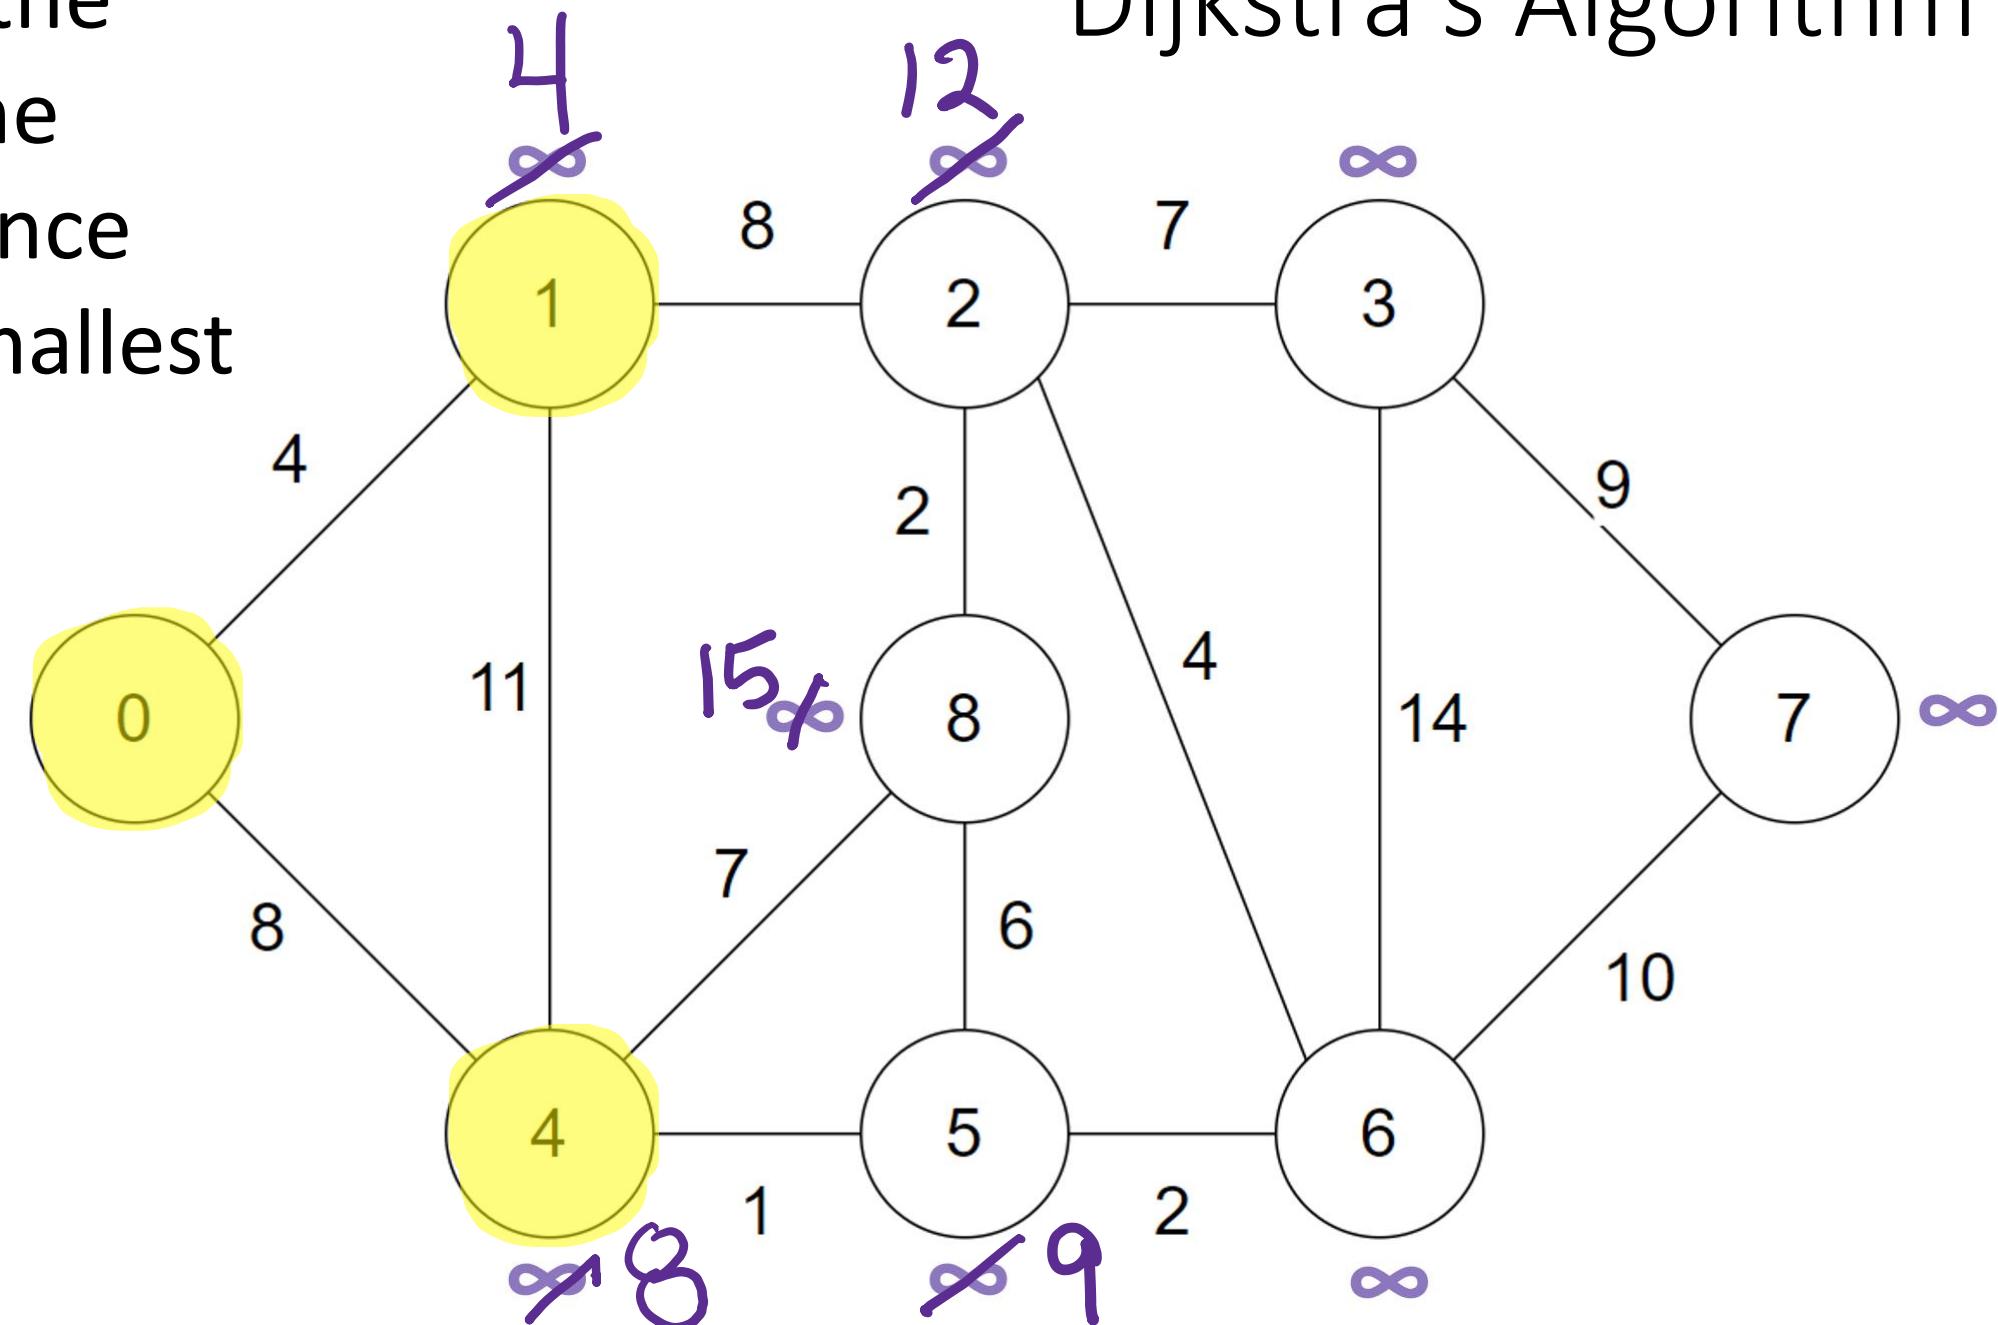

if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$

Dijkstra's Algorithm

if $(9 + 2) < \infty$)
 $d(v) = 9 + 2$
 $d(v) = 11$

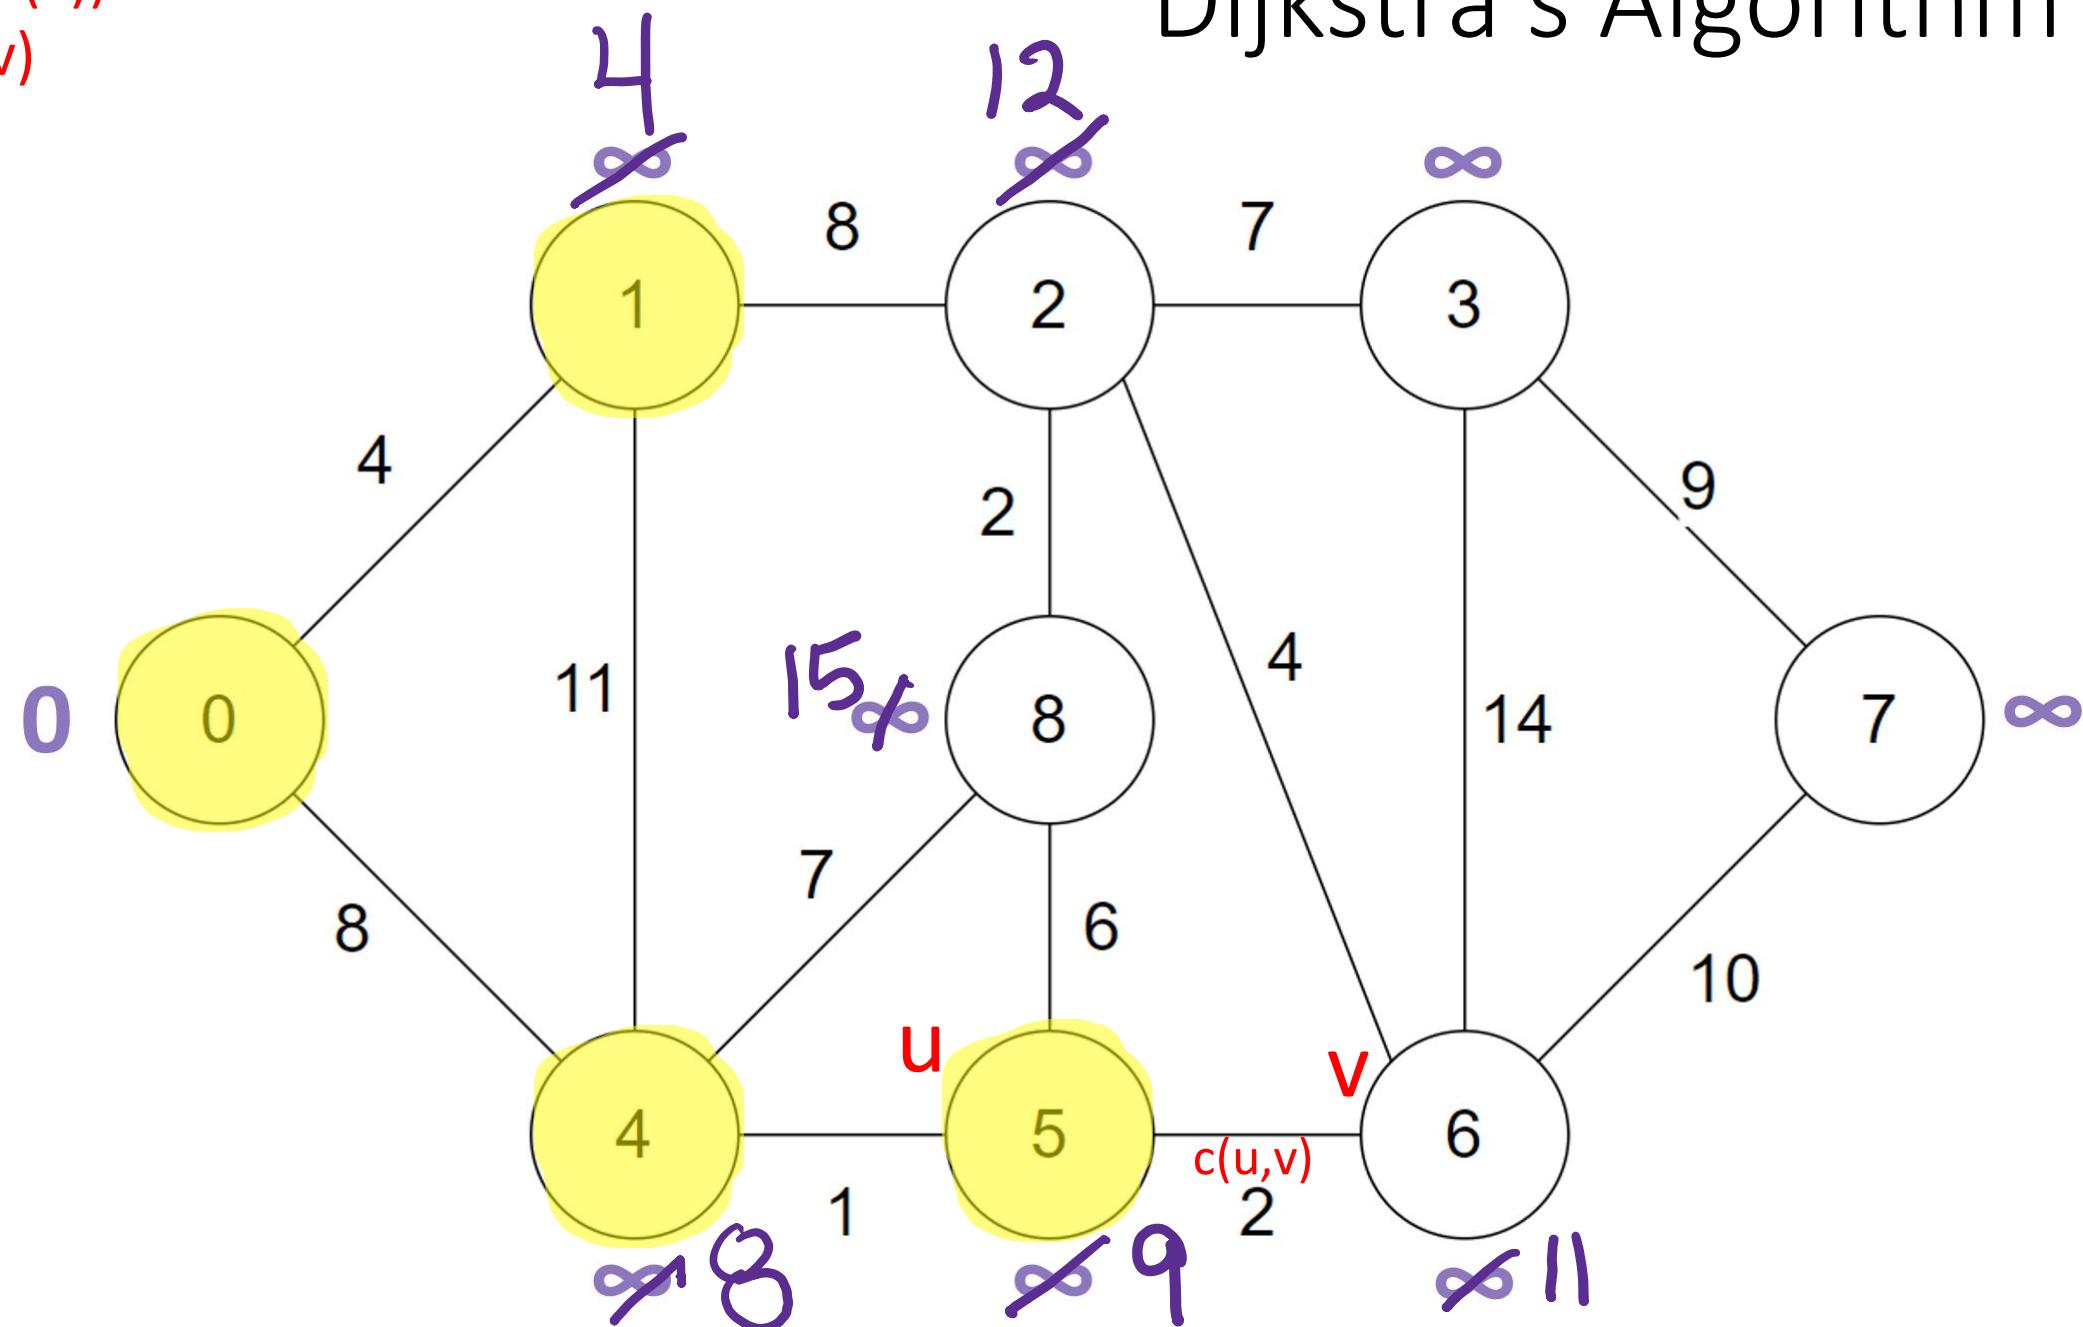


Dijkstra's Algorithm

if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$

if $(9 + 6) < 15$

15 is not less than 15


NO CHANGE

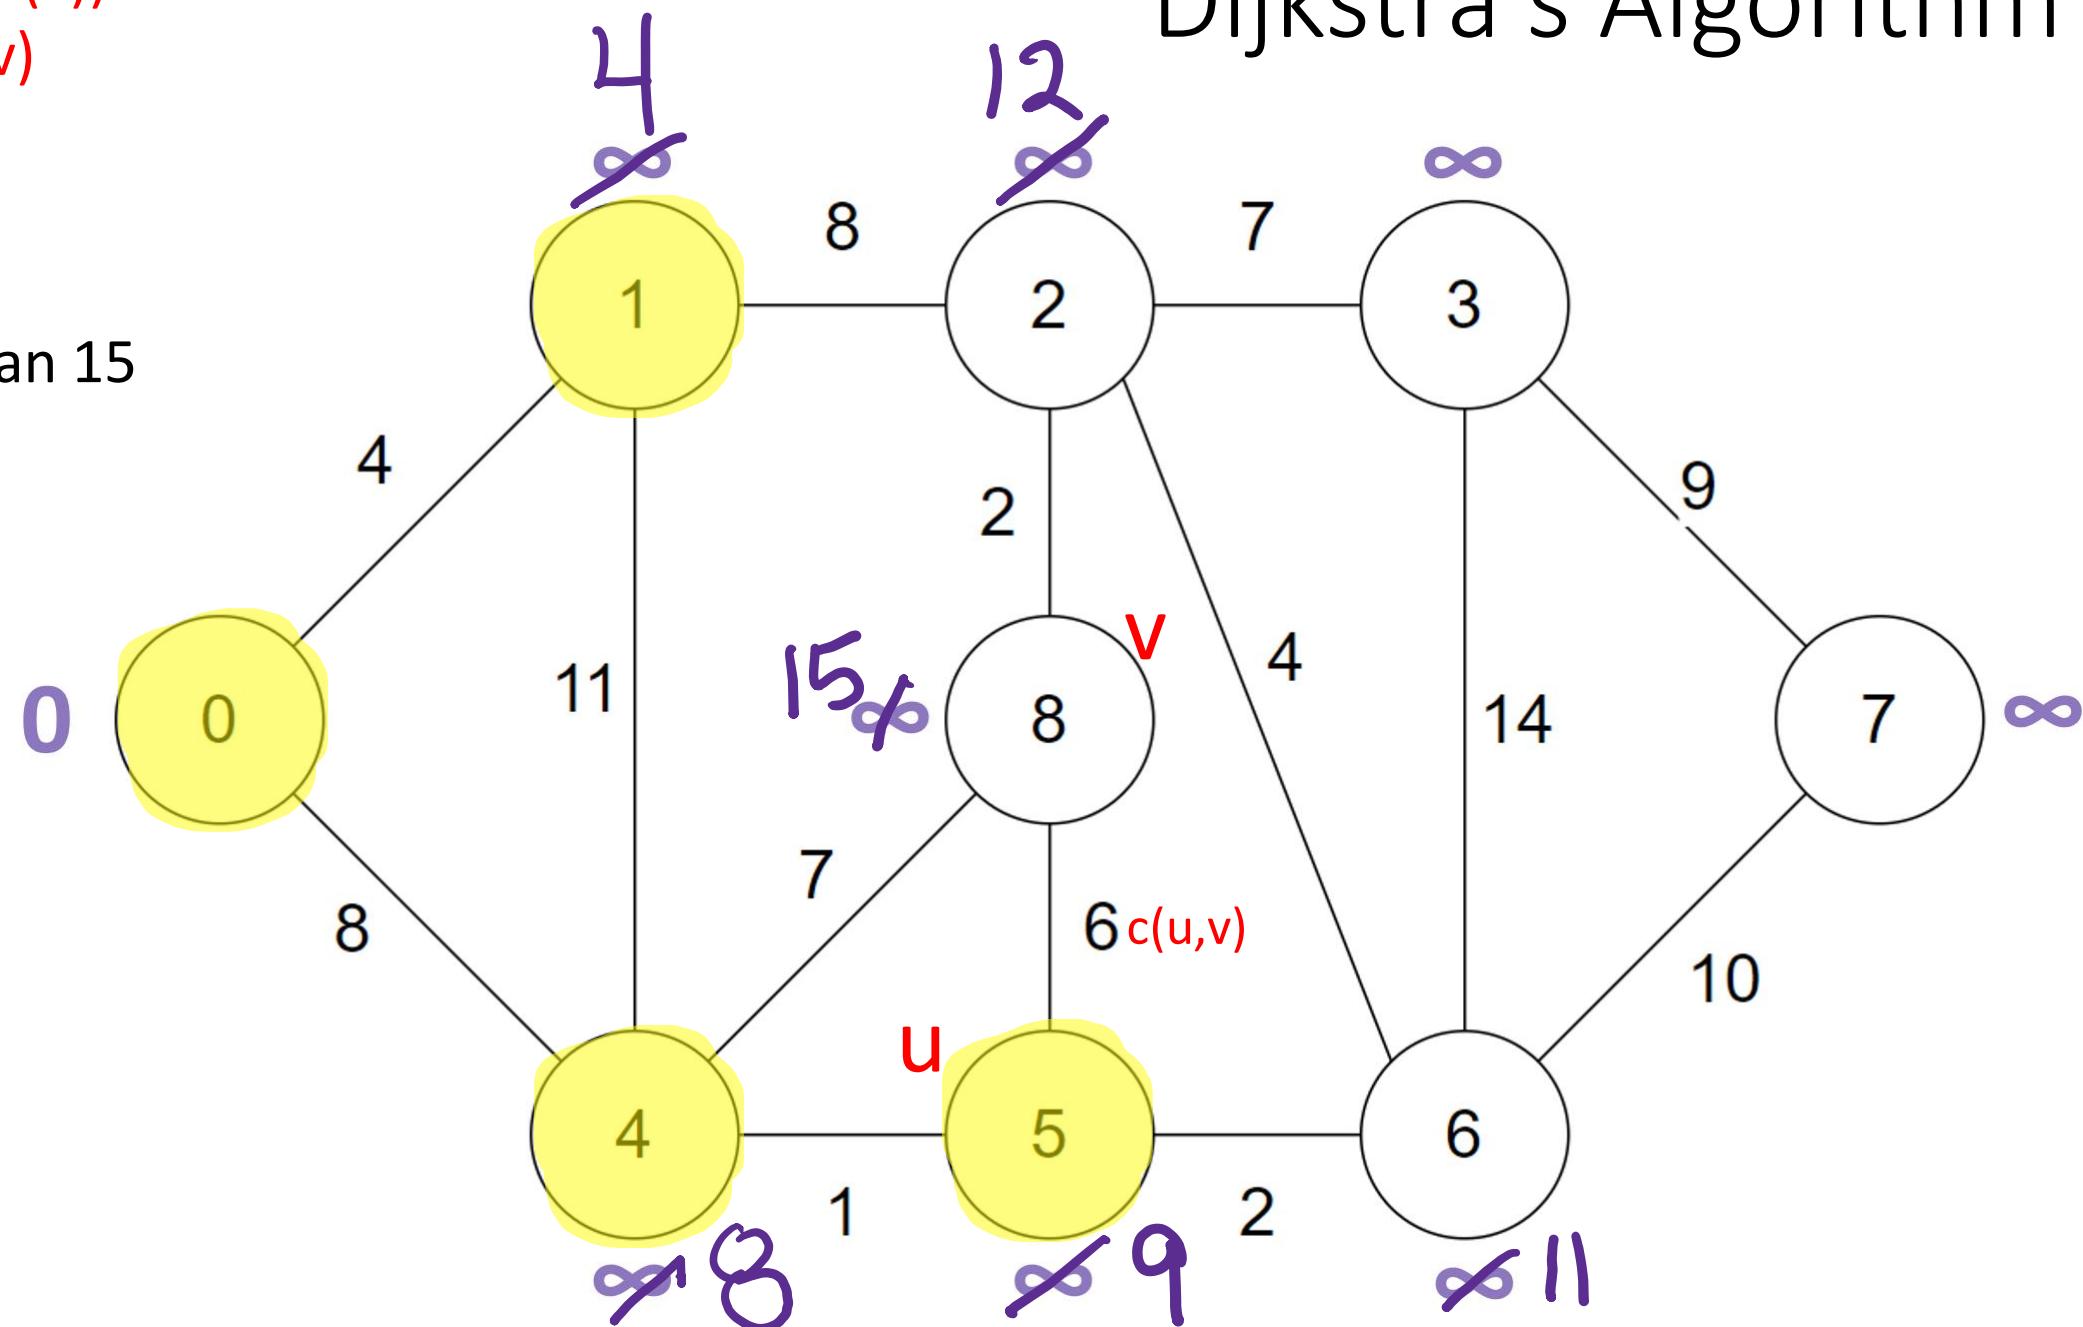

Now we pick the Vertex with the **smallest** distance value – the smallest $d(u)$

- 0 – already visited
- 1 – already visited
- 2 – $d(u)$ of 12
- 3 – $d(u)$ of ∞
- 4 – already visited
- 5 – already visited
- 6 – $d(u)$ of 11**
- 7 – $d(u)$ of ∞
- 8 – $d(u)$ of 15

Dijkstra's Algorithm

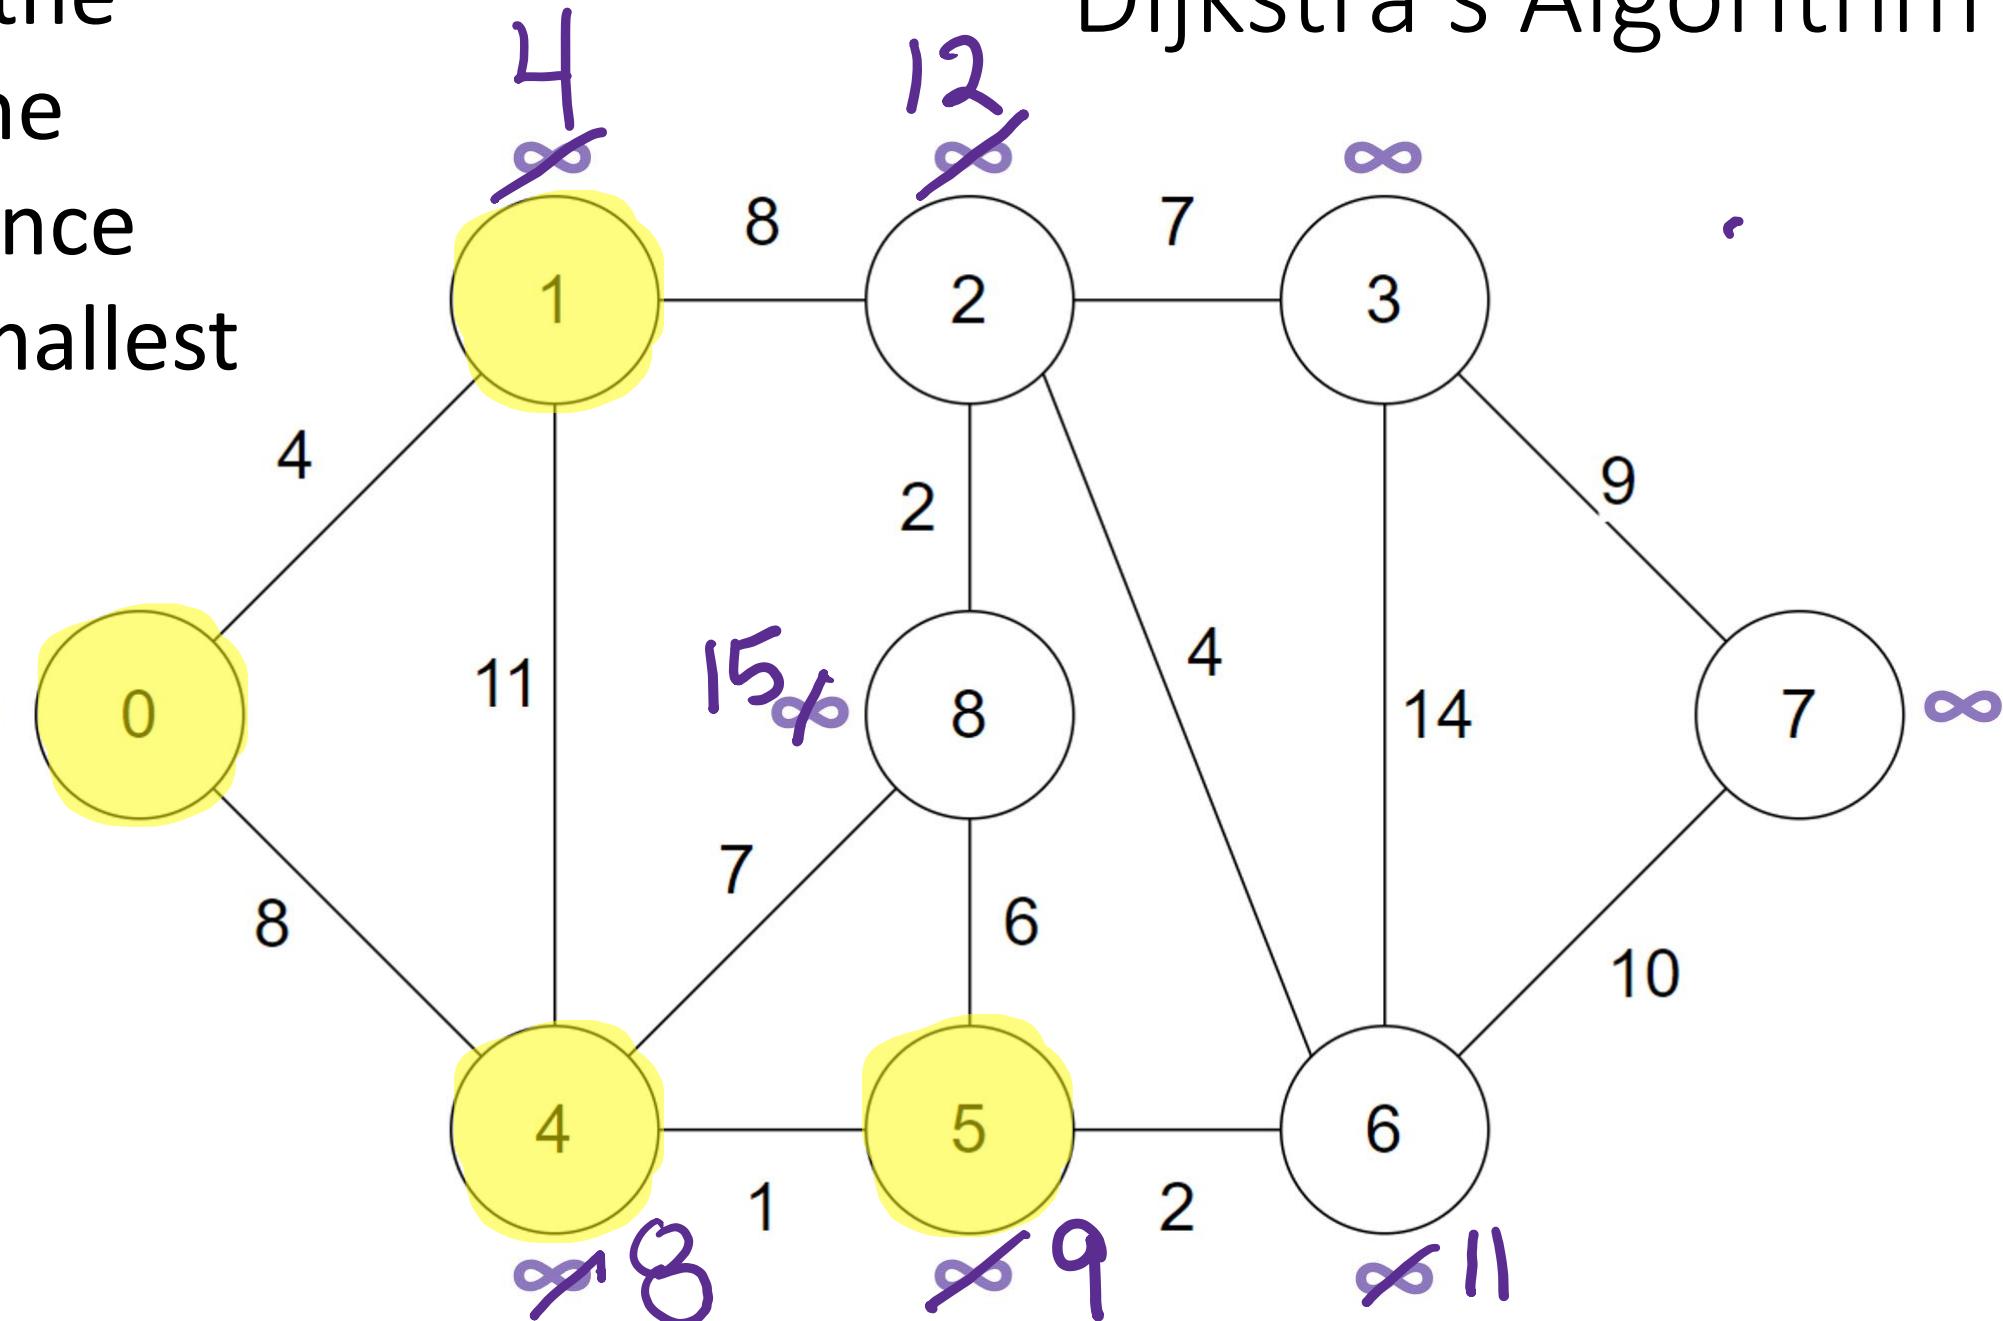


if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$

Dijkstra's Algorithm

if (11 + 4) < 12)

15 is not less than 12


NO CHANGE

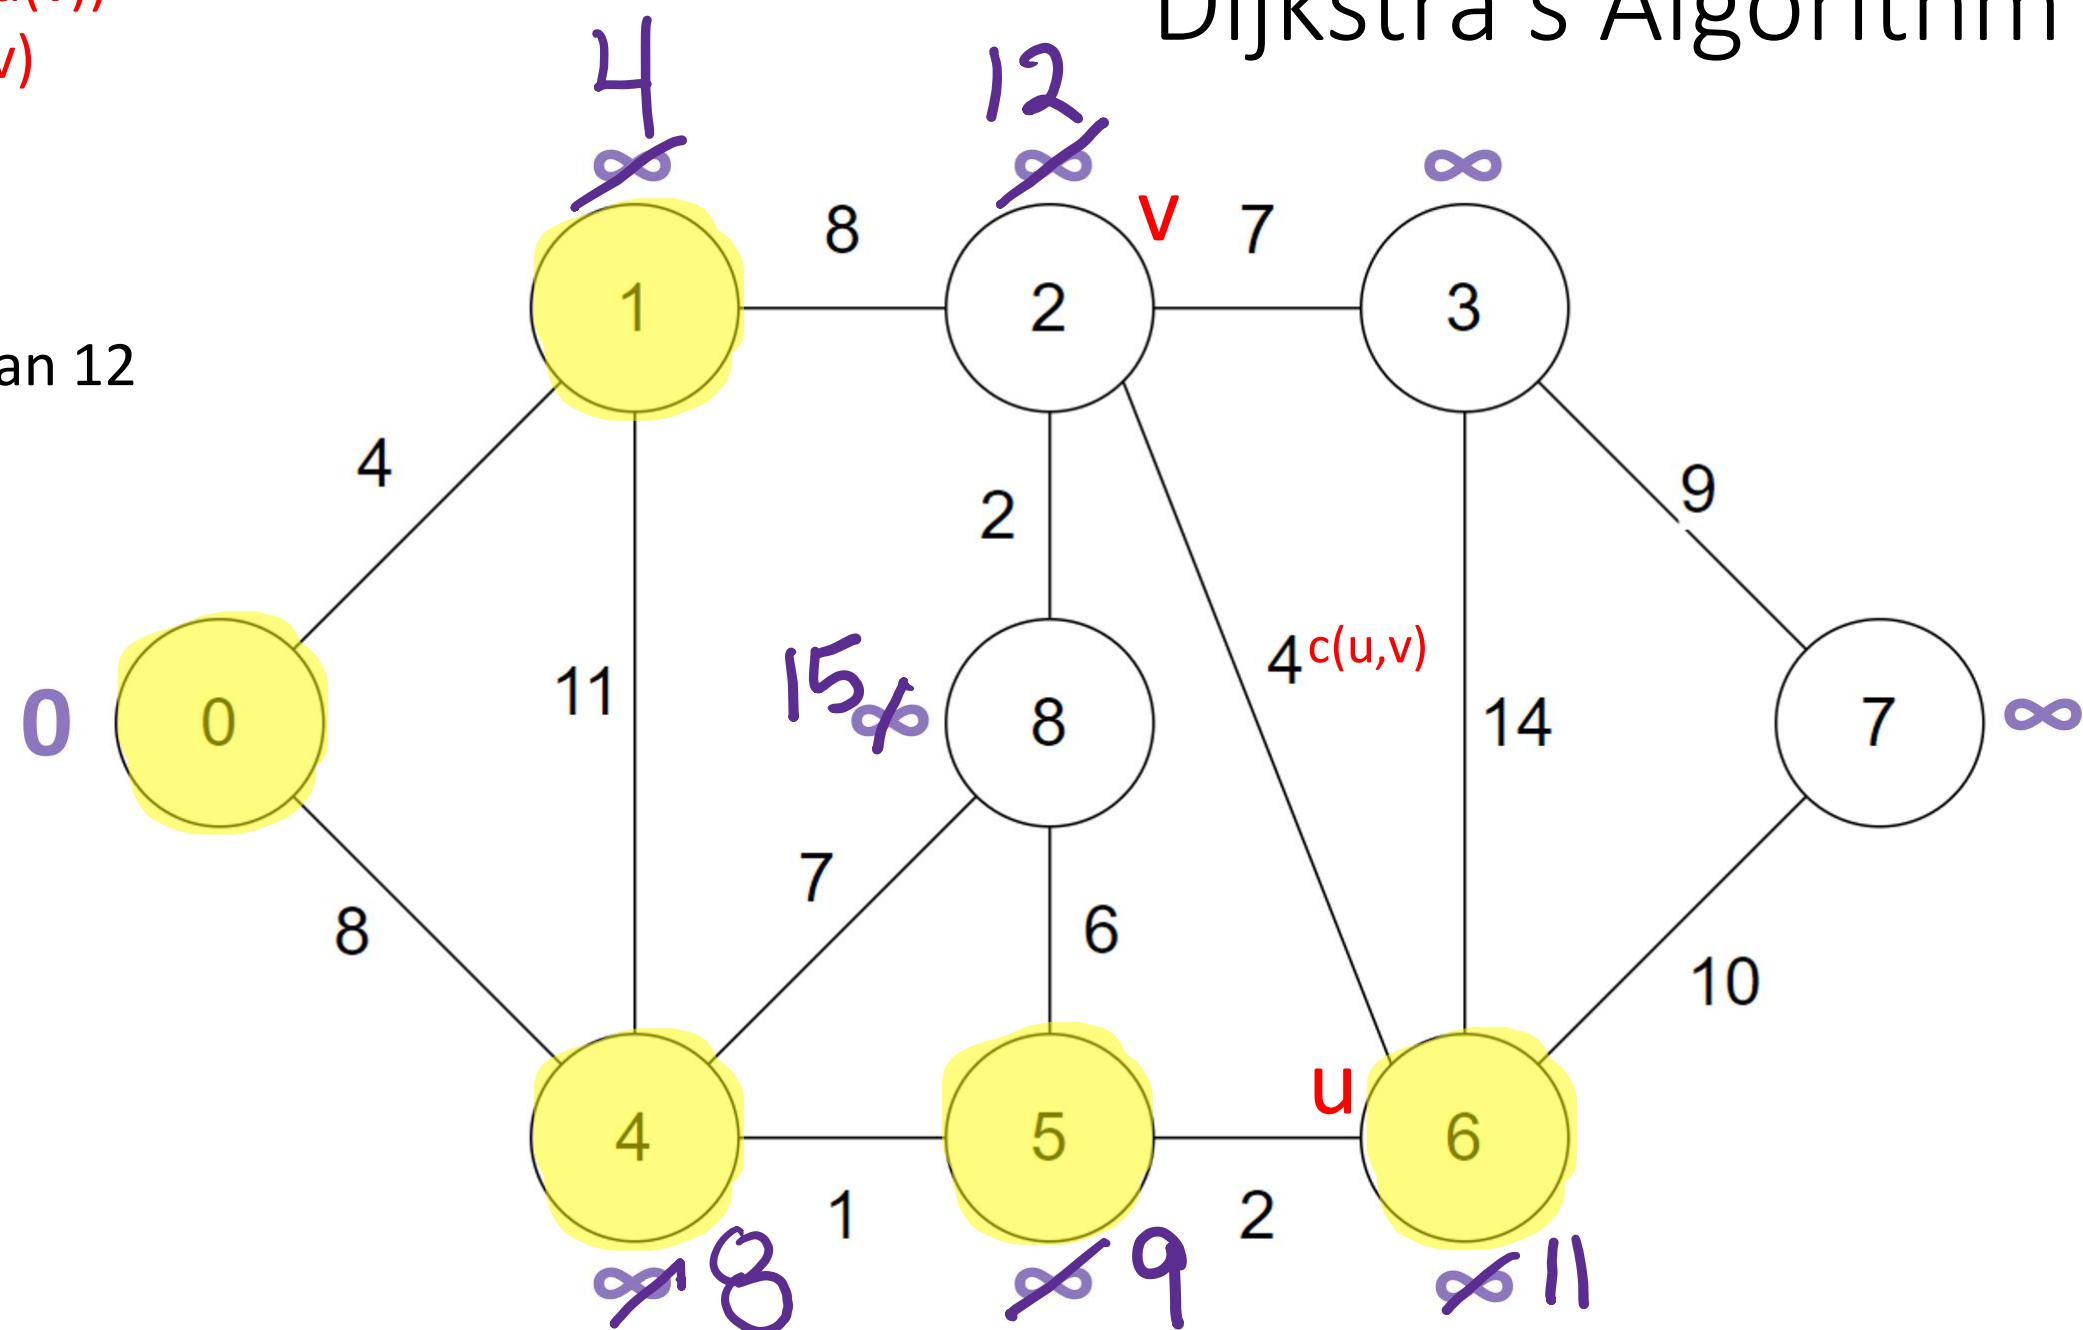

Dijkstra's Algorithm

if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$


if ($11 + 14 < \infty$)
 $d(v) = 11 + 14$
 $d(v) = 25$

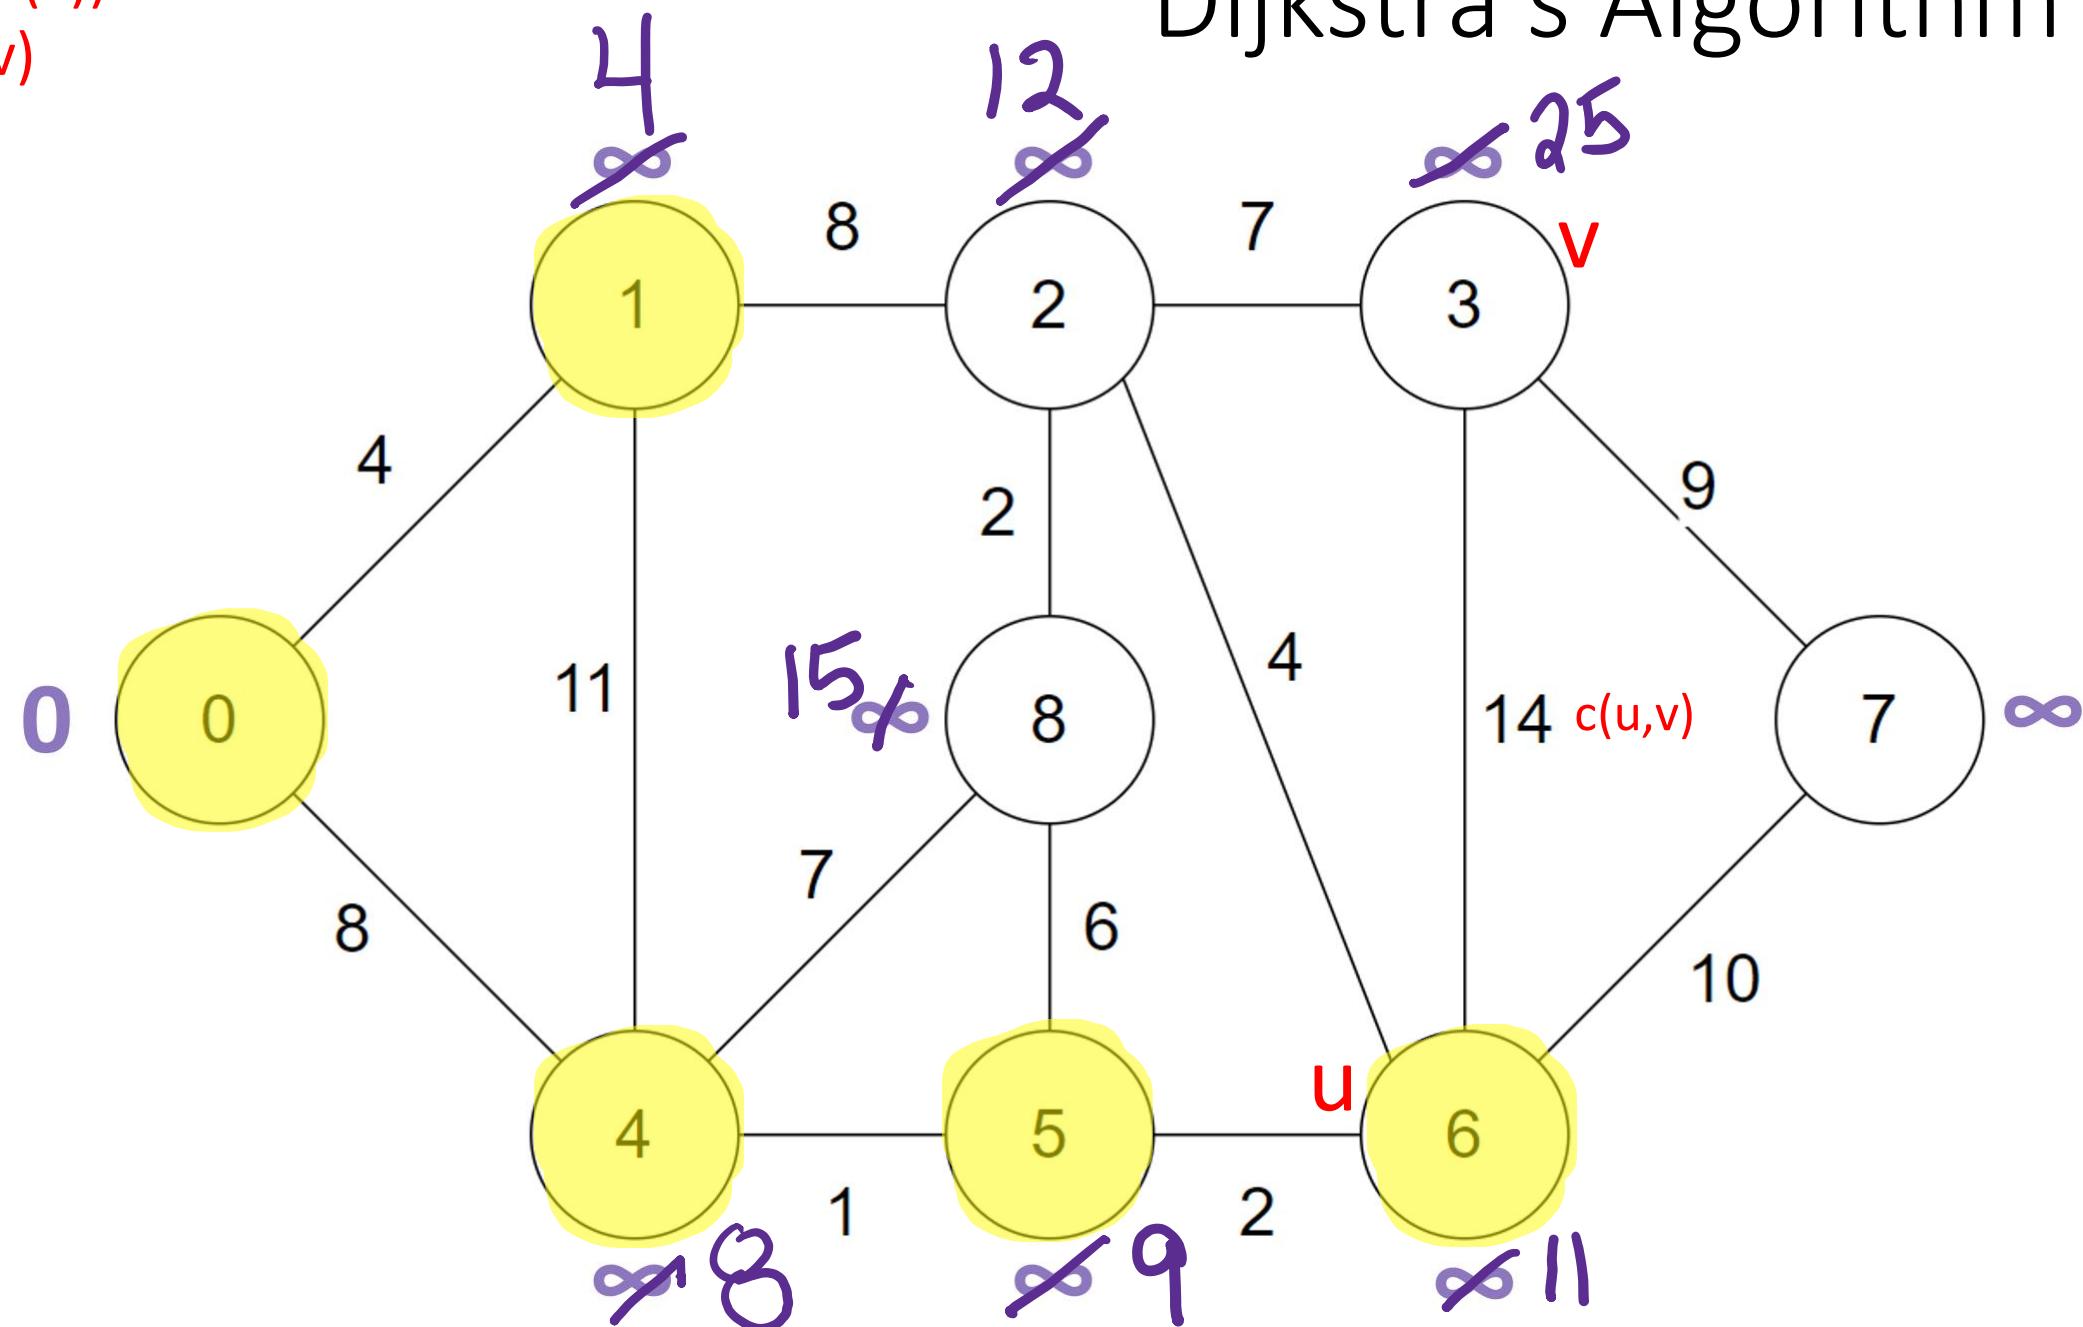

Dijkstra's Algorithm

if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$


if ($11 + 10 < \infty$)
 $d(v) = 11 + 10$
 $d(v) = 21$

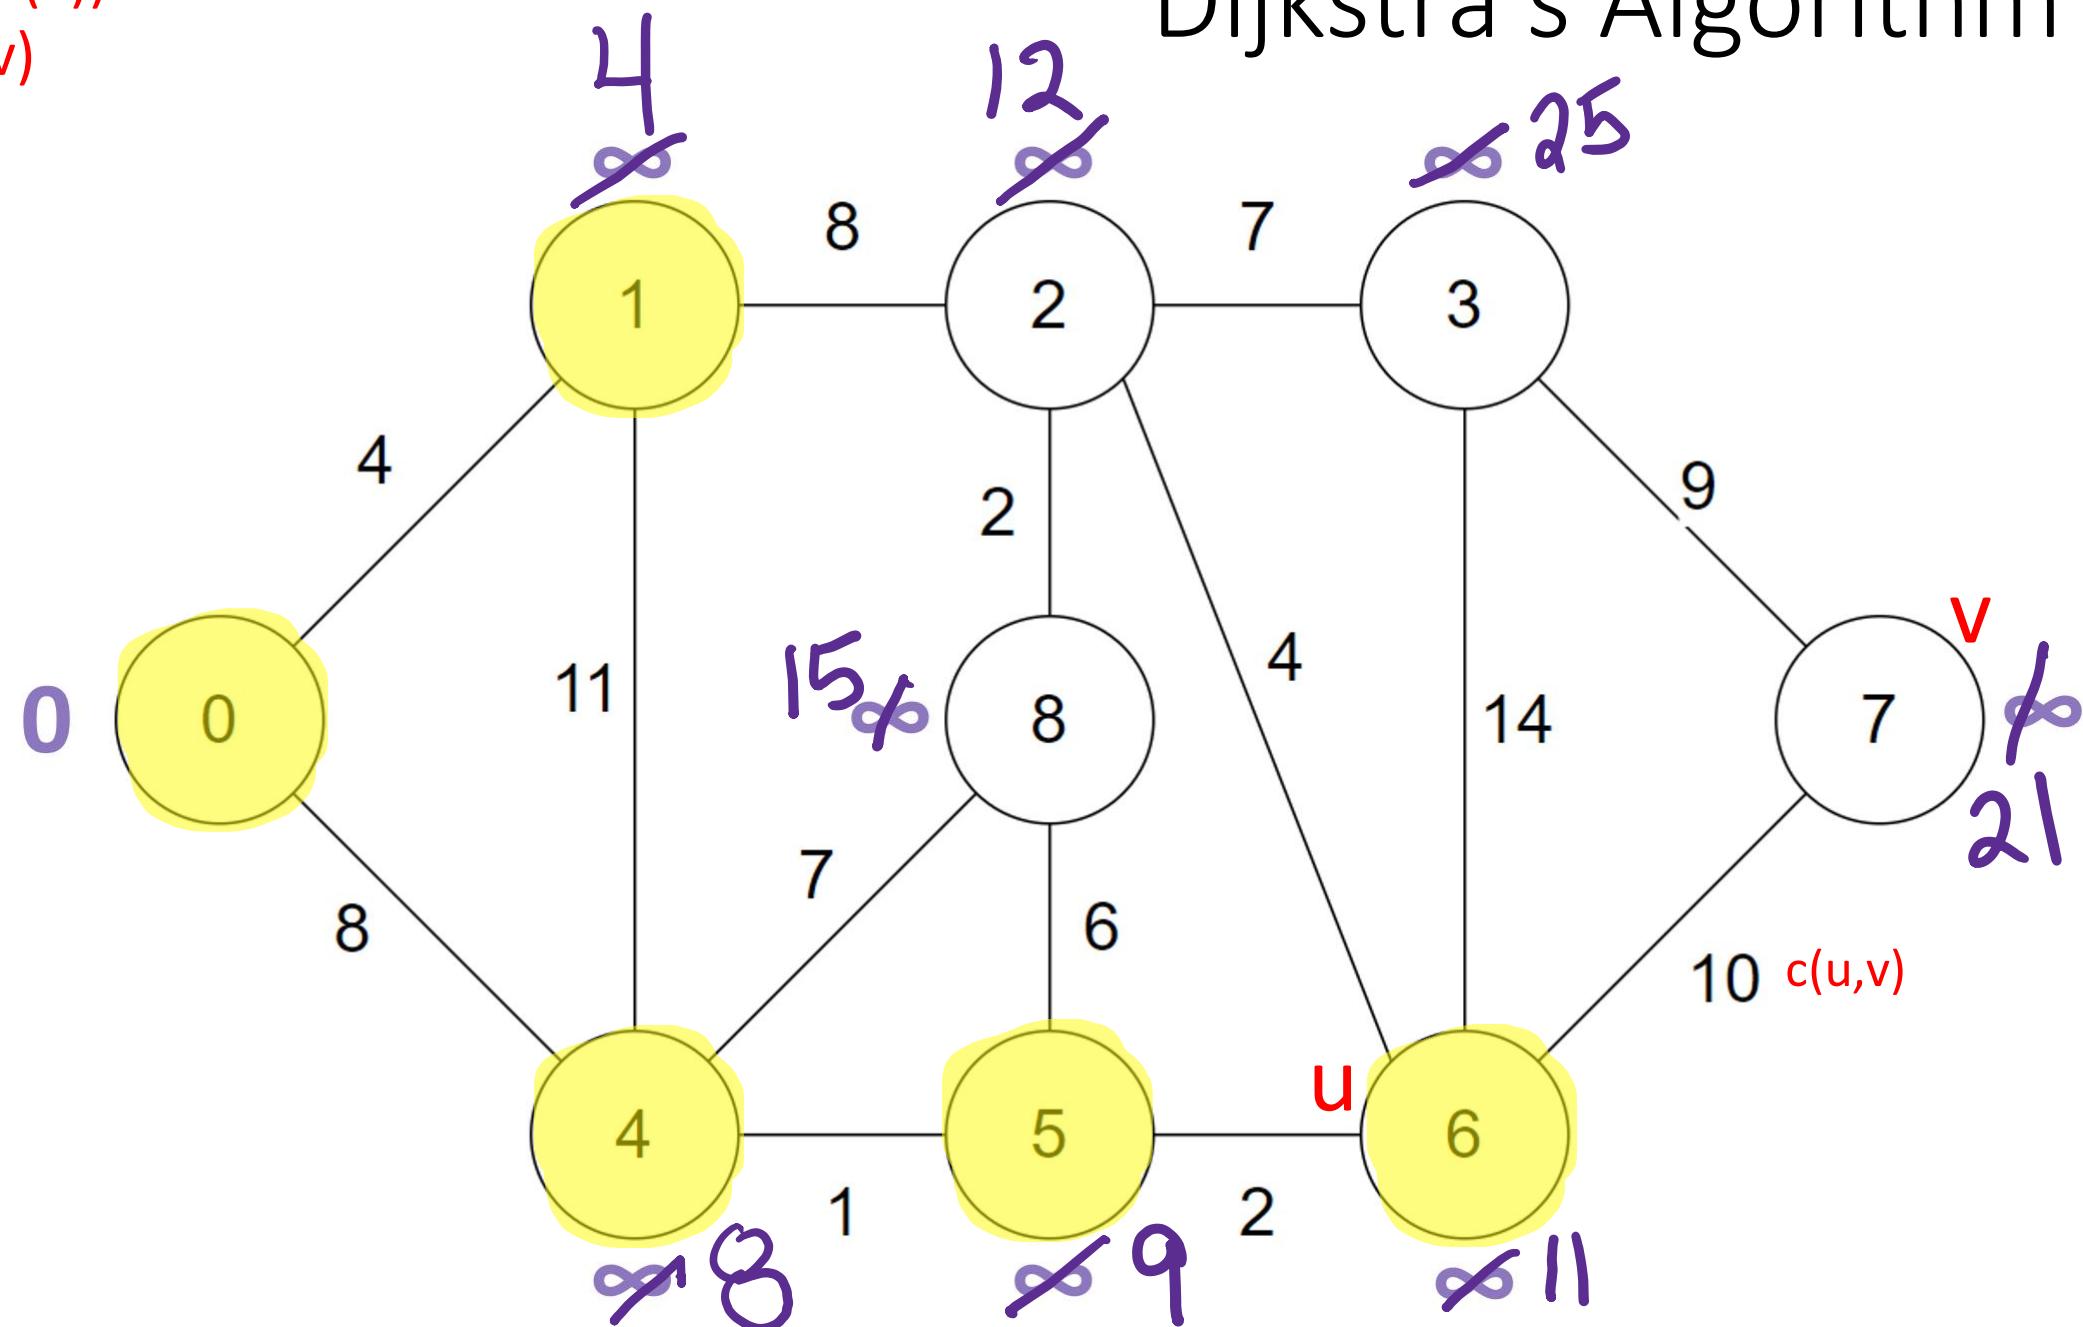

Now we pick the Vertex with the **smallest** distance value – the smallest $d(u)$

- 0 – already visited
- 1 – already visited
- 2 – $d(u)$ of 12
- 3 – $d(u)$ of 25
- 4 – already visited
- 5 – already visited
- 6 – already visited
- 7 – $d(u)$ of 21
- 8 – $d(u)$ of 15


Dijkstra's Algorithm

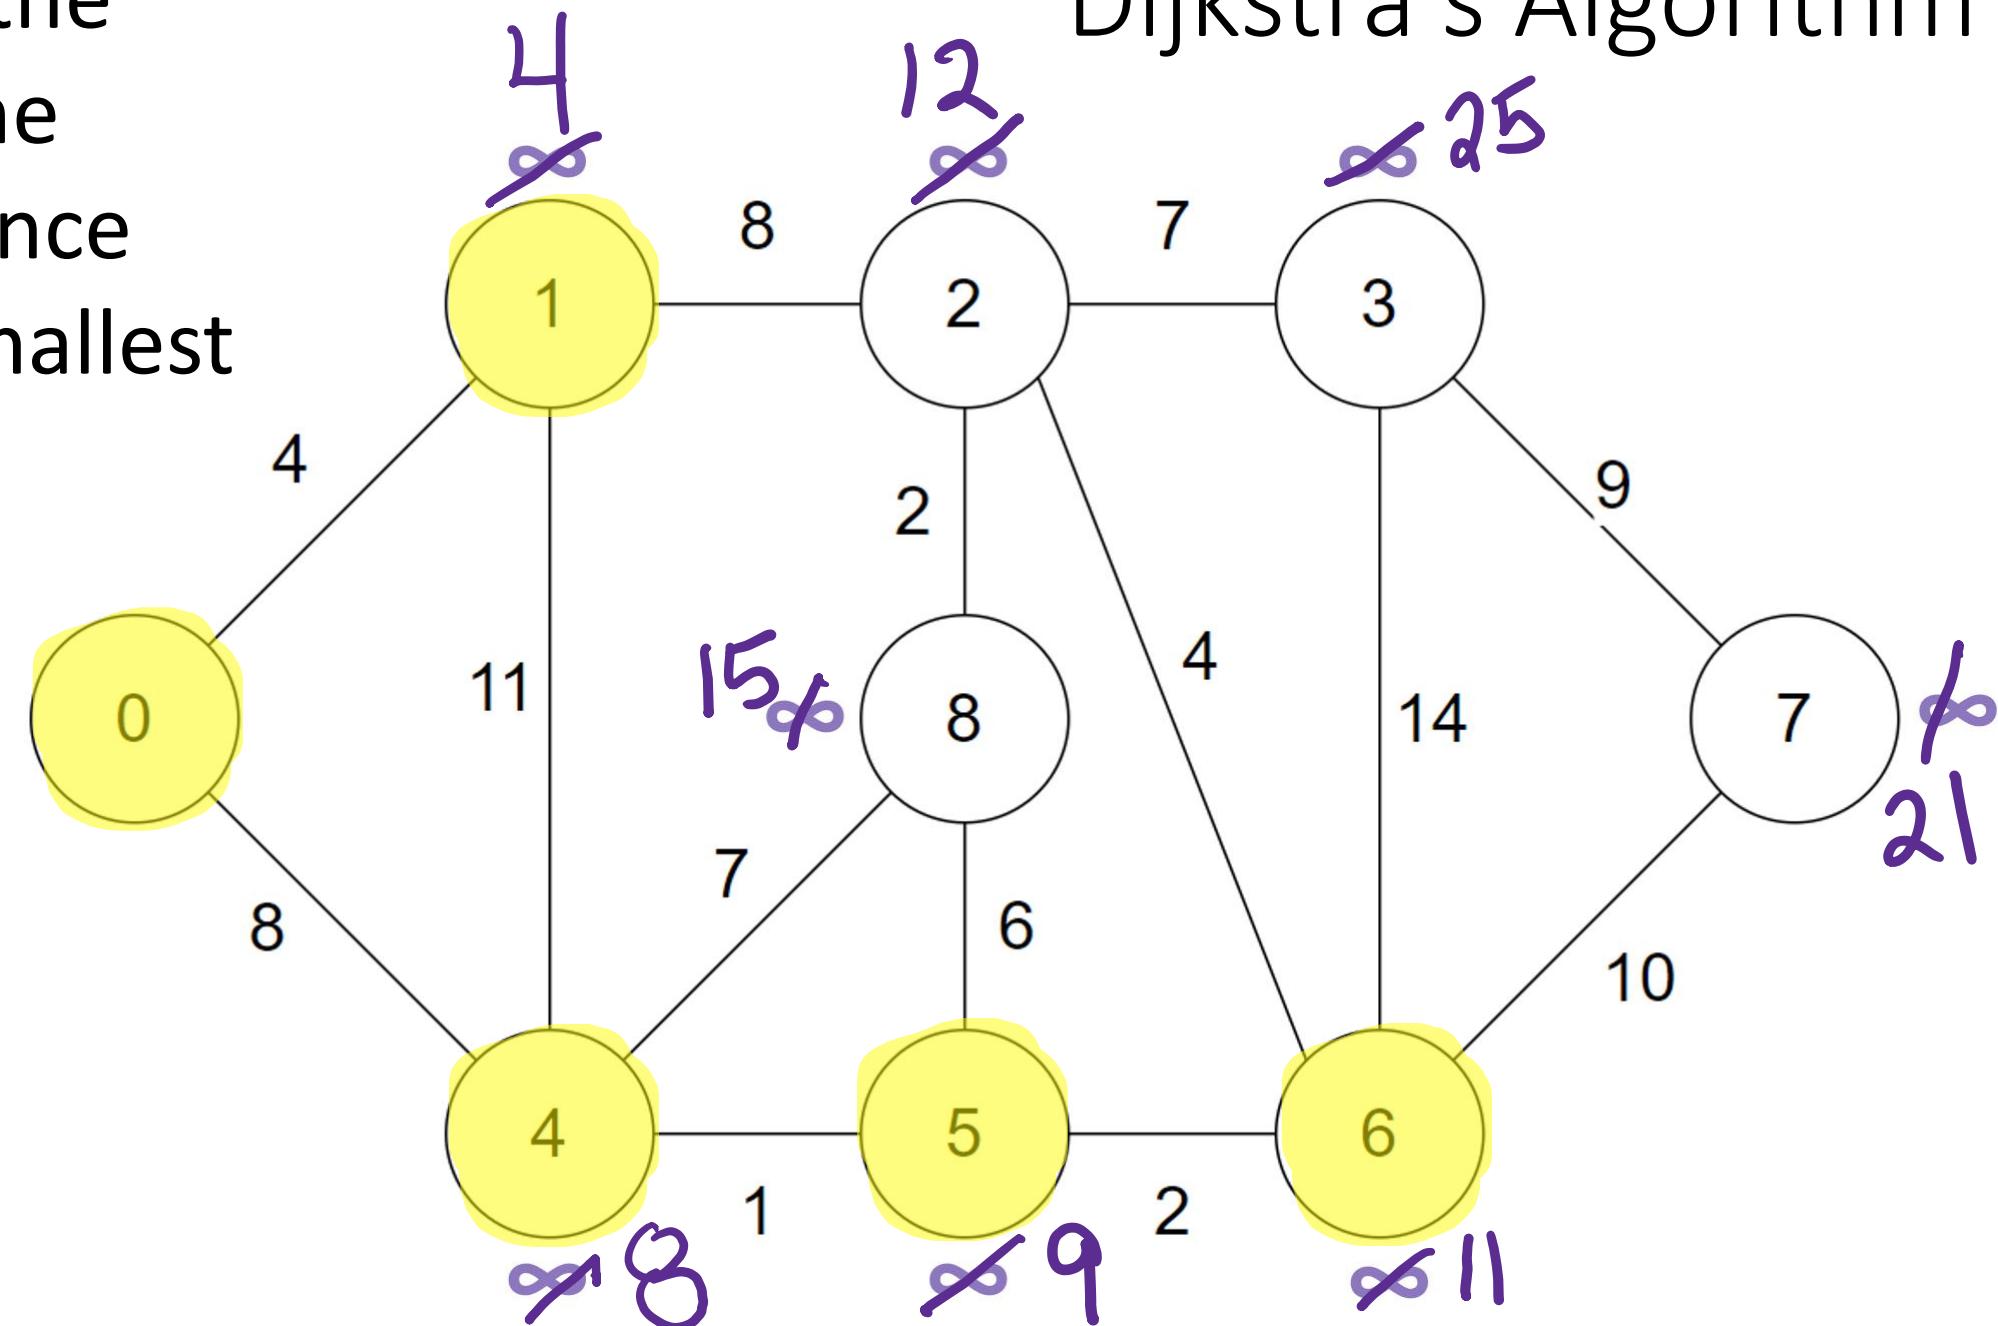

if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$

Dijkstra's Algorithm


```
if (12 + 7) < 25)  
d(v) = 12 + 7  
d(v) = 19
```

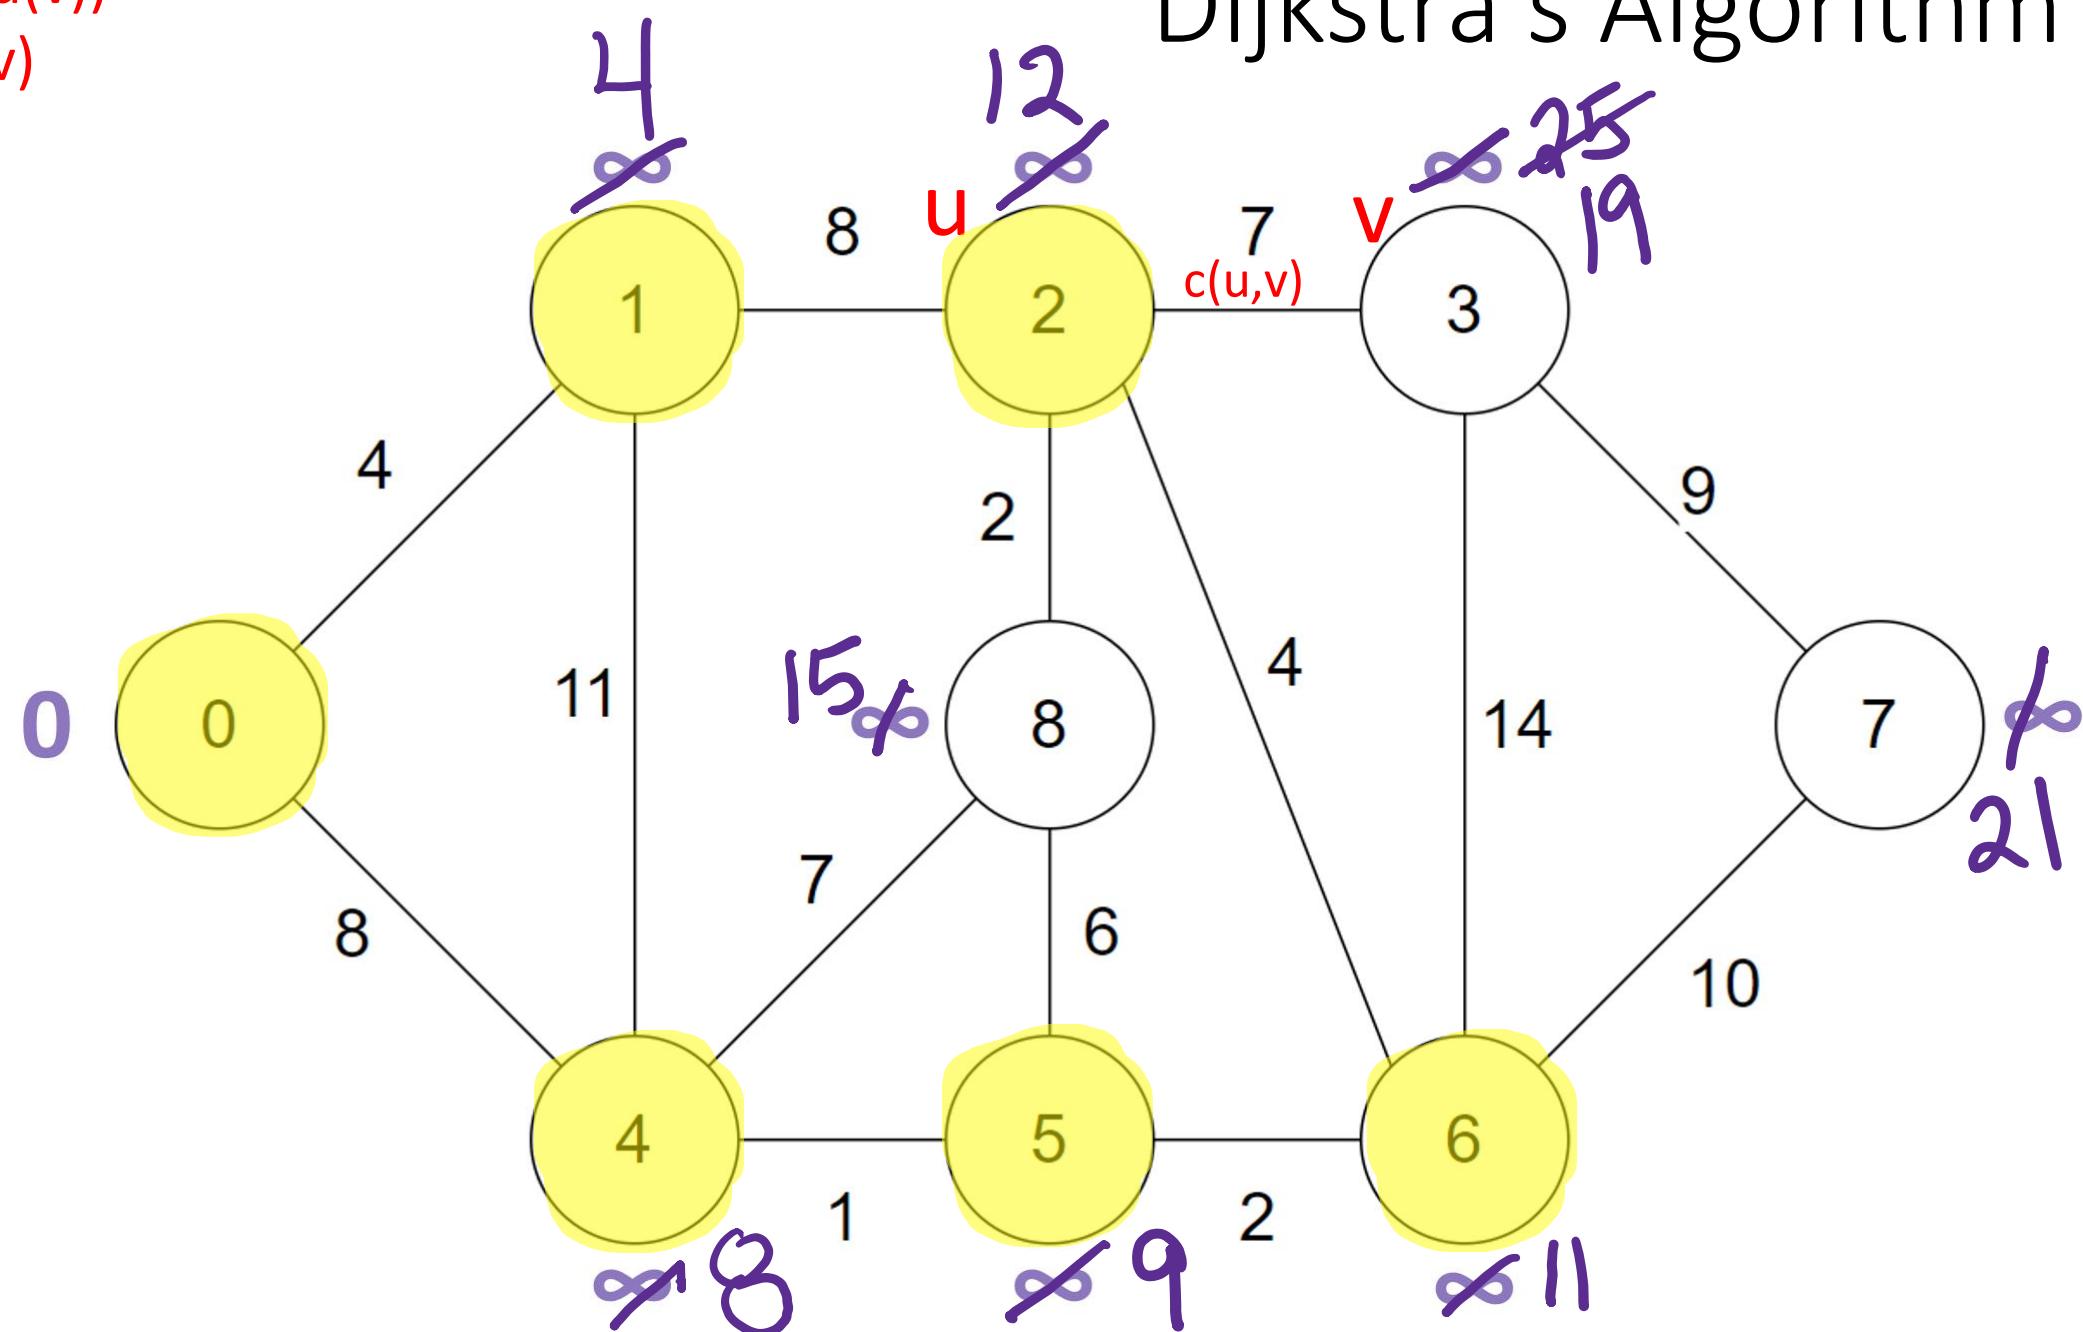

Dijkstra's Algorithm

if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$


if ($12 + 2 < 15$)
 $d(v) = 12 + 2$
 $d(v) = 14$

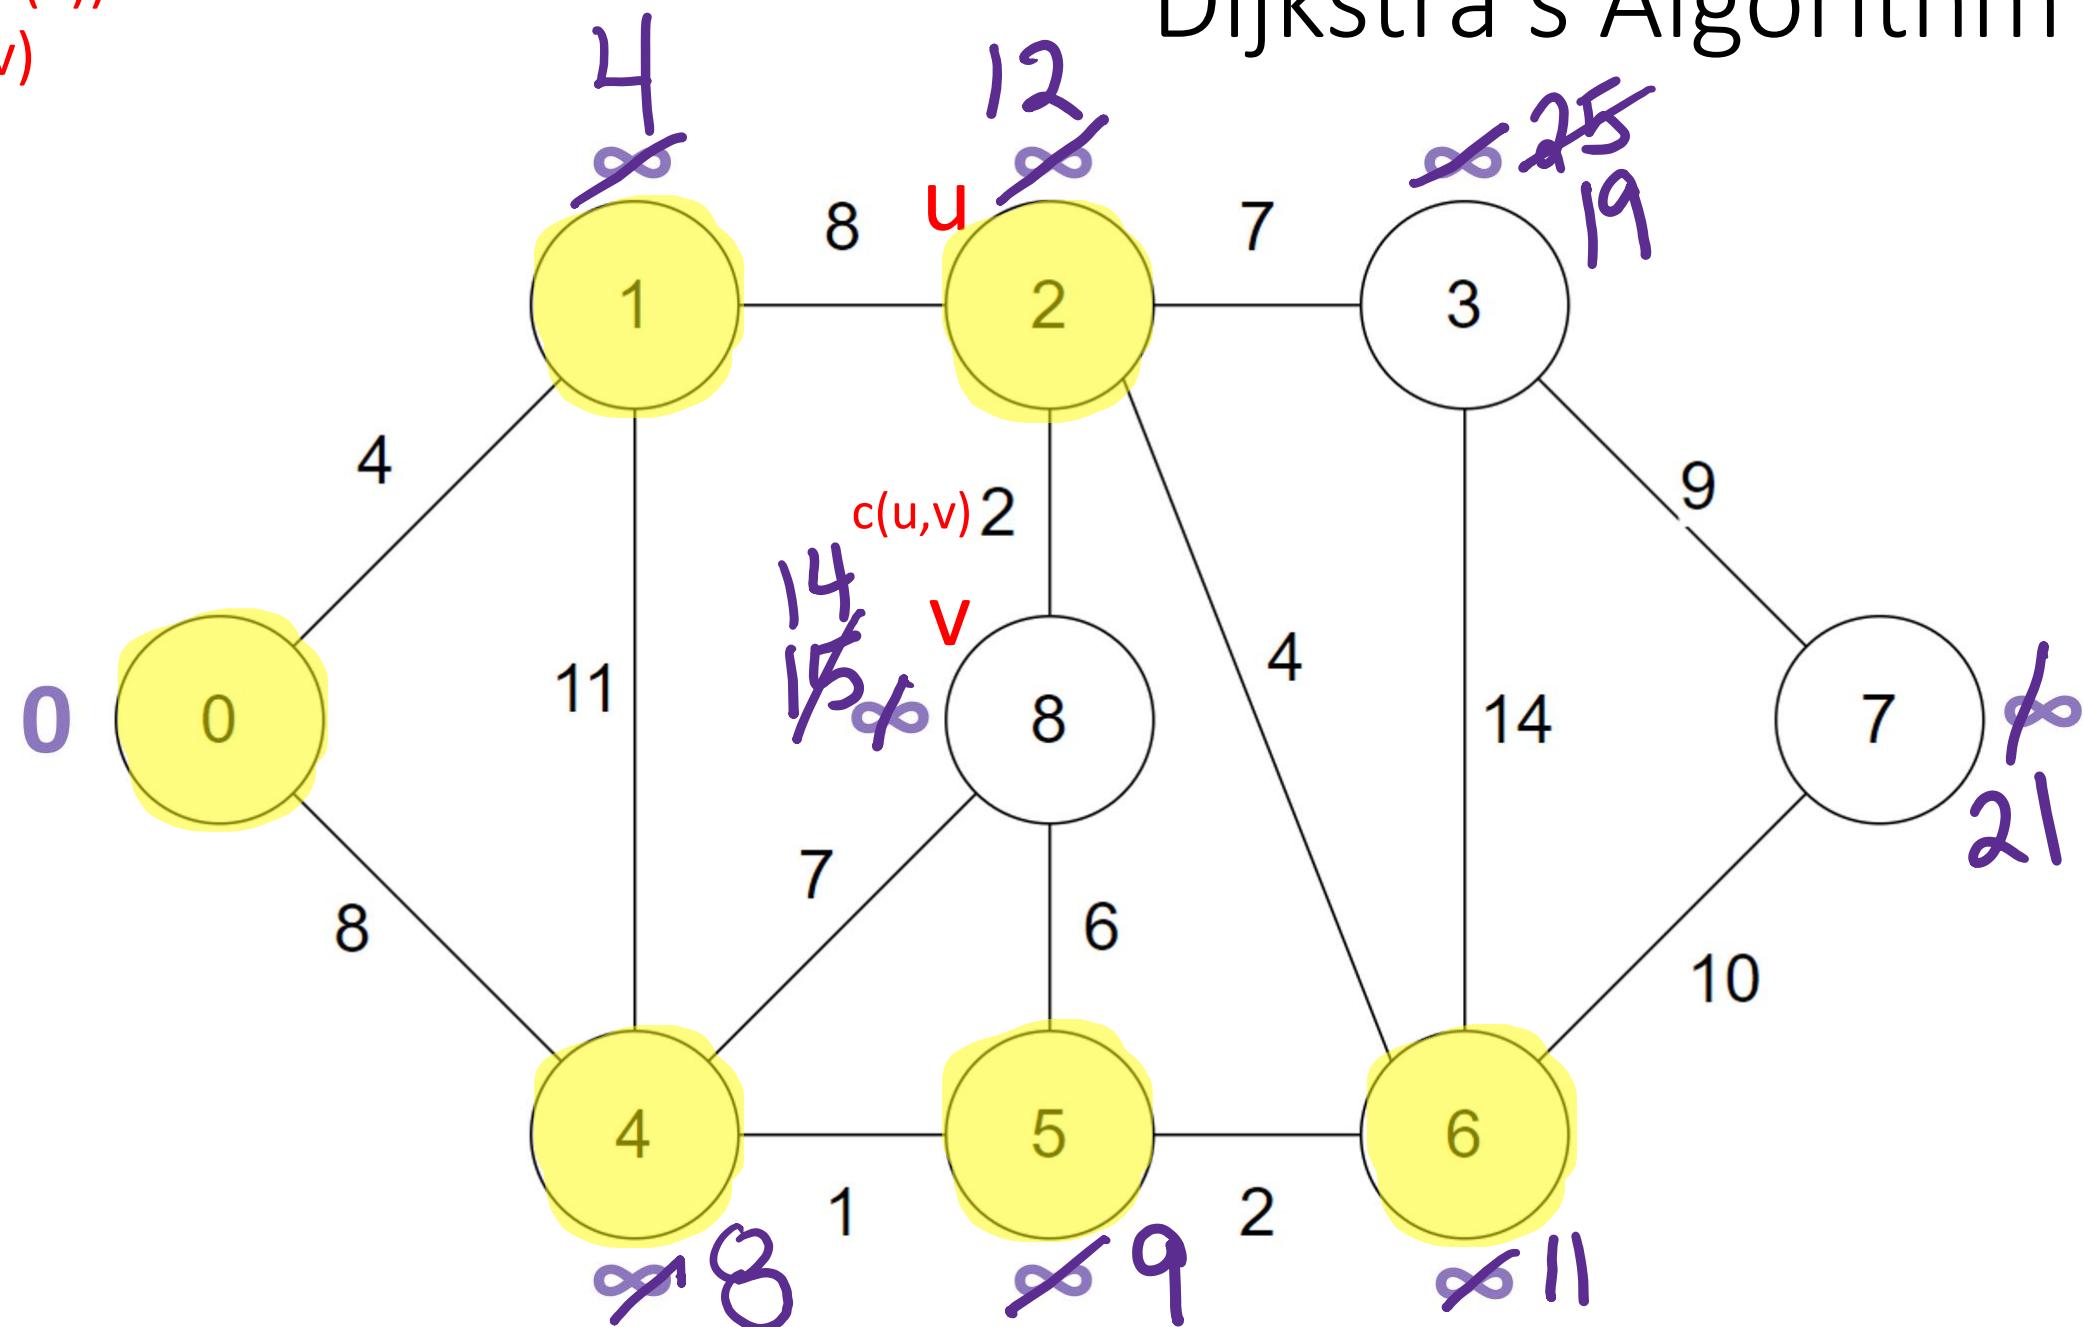

Now we pick the Vertex with the **smallest** distance value – the smallest $d(u)$

- 0 – already visited
- 1 – already visited
- 2 – already visited
- 3 – $d(u)$ of 19
- 4 – already visited
- 5 – already visited
- 6 – already visited
- 7 – $d(u)$ of 21
- 8 – $d(u)$ of 14


Dijkstra's Algorithm

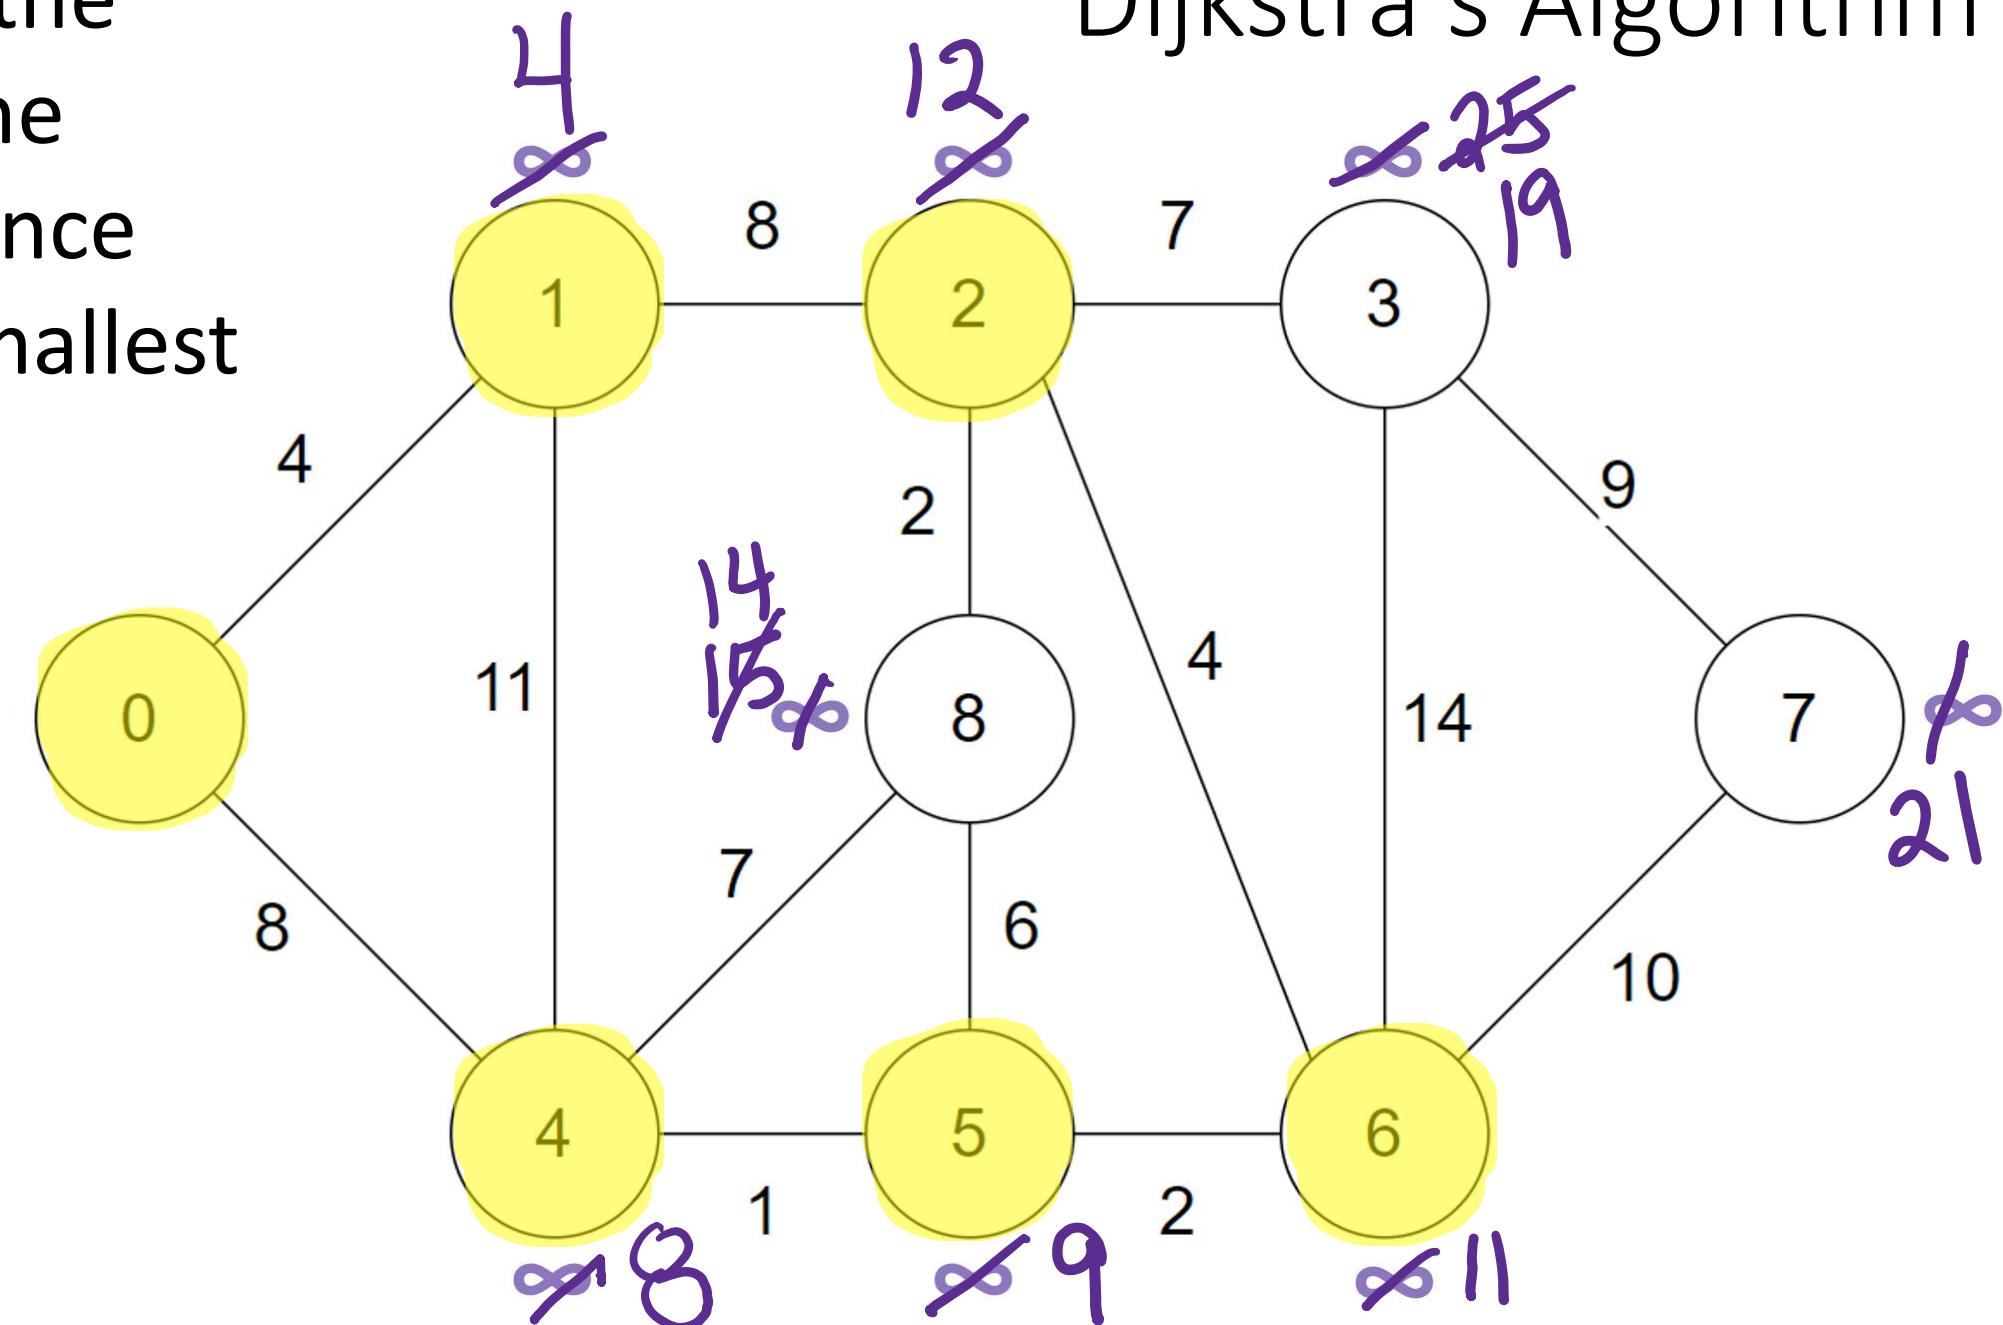

Dijkstra's Algorithm

if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$


$d(u)$ is 14 but Vertex 8 has
NO unvisited neighbors so
we are done with Vertex 8.

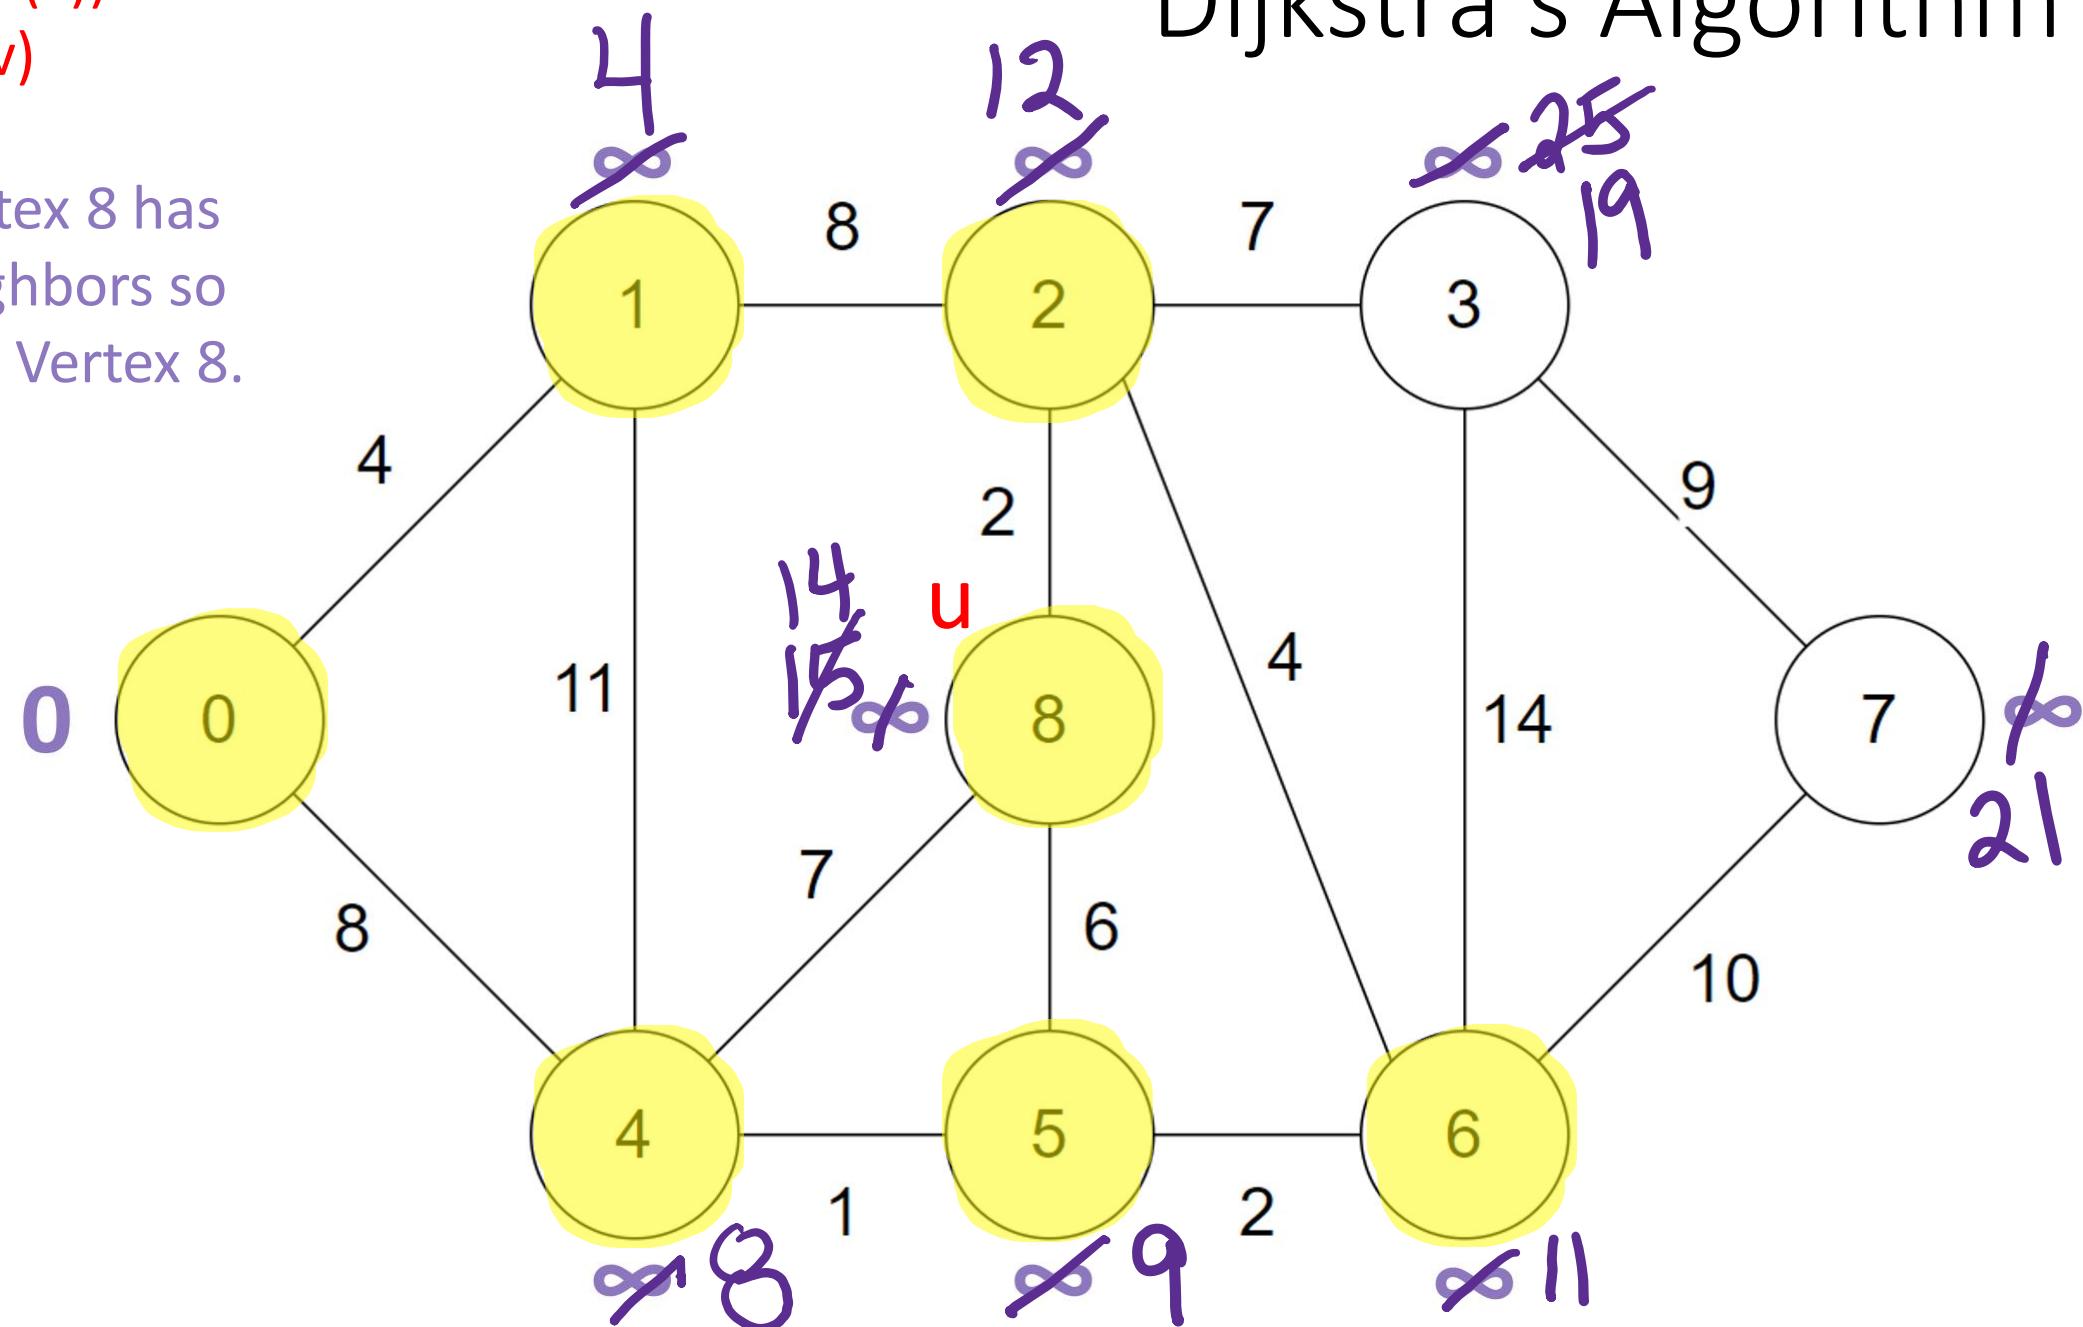

Now we pick the Vertex with the **smallest** distance value – the smallest $d(u)$

- 0 – already visited
- 1 – already visited
- 2 – already visited
- 3 – $d(u)$ of 19**
- 4 – already visited
- 5 – already visited
- 6 – already visited
- 7 – $d(u)$ of 21
- 8 – already visited

Dijkstra's Algorithm

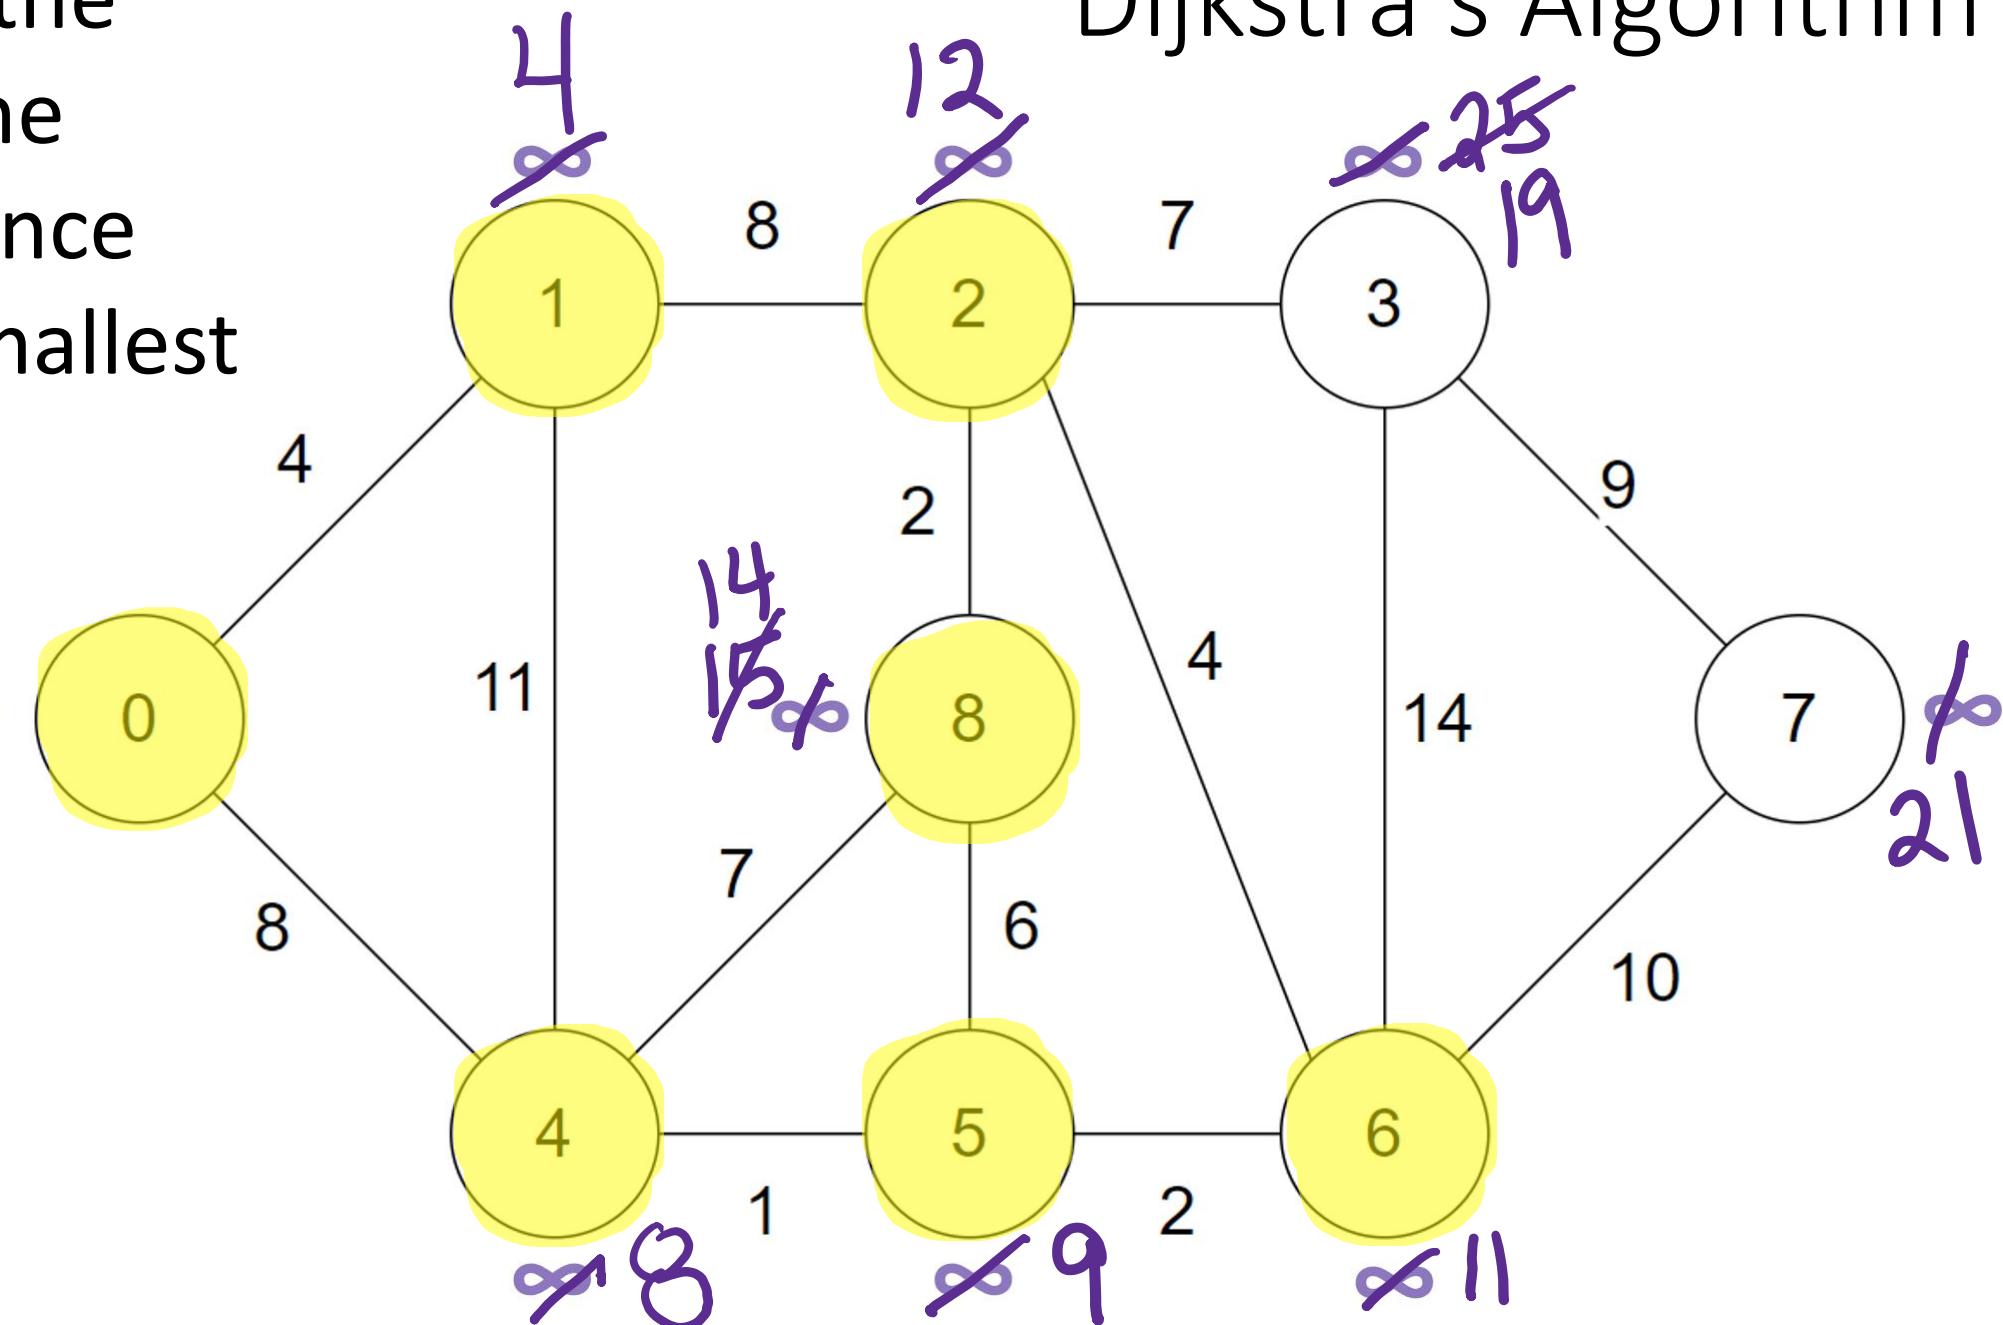


Dijkstra's Algorithm

if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$

if ($19 + 9 < 21$)

28 is not less than 21


NO CHANGE

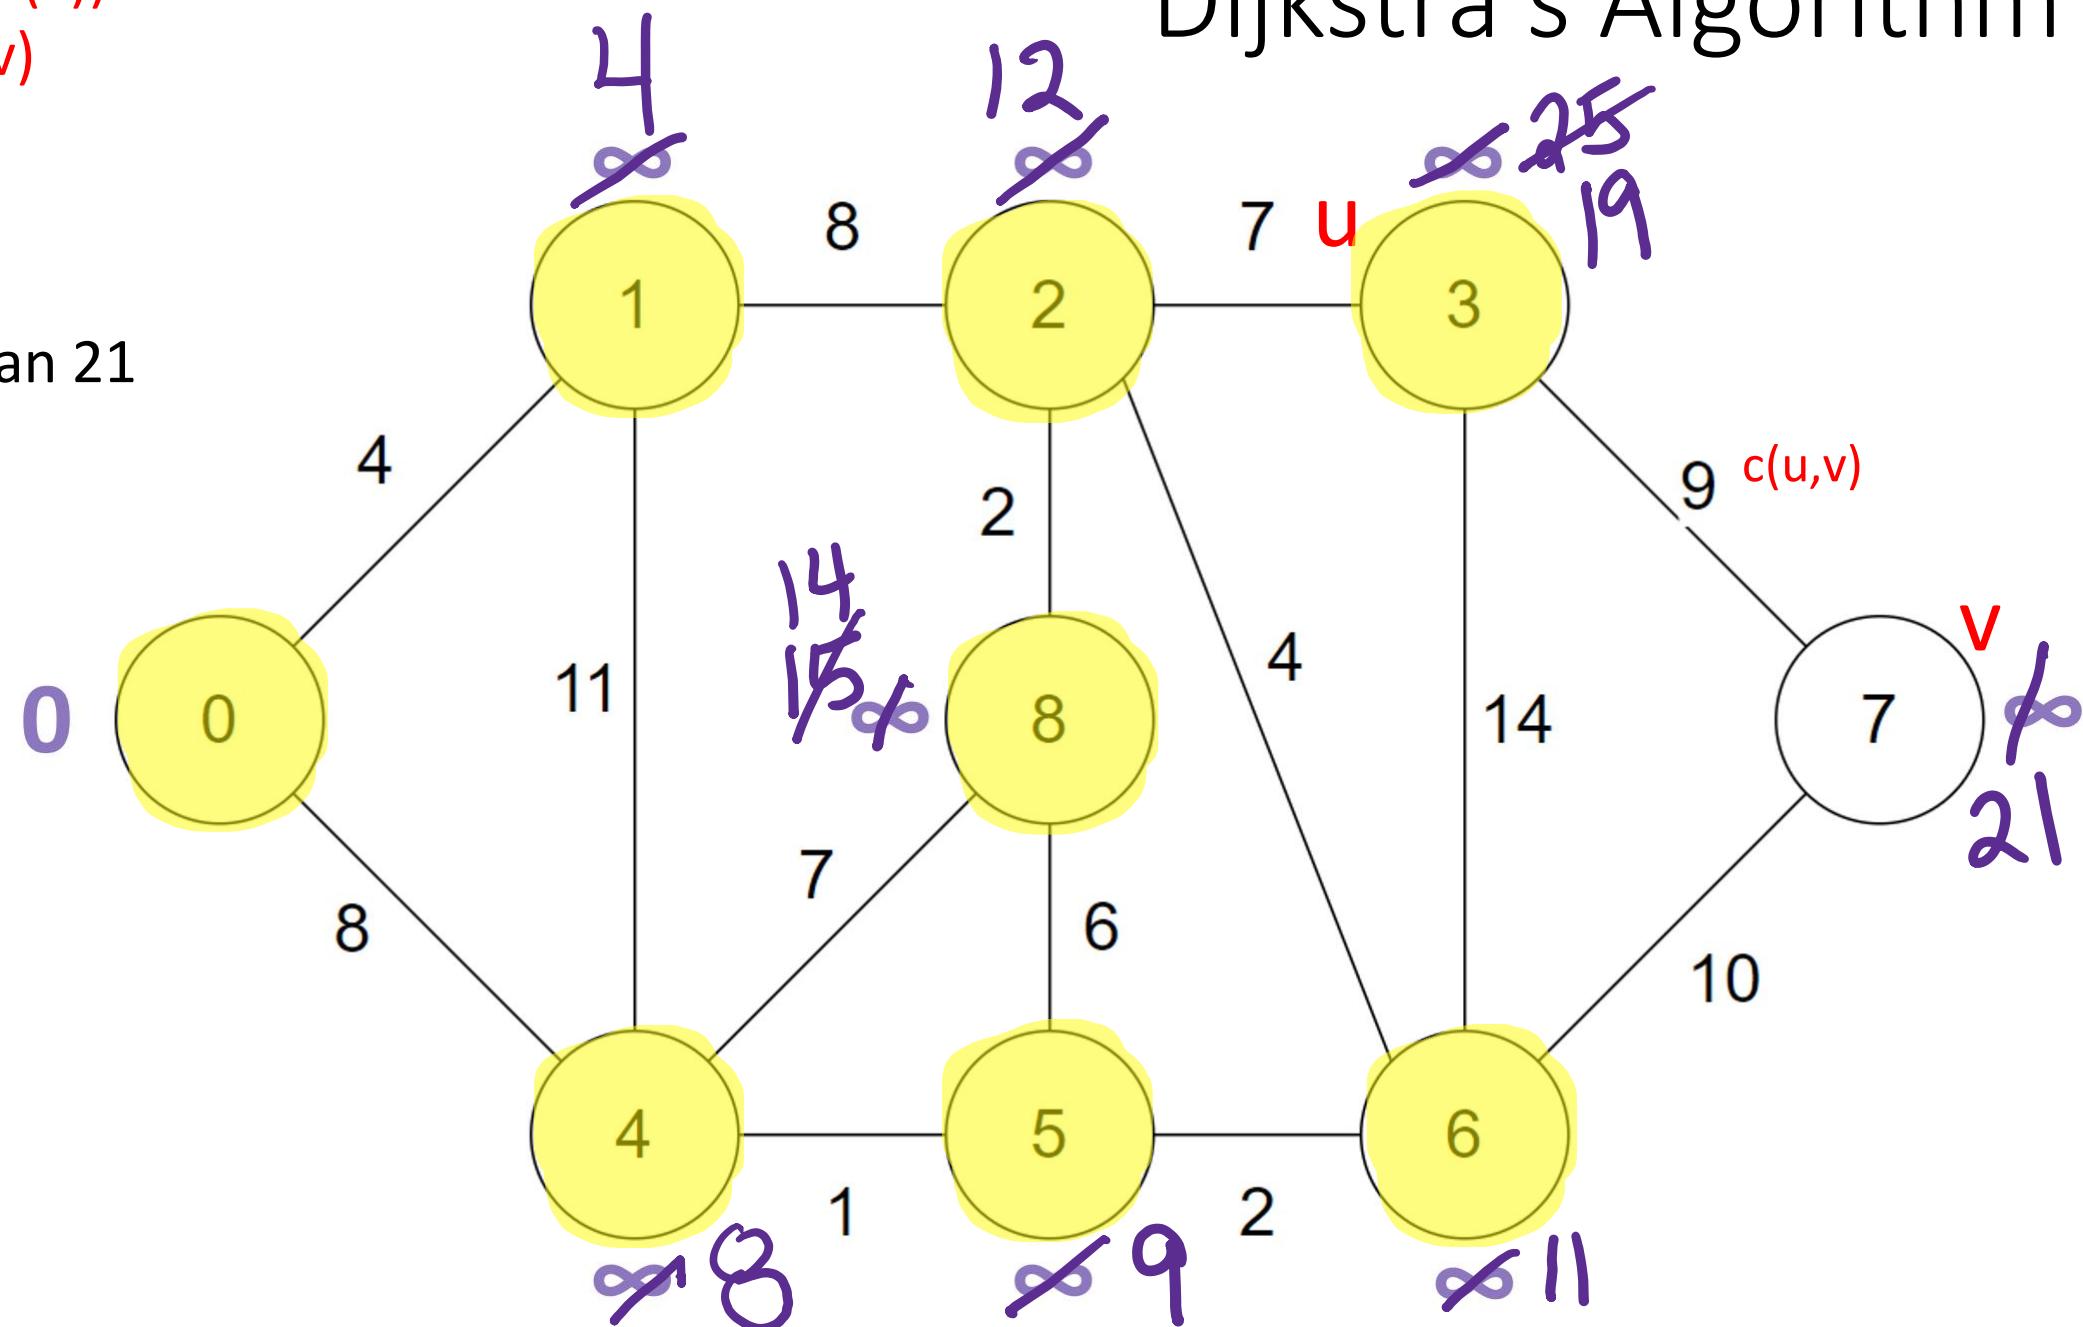

Now we pick the Vertex with the **smallest** distance value – the smallest $d(u)$

- 0 – already visited
- 1 – already visited **0**
- 2 – already visited
- 3 – already visited
- 4 – already visited
- 5 – already visited
- 6 – already visited
- 7 – $d(u)$ of 21**
- 8 – already visited


Dijkstra's Algorithm

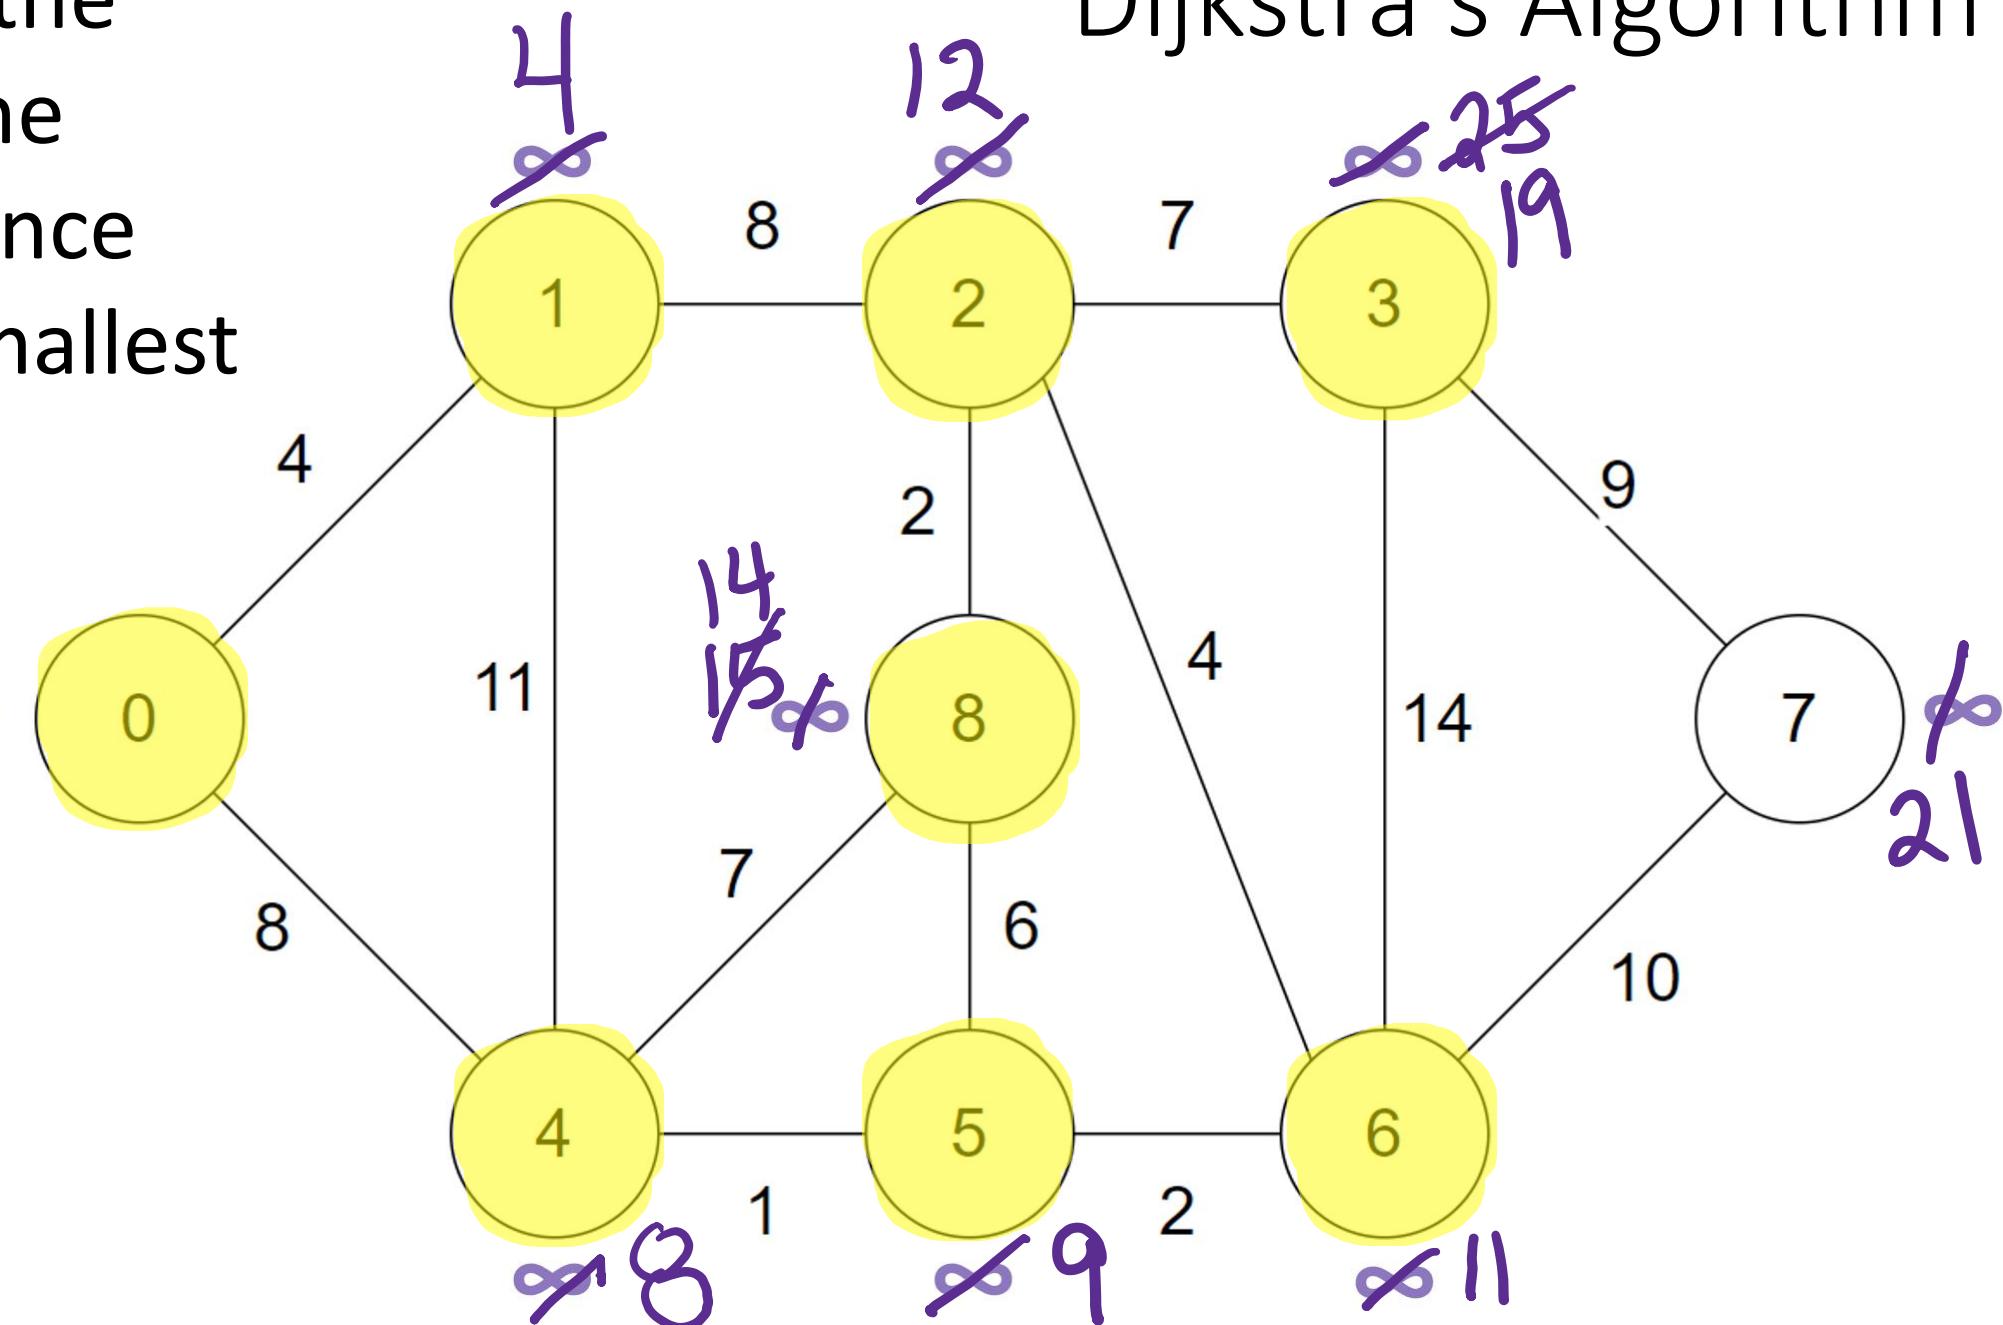


Dijkstra's Algorithm


if ($d(u) + c(u,v) < d(v)$)
 $d(v) = d(u) + c(u,v)$

$d(u)$ is 21 but Vertex 7 has
NO unvisited neighbors so
we are done with Vertex 7.

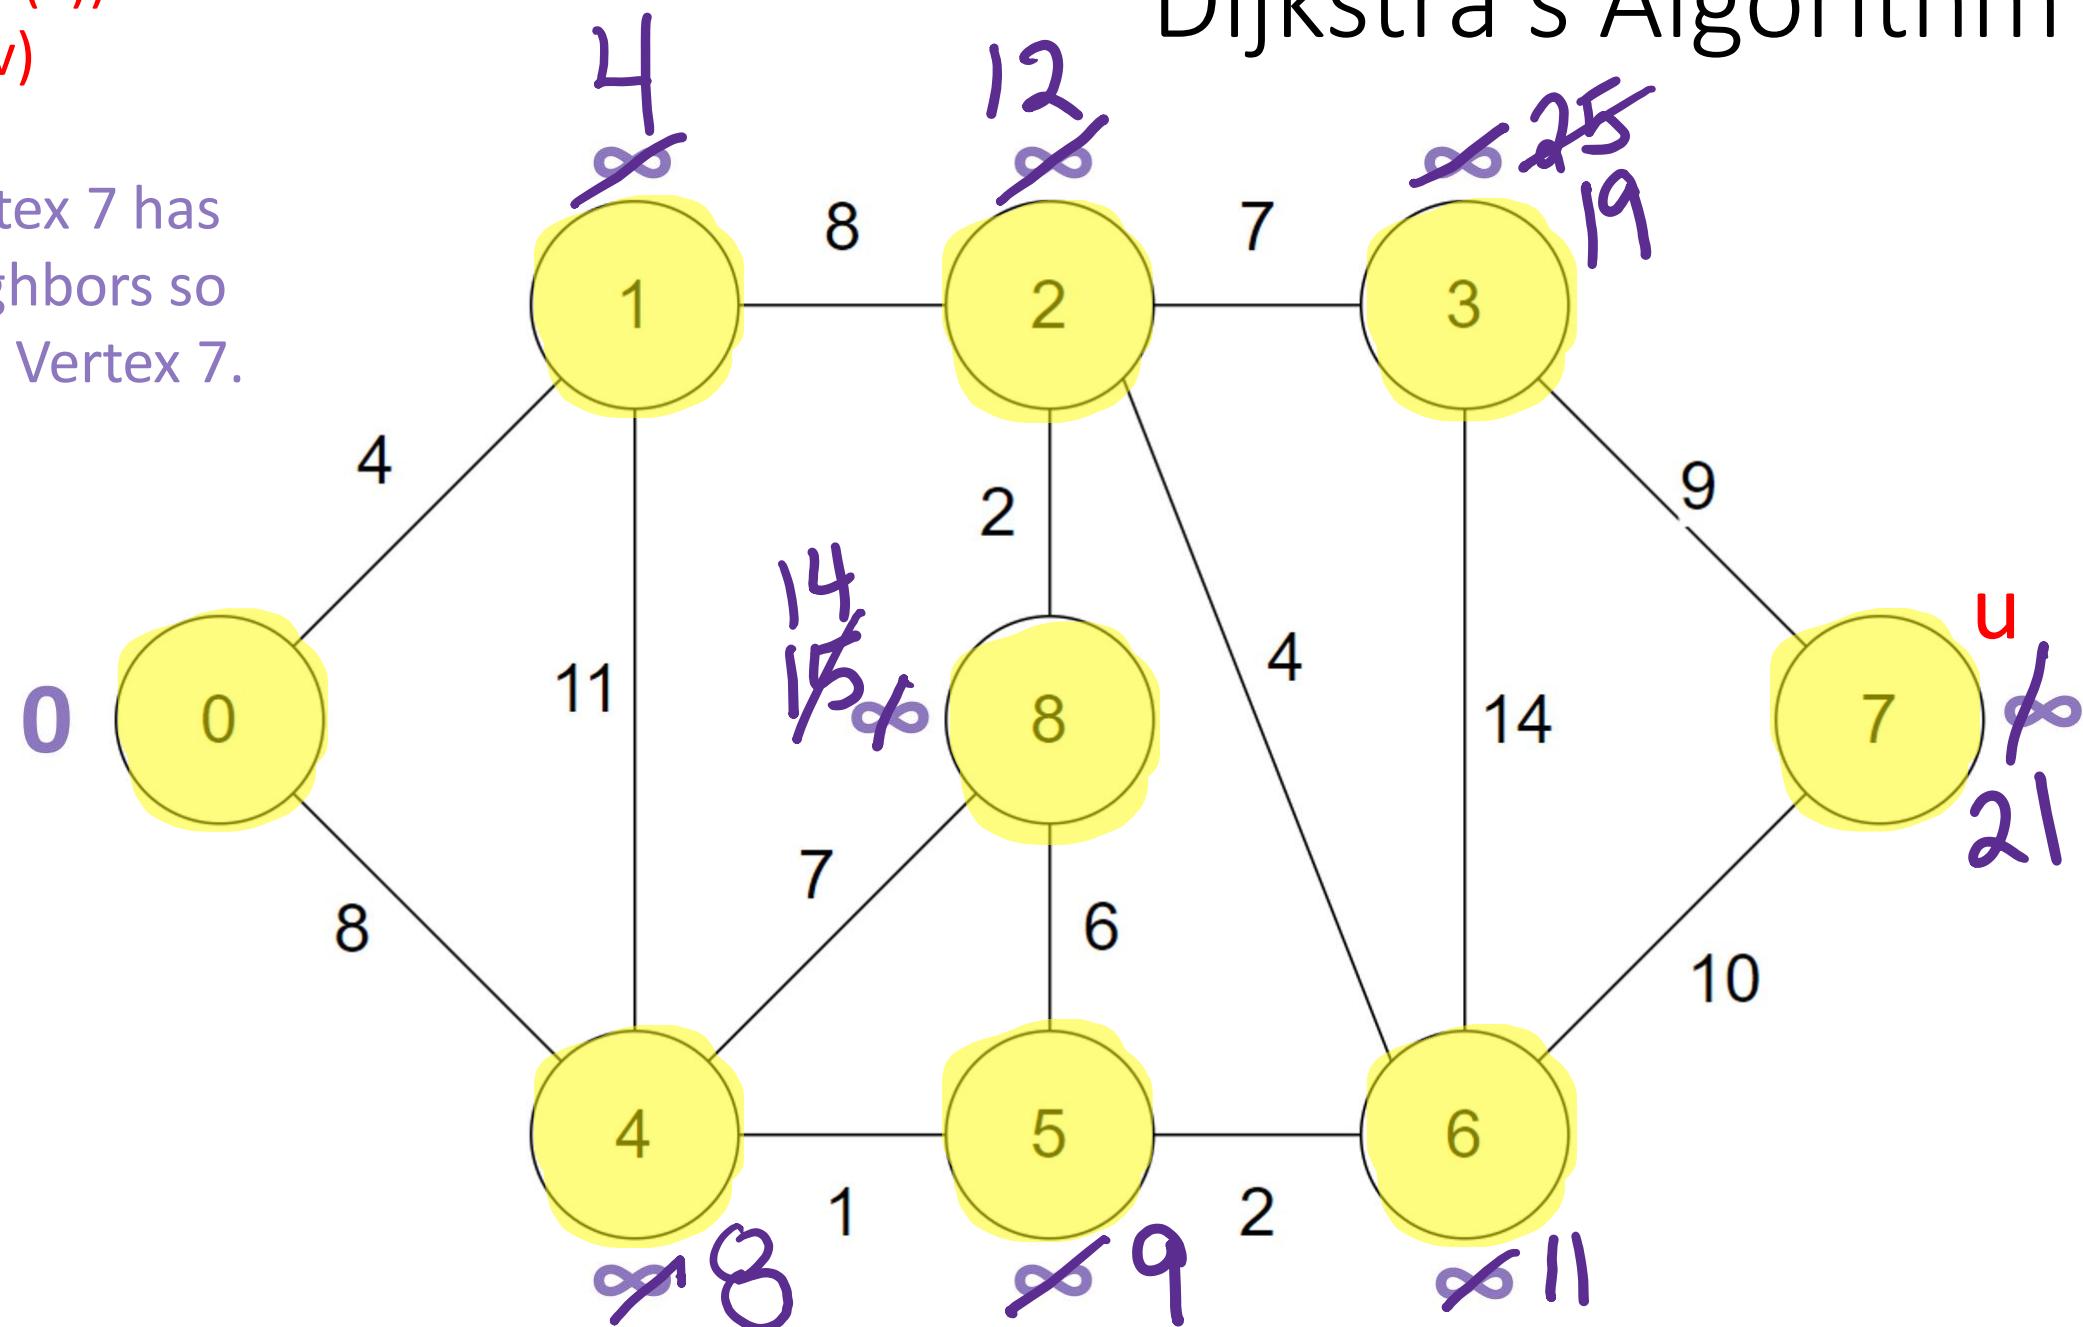


Dijkstra's Algorithm

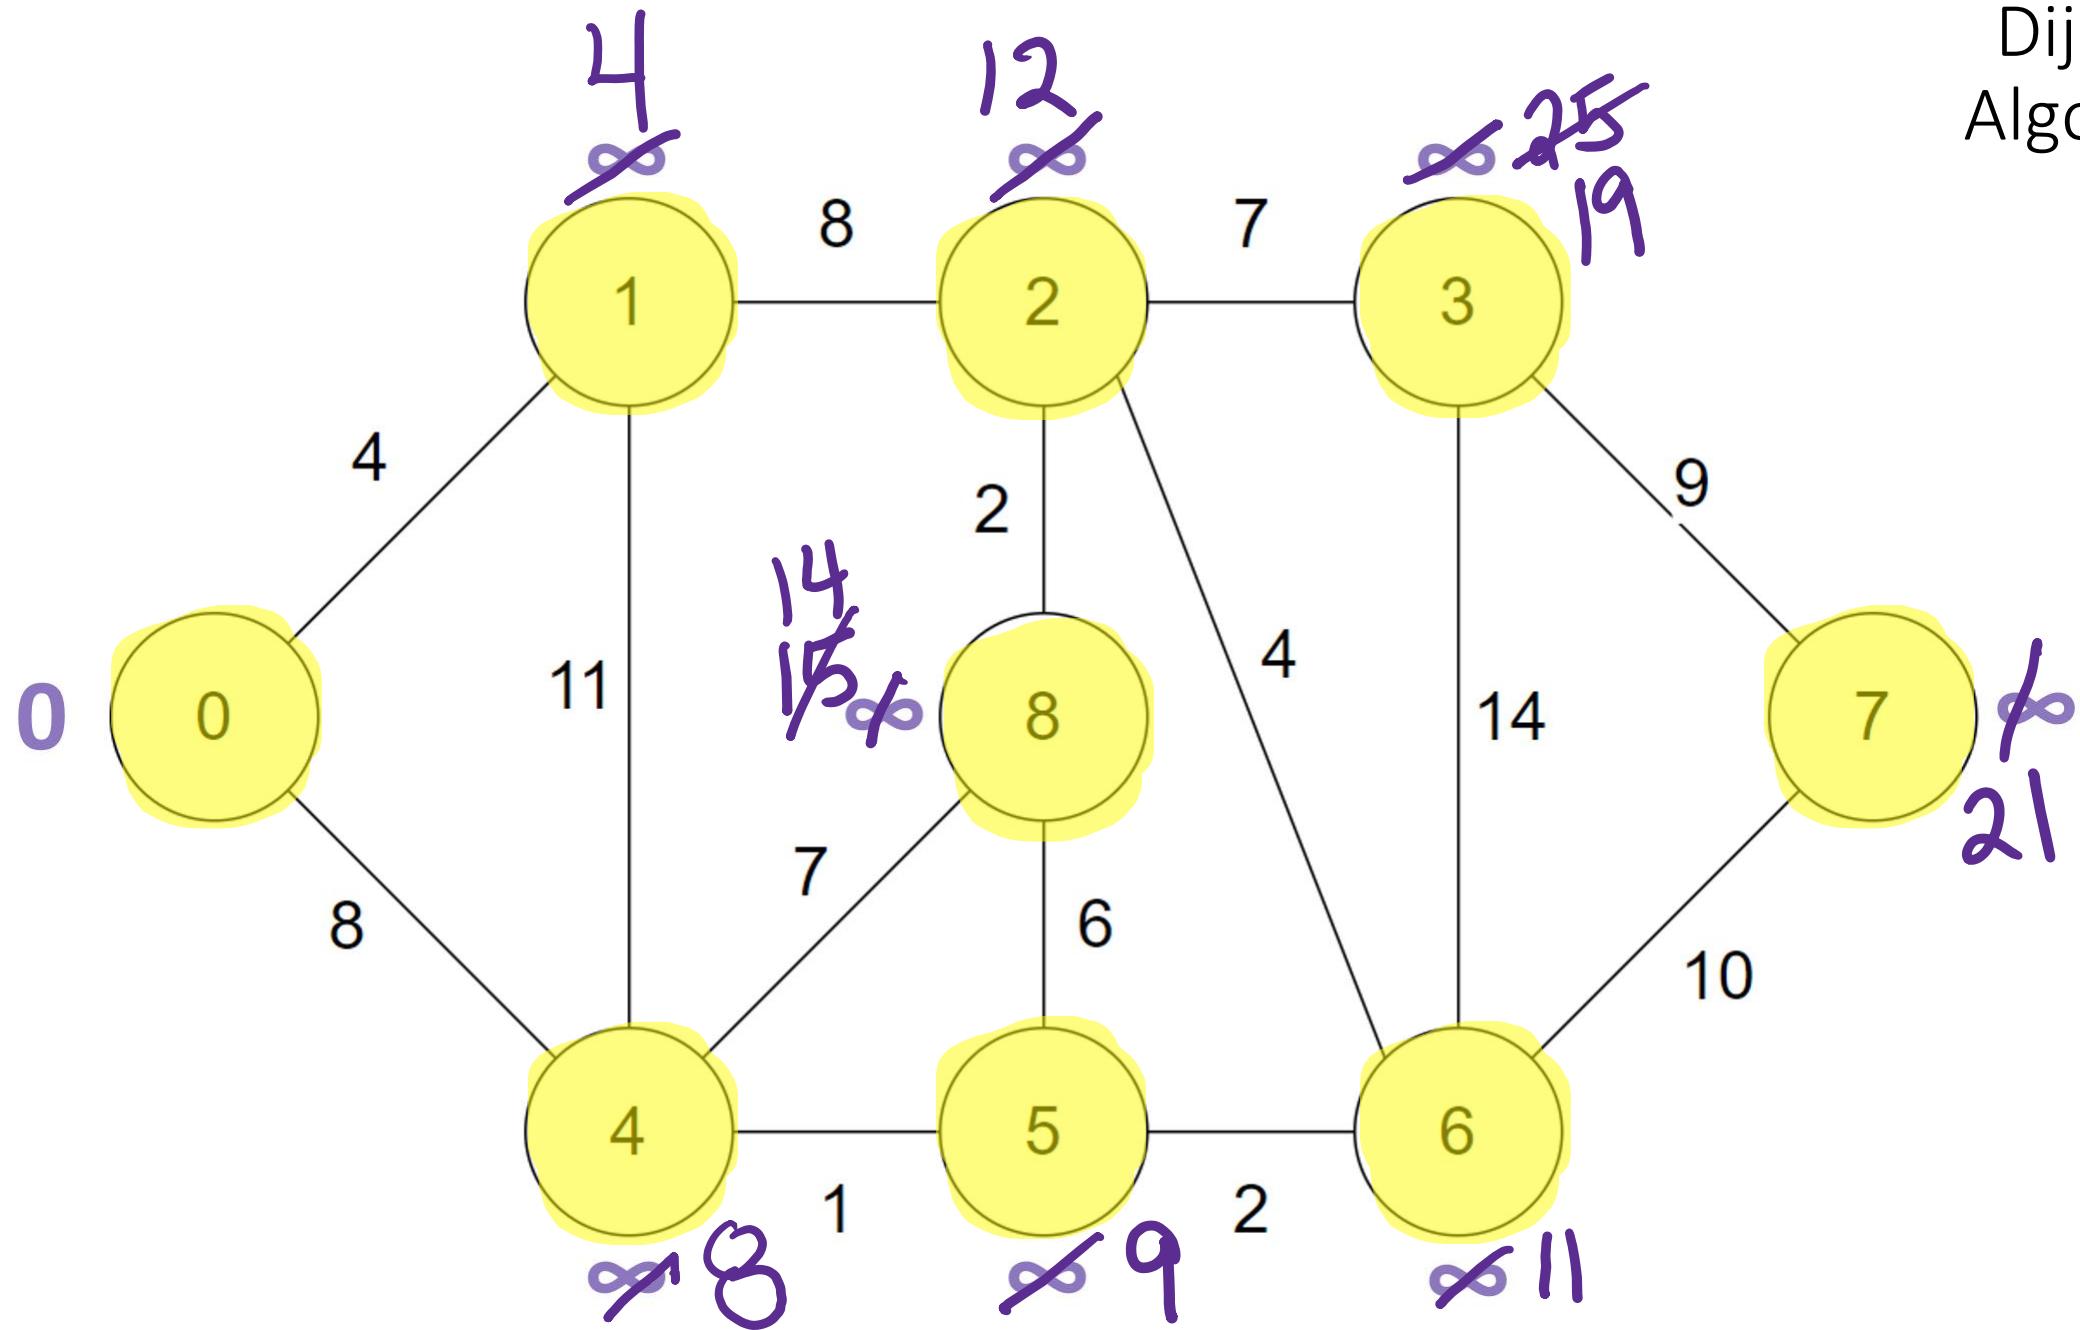

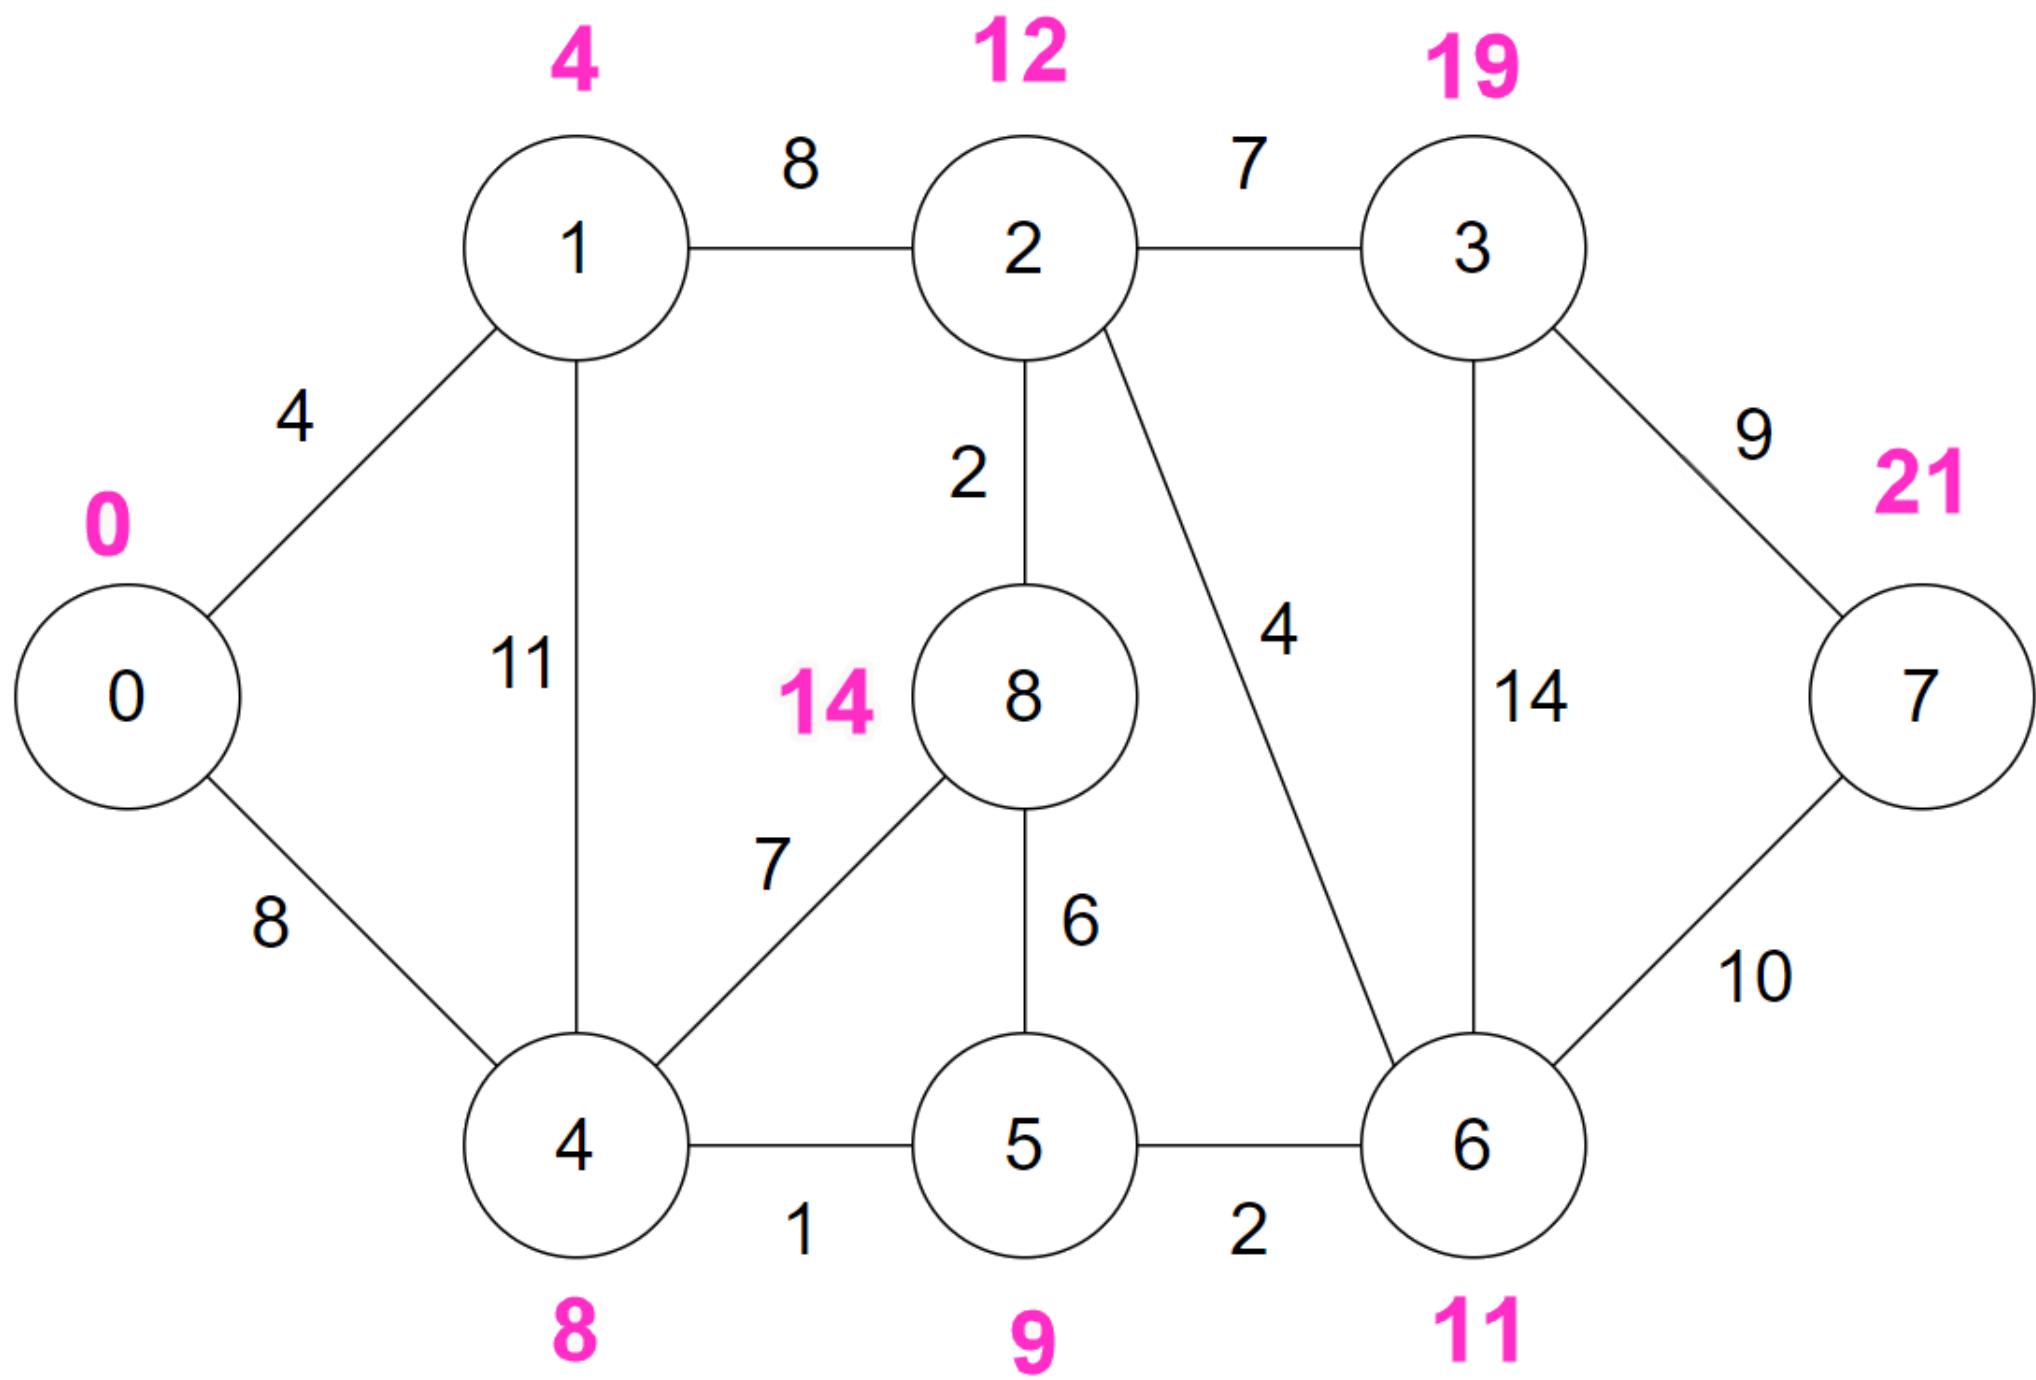


Dijkstra's Algorithm

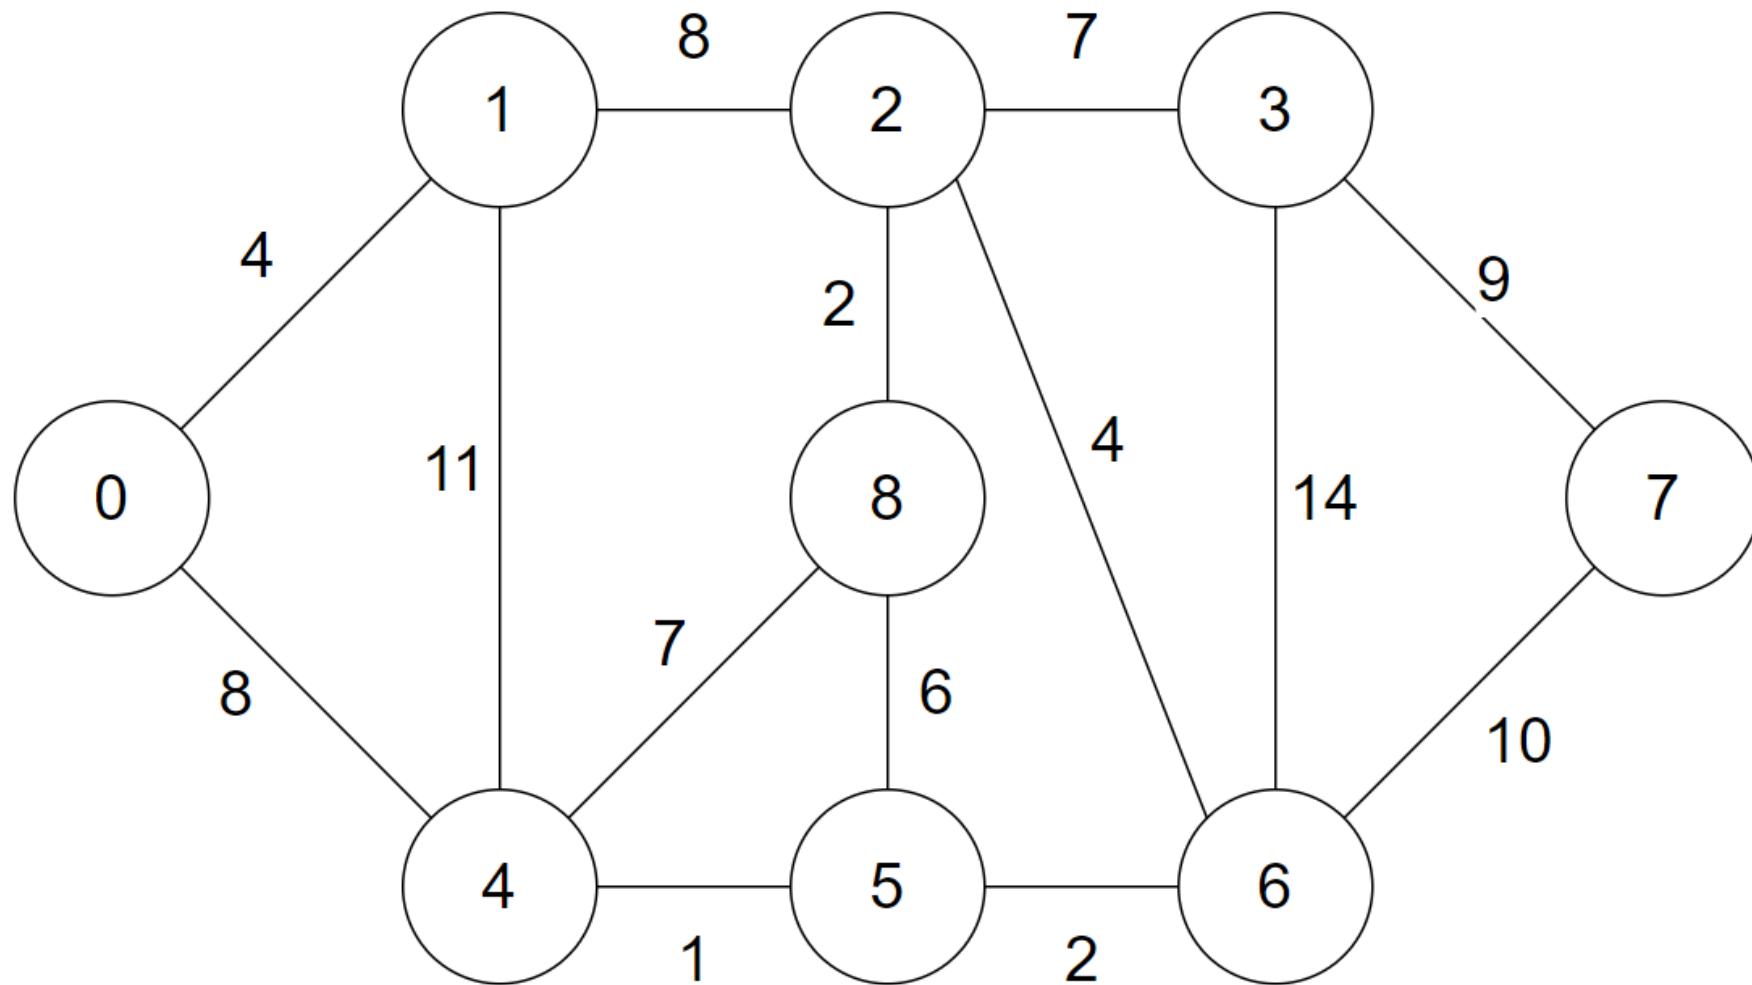


Source vertex MUST be listed first.

A	B	C	D	E
0	∞	∞	∞	∞

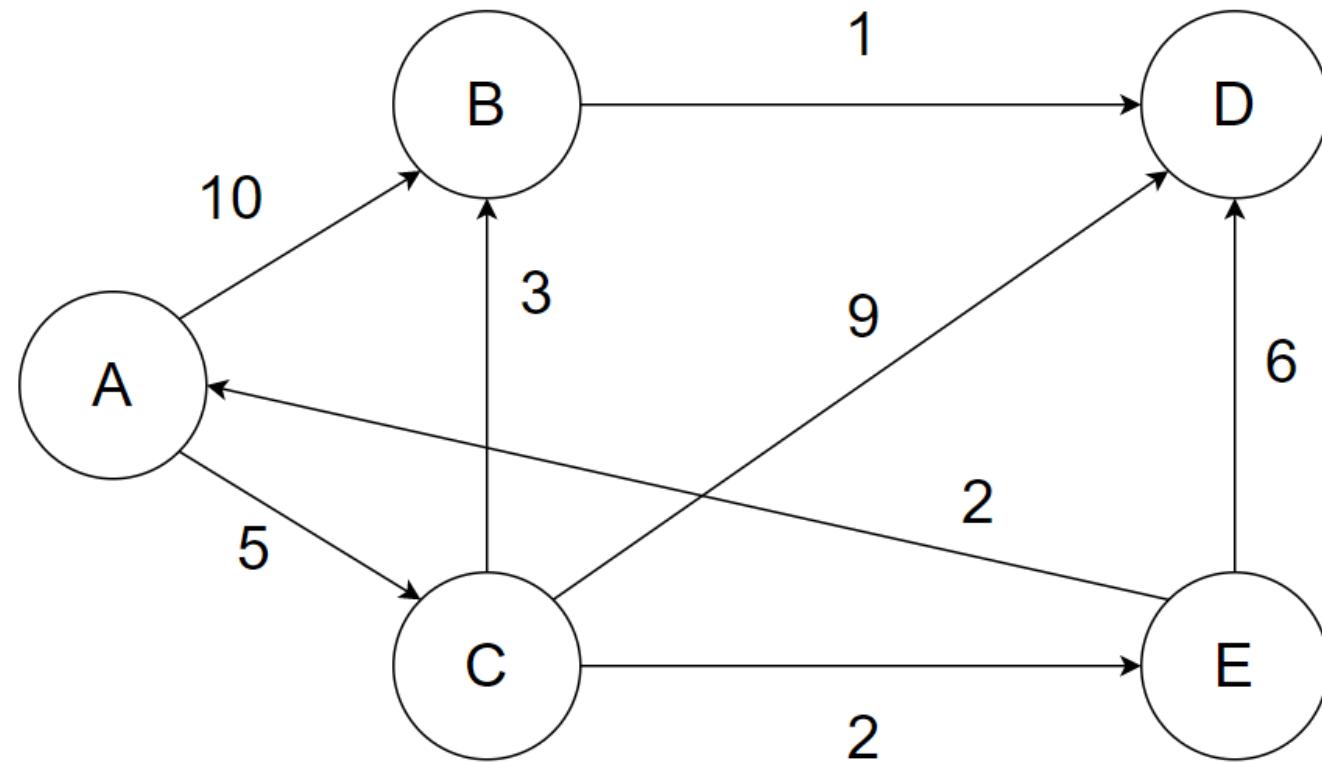


Which vertex has the smallest $d(u)$?

A	B	C	D	E
A	0	∞	∞	∞
B				
C				
D				
E				

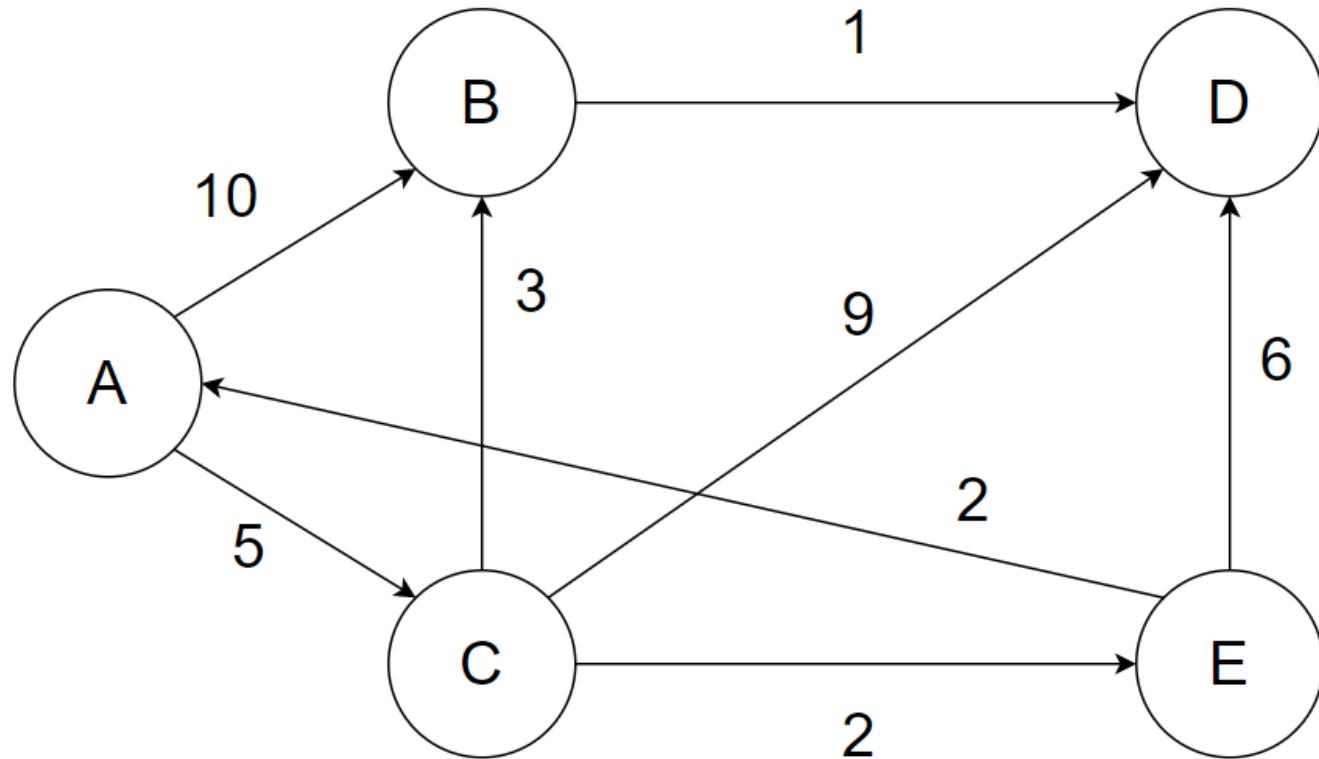


A \rightarrow B and A \rightarrow C

	A	B	C	D	E
A	0	∞	∞	∞	∞
	10	5	∞	∞	

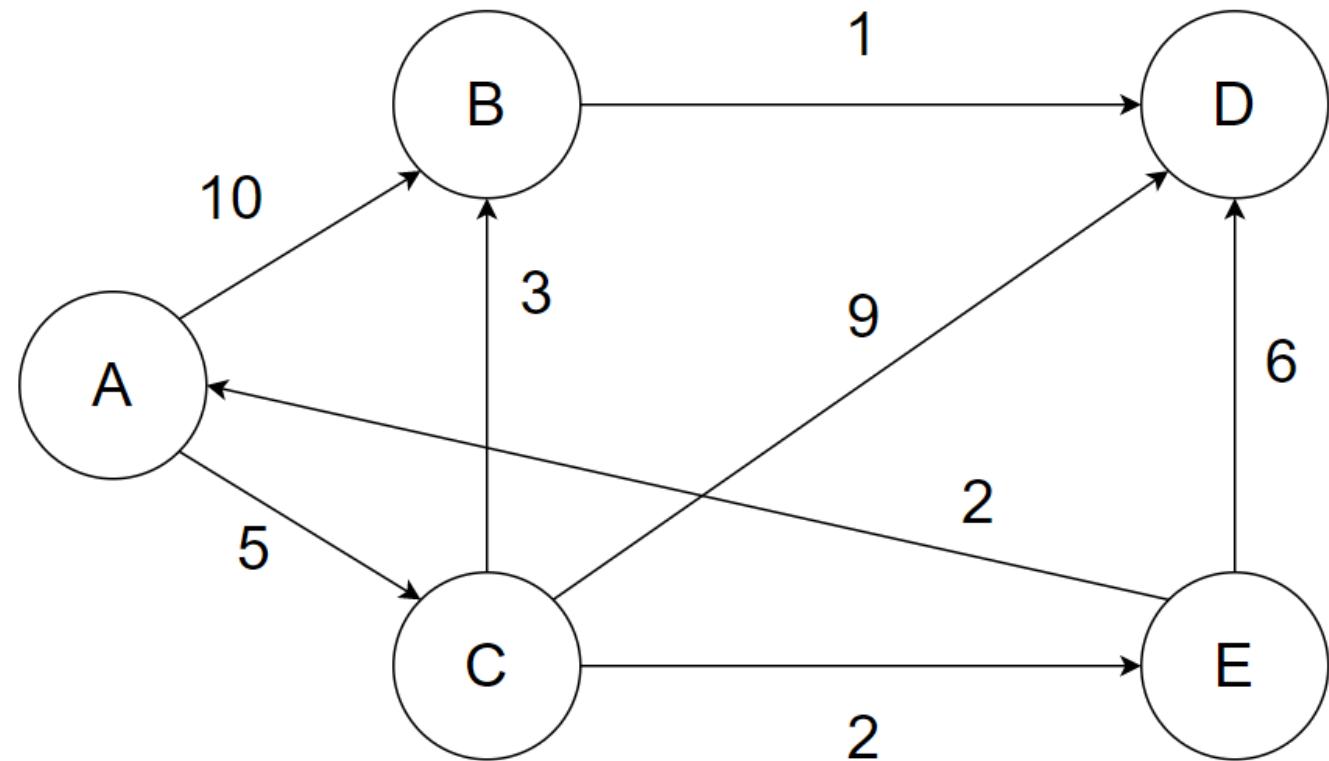


Which vertex has the smallest $d(u)$?

	A	B	C	D	E
A	0	∞	∞	∞	∞
C	10		5	∞	∞

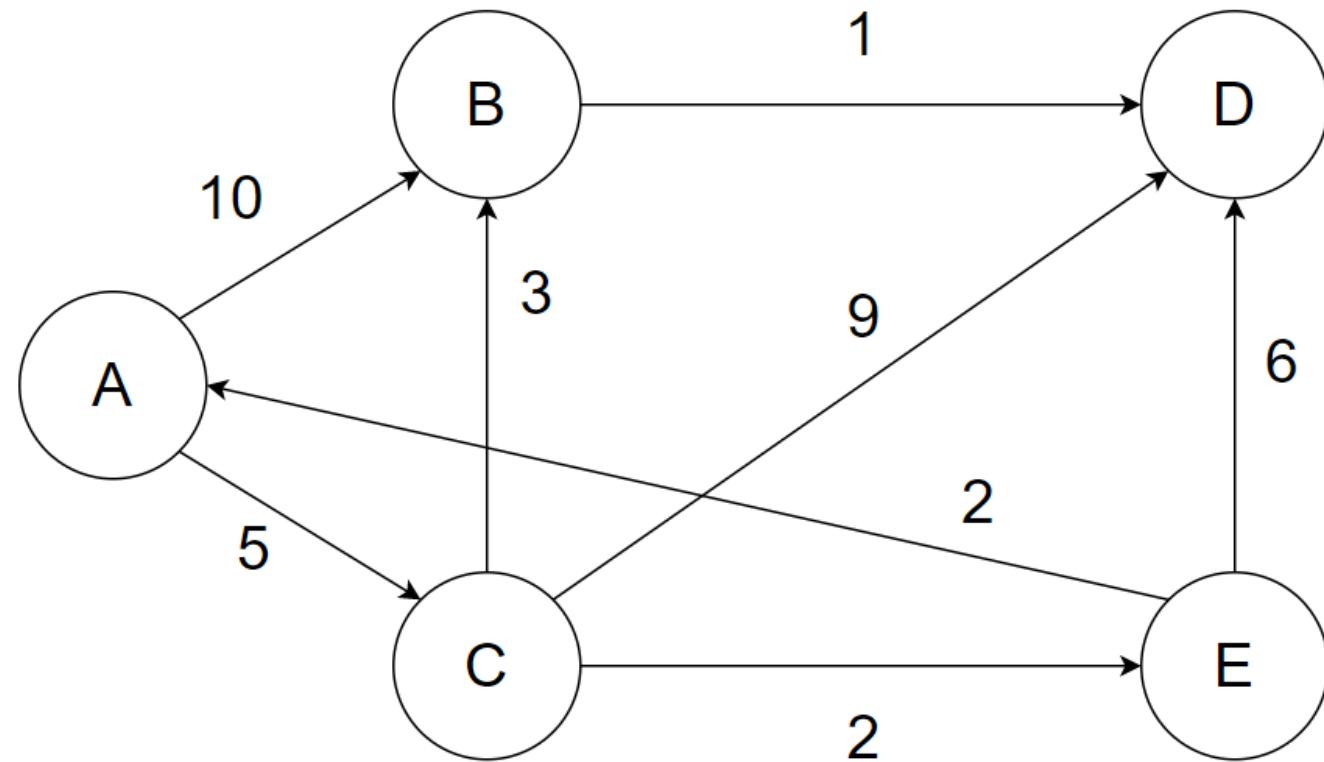


C -> B and C -> D and C->E

	A	B	C	D	E
A	0	∞	∞	∞	∞
C	10	5	∞	∞	
	8		14	7	

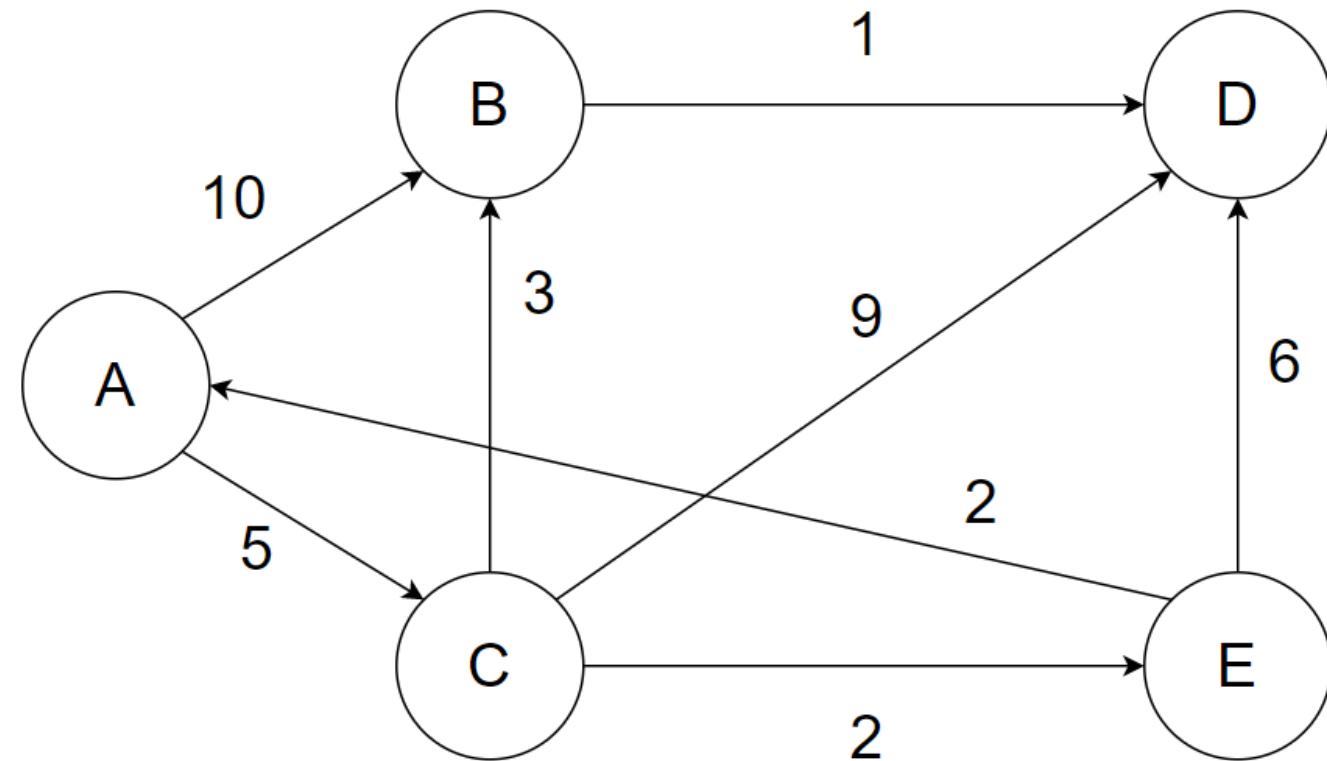

Which vertex has the smallest $d(u)$?


	A	B	C	D	E
A	0	∞	∞	∞	∞
C		10	5	∞	∞
E		8		14	7

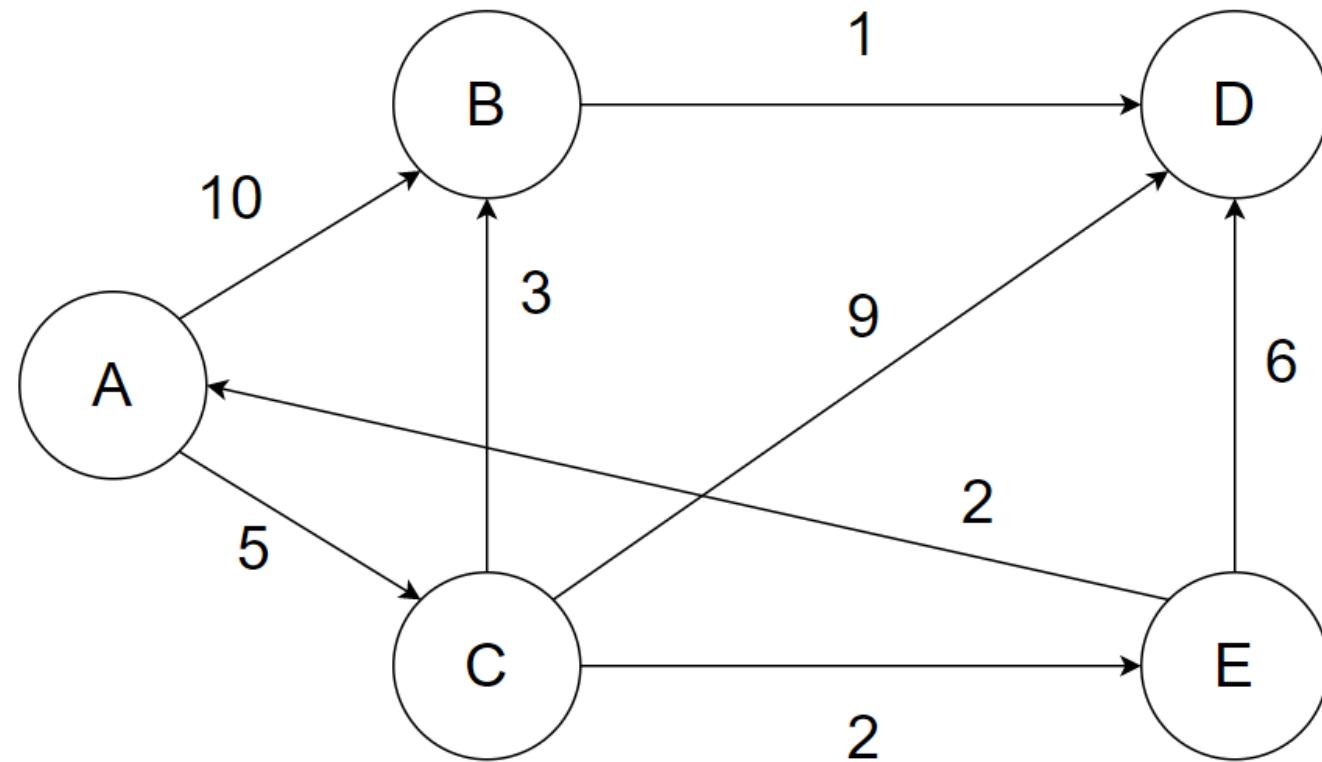

E -> A and E -> D


7 + 6

	A	B	C	D	E
A	0	∞	∞	∞	∞
C	10	5	∞	∞	
E	8		14	7	
	8		13		

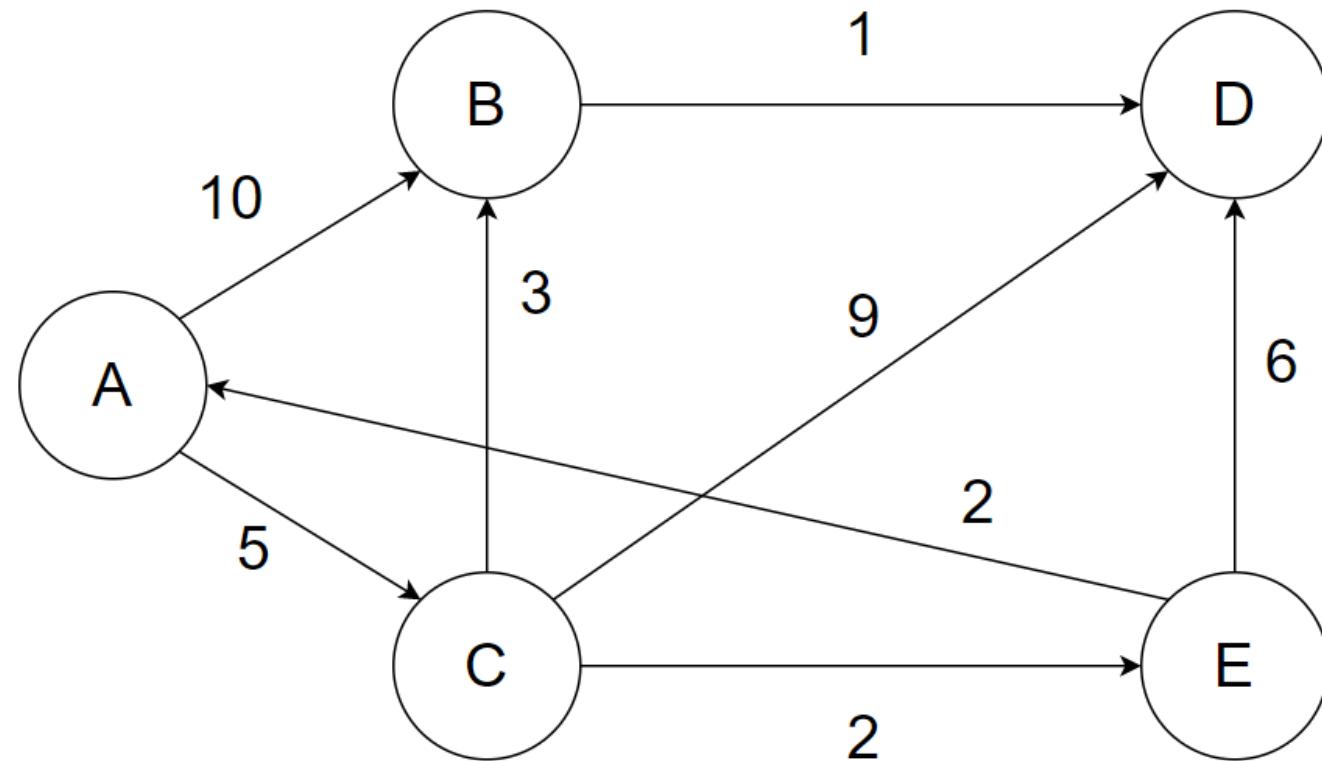

Which vertex has the smallest $d(u)$?


	A	B	C	D	E
A	0	∞	∞	∞	∞
C		10	5	∞	∞
E		8		14	7
B		8			13

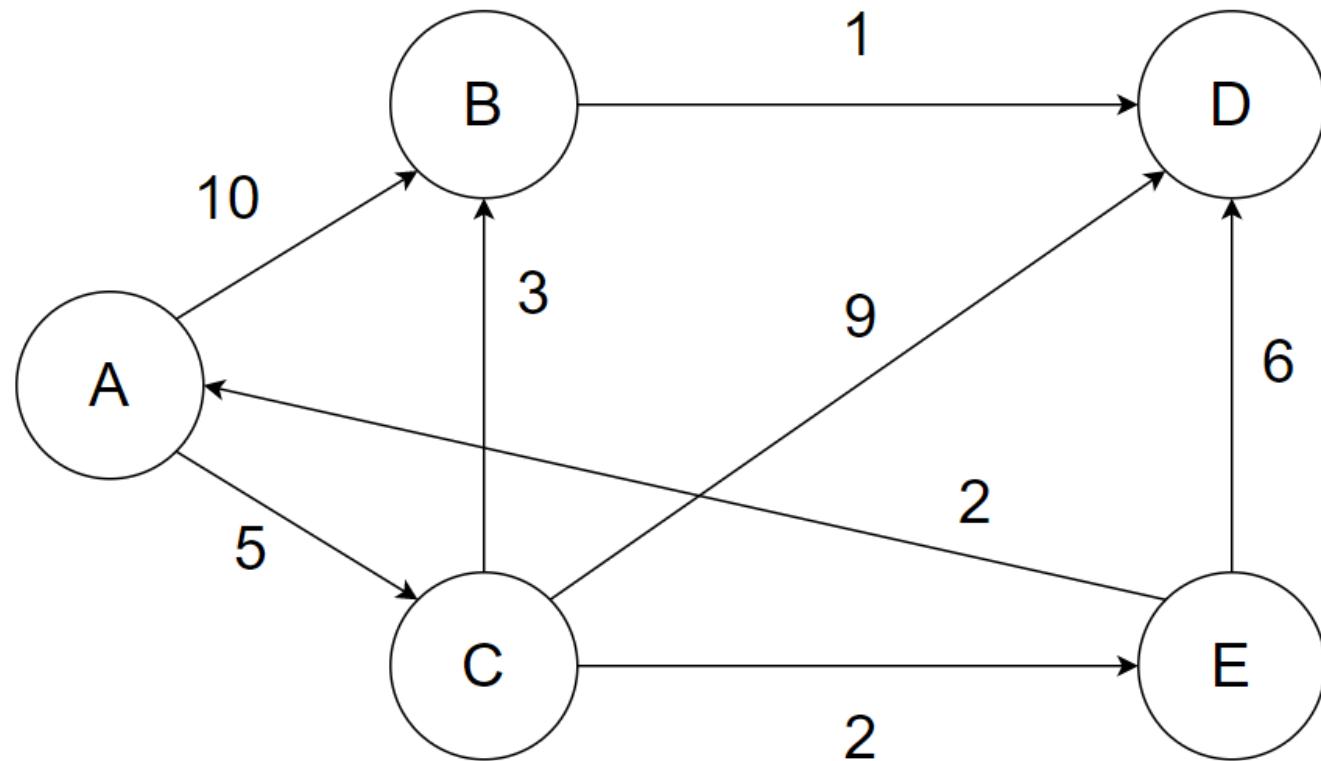

Dijkstra's Algorithm


B -> D
8 + 1

	A	B	C	D	E
A	0	8	8	8	8
C		10	5	8	8
E		8		14	7
B		8		13	
D				9	

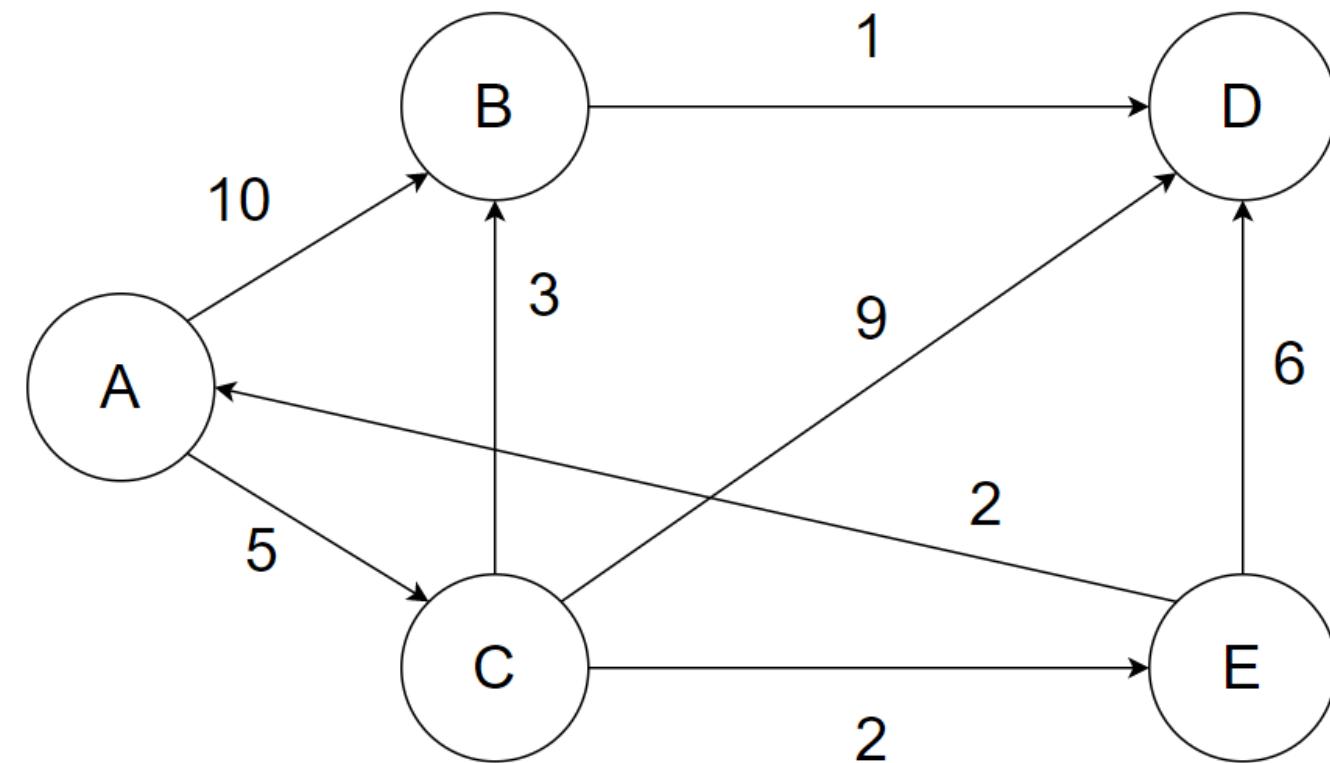

Which vertex has the smallest $d(u)$?

	A	B	C	D	E
A	0	∞	∞	∞	∞
C		10	5	∞	∞
E		8		14	7
B		8		13	
D				9	

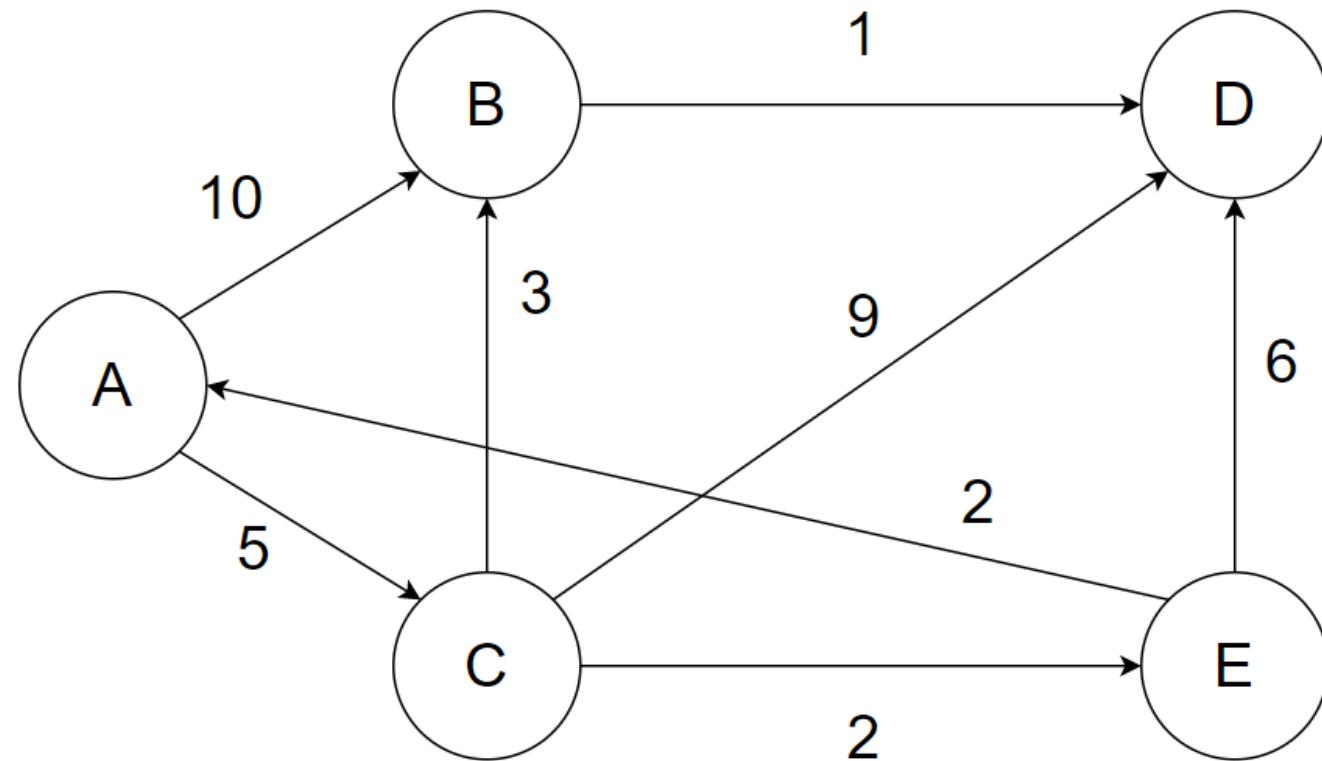

Dijkstra's Algorithm


What is the shortest distance from A to D?

9

What is the shortest distance from A to B?

8

	A	B	C	D	E
A	0	∞	∞	∞	∞
C	10	5		∞	∞
E	8		14	7	
B	8			13	
D				9	

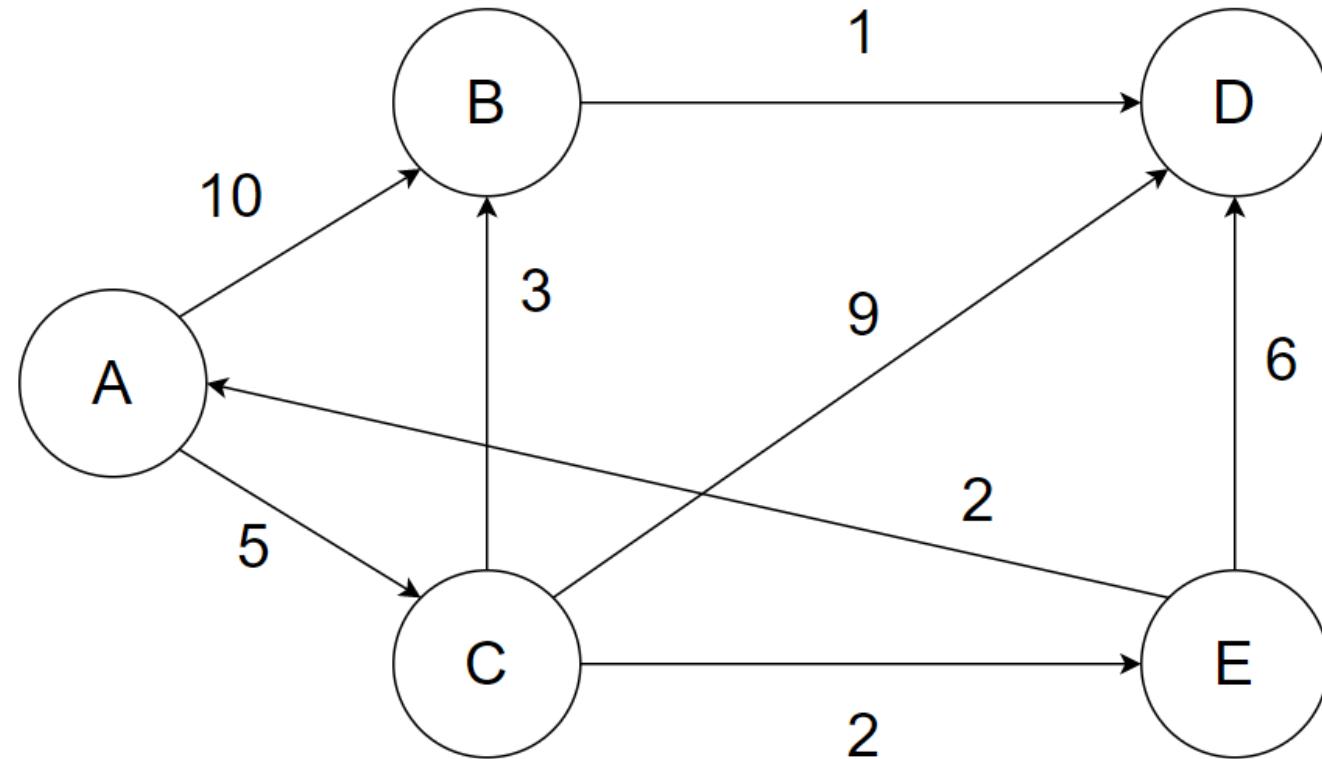


Dijkstra's Algorithm

What is the path from A to D?

ACBD

	A	B	C	D	E
A	0	∞	∞	4 ←	∞
C	10	5	∞	∞	
E	8	3 ←	14	7	
B	8		13	2 ←	
D			9	1 ←	

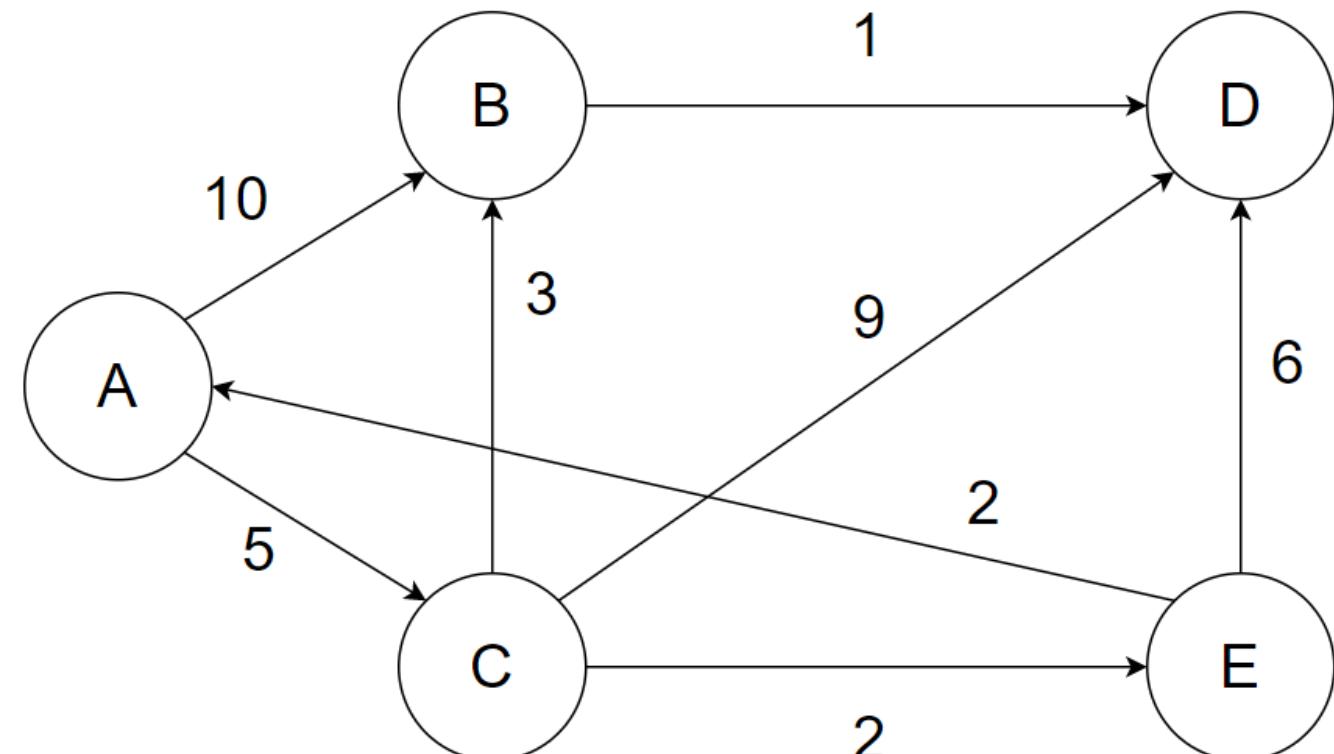


Dijkstra's Algorithm


What is the path from A to B?

ACB


	A	B	C	D	E
A	0	∞	∞	3 ←	∞
C	10	5	∞	∞	
E	8	2 ←	14	7	
B	8	1 ←	13		
D				9	

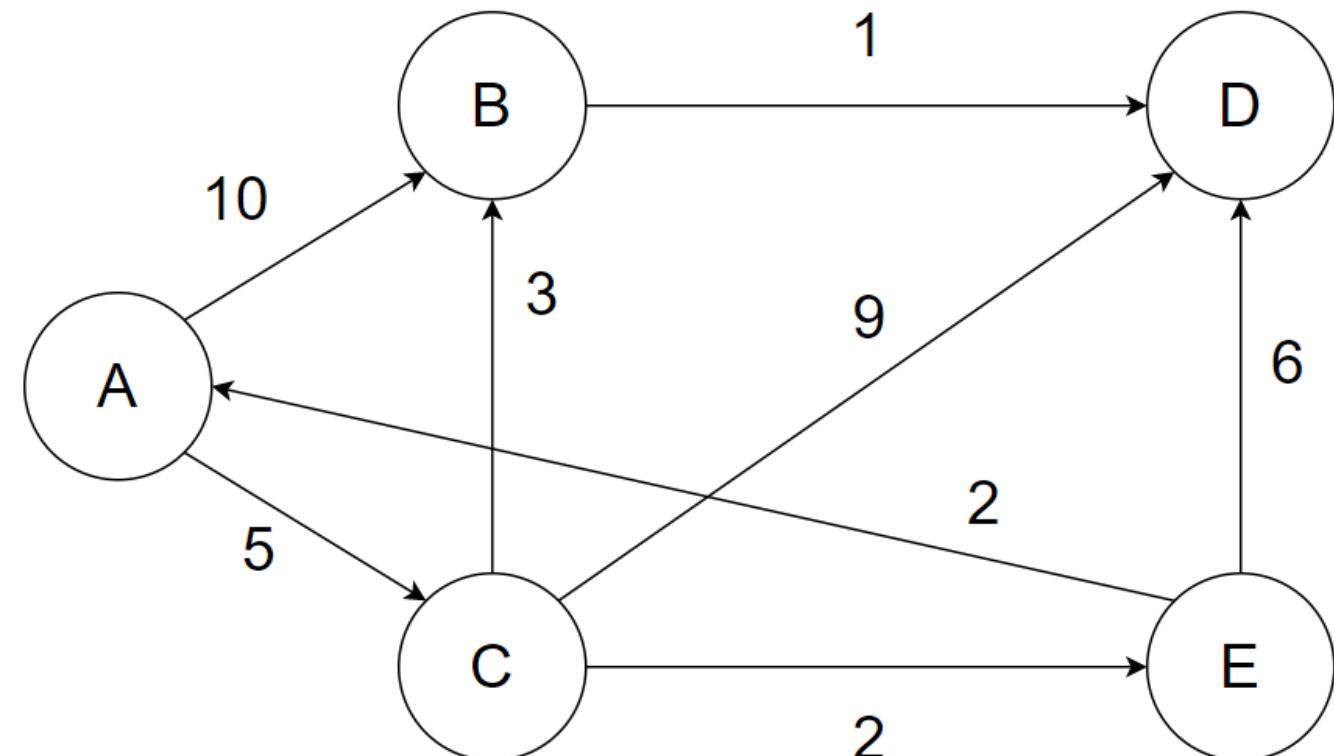


Dijkstra's Algorithm

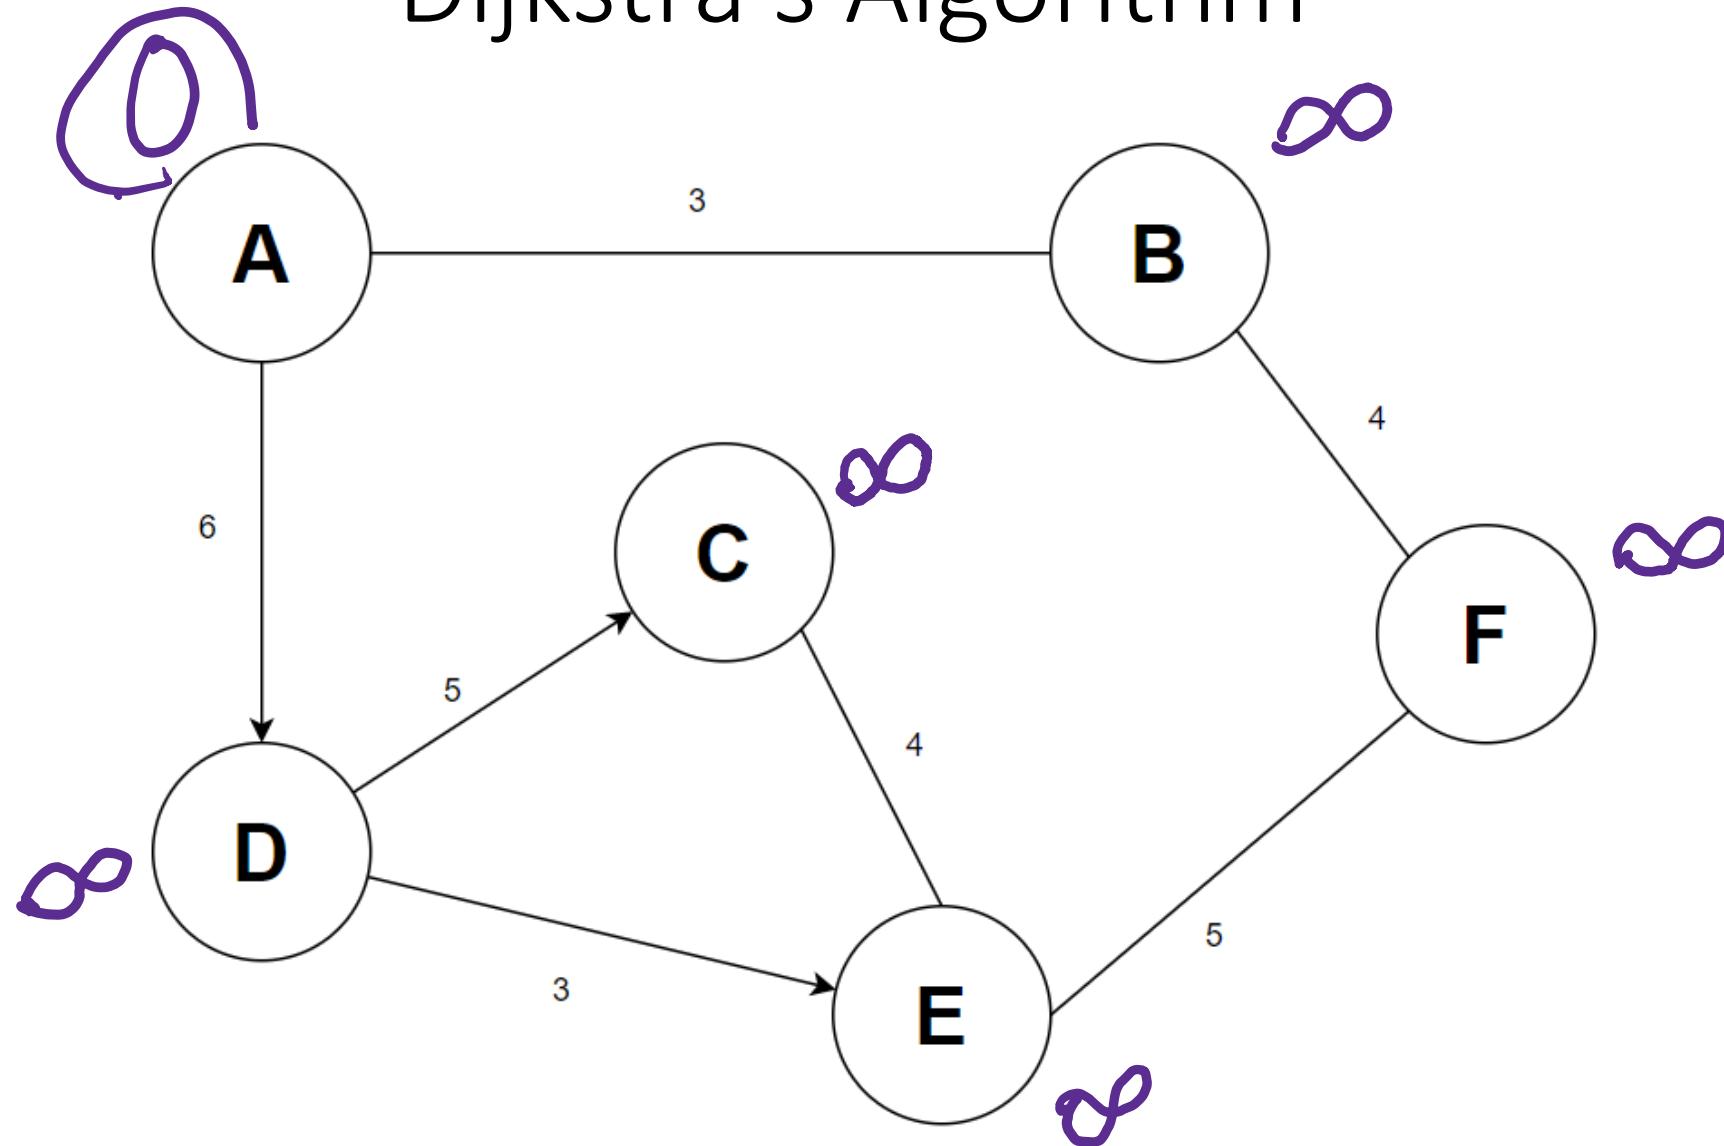


Dijkstra's Algorithm

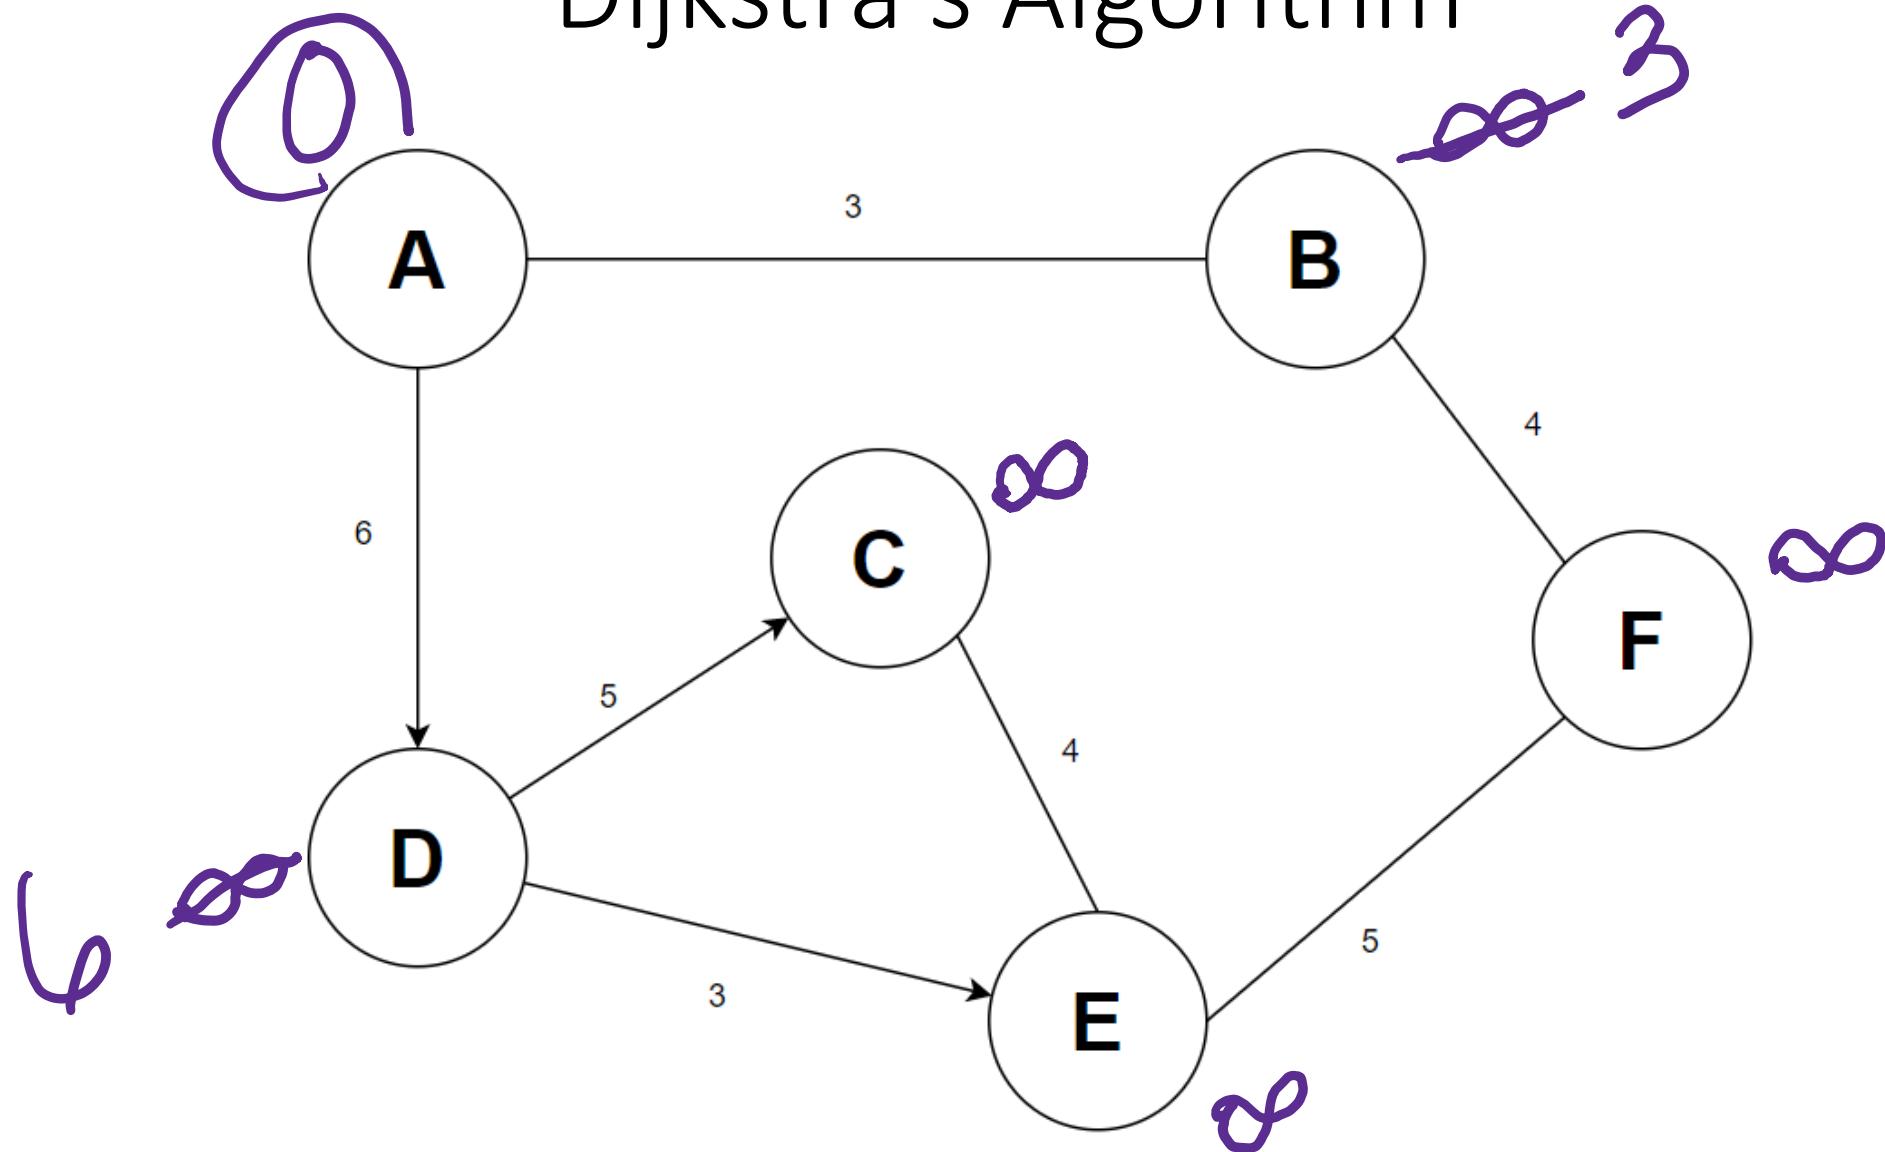


Dijkstra's Algorithm

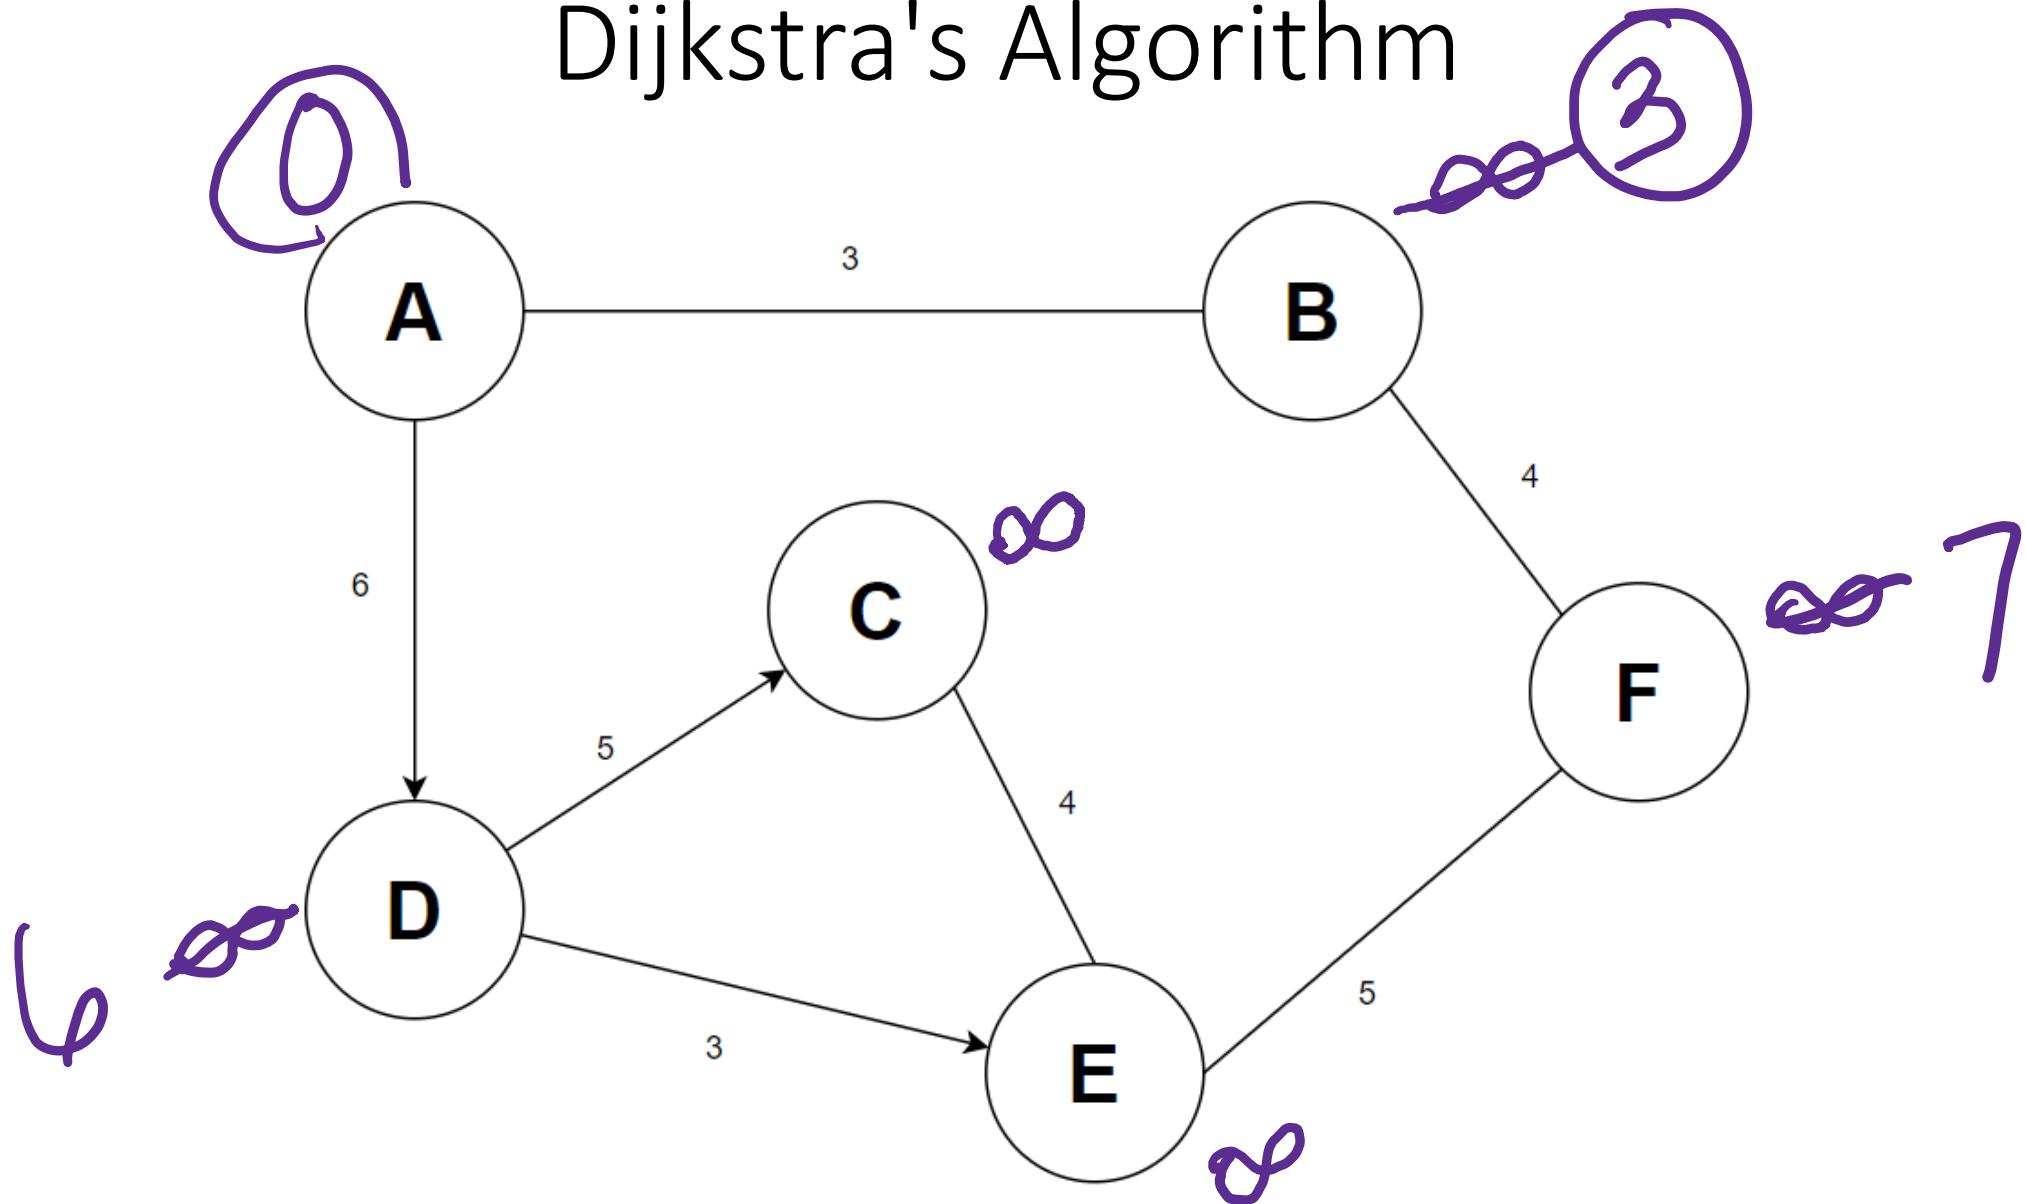


Dijkstra's Algorithm

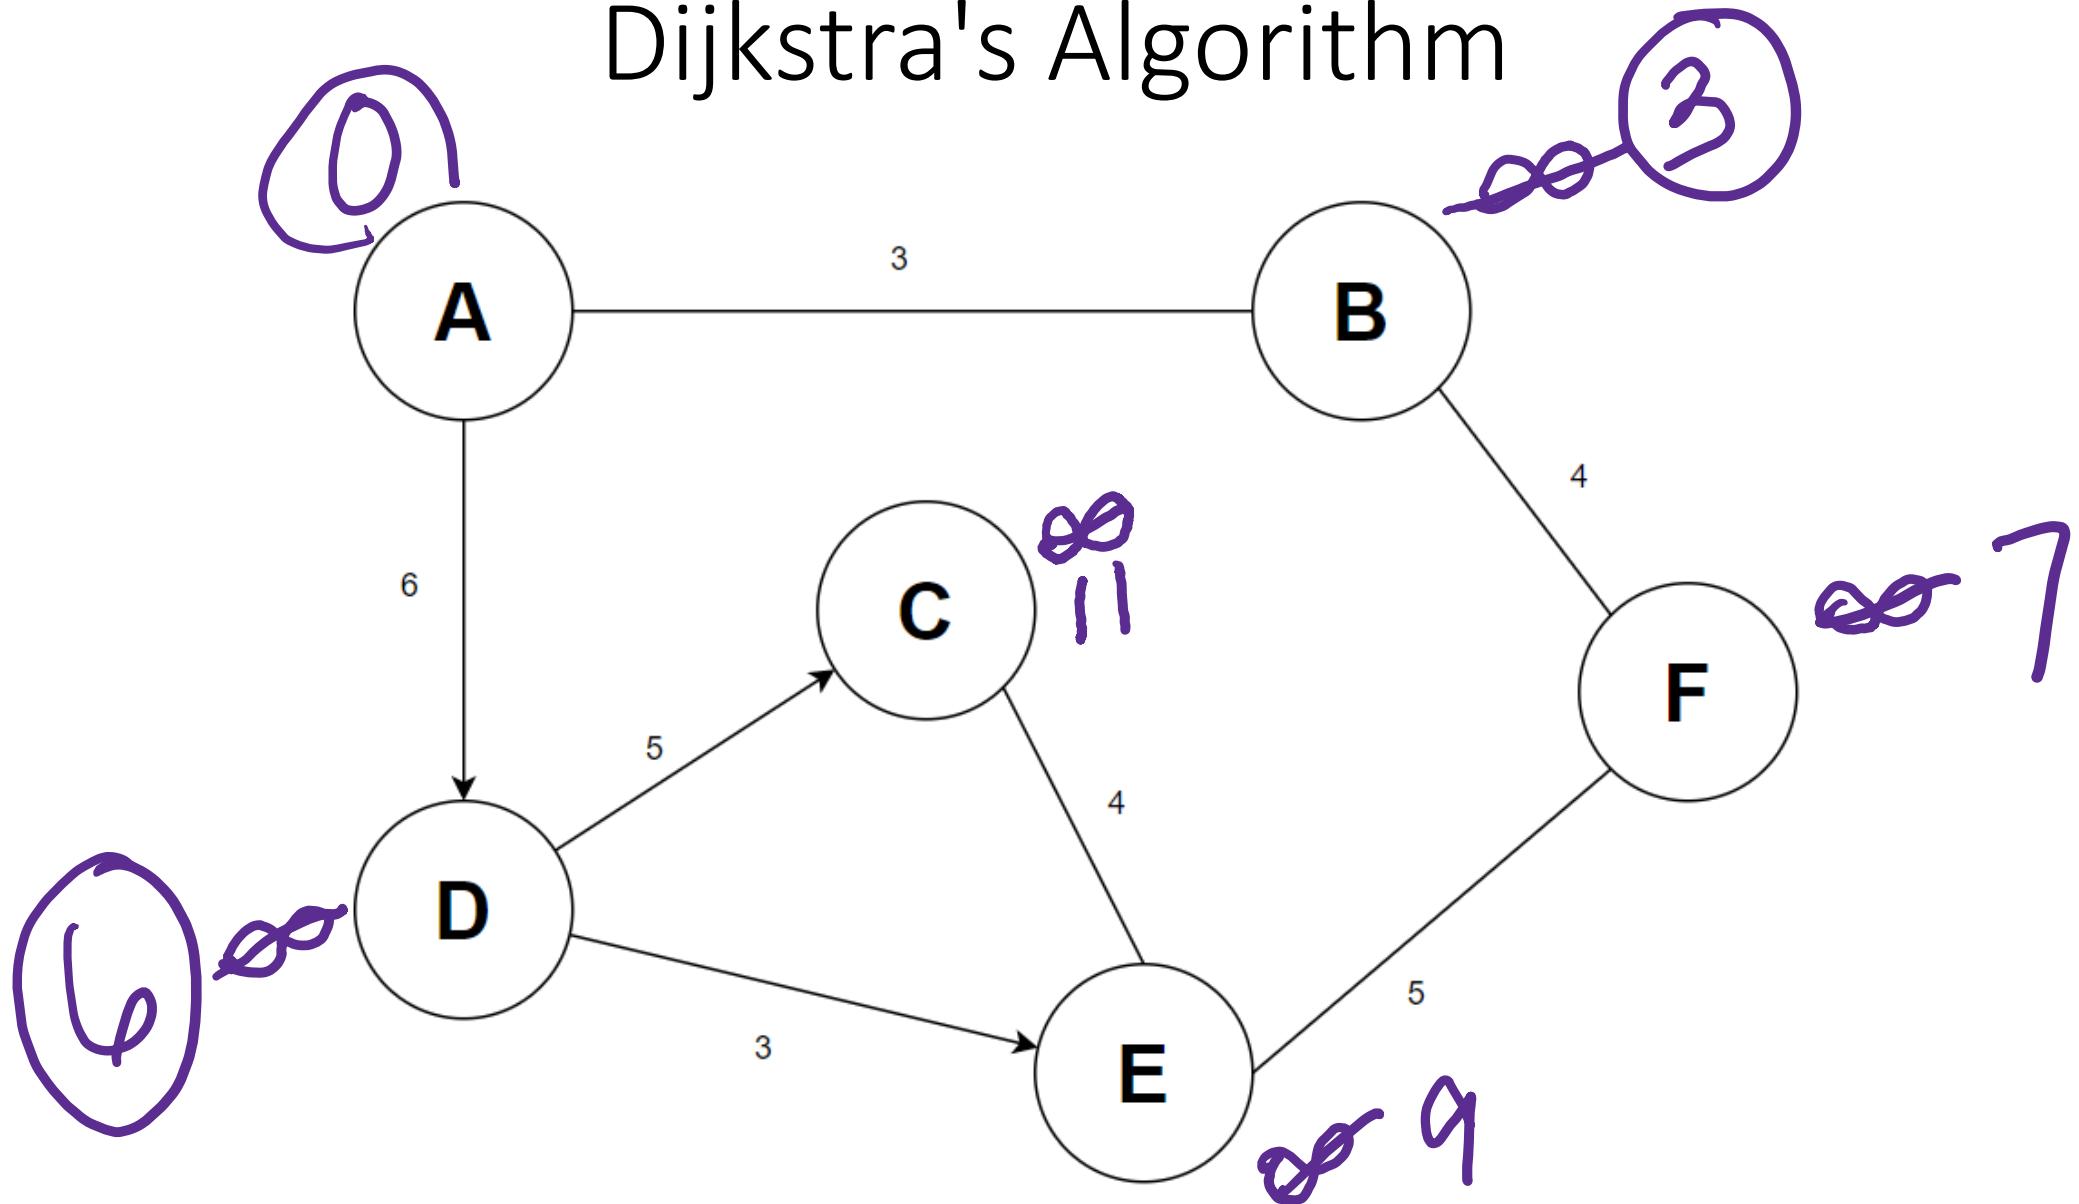


Dijkstra's Algorithm

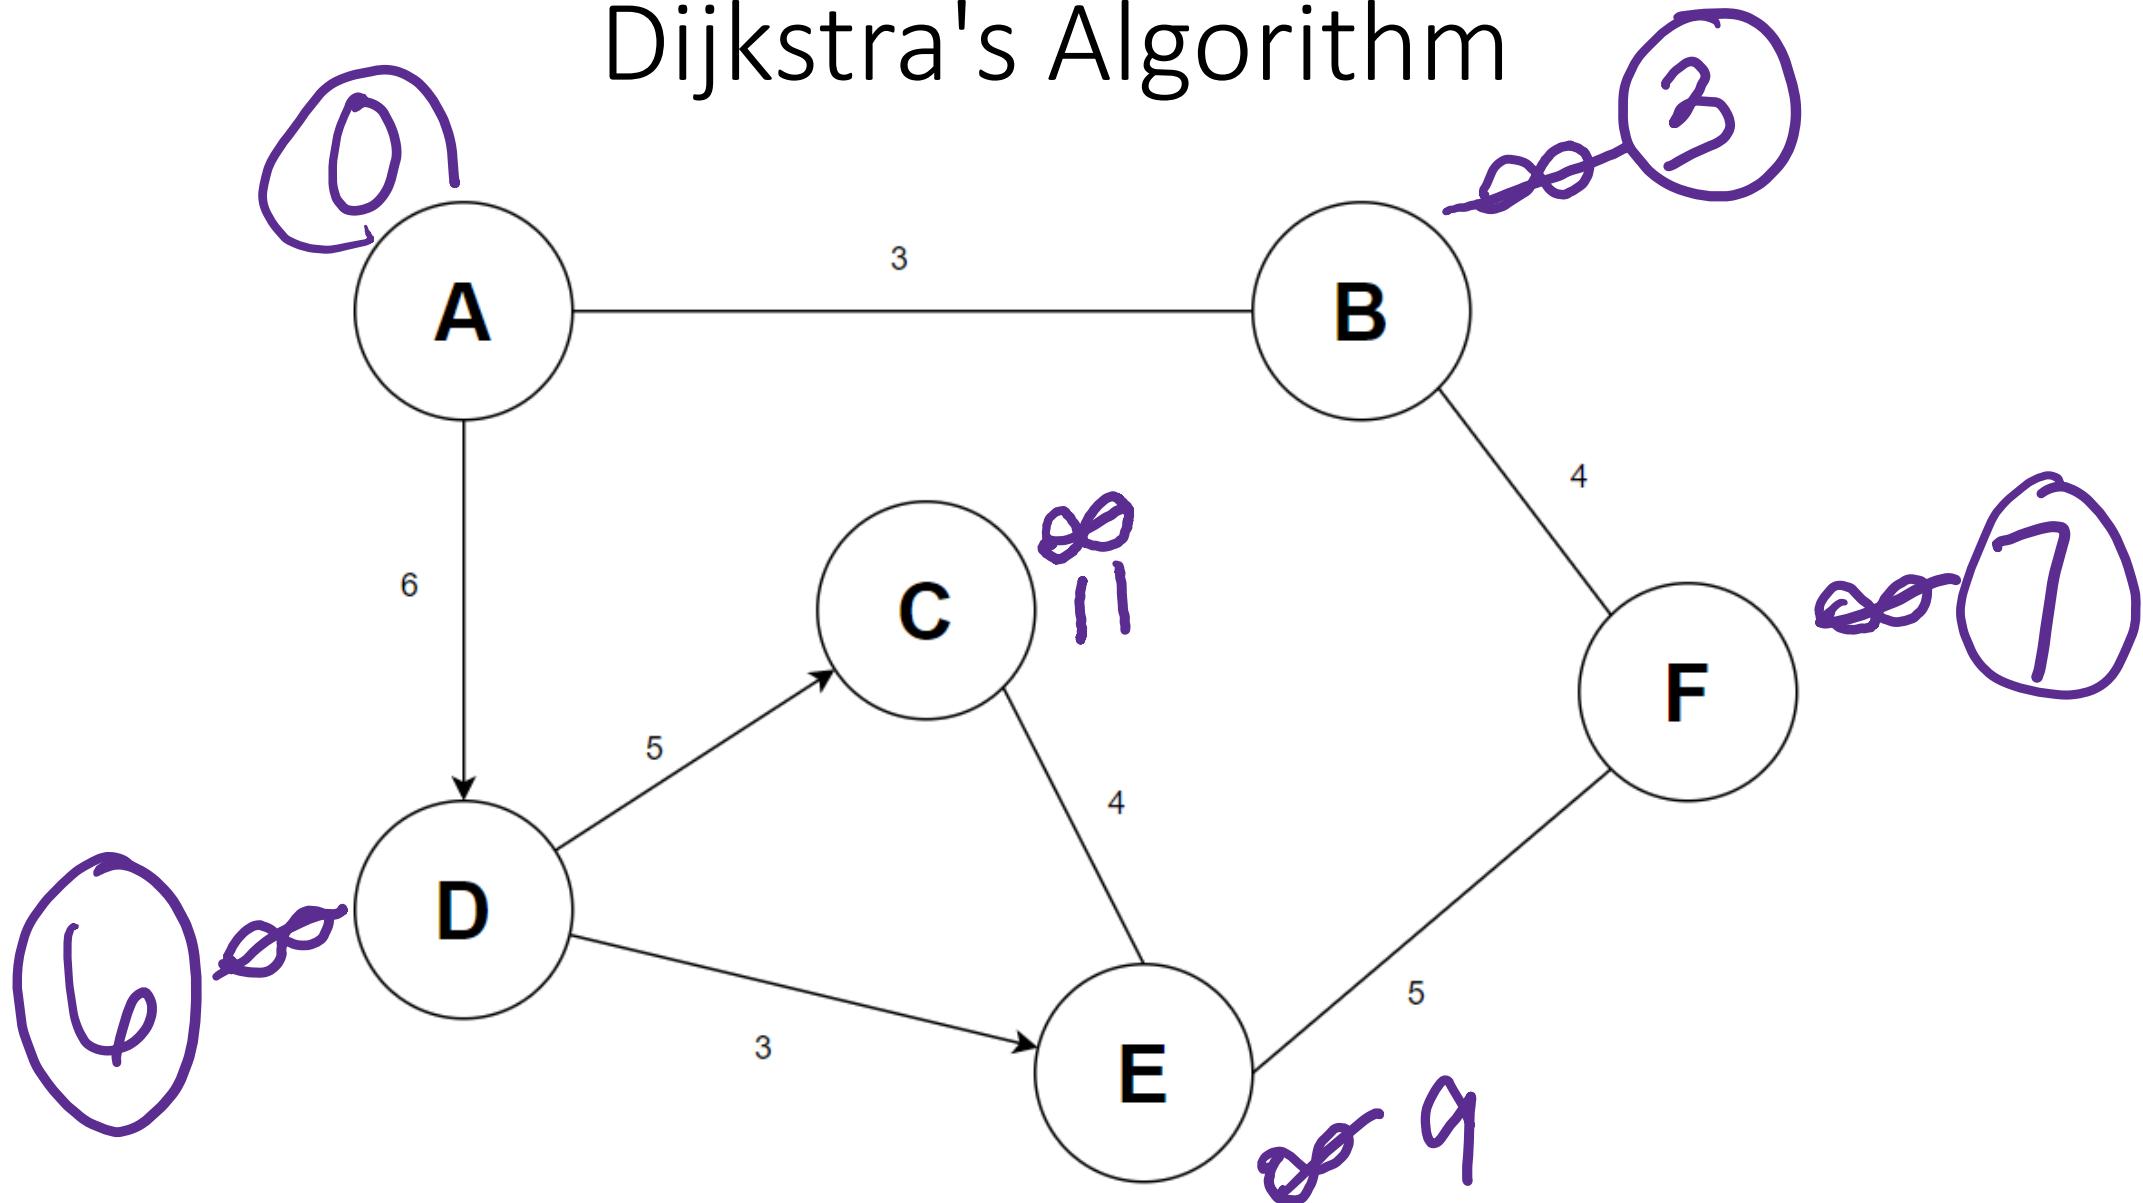


Dijkstra's Algorithm

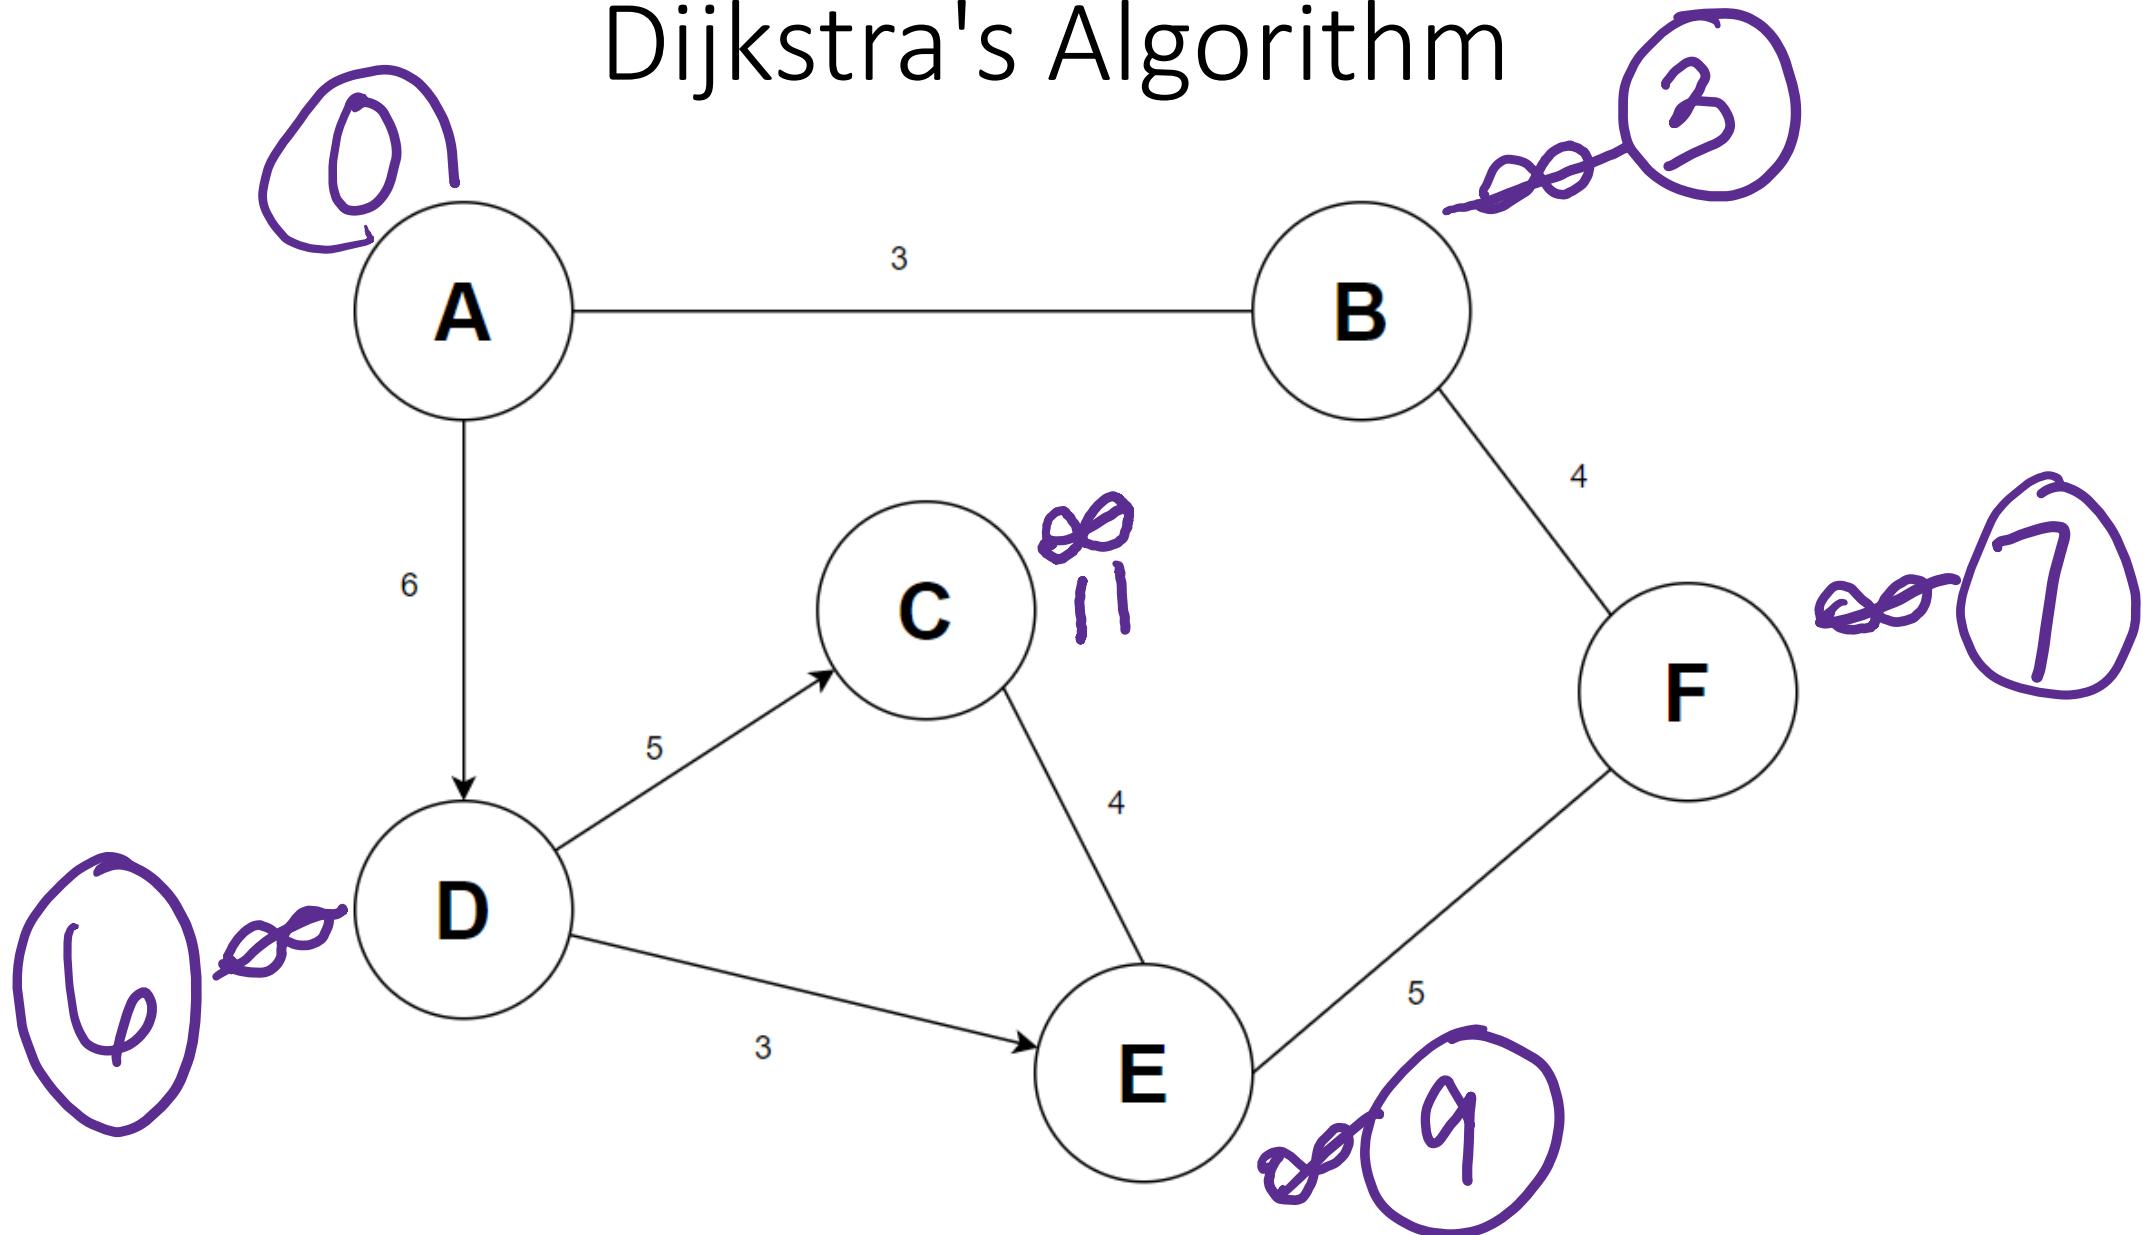


Dijkstra's Algorithm

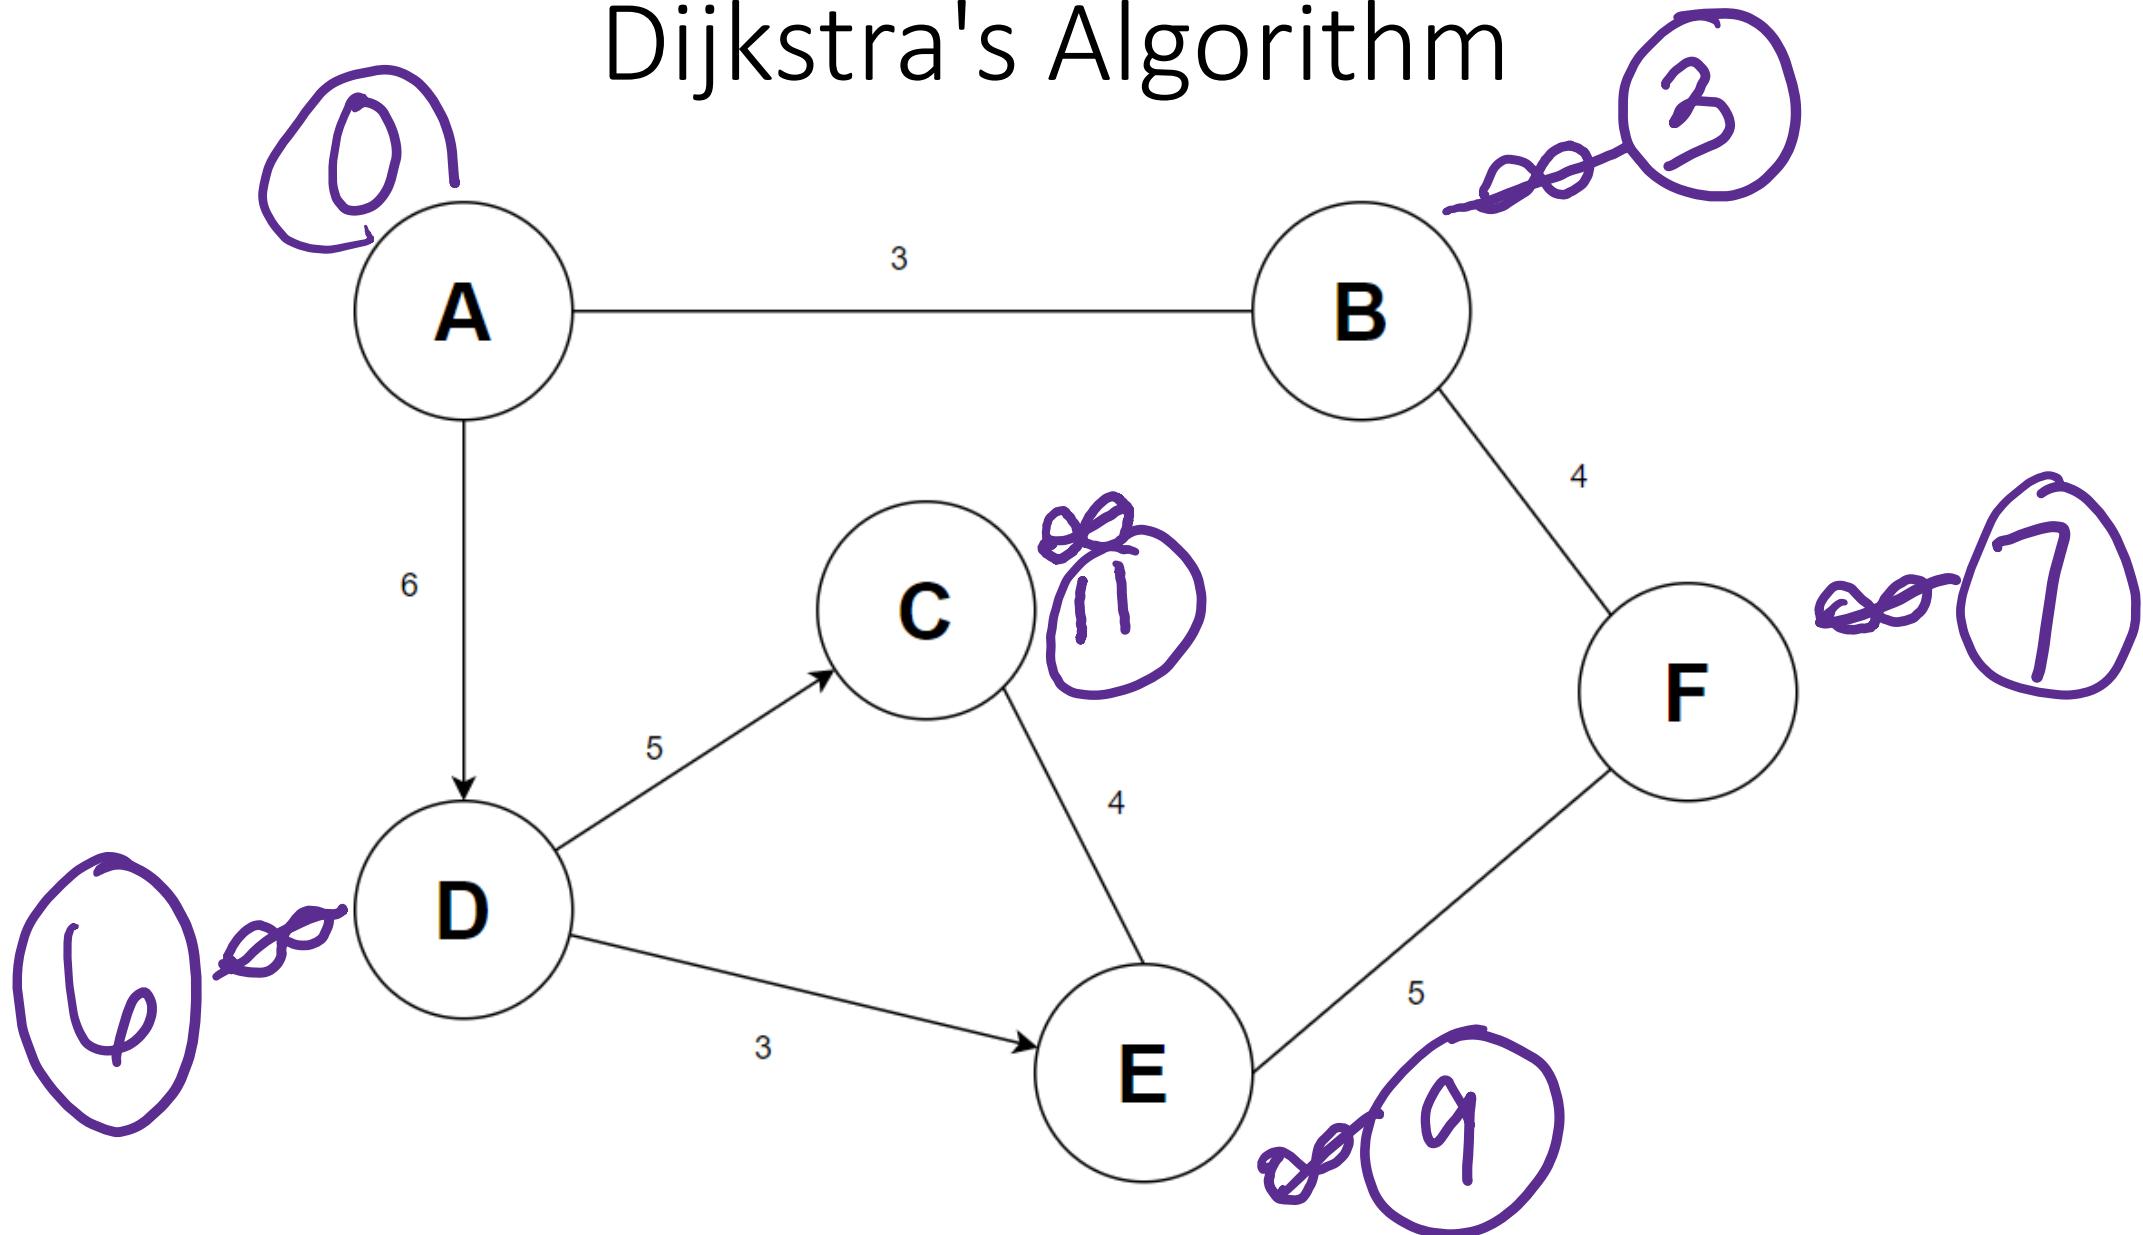

Dijkstra's Algorithm

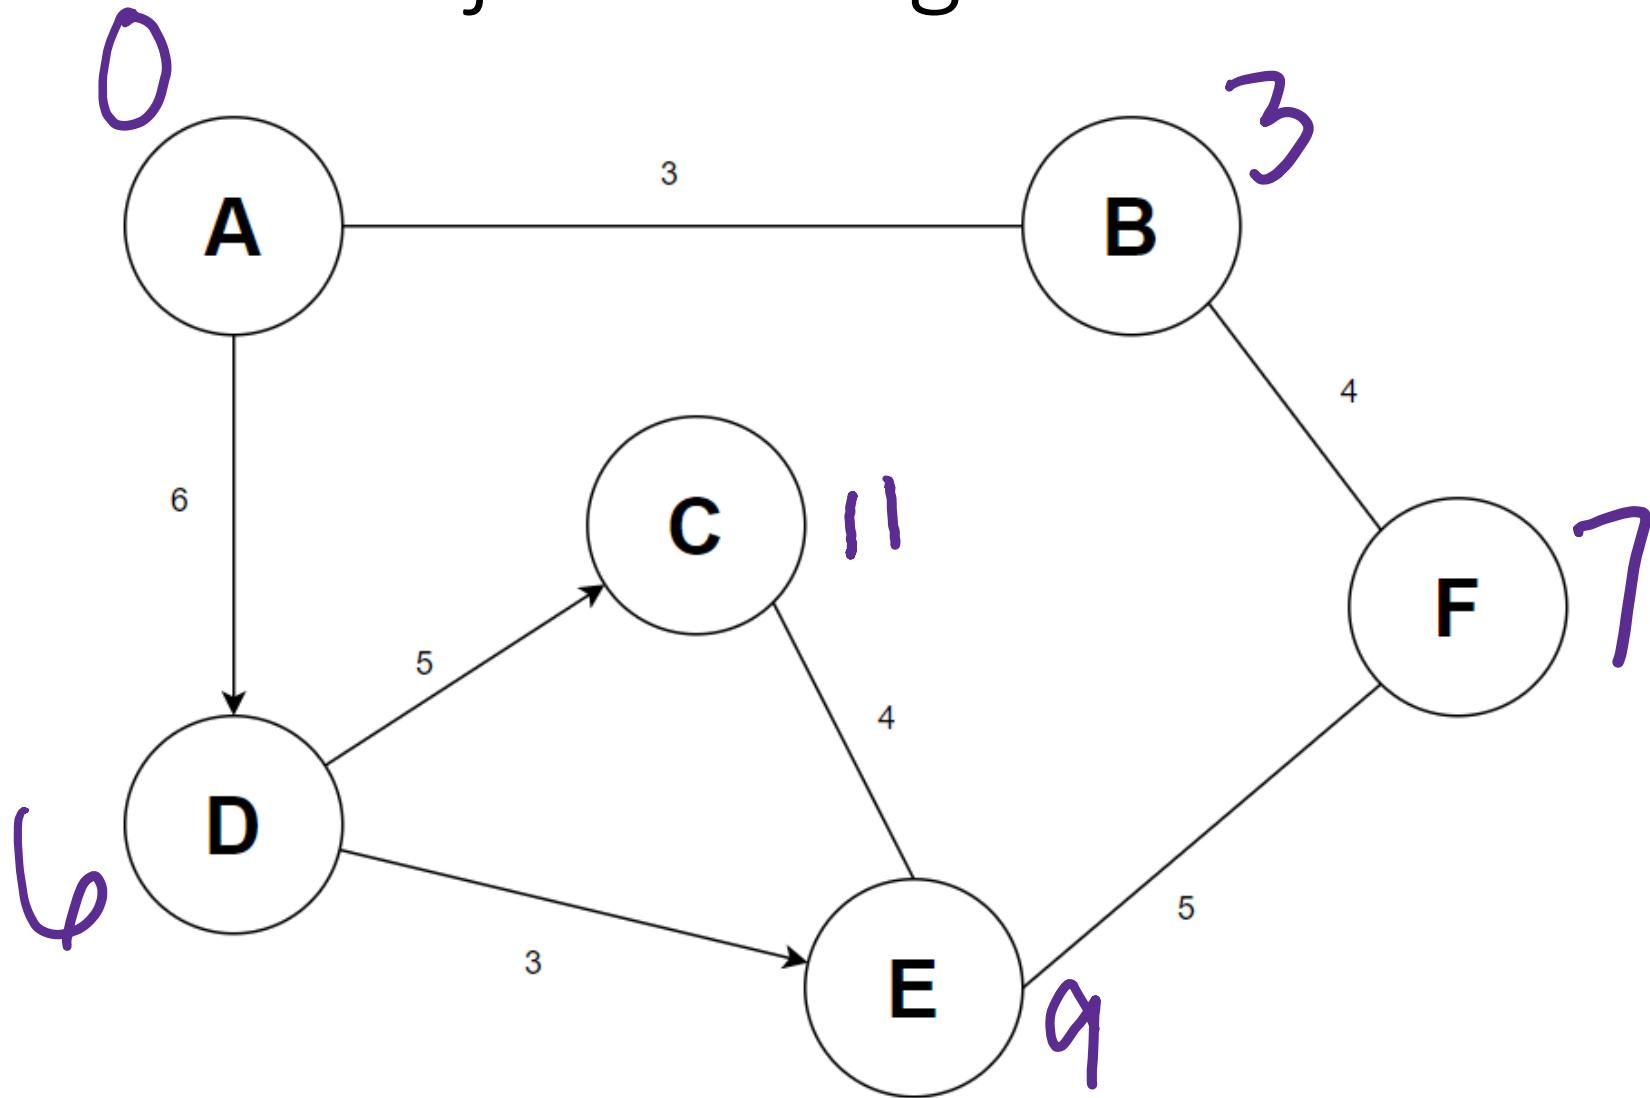


Dijkstra's Algorithm

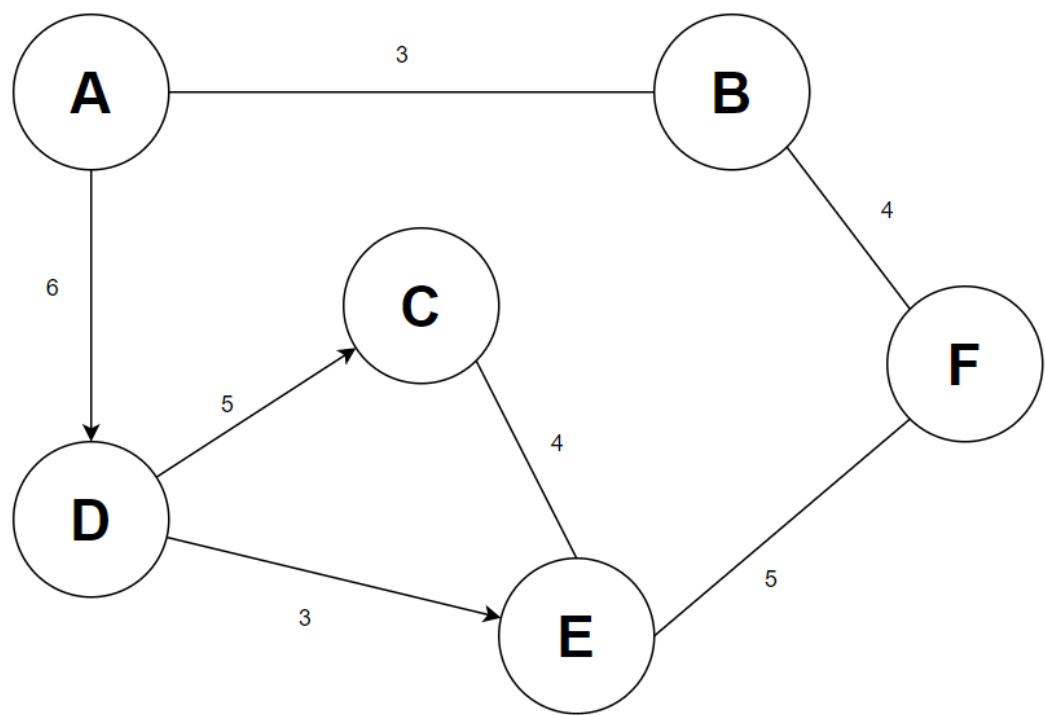


A	B	C	D	E	F
A	6	∞	∞	∞	∞
B	∞	∞	∞	∞	∞
C	∞	∞	∞	∞	∞
D	∞	∞	∞	∞	∞
E	∞	∞	∞	∞	∞
F	∞	∞	∞	∞	∞

Dijkstra's Algorithm

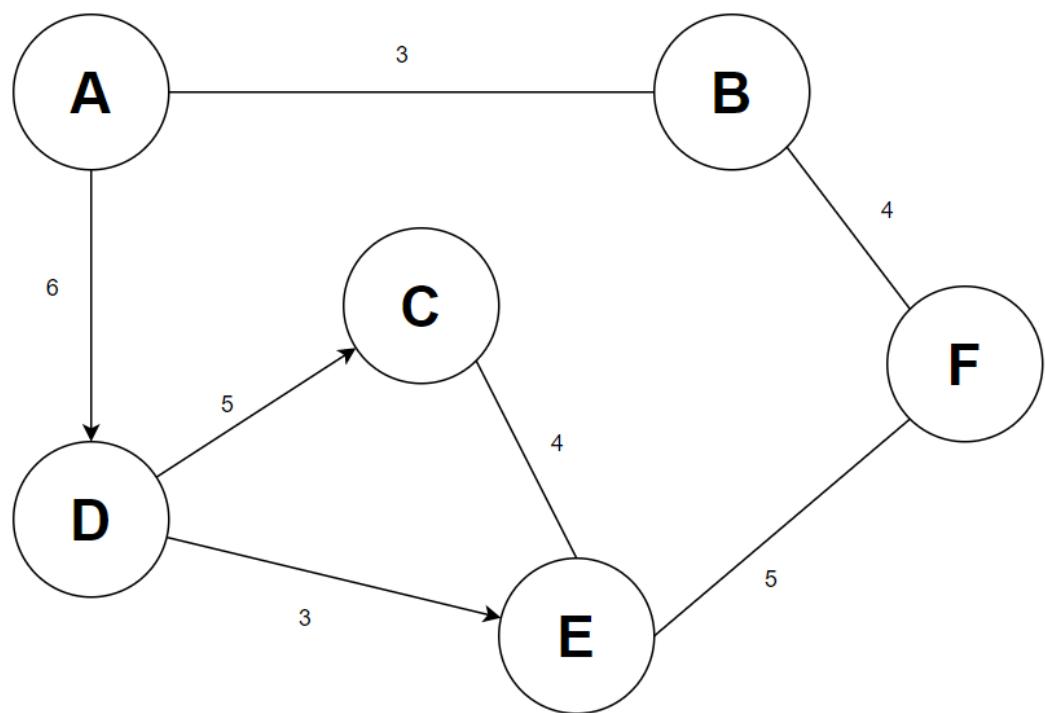


	A	B	C	D	E	F
A	0	∞	∞	∞	∞	∞
B		3	∞	6	∞	∞
C						
D						
E						
F						

Dijkstra's Algorithm

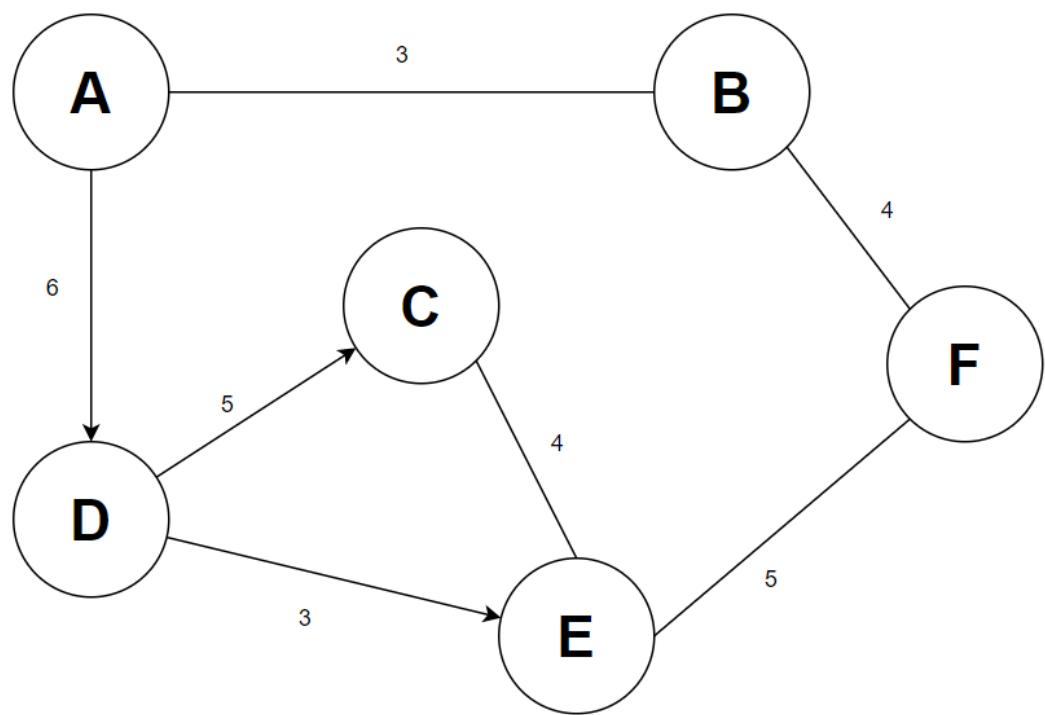


	A	B	C	D	E	F
A	0	∞	∞	∞	∞	∞
B		3	∞	6	∞	∞
D			∞	6	∞	7
E						
F						

Dijkstra's Algorithm

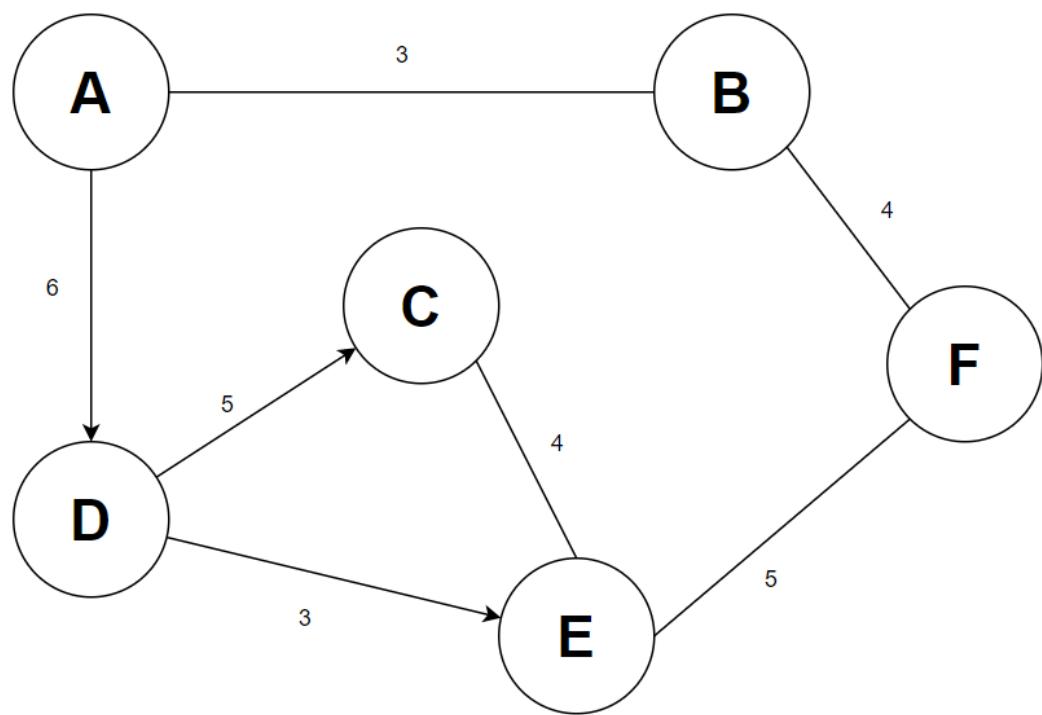

	A	B	C	D	E	F
A	0	∞	∞	∞	∞	∞
B		3	∞	6	∞	∞
C			6	6	∞	7
D				6	∞	9
E					9	7
F						

Dijkstra's Algorithm

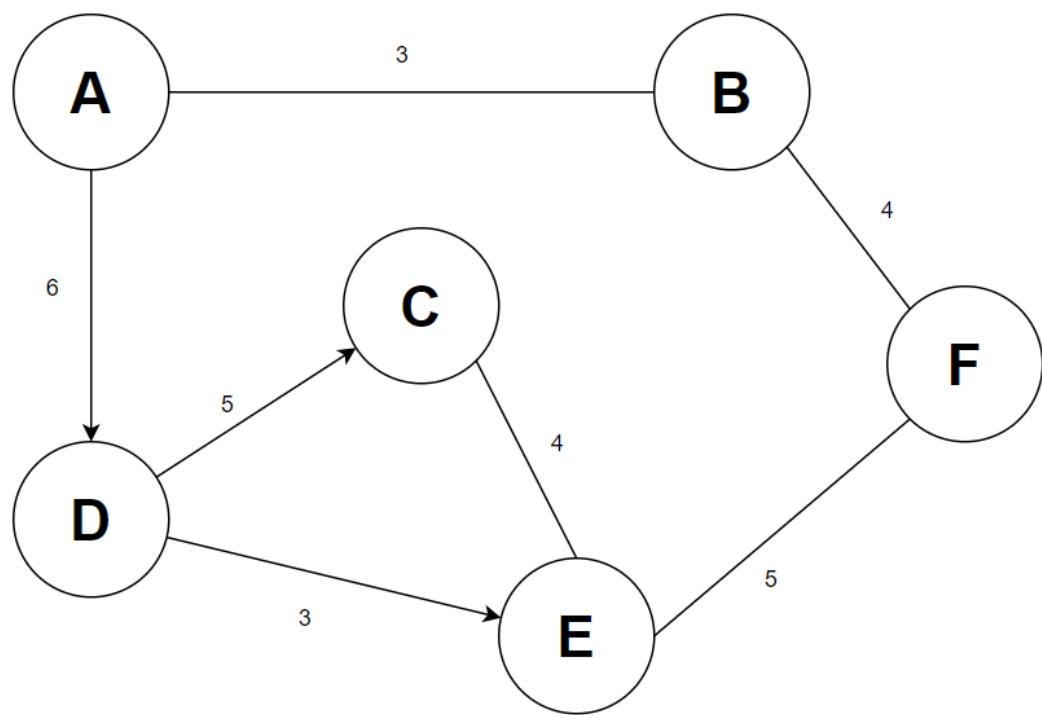


	A	B	C	D	E	F
A	0	∞	∞	∞	∞	∞
B		3	∞	6	∞	∞
D			∞	6	∞	7
F				11	9	7
E				11	9	
C			11			

Vertex Array

I	L	D	P	V
0	A	2147483647	-1	0
1	B	2147483647	-1	0
2	C	2147483647	-1	0
3	D	2147483647	-1	0
4	E	2147483647	-1	0
5	F	2147483647	-1	0

Adjacency Matrix

-1	3	-1	6	-1	-1
3	-1	-1	-1	-1	4
-1	-1	-1	-1	4	-1
-1	-1	5	-1	3	-1
-1	-1	4	-1	-1	5
-1	4	-1	-1	5	-1

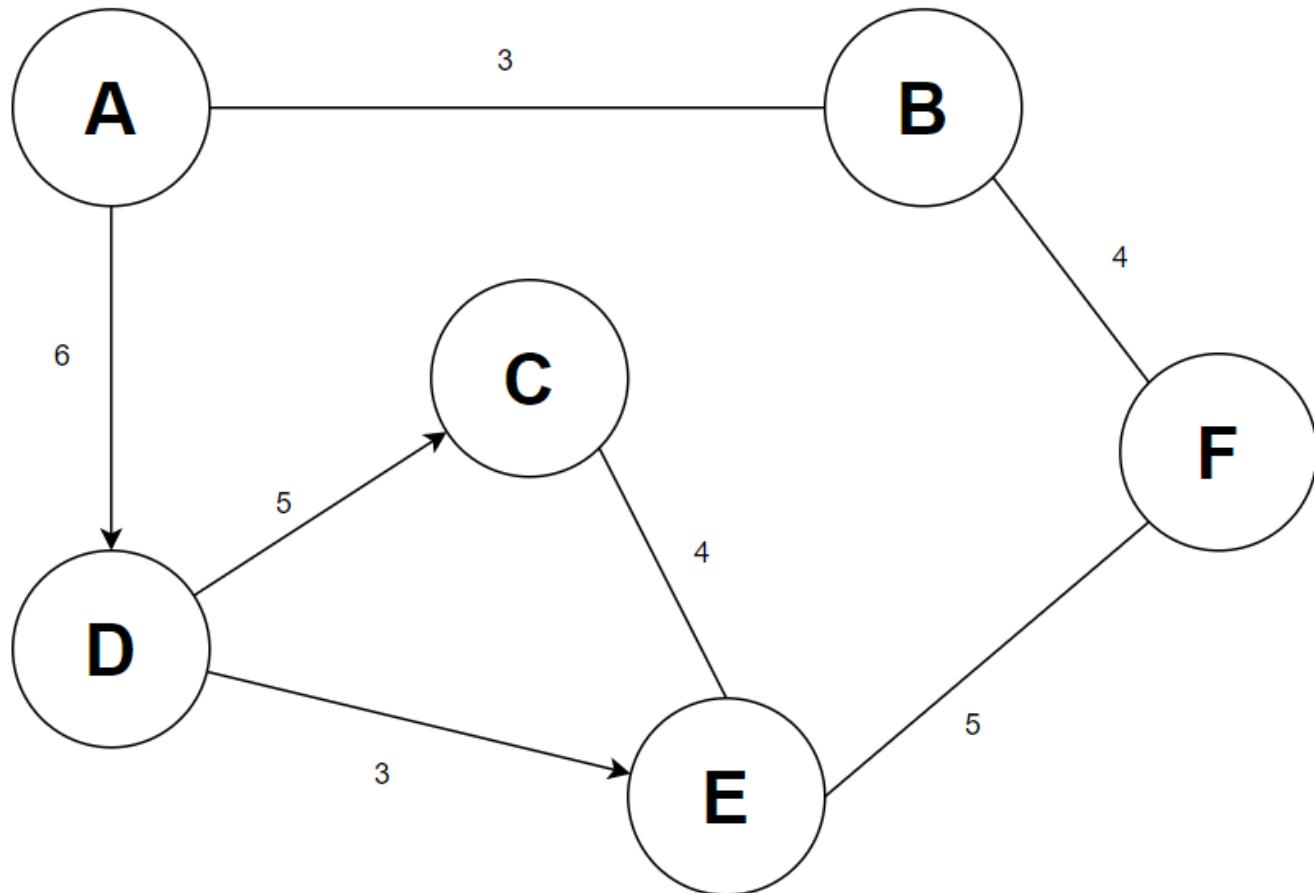


What is the starting vertex? **A**
What is the destination vertex? **E**
The path from A to E is A->D->E
and has a length of 9

Vertex Array

I	L	D		P	V
0	A	0		-1	1
1	B	3		0	1
2	C	11		3	1
3	D	6		0	1
4	E	9		3	1
5	F	7		1	1

Adjacency Matrix

	0	1	2	3	4	5
0	-1	3	-1	6	-1	-1
1	3	-1	-1	-1	-1	4
2	-1	-1	-1	-1	4	-1
3	-1	-1	5	-1	3	-1
4	-1	-1	4	-1	-1	5
5	-1	4	-1	-1	5	-1

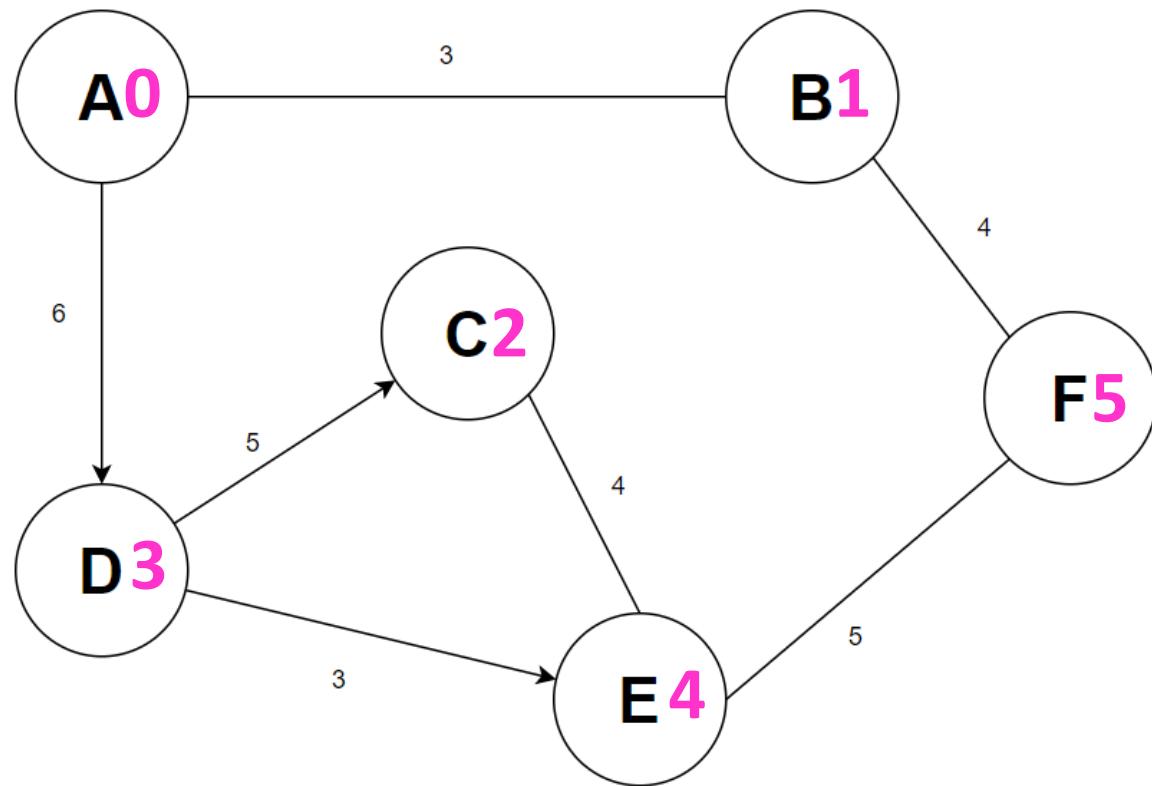


What is the starting vertex? **A**
 What is the destination vertex? **E**
 The path from A to E is A->D->E
 and has a length of 9

```
int CurrentVertex = StartVertex;  
VertexArray[StartVertex].distance = 0;  
VertexArray[StartVertex].previous = -1;  
VertexArray[StartVertex].visited = 1;
```

Setup starting Vertex

```
for (x = 0; x < VertexCount-1; x++)  
{  
}  
}
```

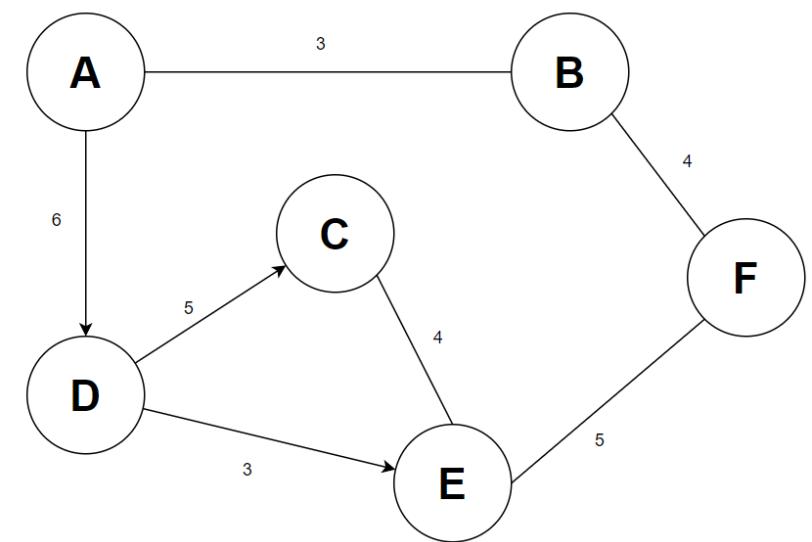

Starting at the next vertex in the Vertex Array, we need to visit every other vertex.


```

for(i = 0; i < VertexCount; i++)
{
    if (AdjMatrix[CurrentVertex][i] != -1 && !VertexArray[i].visited)
    {
        dofu = VertexArray[CurrentVertex].distance;
        cofuv = AdjMatrix[CurrentVertex][i];
        dofv = VertexArray[i].distance;

        if (dofu + cofuv < dofv)
        {
            dofv = dofu + cofuv;
            VertexArray[i].distance = dofv;
            VertexArray[i].previous = CurrentVertex;
        }
    }
}

```

I	L	D	P	V	0	1	2	3	4	5
0	A	0	-1	1	0	-1	3	-1	6	-1
1	B	2147483647	-1	0	1	3	-1	-1	-1	4
2	C	2147483647	-1	0	2	-1	-1	-1	-1	4
3	D	2147483647	-1	0	3	-1	-1	5	-1	-1
4	E	2147483647	-1	0	4	-1	-1	4	-1	-1
5	F	2147483647	-1	0	5	-1	4	-1	-1	5

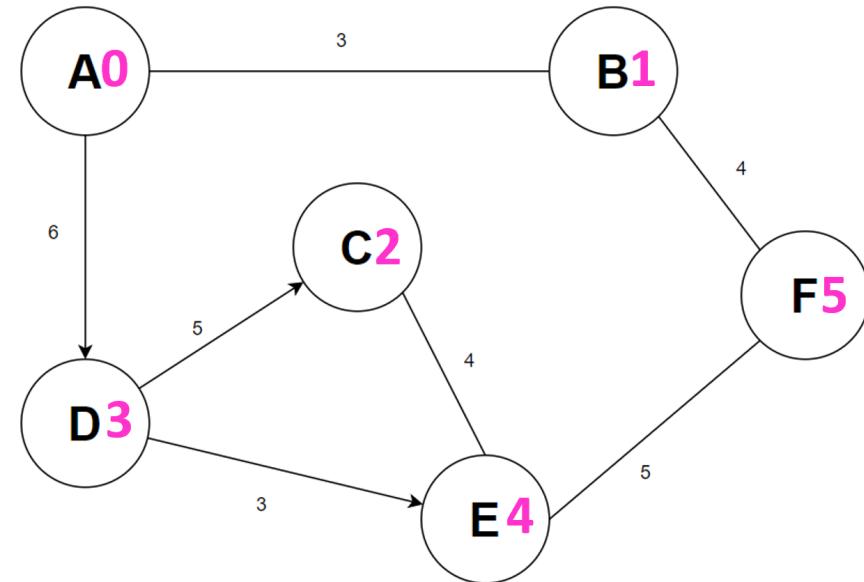

```


for(i = 0; i < VertexCount; i++)
{
    // Check all vertices for distance from CurrentVertex and update

    SmallestVertexIndex = -1;
    int SmallestVertex = INT_MAX;
}

for(i = 0; i < VertexCount; i++)
{
    if (!VertexArray[i].visited)
    {
        if (VertexArray[i].distance < SmallestVertex)
        {
            SmallestVertex = VertexArray[i].distance;
            SmallestVertexIndex = i;
        }
    }
}
CurrentVertex = SmallestVertexIndex;
VertexArray[CurrentVertex].visited = 1;
}

```

INT_MAX is a define in limits.h

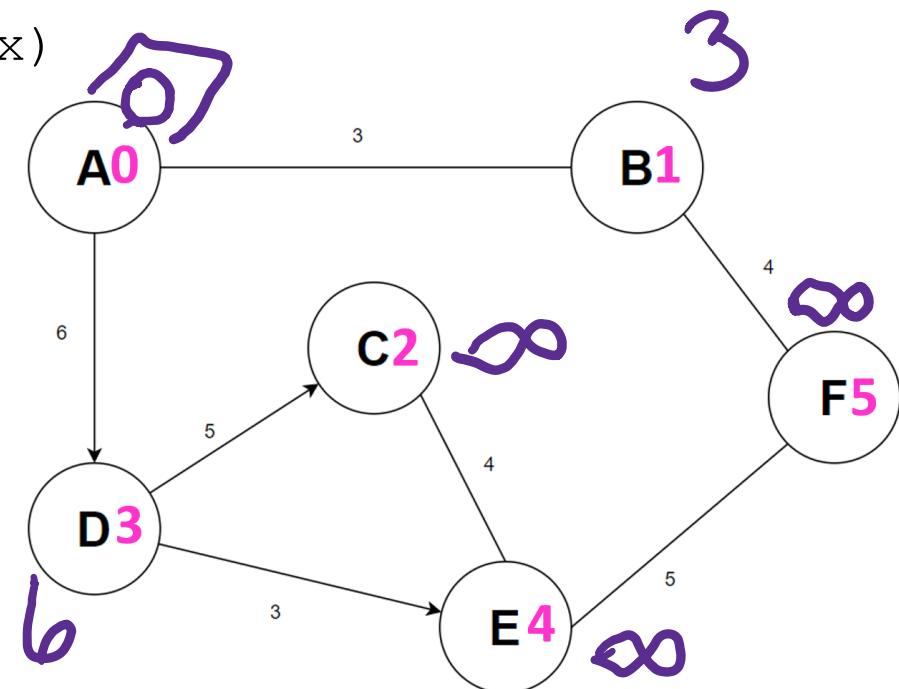


```

for(i = 0; i < VertexCount; i++)
{
    if (AdjMatrix[CurrentVertex][i] != -1 && !VertexArray[i].visited)
    {
        dofu = VertexArray[CurrentVertex].distance;
        cofuv = AdjMatrix[CurrentVertex][i];
        dofv = VertexArray[i].distance;

        if (dofu + cofuv < dofv)
        {
            dofv = dofu + cofuv;
            VertexArray[i].distance = dofv;
            VertexArray[i].previous = CurrentVertex;
        }
    }
}

```

I	L	D	P	V	0	1	2	3	4	5
0	A	0	-1	1	0	-1	3	-1	6	-1
1	B	3	0	1	1	3	-1	-1	-1	4
2	C	2147483647	-1	0	2	-1	-1	-1	-1	4
3	D	6	0	0	3	-1	-1	5	-1	-1
4	E	2147483647	-1	0	4	-1	-1	4	-1	5
5	F	2147483647	-1	0	5	-1	4	-1	-1	-1

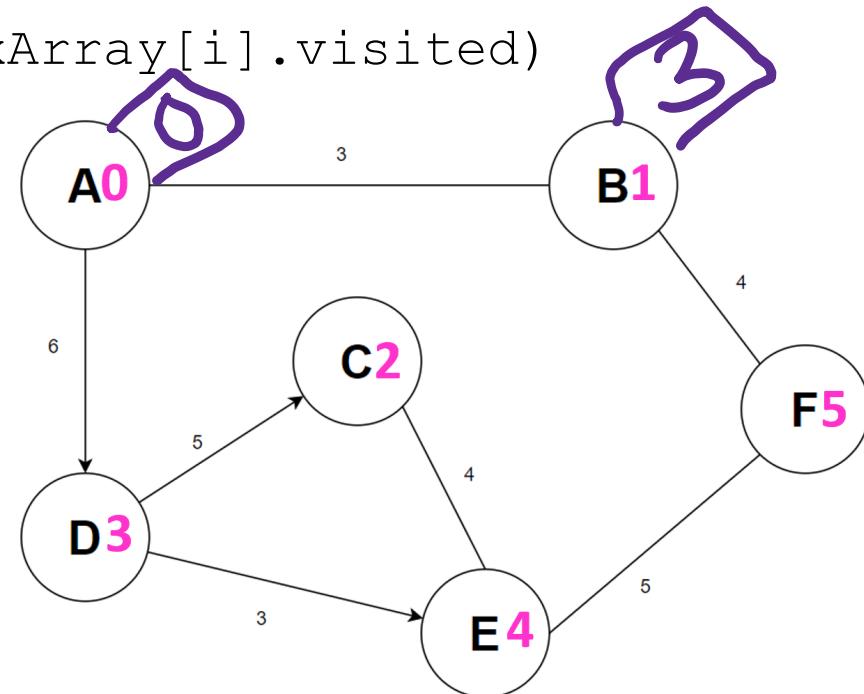

```
for(i = 0; i < VertexCount; i++)
{
    if (AdjMatrix[CurrentVertex][i] != -1 && !VertexArray[i].visited)
    {
        dofu = VertexArray[CurrentVertex].distance;
        cofuv = AdjMatrix[CurrentVertex][i];
        iff (VertexArray[CurrentVertex].distance +
        dofv = VertexArray[CurrentVertex].distance +
        dofv = AdjMatrix[CurrentVertex][i] < VertexArray[i].distance)

        if (dofu + cofuv < dofv)
        {
            VertexArray[i].distance = VertexArray[CurrentVertex].distance +
            dofv = dofu + cofuv;
            dofv = dofv + cofuv;
            VertexArray[i].distance = dofv;
            VertexArray[i].previous = CurrentVertex;
        }
        VertexArray[i].previous = CurrentVertex;
    }
}
```

Dijkstra's Algorithm

What is the run time of Dijkstra's Algorithm?

IT DEPENDS

The big O of Dijkstra's Algorithm will depend on how the algorithm is implemented

Which data structures are used and how those data structures are used.



Dijkstra's Algorithm

What is the run time of our implementation of Dijkstra's Algorithm?

```
for (x = 0; x < VertexCount-1; x++) | V| - 1
{
    for(i = 0; i < VertexCount; i++)
    {
        relaxing edges | V|
    }
    for(i = 0; i < VertexCount; i++) | V|
    {
        looking for smallest vertex (|V| - 1) * 2|V|
    }
} 2|V2| - 2|V|
```

$O(V^2)$

Dijkstra's Algorithm

So our implementation using Vertex Array and Adjacency Matrix $O(V^2)$

Implementing Dijkstra using a min-priority queue $O(V^2)$

Implementing Dijkstra using a min-priority queue with binary min-heap $O(E \log_2 V)$

Implementing Dijkstra using a min-priority queue with Fibonacci heap $O(V \log_2 V + E)$

Coding Assignment 5

The Program

You are creating a program that can read a file of graph information and run Dijkstra's Algorithm on the graph and produce the path and the length/weight of the path between the starting Vertex and any other Vertex in the graph.

Let's say we start with this graph.


Coding Assignment 5

To translate graph to file, we'll first start by numbering the vertices.

The number we assign to a vertex will be that vertex's index number in the Vertex Array.

Just for convenience, I am going to start with A and number it 0 and go alphabetically from there. This is not a necessary order. You could start with Vertex E and 0 and mark Vertex C as 1, etc.

Just pick one to be index 0 and number from there.

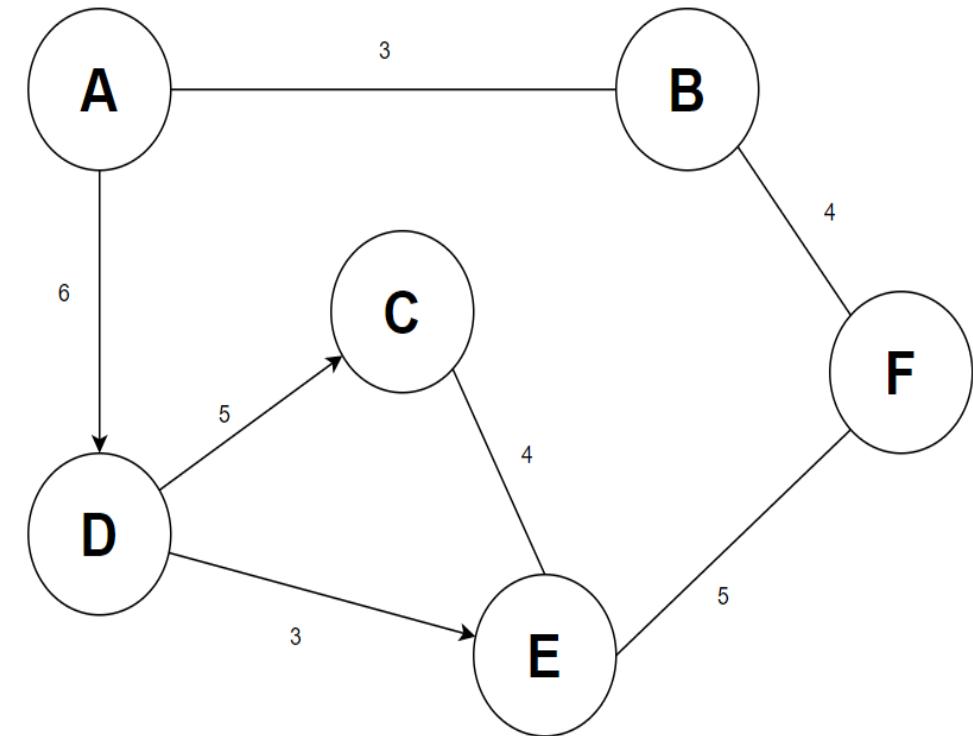

Coding Assignment 5

Now we can translate this graph to our file format.

Our file format assumes that each line in the file represents a vertex and all of its edges and weights.

If the file has 5 lines, then the graph has 5 vertices.

The format of a line in the file is


VertexLabel, Adjacent Vertex Index, Weight of Edge

where “Adjacent Vertex Index, Weight of Edge” can be repeated.

The first line in our file would be

A, 1, 3, 3, 6

This shows that Vertex A (which is at index 0) has an edge between itself and Vertex B (which is at index 1) and that edge has a weight of 3. Vertex A also has an edge between itself and Vertex D (index 3) and that edge has a weight of 6.

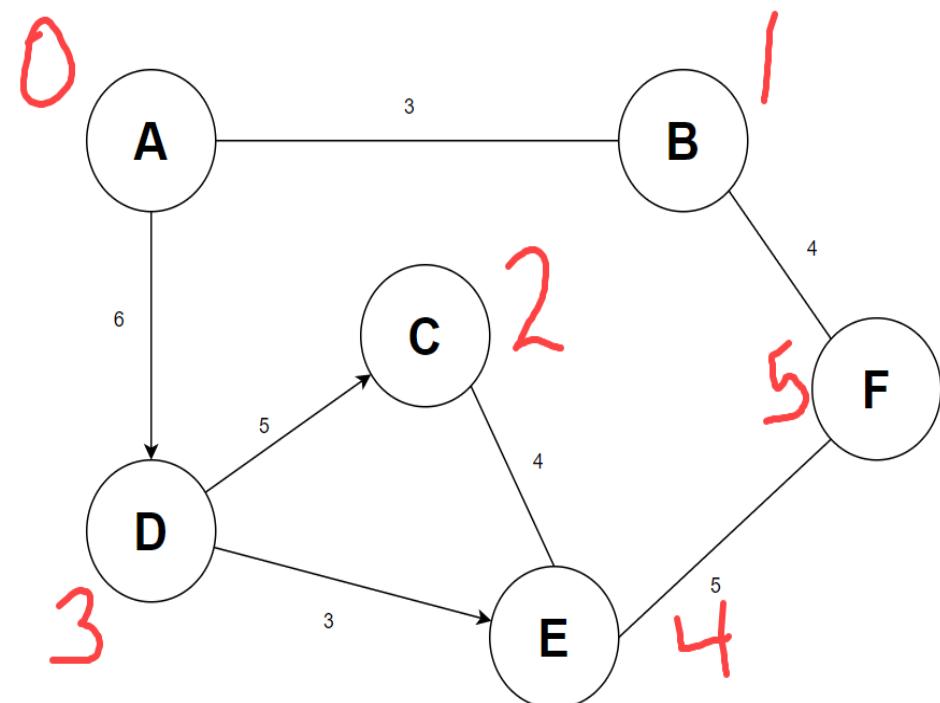


Coding Assignment 5

The file for this graph will be

A,1,3,3,6
B,0,3,5,4
C,4,4
D,2,5,4,3
E,2,4,5,5
F,1,4,4,5

The ordering of the vertex,edge pairs does not matter –
0, 3, 5, 4 is the same as 5, 4, 0, 3.


You need to create the file that represents your graph.
Your program will be tested with various files/graphs.

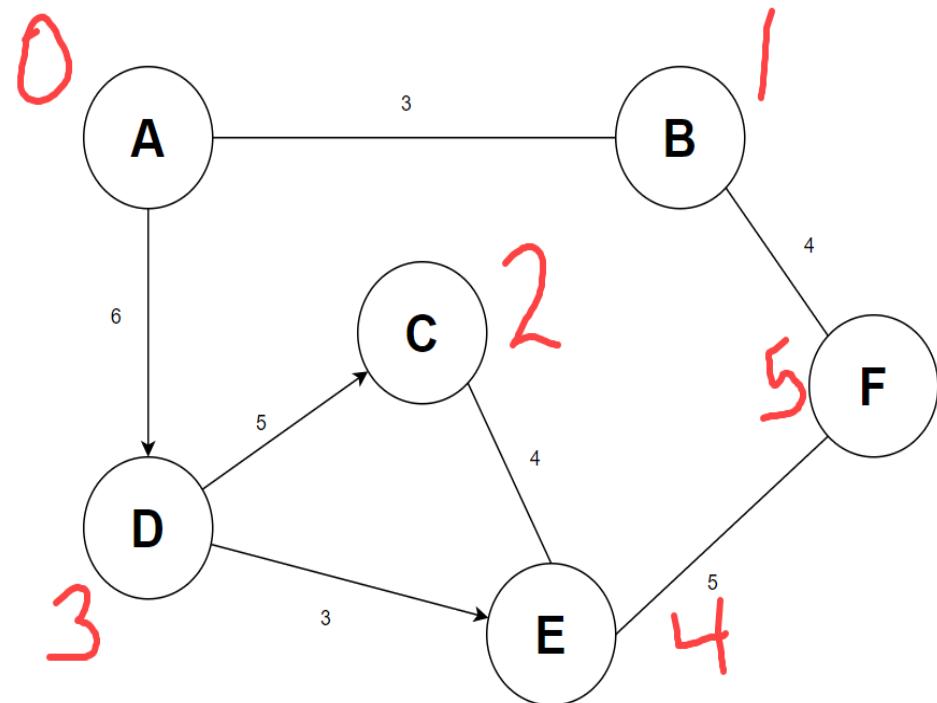

Coding Assignment 5

A,1,3,3,6
B,0,3,5,4
C,4,4
D,2,5,4,3
E,2,4,5,5
F,1,4,4,5

A,1,3,3,6
B
C,4,4
D,2,5,4,3
E,5,5
F,1,4,4,5

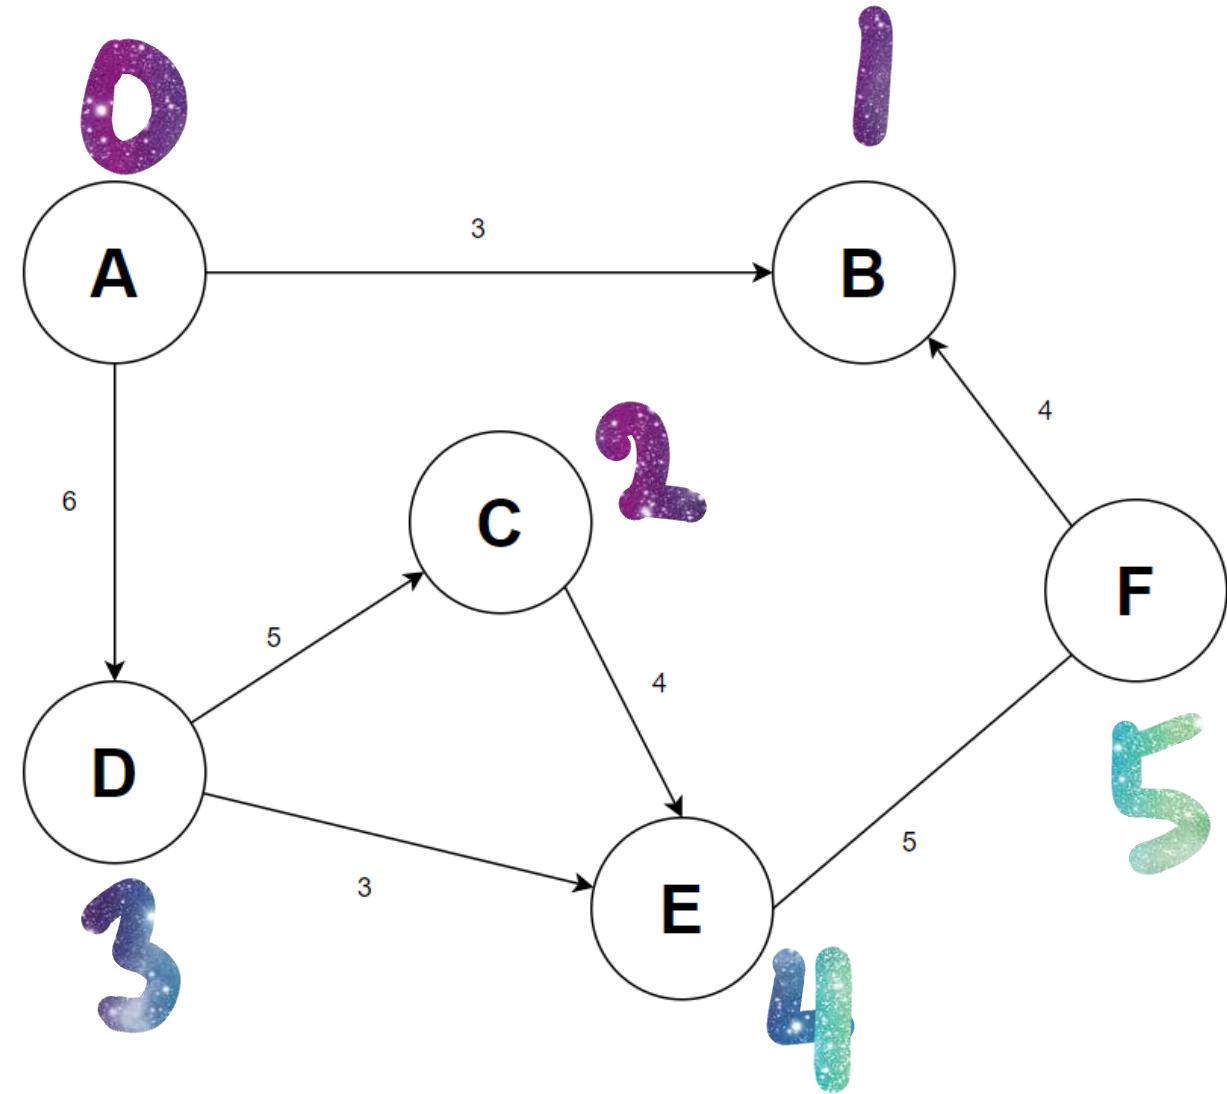

Coding Assignment 5

Getting Started

Create a define that will be set to maximum size of your graph – the maximum number of vertices that your program will load and process.

Create your Vertex Array and your Adjacency Matrix using that define.

Initialize the Adjacency Matrix to -1.

See **File Handling** for details on how to populate the Vertex array and the Adjacency Matrix.

Prompt for the starting vertex. Your program should be able to use any vertex in the graph as the starting vertex.

Coding Assignment 5

File Handling

As in the previous assignments, open the file from the command line using `argv[1]`.

While using `fgets()` to read through the file, use `strtok()` to parse each line into its parts.

Use the parts to add vertices to the Vertex Array and edges to the Adjacency Matrix.

```
typedef struct
{
    char label[6];
    int distance;
    int previous;
    int visited;
}
Vertex;
```

Coding Assignment 5

You are required to use `strtok()` to parse your file. I have posted review materials on `strtok()`.

A,1,3,3,6
B,0,3,5,4
C,4,4
D,2,5,4,3
E,2,4,5,5
F,1,4,4,5

Inside your `fgets` while loop that is reading the file, you will do the first `strtok()` to get the label for the vertex.

A,1,3,3,6
B
C,4,4
D,2,5,4,3
E,5,5
F,1,4,4,5

Then, you will need a while loop to get as many of Adjacent Vertex Index, Weight of Edge pairs that are in a line in the file.

Please note the restrictions on `strtok()` in the rubric.

Coding Assignment 5

Conditional Compile

Add a conditional compile statement PRINTIT to print out the Adjacency Matrix after you have populated it (using values from the file). So, if your code is compiled as

```
gcc Code5_xxxxxxxxxx.c -D PRINTIT
```

then your adjacency matrix will be printed to the screen.

-1	3	-1	6	-1
3	-1	-1	-1	-1
-1	-1	-1	-1	4
-1	-1	5	-1	3
-1	-1	4	-1	-1

```
#ifdef PRINTIT
printf("\n");
for(i = 0; i < VertexCount; i++)
{
    for(j = 0; j < VertexCount; j++)
        printf("%5d\t", AdjMatrix[i][j]);
    printf("\n");
}
#endif
```

Coding Assignment 5

Conditional Compile

The `PRINTIT` conditional compile should also be used to print out your Vertex Array after running Dijkstra.

```
#ifdef PRINTIT
printf("\n\nI\tL\tD\tP\tV\n");
for (i = 0; i < VertexCount; i++)
{
    printf("%d\t%s\t%d\t%d\t%d\n", i,
           VertexArray[i].label, VertexArray[i].distance,
           VertexArray[i].previous, VertexArray[i].visited);
}
printf("\n");
#endif
```

```
gcc Code5_XXXXXXXXXX.c -D PRINTIT
```

then your Vertex Array will be printed to the screen.

I	L	D	P	V
0	A	0	-1	1
1	B	3	0	1
2	C	11	3	1
3	D	6	0	1
4	E	9	3	1

This feature will be used to grade your program. The printing should be controlled with the compiler directive (not by commenting or uncommenting code). The output of your adjacency matrix and vertex array **must** have these formats.

I = Index, L = Label, D = Distance, P = Previous, V = Visited

Coding Assignment 5

Dijkstra's Algorithm

I suggest you use the Dijkstra code shown in class.

It closely mirrors the manual method we learned.

If you so choose to use the Internet as your source, be sure you are getting the C version of Dijkstra (and not some other graph traversal/variation of Dijkstra).

Your Dijkstra code, regardless of where you source it, **MUST** use an adjacency matrix and a vertex array so that you can create the required output for grading.



Terminal - student@Maverick: /media/sf_VM/CSE3318/CA5

- + ×


File Edit View Terminal Tabs Help

student@Maverick:/media/sf_VM/CSE3318/CA5\$

|

Coding Assignment 5

```
typedef struct
{
    char label[6];
    int distance;
    int previous;
    int visited;
}
Vertex;
```

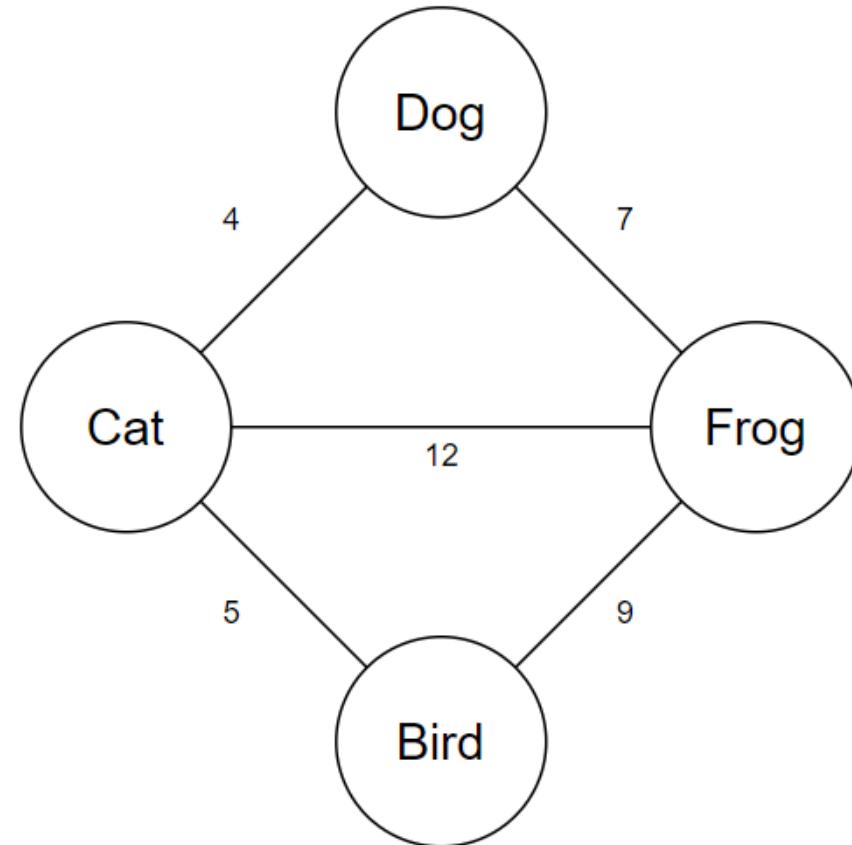


Coding Assignment 5

Dog, 1, 4, 2, 7

Cat, 0, 4, 3, 5, 2, 12

Frog, 0, 7, 3, 9, 1, 12

Bird, 1, 5, 2, 9

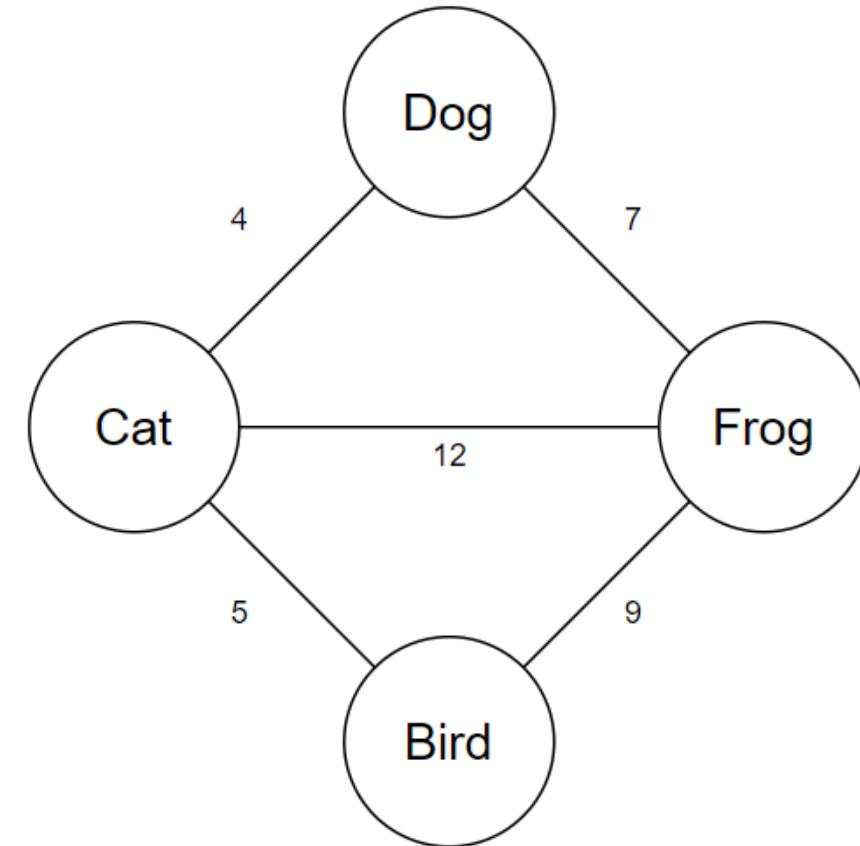

Coding Assignment 5

What is the starting vertex? Cat


What is the destination vertex? Frog

The path from Cat to Frog is Cat->Dog->Frog and has a length of 11

What is the starting vertex? Dog

What is the destination vertex? Bird

The path from Dog to Bird is Dog->Cat->Bird and has a length of 9

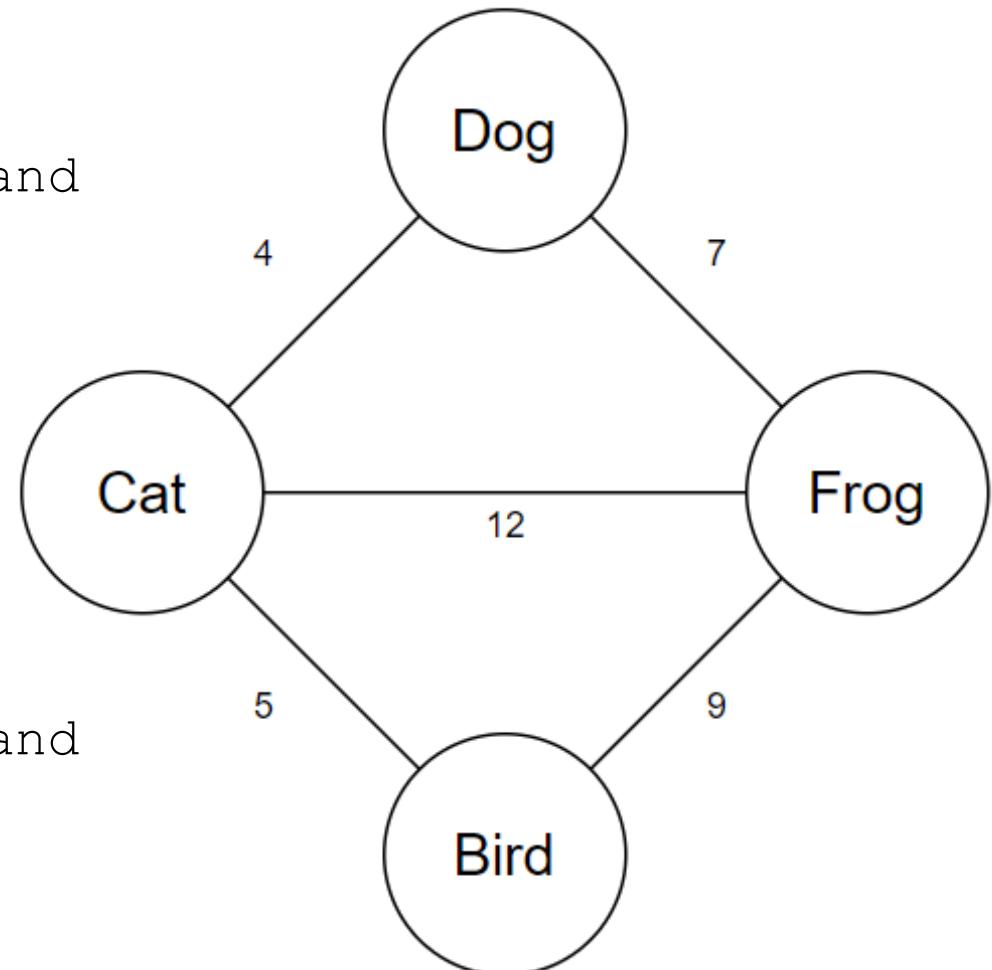

Coding Assignment 5

IMPORTANT

Make NO assumptions about the ordering or the labeling of the vertices in the graph.

The VertexLabel could be up to 5 characters and the vertices can be listed in any order in the file.

Coding Assignment 5

You will also need to submit a drawing of your graph.

Draw the graph by hand or use a program.

However you create the graph, you must submit an electronic picture version of it. Make a PDF version, take a picture with your phone or take a screenshot – doesn't matter how you do it.

Your submission must be something that can be viewed without a specialized app – use PDF, JPEG or PNG.

Coding Assignment 5

Your graph should have a minimum of 5 vertexes.

Your graph should have a mix of directed and undirected edges.

Your edges must ALL be weighted.

Make sure every vertex can be reached from every other vertex.

A, 1, 3, 3, 6

B, 0, 3, 5, 4


Dijkstra's Algorithm

OLQ8 will be over Dijkstra's Algorithm.

See the Study Gude.

OLQ8

Perform Dijkstra's Algorithm and determine the distance of each vertex from the starting vertex of W.

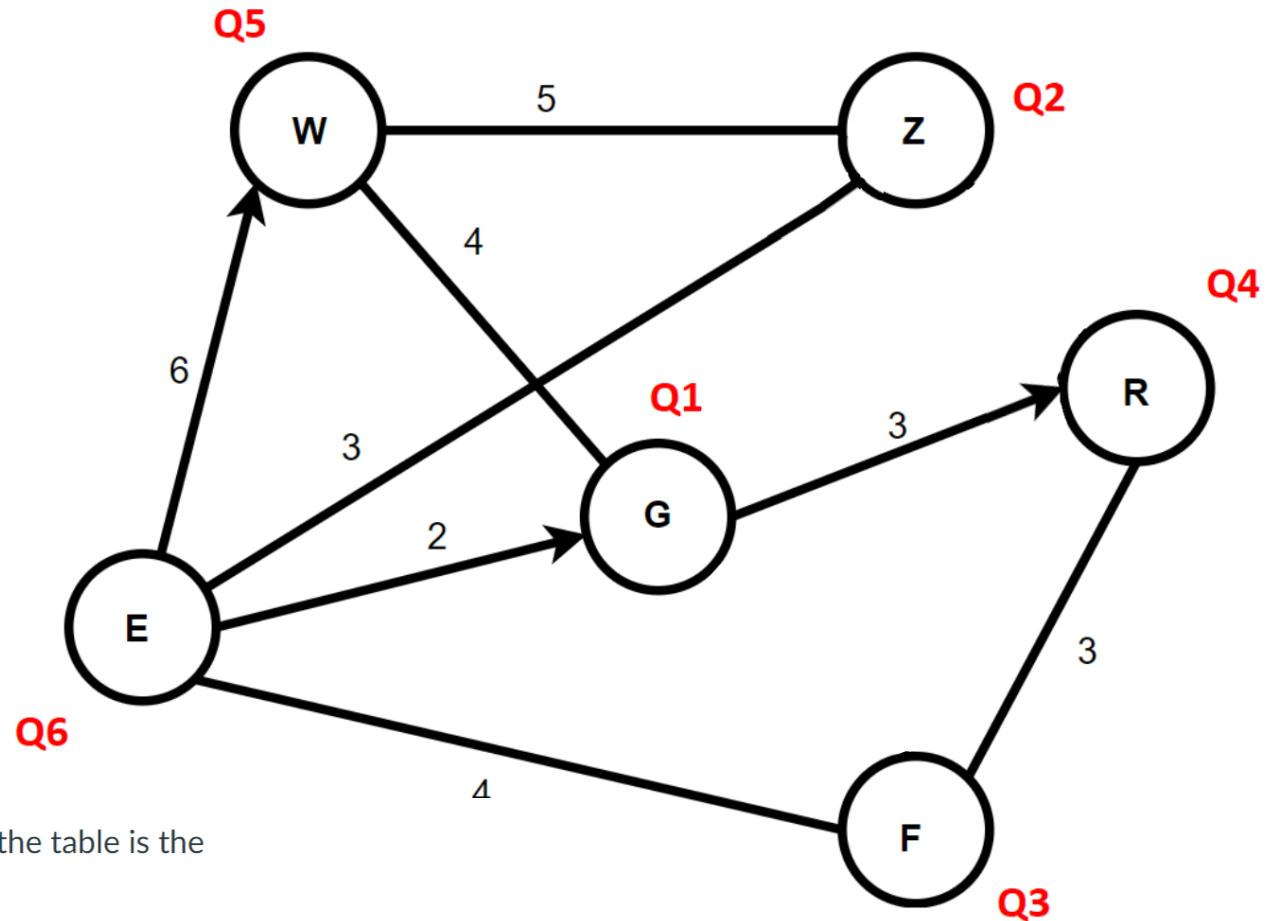

Each vertex is labeled with a question number - Q1, Q2, etc. Your answer in the table is the distance from the starting vertex to that vertex.


For example, if the starting vertex is Z, then Q3 is asking for the distance from Z to F (since Vertex F is labeled with Q3).

Q1	Q2	Q3	Q4	Q5	Q6

OLQ8

	A	F	H	J	V

Given this graph, perform Dijkstra's Algorithm and fill out the grid using a starting index of A.

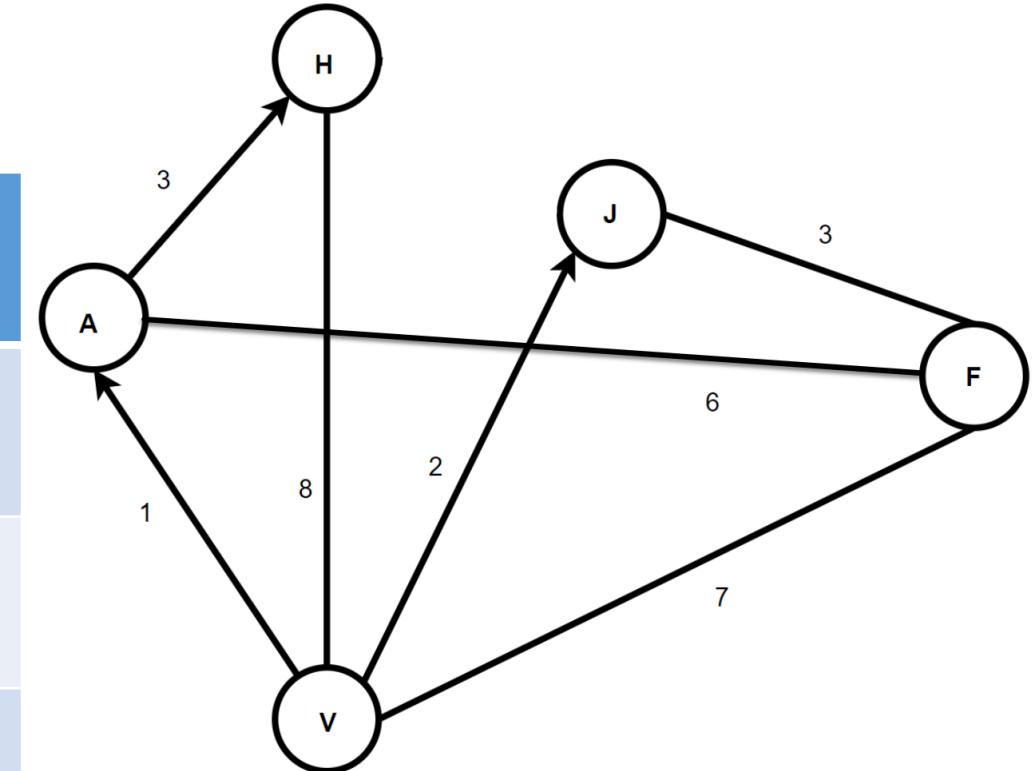


	W	Z	R	E	F	G
W	0	∞	∞	∞	∞	∞
E		∞	5	3	∞	4
G		∞	5		7	4
R		∞	5		7	
F		8			7	
Z		8				

Answer the following questions

1. What is the starting vertex?	W
2. What is the distance from the starting vertex to Vertex F ?	7
3. What is the path from the starting vertex to Vertex F ?	W->E->F
4. What is the distance from the starting vertex to Vertex Z ?	8
5. What is the path from the starting vertex to Vertex Z ?	W->R->Z

Can you
create
the
graph?


	W	Z	R	E	F	G
W	0	∞	∞	∞	∞	∞
E		∞	5	3	∞	4
G		∞	5		7	4
R		∞	5		7	
F		8			7	
Z		8				

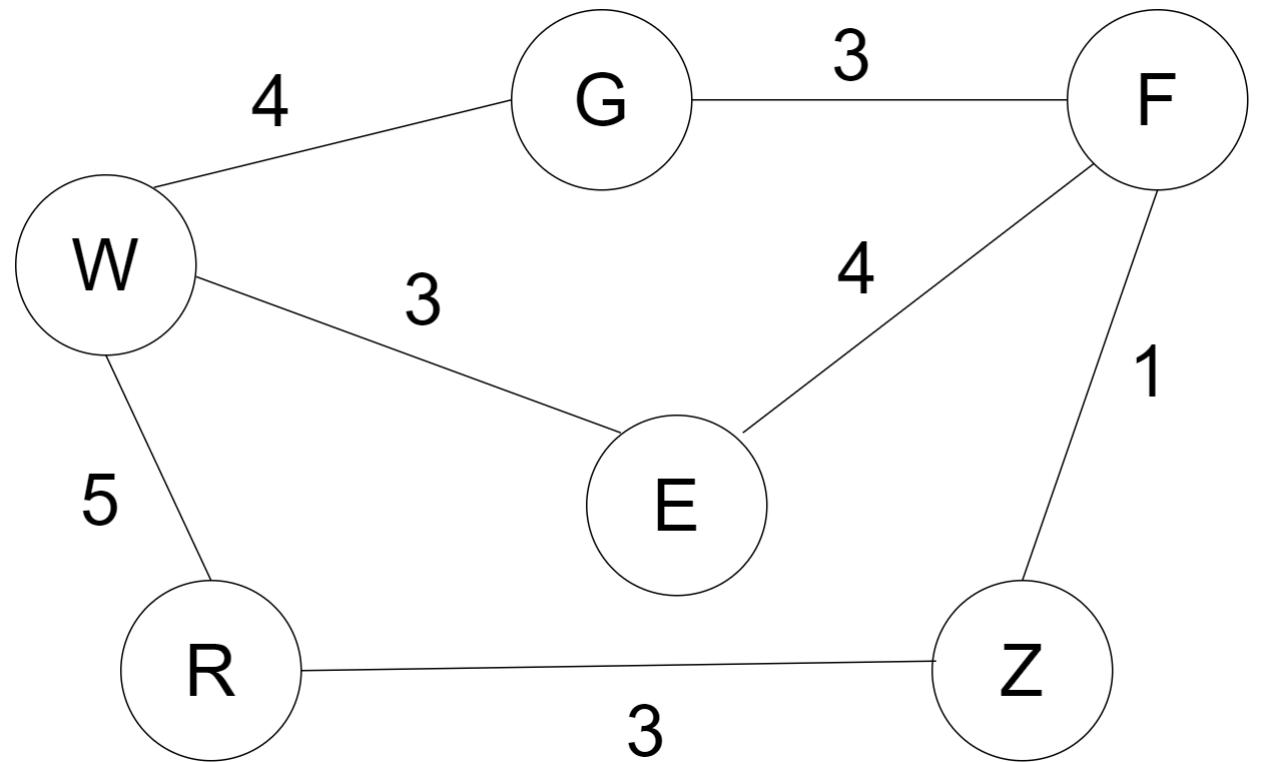

	W	Z	R	E	F	G
W	0	∞	∞	∞	∞	∞
E		∞	5	3	∞	4
G		∞	5		7	4
R		∞	5		7	
F		8			7	
Z		8				

Big Oh Notation, O

The notation $O(n)$ is the formal way to express the upper bound of an algorithm's running time. It measures the worst case time complexity or the longest amount of time an algorithm can possibly take to complete.

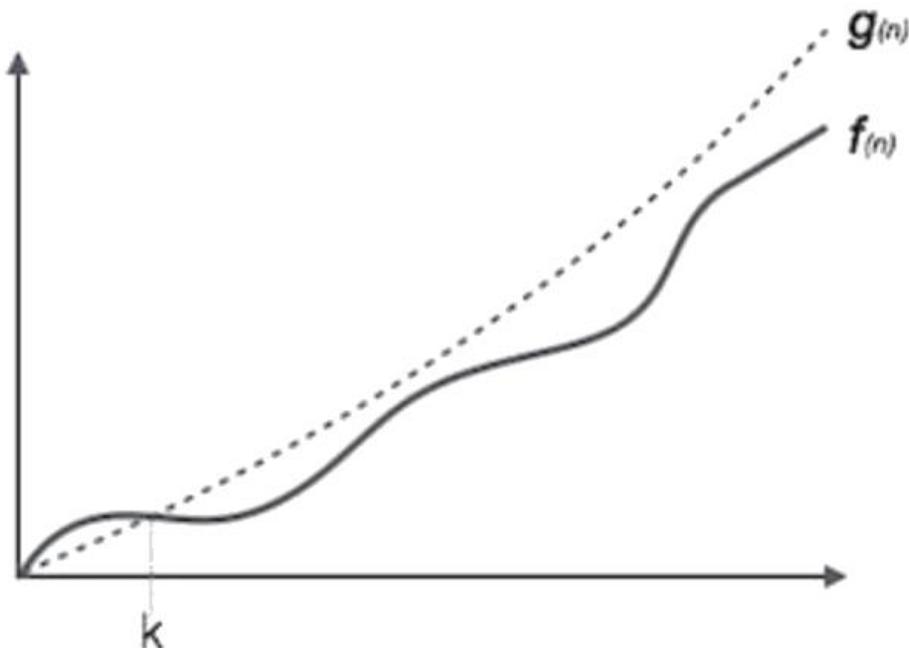


For example, for a function $f(n)$

$$O(f(n)) = \{ g(n) : \text{there exists } c > 0 \text{ and } n_0 \text{ such that } f(n) \leq c \cdot g(n) \text{ for all } n > n_0. \}$$

Omega Notation, Ω

The notation $\Omega(n)$ is the formal way to express the lower bound of an algorithm's running time. It measures the best case time complexity or the best amount of time an algorithm can possibly take to complete.

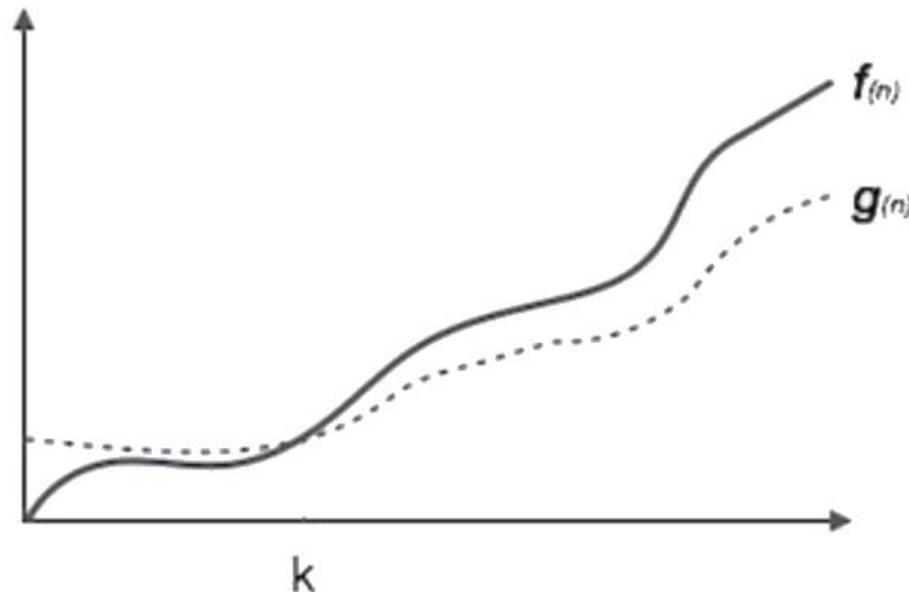


For example, for a function $f(n)$

$$\Omega(f(n)) \geq \{ g(n) : \text{there exists } c > 0 \text{ and } n_0 \text{ such that } g(n) \leq c \cdot f(n) \text{ for all } n > n_0. \}$$

Theta Notation, θ

The notation $\theta(n)$ is the formal way to express both the lower bound and the upper bound of an algorithm's running time. It is represented as follows -

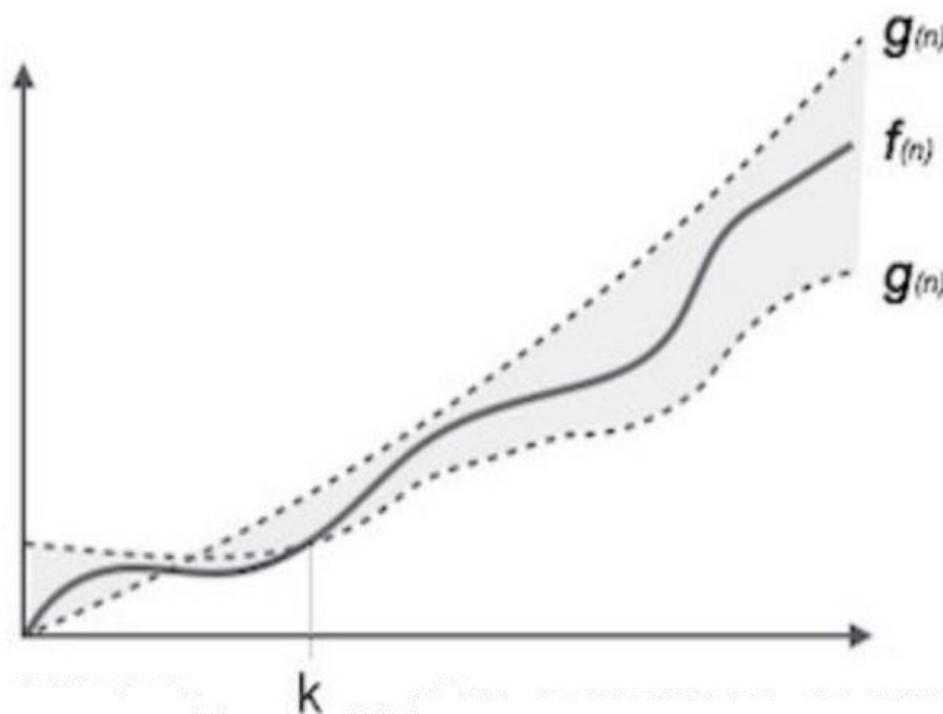

$$\theta(f(n)) = \{ g(n) \text{ if and only if } g(n) = O(f(n)) \text{ and } g(n) = \Omega(f(n)) \text{ for all } n > n_0. \}$$

Common Asymptotic Notations

Following is a list of some common asymptotic notations –

constant	-	$O(1)$
logarithmic	-	$O(\log n)$
linear	-	$O(n)$
$n \log n$	-	$O(n \log n)$
quadratic	-	$O(n^2)$
cubic	-	$O(n^3)$

What does it mean when we say that an algorithm X is asymptotically more efficient than Y? Which of these statements is true?

What is the time complexity of this code segment?

```
int i, j, k = 0;  
for (i = n / 2; i < n; i++)  
{  
    for (j = 2; j <= n; j = j * 2)  
    {  
        k = k + n / 2;  
    }  
}
```

If n is 16,

$i = n/2 = 16/2 = 8 \quad i < 16$	$j = 2 \quad j \leq 16 \quad j = j * 2$	$k = k + n/2$
8	2, 4, 8, 16	$k = \text{doesn't matter}$
9	2, 4, 8, 16	
10	2, 4, 8, 16	
11	2, 4, 8, 16	
12	2, 4, 8, 16	<code>int i, j, k = 0;</code>
13	2, 4, 8, 16	<code>for (i = n / 2; i < n; i++)</code>
14	2, 4, 8, 16	{
15	2, 4, 8, 16	<code> for (j = 2; j <= n; j = j * 2)</code> { $k = k + n / 2;$ }

then 8 passes ($\frac{n}{2}$) through i loop and 4 passes through j loop for each pass through i loop ($n = 16$ gives 4 passes).

}

What if n is 32?

i = n/2 = 32/2 = 16 i < 32	j = 2 j <= 32 j = j*2	k = k + n/2
16	2, 4, 8, 16,32	k = doesn't matter
17	2, 4, 8, 16,32	
18	2, 4, 8, 16,32	
19	2, 4, 8, 16,32	int i, j, k = 0;
20	2, 4, 8, 16,32	for (i = n / 2; i < n; i++)
21	2, 4, 8, 16,32	{
22	2, 4, 8, 16,32	for (j = 2; j <= n; j = j * 2)
23	2, 4, 8, 16,32	{
24	2, 4, 8, 16,32	k = k + n / 2;
25	2, 4, 8, 16,32	}
26	2, 4, 8, 16,32	
27	2, 4, 8, 16,32	
28	2, 4, 8, 16,32	}
29	2, 4, 8, 16,32	
30	2, 4, 8, 16,32	
31	2, 4, 8, 16,32	

then 16 passes ($\frac{n}{2}$) through i loop and 5 passes through j loop for each pass through i loop (n = 32 gives 5 passes).

What if n is 8?

$i = n/2 = 8/2 = 4 \ i < 8$	$j = 2 \ j \leq 8 \ j = j * 2$	$k = k + n/2$
4	2, 4, 8	$k = \text{doesn't matter}$
5	2, 4, 8	<pre>int i, j, k = 0; for (i = n / 2; i < n; i++)</pre>
6	2, 4, 8	{
7	2, 4, 8	<pre> for (j = 2; j <= n; j = j * 2) { k = k + n / 2; }</pre>

then 4 passes ($\frac{n}{2}$) through i loop and 3 passes through j loop for each pass through i loop (n = 8 gives 3 passes).

For the outer i loop, we always had $\frac{n}{2}$ passes.

For the inner j loop, we had

n of 8 gave 3 passes

n of 16 gave 4 passes

n of 32 gave 5 passes

n	$\log_2 n$
1	0
2	1
4	2
8	3
16	4
32	5
64	6

This tell us that the inner j loop will have $\log_2 n$ passes.

For the complete run time, we have to multiple the run time of the inner loop by the iterations of the outer loop

$$\frac{n}{2} * \log_2 n = \frac{1}{2}n * \log_2 n = O(n \log_2 n)$$

Using big O notation allows us to drop the $\frac{1}{2}$ from the function.

What is the time complexity of this code segment?

```
int a = 0, i = n; // n is the number of items in the array
while (i > 0)
{
    a += i;
    i /= 2;
}
```

Pick one

1. $O(n)$
2. $O(\sqrt{n})$
3. $O(\frac{n}{2})$
4. $O(\log_2 n)$

```
int a = 0, i = n; // n is the number of items in the array
while (i > 0)
{
    a += i;
    i /= 2;
}
```

The pattern here is

32 -> 6

16 -> 5

8 -> 4

4 -> 3

which looks almost familiar.

If we think of this pattern like this...

32 -> 6 -> 5+1

16 -> 5 -> 4+1

8 -> 4 -> 3+1

4 -> 3 -> 2+1

This looks like $\log_2 n + 1$

We can drop the +1 for asymptotic notation so we can call this $O(\log_2 n)$.

n	$\log_2 n$
1	0
2	1
4	2
8	3
16	4
32	5
64	6

What is the time complexity of this code segment?

```
int a = 0;  
for (i = 0; i < n; i++)      // n is the number of elements in the array  
{  
    for (j = n; j > i; j--)  
    {  
        a = a + i + j;  
    }  
}
```

Pick one

1. $O(n)$
2. $O(n \log(n))$
3. $O(n\sqrt{n})$
4. $O(n^2)$

$n = 32$

$i = 0; i < 32; i++$	$j = 32; j > i; j--$
0	j loops from 32 to 0 => 32 times
1	j loops from 32 to 1 => 31 times
2	j loops from 32 to 2 => 30 times
3	j loops from 32 to 3 => 29 times
...	...
29	j loops from 32 to 29 => 3 times
30	j loops from 32 to 30 => 2 times
31	j loops from 32 to 31 => 1 time
loop condition fails at $i = 32$	

```
int a = 0;  
for (i = 0; i < n; i++)  
{  
    for (j = n; j > i; j--)  
    {  
        a = a + i + j;  
    }  
}
```

We could do $n = 16$ or other values but we'll see the same pattern.

This pattern is an arithmetic series which is described by $\frac{n^2+n}{2}$

which is asymptotically described as $O(n^2)$.

$$\frac{n^2 + n}{2}$$

```
student@maverick:/media/sf_VM/CSE3318$ ./a.out
Enter a value for n 32
loop counter = 528
```

```
student@maverick:/media/sf_VM/CSE3318$ ./a.out
Enter a value for n 16
loop counter = 136
```



```
student@maverick:/media/sf_VM/CSE3318$ ./a.out
Enter a value for n 8
loop counter = 36
```

```
student@maverick:/media/sf_VM/CSE3318$ ./a.out
Enter a value for n 4
loop counter = 10
```