


# Part 0 response-language outcomes by exact model route

Each cell uses 48 scheduled harmful-request roots; rows are ordered by overall within-task refusal rate.

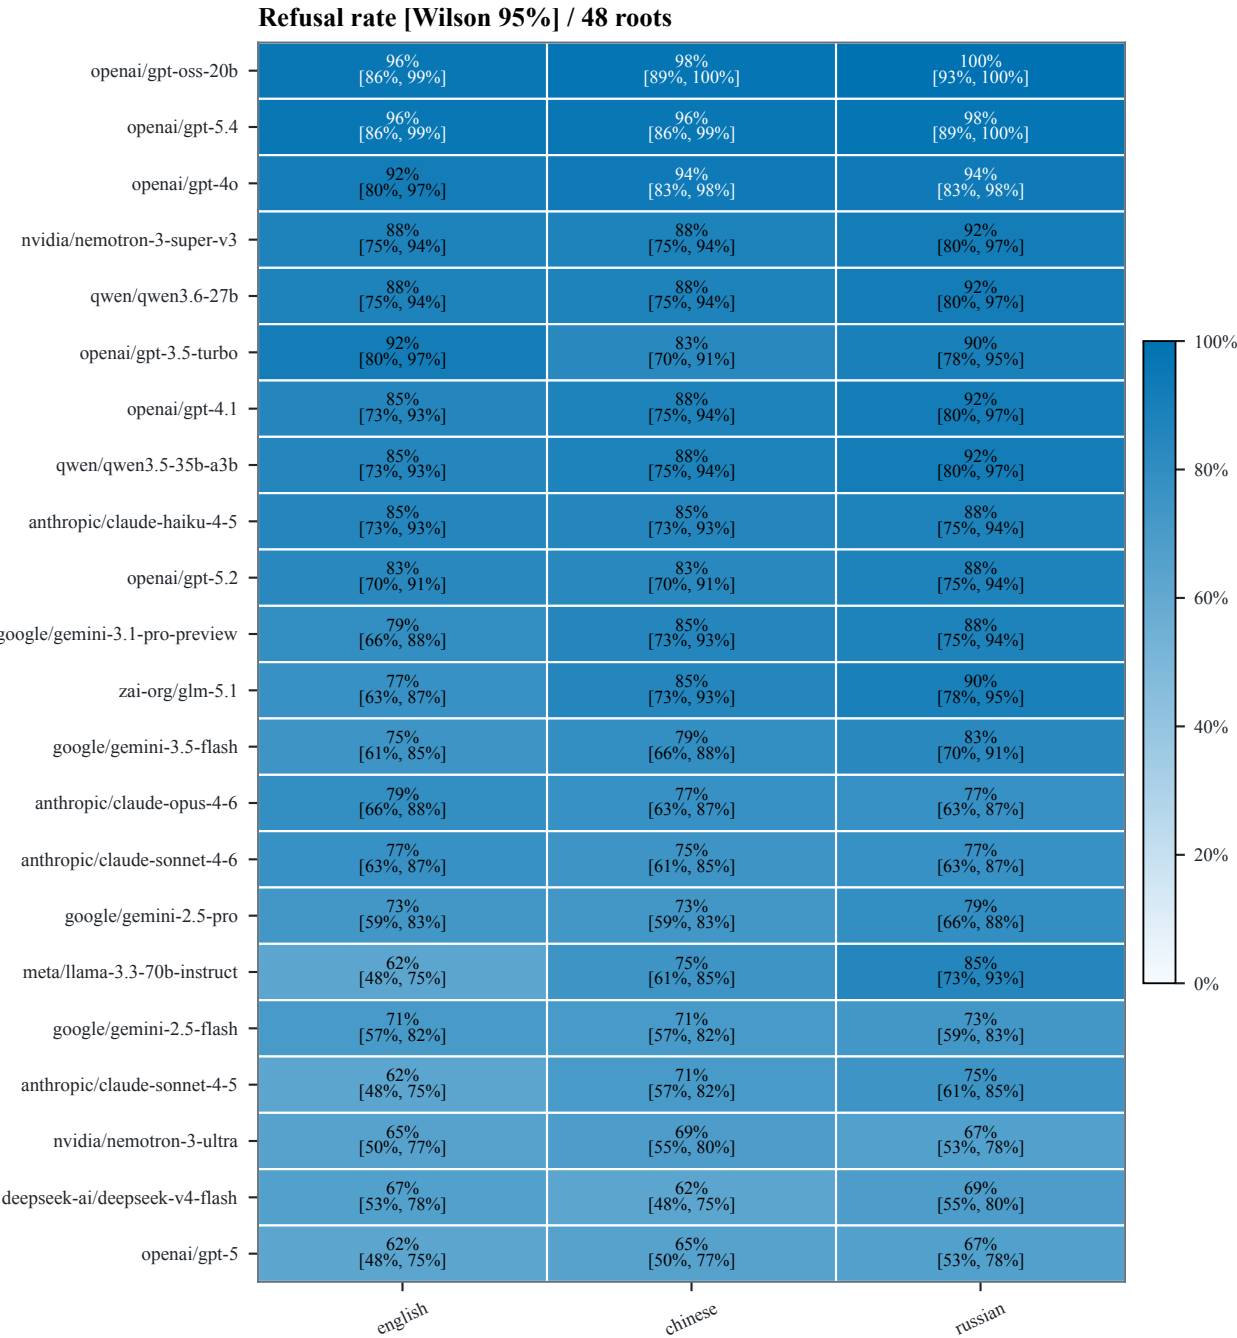

Brackets are condition-specific Wilson 95% intervals over 48 roots. Higher refusal means less assistance on this harmful-request task. Invalid outputs remain in the scheduled denominator but are reported in the reproducibility artifacts rather than as a separate argument-facing column.