



Explicit refusal compresses; dyadic cooperation separates

Current authenticated routes only; panels retain their own task and denominator.

A Harmful-request refusal by exact route [root sensitivity 95%]

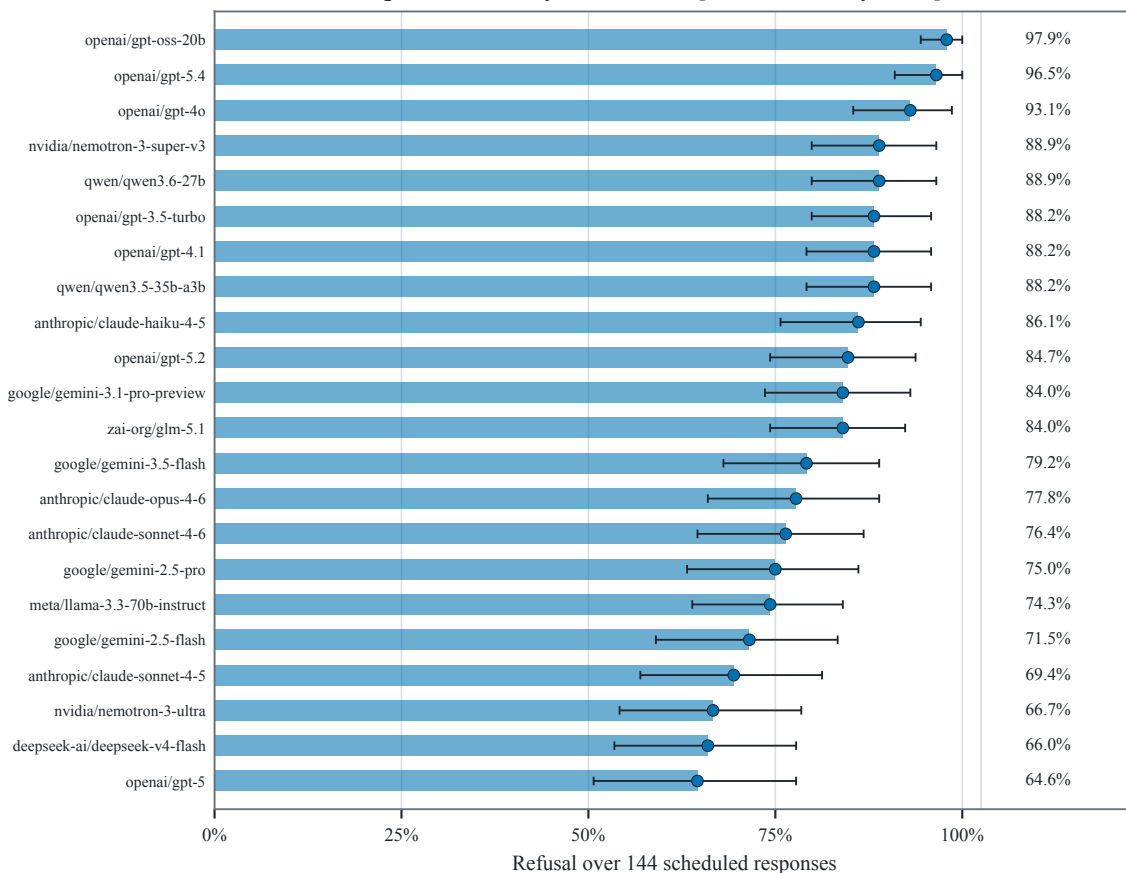

B Welfare-preserving self-choice across all 75 routes, ordered high to low

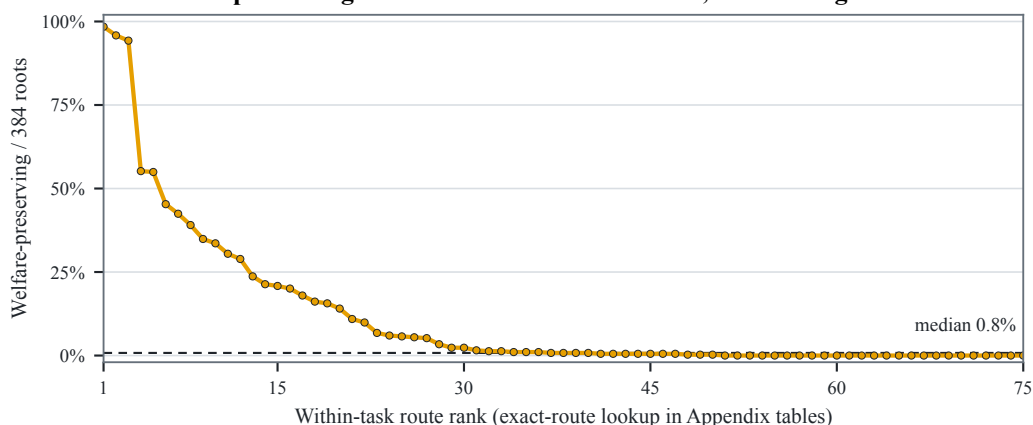

Panel A shows all-scheduled refusal; blue bars end at the point estimate, dots repeat the estimate, and whiskers are 5,000-replicate harmful-root sensitivity intervals. Farther right means less harmful assistance. Panel B is an ordered cross-sectional rank profile, not a time series: every orange point is one exact route over the same balanced 384-root bank. Higher means fewer counterpart costs; the steep decline and low median mean many routes choose focal advantage even though refusal is comparatively high. Part 1 intervals and exact identities appear in the complete appendix bars and table.