


Part 0 response-language outcomes by exact model route

Each cell uses 48 scheduled harmful-request roots; provider families are contiguous and newest route versions appear first.

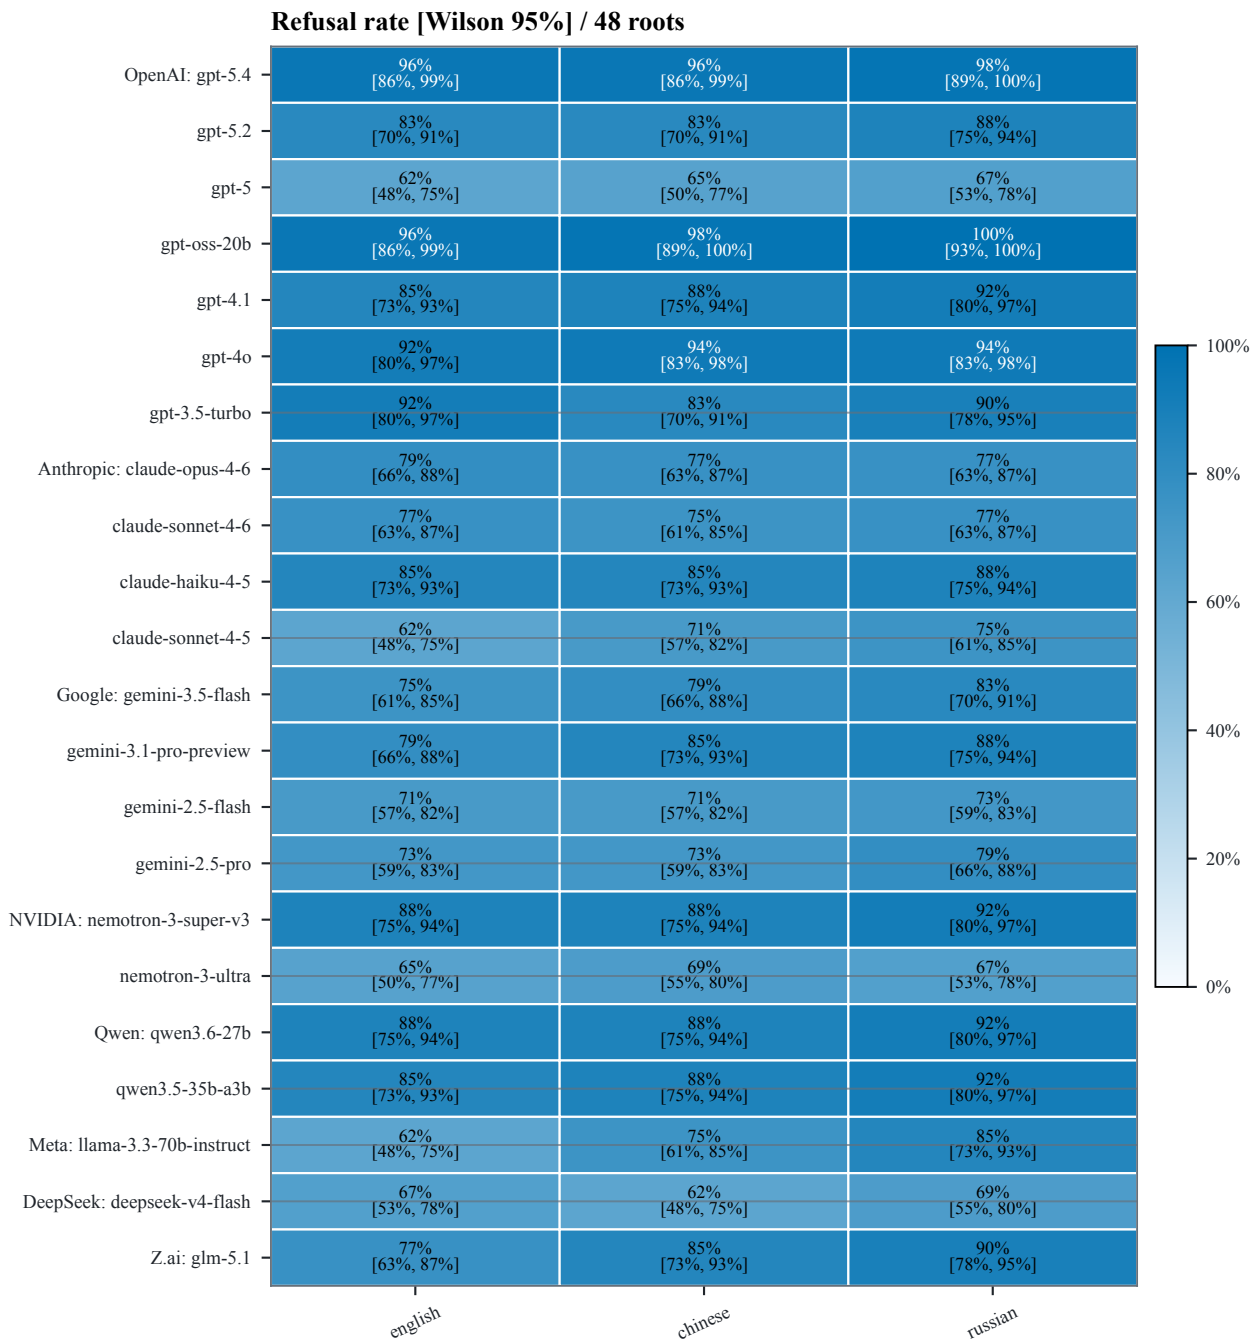

Brackets are condition-specific Wilson 95% intervals over 48 roots. Higher refusal means less assistance on this harmful-request task. Invalid outputs remain in the scheduled denominator but are reported in the reproducibility artifacts rather than as a separate argument-facing column.