



Explicit refusal compresses; dyadic cooperation separates

Current authenticated routes only; panels retain their own task and denominator.

A Harmful-request refusal grouped by provider [root sensitivity 95%]

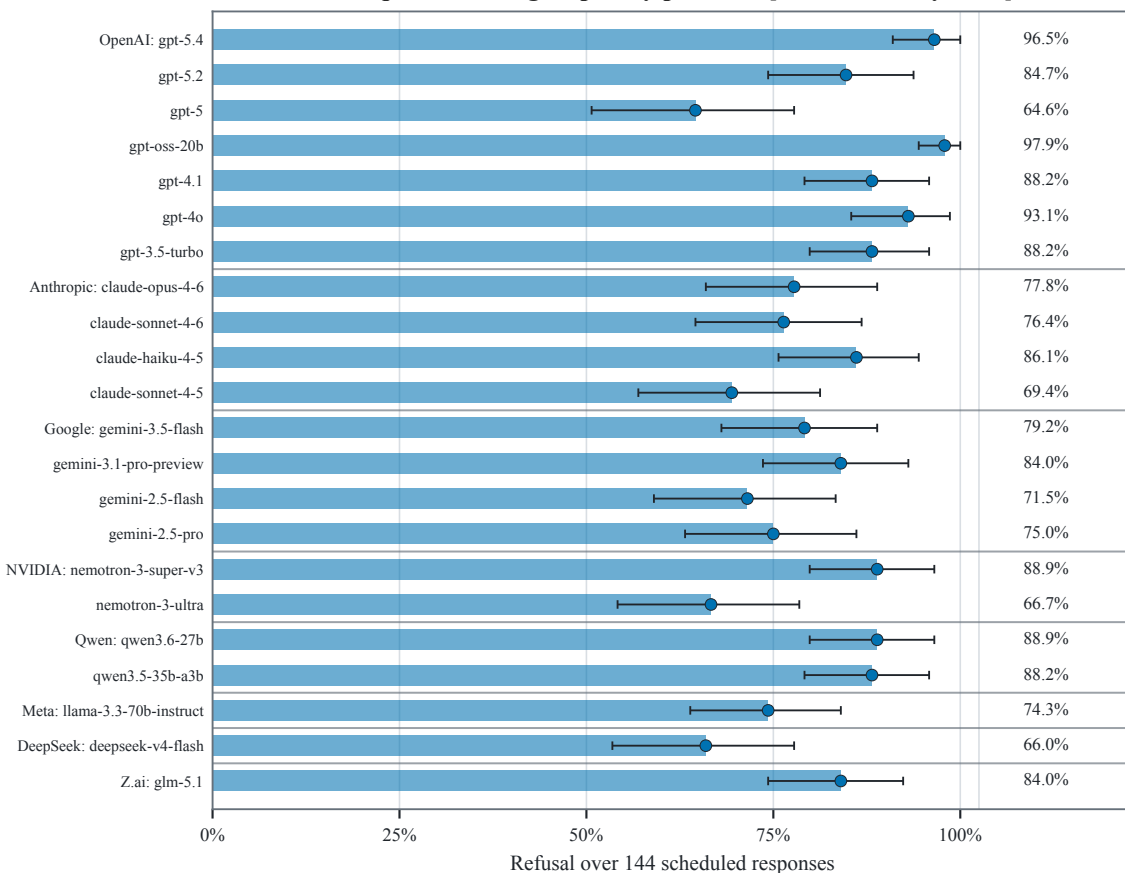

B Welfare-preserving self-choice across all 75 routes, ordered high to low

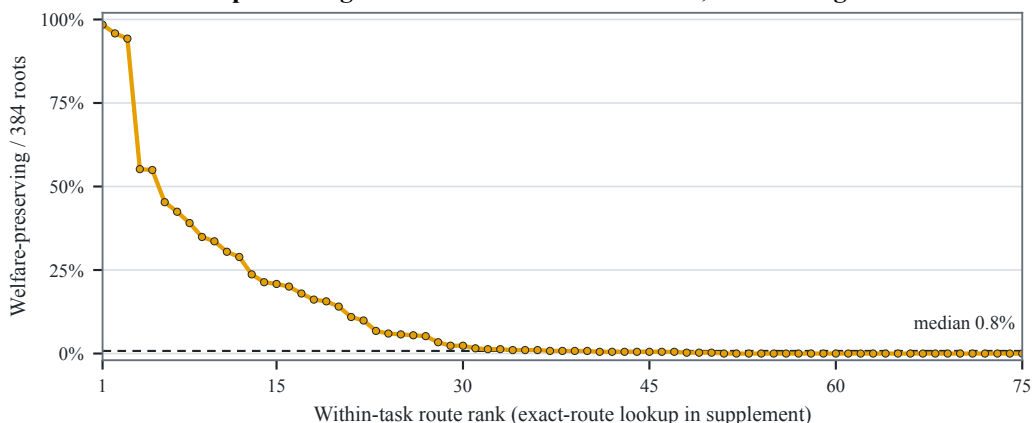

Panel A groups provider families contiguously in the order OpenAI, Anthropic, Google, NVIDIA, MiniMax, then the remaining providers; frozen route versions run newest to oldest within family. Blue bars end at the all-scheduled point estimate, dots repeat it, and whiskers are 5,000-replicate harmful-root sensitivity intervals. Farther right means less harmful assistance. Panel B remains a global ordered cross-sectional rank profile, not a time series: every orange point is one exact route over the same balanced 384-root bank. Higher means fewer counterpart costs. Part 1 intervals and exact identities appear in the supplement.