


1 All four operations

```
#include <stdio.h>
int main() {
    int a = 20, b = 10, c;
    c = a+b
    printf("a+b =%d,c");
    c = a-b
    printf("a*b =%d,c");
    c = a*b
    printf("a/b =%d,c");
    c = a/b
    printf("a+b =%d,c");
    return 0;
}
```

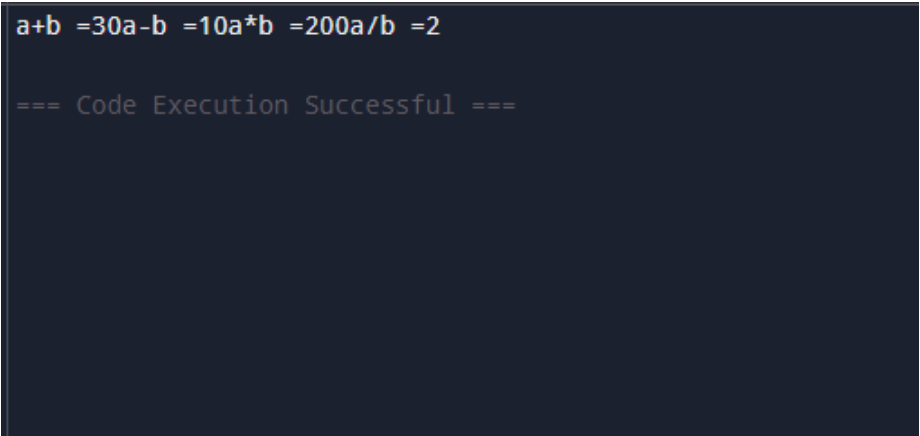

```
a+b =30a-b =10a*b =200a/b =2

=== Code Execution Successful ===
```

Figure 1: Program 4