

91 CSS Interview Question

Sr.No	Topic	Number of Questions
1	Basic CSS	10
2	Selectors	4
3	CSS Box Model	7
4	Layout	8
5	Typography	7
6	Colors and Backgrounds	9
7	CSS Transition	5
8	CSS Animation	5
9	CSS Transform	10
10	CSS Flex	8
11	Grid Layout	10
12	Responsive Design	8
Total		91

Here are 99 CSS questions that cover a wide range of topics, including theory, concepts, and practical questions. These questions will help you prepare effectively for an interview.

Basic CSS

Q.1] What does CSS stand for?

- CSS stands for Cascading Style Sheets.

Q.2] What is the purpose of CSS?

- CSS is used to style and format the appearance of web pages written in HTML and XML.
- It allows web developers to control aspects like **layout**, **colors**, **fonts**, and **spacing** of HTML elements.

Q.3] How do you link a CSS file to an HTML document?

- You can link a CSS file to an HTML document using the `<link>` element within the `<head>` section of the HTML document.

```
<link rel="stylesheet" type="text/css" href="style.css">
```

- **rel** – It is used to indicate different relationships between the current document and the linked resource. Some common values are
 - stylesheet
 - icon
 - preload
 - alternate
- **type** – The `type` attribute specifies the MIME type of the linked resource.

Q.4] What is the syntax of a CSS rule?

- A CSS rule consists of a **selector** and a **declaration block**.

```
selector {  
  property: value;  
  /* more properties and values */  
}
```

Q.5] What are the different ways to apply CSS to a web page?

CSS can be applied in three ways:

1. **Inline styles:** Directly within an HTML element.
2. **Internal stylesheets:** Within a `<style>` element in the `<head>` section of an HTML document.
3. **External stylesheets:** linked to an HTML document using the `<link>` element.

Q.6] What is an inline style?

- Inline styles are **CSS** styles applied directly to an individual HTML element using the `style` attribute

Q.7] What is an internal stylesheet?

- An internal stylesheet is CSS code written within a `<style>` element in the `<head>` section of an HTML document.
- It applies styles to that particular HTML document only.

Q.8] What is an external stylesheet?

- An external stylesheet is a separate CSS file linked to an HTML document using the `<link>` element.
- It allows styles to be applied across multiple HTML documents.

Q.9] How do you apply multiple styles to a single element?

- Multiple styles can be applied to a single element by separating each style declaration with a semicolon within the style attribute (for inline styles) or within the CSS rule:

```
selector {  
  property1: value1;  
  property2: value2;  
  /* more properties */  
}
```

Q.10] What is the difference between a class selector and an ID selector?

Class selector

- Defined using a dot (.) followed by a class name.
- Classes can be applied to multiple elements, and one element can have multiple classes.

```
.classname {  
    property: value;  
}
```

ID selector

- Defined using a hash (#) followed by an ID name.
- IDs are unique within a document and should only be applied to one element.

```
#idname {  
    property: value;  
}
```

Selectors

Q.11] What is a CSS selector?

- A CSS selector is a pattern that is used to select and style HTML elements based on various criteria such as **element types**, **IDs**, **classes**, **attributes**, and **relationships with other elements**

Q.12] What are the types of CSS Selectors

1. Universal Selector (*)

- ✓ Selects all elements on the page

```
* {  
    property: value;  
}
```

2. Type Selector

- ✓ Selects all elements of a specific type

```
p {  
    property: value;  
}
```

3. Class Selector (.)

- ✓ Selects elements with a specific class attribute

```
.classname {  
    property: value;  
}
```

4. ID Selector (#)

- ✓ Selects a single element with a specific ID attribute

```
#idname {  
    property: value;  
}
```

5. Attribute Selector

- ✓ Selects elements based on the presence or value of an attribute.

```
input[type="text"] {  
    property: value;  
}
```

6. Pseudo-classes

- ✓ Selects elements based on their special state

```
a:hover {  
    property: value;  
}
```

7. Pseudo-elements

- ✓ Selects specific parts of an element's content

```
p::before {  
    content: "Prefix";  
}
```


8. Descendant Selector (space)

- ✓ Selects elements that are descendants of another element.

```
div p {  
  property: value;  
}
```

9. Child Selector (>)

- ✓ Selects elements that are direct children of another element.

```
div > p {  
  property: value;  
}
```

10. Adjacent Sibling Selector (+)

- ✓ Selects the first **element** that immediately follows a specified element, and both elements must have the same parent.

```
h2 + p {  
  property: value;  
}
```

11. General Sibling Selector (~)

- ✓ Selects **elements** that are siblings of a specified element.

```
h2 ~ p {  
  property: value;  
}
```

Q.13] What is a pseudo-class?

- A pseudo-class is a way to style an element in CSS **based on its state or position** without needing extra HTML code.
- Pseudo-classes are particularly useful for creating interactive and dynamic styles without needing to manipulate the DOM directly with JavaScript

Q.14] What is a pseudo-element?

```
/* Example 1: Pseudo-class selector */  
p:hover {  
  background-color: yellow;  
}  
  
/* Example 2: Pseudo-class selector with multiple properties */  
p:hover {  
  color: red;  
  font-weight: bold;  
}  
  
/* Example 3: Pseudo-class selector with a media query */  
@media (max-width: 600px) {  
  p:hover {  
    background-color: yellow;  
  }  
}
```

```
/* Example 4: Pseudo-class selector with a media query */  
@media (max-width: 600px) {  
  p:hover {  
    color: red;  
  }  
}  
  
/* Example 5: Pseudo-class selector with a media query */  
@media (max-width: 600px) {  
  p:hover {  
    background-color: yellow;  
  }  
}
```

- It is a keyword added to the selectors which will allow to style the specific parts of an element's content.
- Pseudo classes - targets the entire element
- Pseudo elements - targets the specific part of an element
- Pseudo-elements are written with a double colon (::)


Here are some common pseudo-elements

```
/* Insert content before the content of a paragraph */  
p:before {  
  content: "Note: ";  
  font-weight: bold;  
}  
  
/* Insert content after the content of a paragraph */  
p:after {  
  content: " (end)";  
  font-style: italic;  
}  
  
/* Style the first line of a paragraph */  
p:first-line {  
  color: blue;  
  font-weight: bold;  
}  
  
/* Style the first letter of a paragraph */  
p:first-letter {  
  font-size: 200%;  
  color: red;  
}  
  
/* Style the selected text */  
::selection {  
  background: yellow;  
  color: black;  
}
```

CSS BOX MODEL

Q.15] What is the CSS box model?

- The **CSS** box model is a fundamental concept that describes the rectangular boxes generated for elements in a web page, which includes the element's **content**, **padding**, **border**, and **margin**

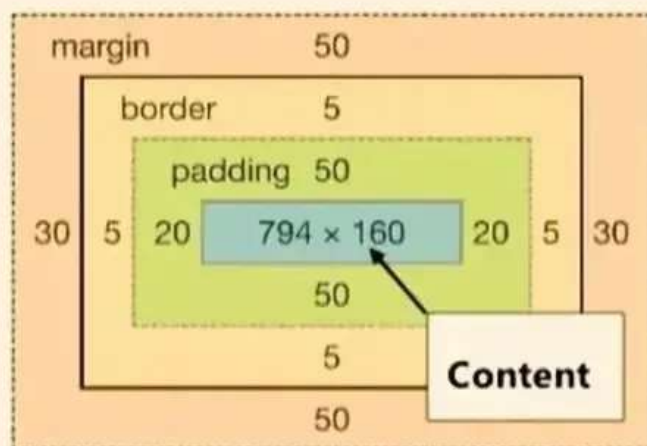

Q.16] What are the components of the box model?

- Content:** The actual content of the box, where text and images appear.
- Padding:** The space between the content and the border.
- Border:** The border surrounding the padding (if any) and content.
- Margin:** The space outside the border, separating the element from other elements.

Q.17] What is the difference between margin and padding?

- Margin:** Space outside the element's border, creating space between elements.
- Padding:** Space inside the element's border, creating space between the content and the border.

Q.18] How do you center an element horizontally?

- To center an element horizontally, you can use the **margin: auto;** property for **block-level** elements

Q.19] How do you center an element vertically?

- To center an element vertically, you can use **Flexbox**

```
container {  
  display: flex;  
  align-items: center;  
}
```

Q.20] What is the box-sizing property?

- The **box-sizing** property defines how the total width and height of an element are calculated.
- With **box-sizing: border-box;** the **padding** and **border** are included in the element's total width and height.

```
element {  
  box-sizing: border box;  
}
```

Q.20] How do you create a rounded border?

- Use the **border-radius** property to create rounded borders

```
element {  
  border-radius: 10px;  
}
```

Q.22] How do you create a border around an element?

- Use the **border-radius** property to create rounded borders

```
element {
  border: 2px solid black;
}
```

LAYOUT

Q.23] What is the position property in CSS?

- The **position** property in CSS determines how an element is positioned in a document.
- It can take several values: **static**, **relative**, **absolute**, **fixed**, and **sticky**.

Q.24] Different Values of the position Property

static

[Refer a codepen](#)


- Default positioning
- Elements are positioned according to the normal flow of the document.
- We can't use offsets like **top**, **right**, **bottom**, and **left**

relative

[Refer a codepen](#)

- Positioned relative to its normal position
- We can use offsets like **top**, **right**, **bottom**, and **left**

Here is the diagram which illustrates the **static** and **relative** position

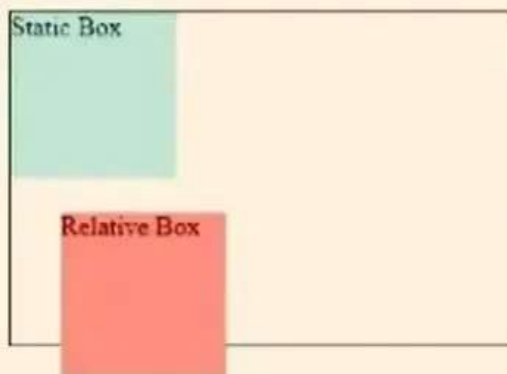

absolute

[Refer codepen](#)

- Positioned relative to the nearest positioned ancestor


- If there is no positioned ancestor, the element is positioned relative to the initial containing block (usually the **<html>** element).
- The ancestor can have **relative**, **absolute**, **fixed**, or **sticky** positioning
- It does not work with position **static**



fixed

[Refer a codepen](#)

- Positioned relative to the viewport, meaning it stays in the same place even when the page is scrolled

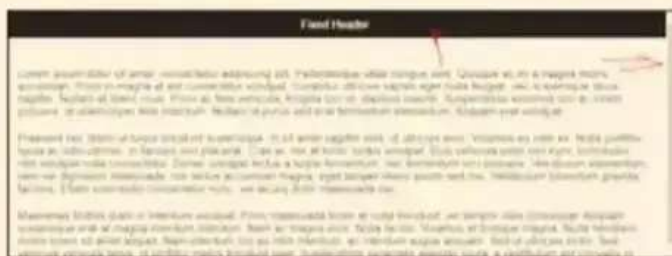

Sticky

[Refer a codepen](#)

- Acts like relative until the element reaches a specified scroll point, then it "**sticks**" in place.

Q.25] What is the float property?

- Used to position an element to the left or right within its container, allowing text and inline elements to wrap around it.

[Refer a codepen](#)

Q.26] How do you clear floats in CSS?

- To clear floats and ensure elements below a floated element are not affected, you can use the **clear** property

[Refer a codepen](#)

Q.27] What are the different values of the display property?

- Text alignment can be controlled using the `text-align` property.

```
.cover-background {
  background-image:
    url('image1.jpg');
  background-size: cover;
}
```

```
.contain-background {
  background-image:
    url('image2.jpg');
  background-size: contain;
}
```

Colors & Backgrounds

Q.37] How do you change the color of the text?

- You can set the background color of an element using the `background-color` property.

```
selector {
  background-color: #ffcc00;
}
```

Q.38] How do you set a background image?

- You can set a background image using the `background-image` property.

```
selector {
  background-image: url('image.jpg');
}
```

Q.39] How do you set the size of a background image?

- To set the size of a background image, you can use the `background-size` property in CSS.

Here are some common ways to use it

- Cover:** Scales the background image to cover the entire element, possibly cropping it to fit.

```
.specific-size-background {
  background-image:
    url('image3.jpg');
  background-size: 100px 100px; /*
    width height */
}
```

- Contain:** Scales the background image to be fully visible within the element, maintaining its aspect ratio.
- Specific Size:** You can set specific dimensions for the background image using units like pixels, percentages, or any other CSS length units.
- Auto:** Maintains the original size of the background image.

```
.auto-size-background {
  background-image:
    url('image5.jpg');
  background-size: auto;
}
```

- Multiple Background Sizes:** If you have multiple background images, you can specify sizes for each one.

```
.multiple-backgrounds {
  background-image:
    url('image6.jpg'), url('image7.jpg');
  background-size: 50% 50%, cover; /*
    First image is 50% by 50%, second image
    covers the element */
}
```

Q.40] How do you repeat a background image?

- You can control the repetition of a background image using the `background-repeat` property.
- This prevents the background image from repeating.

- **Block** - Elements take up the full width available and start on a new line
- **Inline** - Elements only take up as much width as necessary and do not start on a new line.
- **inline-block** - Behaves like inline elements but can have a width and height.
- **Flex** - Turns the element into a flex container
- **grid** - Turns the element into a grid container

Q.28] How do you create a flexbox layout?


- To create a flexbox layout, you set `display: flex;` on the parent container and use various properties like `flex-direction`, `justify-content`, `align-items`, etc., on the child elements to control their layout.

Q.29] What is the flex property?

- The **flex** property is a shorthand for **flex-grow**, **flex-shrink**, and **flex-basis** combined, defining how a flex item will grow or shrink to fit the available space.

Q.30] How do you create a grid layout in CSS?

- To create a grid layout, you set `display: grid;` on the container and define its columns and rows using `grid-template-columns`, `grid-template-rows`, and place items within the grid using `grid-column` and `grid-row` properties.
- [Refer codepen](#)



TYPOGRAPHY

Q.31] How do you change the font of an element?

- Using the **font-family** property in CSS.

```
selector {
  font-family: Arial, sans-serif;
}
```

Q.32] What is the font-family property?

- The **font-family** property specifies the font family for text.
- It allows you to define a prioritized list of fonts to use, **separated by commas**.
- If the first font is not available on the user's system, it falls back to the next one in the list.

Q.33] What is the font-family property?

- You specify a fallback font by listing multiple fonts in the font-family property, separated by commas.

```
selector {
  font-family: "Helvetica Neue",
  Helvetica, Arial, sans-serif;
}
```

Q.34] What is the font-size property?

- The **font-size** property in CSS specifies the size of the font.
- It can be set to various units like pixels (**px**), **ems** (**em**), or **percentages** (%).

Q.35] How do you change the color of the text?

- Text color is changed using the **color** property.

```
selector {
  color: blue;
}
```

Q.36] How do you change the color of the text?

- Other values include **repeat**, **repeat-x**, and **repeat-y**.

CSS TRANSITION

Q.46] What is a CSS transition?

- A CSS transition allows you to change property values smoothly (over a given duration) instead of instantly.

Q.47] How do you create a transition effect?

- You create a transition effect using the transition property.
- It specifies which properties to animate, the **duration of the animation**, the **timing function**, and any **delay** before the animation starts.

Q.48] What is the transition-duration property?

- The **transition-duration** property specifies how long the transition should take to complete.
- It can be set in seconds (s) or milliseconds (ms).

Q.49] What is the transition-timing-function property?

- The **transition-timing-function** property describes how the intermediate values of the transition are calculated.
- Common values include **linear**, **ease**, **ease-in**, **ease-out**, and **ease-in-out**.

Q.50] What is the transition-delay property?

- The **transition-delay** property specifies the amount of time to wait before starting the transition.
- It can be set in seconds (s) or milliseconds (ms).

Example of CSS Transition

```
.element {
  transition: all 0.5s ease-in-out;
  /* Or individual properties */
  /* transition-property: background-color, width; */
  /* transition-duration: 0.5s, 1s; */
  /* transition-timing-function: ease-in-out, linear; */
  /* transition-delay: 0s, 0.2s; */
}
```

Refer Advance CSS Animation and Transition git hub repository



Remember

The syntax for the transition property is as follows

```
element {
  transition: [property] [duration] [timing-function] [delay];
}
```

CSS ANIMATION

Q.51] What is the transition-delay property?

- A CSS animation allows you to animate changes to CSS properties over time, using keyframes to define the changes.

Q.52] How do you create a CSS animation?

- You create a **CSS animation** by defining keyframes with the **@keyframes** rule and then applying the animation to an element using the animation property.

Q.53] What is the @keyframes rule?

- The **@keyframes** rule specifies the animation code.
- It defines the styles for the element at various points during the animation sequence.

Q.54] What is the animation-duration property?

- The **animation-duration** property specifies how long an animation should take to complete one cycle.
- It can be set in seconds (s) or milliseconds (ms).

Q.55] What is the animation-timing-function property?

- The **animation-timing-function** property specifies the speed curve of the animation.