



Performance



Accessibility

Best
Practices

SEO

There were issues affecting this run of Lighthouse:

- **Chrome extensions negatively affected this page's load performance. Try auditing the page in incognito mode or from a Chrome profile without extensions.**



Performance


Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)



0–49

50–89

90–100

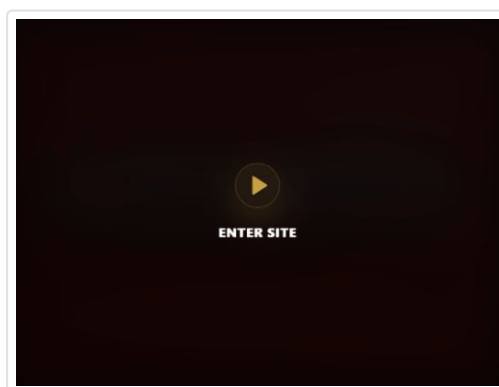

METRICS

[Expand view](#)

First Contentful Paint

Largest Contentful Paint

1.3 s

2.3 s

▲ Total Blocking Time

2,450 ms

Cumulative Layout Shift

0

▲ Speed Index

4.8 s

Show audits relevant to: All FCP LCP TBT

INSIGHTS

▲ LCP breakdown

^

Each [subpart has specific improvement strategies](#). Ideally, most of the LCP time should be spent on loading the resources, not within delays. LCP Unscored

Subpart	Duration
Time to first byte	110 ms
Element render delay	4,910 ms

▲ Network dependency tree

^

[Avoid chaining critical requests](#) by reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. LCP Unscored

Maximum critical path latency: **2,024 ms**

Initial Navigation

https://ine-ace.netlify.app - **263 ms**, 1.04 KiB

/assets/index-BvZtjp9U.css (ine-ace.netlify.app) - **2,024 ms**, 7.44 KiB

/assets/index-DhNgl8L-.js (ine-ace.netlify.app) - **1,336 ms**, 70.85 KiB

Preconnected origins

[preconnect](#) hints help the browser establish a connection earlier in the page load, saving time when the first request for that origin is made. The following are the origins that the page preconnected to.

no origins were preconnected

Preconnect candidates

Add [preconnect](#) hints to your most important origins, but try to use no more than 4.

No additional origins are good candidates for preconnecting

Render-blocking requests

Requests are blocking the page's initial render, which may delay LCP. [Deferring or inlining](#) can move these network requests out of the critical path. FCP LCP Unscored

URL	Transfer Size	Duration
netlify.app 1st Party	7.4 KiB	0 ms
/assets/index-BvZtJp9U.css (ine-ace.netlify.app)	7.4 KiB	

INP breakdown

Start investigating [how to improve INP](#) by looking at the longest subpart. Unscored

Subpart	Duration
Input delay	0 ms
Processing duration	0 ms
Presentation delay	70 ms

3rd parties

3rd party code can significantly impact load performance. [Reduce and defer loading of 3rd party code](#) to prioritize your page's content. Unscored

3rd party	Transfer size	Main thread time
ijejngggjjphlenbhmjhhgdcpehhacaal	0 KiB	1,135 ms
chrome-extension://ijejngggjjphlenbhmjhhgdcpehhacaal/js/webcam.js	0 KiB	586 ms
chrome-extension://ijejngggjjphlenbhmjhhgdcpehhacaal/js/video-recorder-content.js	0 KiB	317 ms
chrome-extension://ijejngggjjphlenbhmjhhgdcpehhacaal/js/content-script.js	0 KiB	232 ms

3rd party	Transfer size	Main thread time
chrome-extension://ijejngggjjphlenbhmjhhgcdcpehhacaal/assets/video-recorder-content.css	0 KiB	1 ms
eppiocemhmnlbhjplcgkofciiegomcon	0 KiB	821 ms
chrome-extension://eppiocemhmnlbhjplcgkofciiegomcon/ad-blocker/content.js	0 KiB	340 ms
chrome-extension://eppiocemhmnlbhjplcgkofciiegomcon/content/content.js	0 KiB	234 ms
chrome-extension://eppiocemhmnlbhjplcgkofciiegomcon/libs/processor.js	0 KiB	218 ms
chrome-extension://eppiocemhmnlbhjplcgkofciiegomcon/executors/101.js	0 KiB	10 ms
chrome-extension://eppiocemhmnlbhjplcgkofciiegomcon/content/location/location.js	0 KiB	8 ms
chrome-extension://eppiocemhmnlbhjplcgkofciiegomcon/libs/requests.js	0 KiB	5 ms
chrome-extension://eppiocemhmnlbhjplcgkofciiegomcon/executors/200.js	0 KiB	4 ms
chrome-extension://eppiocemhmnlbhjplcgkofciiegomcon/libs/extend-native-history-api.js	0 KiB	3 ms
mclkkofklkfljcocdinagocijmpgghab	0 KiB	527 ms
chrome-extension://mclkkofklkfljcocdinagocijmpgghab/chext_driver.js	0 KiB	489 ms
chrome-extension://mclkkofklkfljcocdinagocijmpgghab/chext_loader.js	0 KiB	37 ms
nlipoenfbbikpbjkfpfillcgkoblgpmj	0 KiB	322 ms
chrome-extension://nlipoenfbbikpbjkfpfillcgkoblgpmj/jasvascripts/bundles/content.bundle.js	0 KiB	256 ms
chrome-extension://nlipoenfbbikpbjkfpfillcgkoblgpmj/jasvascripts/bundles/content_record.bundle.js	0 KiB	60 ms
chrome-extension://nlipoenfbbikpbjkfpfillcgkoblgpmj/jasvascripts/libs/dragresize.js	0 KiB	6 ms
nmigaijibiabddkkmjhlehchpmgbokfj	0 KiB	77 ms
chrome-extension://nmigaijibiabddkkmjhlehchpmgbokfj/js/libs/jquery.min.js	0 KiB	66 ms
chrome-extension://nmigaijibiabddkkmjhlehchpmgbokfj/js/content.js	0 KiB	12 ms
ajiejmhbejpdgkkipddefnjmgcbkenk	0 KiB	19 ms
chrome-extension://ajiejmhbejpdgkkipddefnjmgcbkenk/content-script/expander.js	0 KiB	17 ms
chrome-extension://ajiejmhbejpdgkkipddefnjmgcbkenk/content-script/content-script.js	0 KiB	2 ms
chrome-extension://ajiejmhbejpdgkkipddefnjmgcbkenk/ckeditor-inject.js	0 KiB	1 ms

These insights are also available in the Chrome DevTools Performance Panel - [record a trace](#) to view more detailed information.

DIAGNOSTICS

▲

Minimize main-thread work — 5.3 s

^

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) TBT Unscored

Category	Time Spent
Script Evaluation	2,535 ms
Script Parsing & Compilation	1,677 ms
Other	833 ms
Garbage Collection	78 ms
Parse HTML & CSS	56 ms
Style & Layout	52 ms
Rendering	32 ms

▲

Reduce JavaScript execution time — 4.1 s

^

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time.](#) TBT Unscored

☒ Show 3rd-party resources (3)

URL	Total CPU Time	Script Evaluation	Script Parse
netlify.app 1st Party	2,362 ms	1,435 ms	484 ms
https://ine-ace.netlify.app	1,775 ms	1,032 ms	481 ms
/assets/index-DhNgl8L-.js (ine-ace.netlify.app)	337 ms	186 ms	2 ms
/assets/three-CXfnSXGQ.js (ine-ace.netlify.app)	182 ms	174 ms	1 ms
/assets/motion-EMPuMfmp.js (ine-ace.netlify.app)	68 ms	44 ms	0 ms
Unattributable	1,861 ms	807 ms	494 ms

URL	Total CPU Time	Script Evaluation	Script Parse
Unattributable	789 ms	261 ms	0 ms
chrome-extension://mclkkofklkfljccodinagocijmgpbhab/chext_driver.js	681 ms	404 ms	252 ms
chrome-extension://nlipoenfbbikpbjkfpfillcgkoblgpmj/jascripts/bundles/content.bundle.js	258 ms	84 ms	172 ms
chrome-extension://nmigaijibiabddkkmjhlehchpmgbokfj/js/libs/jquery.min.js	69 ms	36 ms	30 ms
chrome-extension://nlipoenfbbikpbjkfpfillcgkoblgpmj/jascripts/bundles/content_record.bundle.js	64 ms	22 ms	41 ms
Screen Recorder & Screenshot App for Chrome Scrnli Chrome Extension	831 ms	166 ms	655 ms
chrome-extension://ijejnggjphlenbhmjhhgcdpehhacaal/js/webcam.js	597 ms	51 ms	536 ms
chrome-extension://ijejnggjphlenbhmjhhgcdpehhacaal/js/content-script.js	235 ms	115 ms	119 ms
Urban VPN Proxy Chrome Extension	65 ms	51 ms	0 ms
chrome-extension://epiocemhmnlbhjplcgkofciiegomcon/ad-blocker/content.js	65 ms	51 ms	0 ms

▲ Page prevented back/forward cache restoration — 1 failure reason



Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. [Learn more about the bfcache](#) Unscored

Failure reason	Failure type
EmbedderExtensionFrame	Pending browser support
chrome-extension://ijejnggjphlenbhmjhhgcdpehhacaal/audio-devices.html	

Minify JavaScript — Est savings of 239 KiB



Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript](#). FCP LCP Unscored

URL	Transfer Size	Est Savings
Screen Recorder & Screenshot App for Chrome Scrnli Chrome Extension	692.4 KiB	238.8 KiB
chrome-extension://ijejngggjjphlenbhmjhhgcdpehhacaal/js/webcam.js	692.4 KiB	238.8 KiB

Reduce unused CSS — Est savings of 230 KiB

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS.](#) FCP LCP Unscored

URL	Transfer Size	Est Savings
.app-drawing-canvas{pointer-events:none;cursor:default;position:absolute;top:0;left:0} ...	115.8 KiB	115.7 KiB
.app-select-area[data-v-3213e954]{border:0px solid var(--border-color);position:fixed;top:100px; ... } ...	57.3 KiB	57.3 KiB
button.btn[data-v-2b23e28f]{display:inline-block;font-weight:300;line-height:1.25;text-align:center; ... } ...	56.7 KiB	56.6 KiB

Reduce unused JavaScript — Est savings of 1,298 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn how to reduce unused JavaScript.](#) FCP LCP Unscored

☒ Show 3rd-party resources (7)

URL	Transfer Size	Est Savings
Screen Recorder & Screenshot App for Chrome Scrnli Chrome Extension	1,073.9 KiB	568.6 KiB
chrome-extension://ijejngggjjphlenbhmjhhgcdpehhacaal/js/webcam.js	692.4 KiB	371.6 KiB
chrome-extension://ijejngggjjphlenbhmjhhgcdpehhacaal/js/video-recorder-content.js	237.0 KiB	169.0 KiB
chrome-extension://ijejngggjjphlenbhmjhhgcdpehhacaal/js/content-script.js	144.4 KiB	28.0 KiB
Unattributable	338.6 KiB	256.3 KiB

URL	Transfer Size	Est Savings
chrome-extension://nlipoenfbbikpbjkfpfillcgkoblgpmj/javascrip	97.7 KiB	85.7 KiB
chrome-extension://nlipoenfbbikpbjkfpfillcgkoblgpmj/javascrip	97.7 KiB	85.5 KiB
chrome-extension://mclkkofklkfljcocdinagocijmgpbhab/chext_driver.js	104.7 KiB	61.3 KiB
chrome-extension://nlipoenfbbikpbjkfpfillcgkoblgpmj/javascrip	38.6 KiB	23.8 KiB
Urban VPN Proxy Chrome Extension	316.9 KiB	253.1 KiB
chrome-extension://eppiocemhmnlbhjplcgkofciiegomcon/ad-blocker/content.js	81.1 KiB	77.7 KiB
chrome-extension://eppiocemhmnlbhjplcgkofciiegomcon/ad-blocker/content.js	81.1 KiB	75.1 KiB
chrome-extension://eppiocemhmnlbhjplcgkofciiegomcon/ad-blocker/content.js	81.1 KiB	68.5 KiB
chrome-extension://eppiocemhmnlbhjplcgkofciiegomcon/libs/processor.js	73.5 KiB	31.8 KiB
netlify.app 1st Party	321.8 KiB	220.3 KiB
/assets/three-CXfnSXGQ.js (ine-ace.netlify.app)	211.7 KiB	160.9 KiB
/assets/index-DhNgl8L-.js (ine-ace.netlify.app)	66.7 KiB	33.9 KiB
/assets/motion-EMPuMfmp.js (ine-ace.netlify.app)	43.4 KiB	25.5 KiB

Avoid long main-thread tasks — 15 long tasks found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn how to avoid long main-thread tasks](#) TBT Unscored

Show 3rd-party resources (1)

URL	Start Time	Duration
Unattributable		1,535 ms
chrome-extension://mclkkofklkfljcocdinagocijmgpbhab/chext_driver.js	3,391 ms	651 ms

URL	Start Time	Duration
Unattributable	1,832 ms	194 ms
Unattributable	4,504 ms	181 ms
chrome-extension://nlipoenfbbikpbjkfpfillcgkoblgpmj/javascrpts/libs/dragresize.js	2,257 ms	168 ms
Unattributable	1,325 ms	110 ms
chrome-extension://nlipoenfbbikpbjkfpfillcgkoblgpmj/javascrpts/libs/dragresize.js	4,168 ms	91 ms
chrome-extension://nmigaijibiabddkkmjhlehchpmgbokfj/js/libs/jquery.min.js	4,042 ms	80 ms
chrome-extension://nlipoenfbbikpbjkfpfillcgkoblgpmj/javascrpts/bundles/content_record.bundle.js	2,425 ms	60 ms
netlify.app 1st Party		1,342 ms
https://ine-ace.netlify.app	857 ms	468 ms
https://ine-ace.netlify.app	1,445 ms	372 ms
https://ine-ace.netlify.app	4,259 ms	190 ms
/assets/three-CXfnSXGQ.js (ine-ace.netlify.app)	2,107 ms	117 ms
https://ine-ace.netlify.app	743 ms	114 ms
/assets/index-DhNgI8L-.js (ine-ace.netlify.app)	2,026 ms	81 ms
Screen Recorder & Screenshot App for Chrome Scrnli Chrome Extension		831 ms
chrome-extension://ijejnggjpphlenbhmjhhgdcpehacaal/js/content-script.js	2,521 ms	831 ms

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (17)

Hide

Use efficient cache lifetimes

^

A long cache lifetime can speed up repeat visits to your page. [Learn more about caching.](#) FCP LCP Unscored

Layout shift culprits



Layout shifts occur when elements move absent any user interaction. [Investigate the causes of layout shifts](#), such as elements being added, removed, or their fonts changing as the page loads. CLS Unscored

Document request latency



Your first network request is the most important. [Reduce its latency](#) by avoiding redirects, ensuring a fast server response, and enabling text compression. FCP LCP Unscored

- Avoids redirects
- Server responds quickly (observed 91 ms)
- Applies text compression

Optimize DOM size



A large DOM can increase the duration of style calculations and layout reflows, impacting page responsiveness. A large DOM will also increase memory usage. [Learn how to avoid an excessive DOM size](#). Unscored

Statistic	Element	Value
Total elements		51
DOM depth		9
Most children	 body	11

Duplicated JavaScript



Remove large, [duplicate JavaScript modules](#) from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP Unscored

Font display



Consider setting [font-display](#) to swap or optional to ensure text is consistently visible. swap can be further optimized to mitigate layout shifts with [font metric overrides](#). Unscored

Forced reflow



A forced reflow occurs when JavaScript queries geometric properties (such as `offsetWidth`) after styles have been invalidated by a change to the DOM state. This can result in poor performance. Learn more about [forced reflows](#) and possible mitigations. Unscored

Improve image delivery



Reducing the download time of images can improve the perceived load time of the page and LCP. [Learn more about optimizing image size](#) FCP LCP Unscored

LCP request discovery



[Optimize LCP](#) by making the LCP image discoverable from the HTML immediately, and avoiding lazy-loading Unscored

Legacy JavaScript



Polyfills and transforms enable older browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile [Baseline](#) features, unless you know you must support older browsers. [Learn why most sites can deploy ES6+ code without transpiling](#) FCP LCP Unscored

Modern HTTP



HTTP/2 and HTTP/3 offer many benefits over HTTP/1.1, such as multiplexing. [Learn more about using modern HTTP](#). FCP LCP Unscored

Optimize viewport for mobile



Tap interactions may be [delayed by up to 300 ms](#) if the viewport is not optimized for mobile. Unscored

meta

Minify CSS



Minifying CSS files can reduce network payload sizes. [Learn how to minify CSS](#). FCP LCP Unscored

Avoids enormous network payloads — Total size was 946 KiB



Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes](#). Unscored

URL	Transfer Size
netlify.app 1st Party	945.9 KiB
...Intro/I&E%20Intro%20Mobile%20Final.mp4 (ine-ace.netlify.app)	531.7 KiB
/assets/three-CXfnSXGQ.js (ine-ace.netlify.app)	215.8 KiB

URL	Transfer Size
/assets/index-DhNgl8L-.js (ine-ace.netlify.app)	70.9 KiB
/assets/l_E%20CELL-C5dbllk_.ico (ine-ace.netlify.app)	55.8 KiB
/assets/motion-EMPuMfmp.js (ine-ace.netlify.app)	43.5 KiB
/assets/react-Cy3-nCQ9.js (ine-ace.netlify.app)	16.4 KiB
/assets/index-BvZtJp9U.css (ine-ace.netlify.app)	7.4 KiB
/assets/icons-CVuSJEEL.js (ine-ace.netlify.app)	3.4 KiB
https://ine-ace.netlify.app	1.0 KiB

- ☐

User Timing marks and measures

^
- Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks.](#) Unscored
- ☐

Avoid non-composited animations

^
- Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) CLS Unscored
- Image elements have explicit **width** and **height**

^
- Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn how to set image dimensions](#) CLS Unscored



Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

BEST PRACTICES

▲ Document does not have a main landmark.



One main landmark helps screen reader users navigate a web page. [Learn more about landmarks.](#)

Failing Elements



html

These items highlight common accessibility best practices.

AUDIO AND VIDEO

○ <video> elements contain a <track> element with [kind="captions"]



When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions.](#) Unscored

Failing Elements

video.absolute.inset-0.w-full.h-full.object-cover.blur-2xl.scale-110.opacity-60.z-0.pointer-events-none

These are opportunities to provide alternative content for audio and video. This may improve the experience for users with hearing or vision impairments.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

○ Interactive controls are keyboard focusable



Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable.](#) Unscored

○ Interactive elements indicate their purpose and state



Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints.](#) Unscored

○ The page has a logical tab order



Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more about logical tab ordering.](#) Unscored

☐ Visual order on the page follows DOM order ^

DOM order matches the visual order, improving navigation for assistive technology. [Learn more about DOM and visual ordering.](#) Unscored

☐ User focus is not accidentally trapped in a region ^

A user can tab into and out of any control or region without accidentally trapping their focus. [Learn how to avoid focus traps.](#) Unscored

☐ The user's focus is directed to new content added to the page ^

If new content, such as a dialog, is added to the page, the user's focus is directed to it. [Learn how to direct focus to new content.](#) Unscored

☐ HTML5 landmark elements are used to improve navigation ^

Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. [Learn more about landmark elements.](#) Unscored

☐ Offscreen content is hidden from assistive technology ^

Offscreen content is hidden with display: none or aria-hidden=true. [Learn how to properly hide offscreen content.](#) Unscored

☐ Custom controls have associated labels ^

Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. [Learn more about custom controls and labels.](#) Unscored

☐ Custom controls have ARIA roles ^

Custom interactive controls have appropriate ARIA roles. [Learn how to add roles to custom controls.](#) Unscored

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review.](#)

PASSED AUDITS (6)

Hide

`[aria-hidden="true"]` is not present on the document `<body>` ^

Assistive technologies, like screen readers, work inconsistently when `aria-hidden="true"` is set on the document `<body>`. [Learn how aria-hidden affects the document body.](#)

[[user-scalable="no"](#)] is not used in the `<meta name="viewport">` element and the [[maximum-scale](#)] attribute is not less than 5.



Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more about the viewport meta tag.](#)

Background and foreground colors have a sufficient contrast ratio



Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast.](#)

Document has a `<title>` element



The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

`<html>` element has a [[lang](#)] attribute



If a page doesn't specify a `lang` attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. [Learn more about the `lang` attribute.](#)

`<html>` element has a valid value for its [[lang](#)] attribute



Specifying a valid [BCP 47 language](#) helps screen readers announce text properly. [Learn how to use the `lang` attribute.](#)

NOT APPLICABLE (55)

Hide

☐ [[accesskey](#)] values are unique



Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. [Learn more about access keys.](#) Unscored

☐ [[aria-*](#)] attributes match their roles



Each ARIA role supports a specific subset of `aria-*` attributes. Mismatching these invalidates the `aria-*` attributes. [Learn how to match ARIA attributes to their roles.](#) Unscored

☐ `button`, `link`, and `menuitem` elements have accessible names



When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to make command elements more accessible.](#) Unscored

☐ ARIA attributes are used as specified for the element's role



Some ARIA attributes are only allowed on an element under certain conditions. [Learn more about conditional ARIA attributes.](#) Unscored

☐ Deprecated ARIA roles were not used ^

Deprecated ARIA roles may not be processed correctly by assistive technology. [Learn more about deprecated ARIA roles.](#) Unscored

☐ Elements with `role="dialog"` or `role="alertdialog"` have accessible names. ^

ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. [Learn how to make ARIA dialog elements more accessible.](#) Unscored

☐ `[aria-hidden="true"]` elements do not contain focusable descendents ^

Focusable descendents within an `[aria-hidden="true"]` element prevent those interactive elements from being available to users of assistive technologies like screen readers. [Learn how aria-hidden affects focusable elements.](#) Unscored

☐ ARIA input fields have accessible names ^

When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about input field labels.](#) Unscored

☐ ARIA `meter` elements have accessible names ^

When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name meter elements.](#) Unscored

☐ ARIA `progressbar` elements have accessible names ^

When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to label progressbar elements.](#) Unscored

☐ Elements use only permitted ARIA attributes ^

Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. [Learn more about prohibited ARIA roles.](#) Unscored

☐ `[role]`s have all required `[aria-*)` attributes ^

Some ARIA roles have required attributes that describe the state of the element to screen readers. [Learn more about roles and required attributes.](#) Unscored

☐ Elements with an ARIA `[role]` that require children to contain a specific `[role]` have all required children. ^

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more about roles and required children elements.](#) Unscored

- ☐ [role]s are contained by their required parent element ^

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more about ARIA roles and required parent element.](#) Unscored

- ☐ [role] values are valid ^

ARIA roles must have valid values in order to perform their intended accessibility functions. [Learn more about valid ARIA roles.](#) Unscored

- ☐ Elements with the `role=text` attribute do not have focusable descendants. ^

Adding `role=text` around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendants will not be announced. [Learn more about the `role=text` attribute.](#) Unscored

- ☐ ARIA toggle fields have accessible names ^

When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about toggle fields.](#) Unscored

- ☐ ARIA `tooltip` elements have accessible names ^

When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name tooltip elements.](#) Unscored

- ☐ ARIA `treeitem` elements have accessible names ^

When a `treeitem` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about labeling treeitem elements.](#) Unscored

- ☐ [aria-`*`] attributes have valid values ^

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. [Learn more about valid values for ARIA attributes.](#) Unscored

- ☐ [aria-`*`] attributes are valid and not misspelled ^

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. [Learn more about valid ARIA attributes.](#) Unscored

- ☐ Buttons have an accessible name ^

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn how to make buttons more accessible.](#) Unscored

- ☐ The page contains a heading, skip link, or landmark region ^

Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. [Learn more about bypass blocks.](#) Unscored

- ☐ `<d1>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements. ^

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. [Learn how to structure definition lists correctly.](#) Unscored

- ☐ Definition list items are wrapped in `<d1>` elements ^

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<d1>` element to ensure that screen readers can properly announce them. [Learn how to structure definition lists correctly.](#) Unscored

- ☐ ARIA IDs are unique ^

The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. [Learn how to fix duplicate ARIA IDs.](#) Unscored

- ☐ No form fields have multiple labels ^

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. [Learn how to use form labels.](#) Unscored

- ☐ `<frame>` or `<iframe>` elements have a title ^

Screen reader users rely on frame titles to describe the contents of frames. [Learn more about frame titles.](#) Unscored

- ☐ Heading elements appear in a sequentially-descending order ^

Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. [Learn more about heading order.](#) Unscored

- ☐ `<html>` element has an `[xml:lang]` attribute with the same base language as the `[lang]` attribute. ^

If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. [Learn more about the lang attribute.](#) Unscored

- ☐ Image elements have `[alt]` attributes ^

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#) Unscored

- ☐ Input buttons have discernible text. ^

Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. [Learn more about input buttons.](#) Unscored

- ☐ `<input type="image">` elements have `[alt]` text ^

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn about input image alt text.](#) Unscored

- ☐ Form elements have associated labels ^

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more about form element labels.](#) Unscored

- ☐ Links are distinguishable without relying on color. ^

Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. [Learn how to make links distinguishable.](#) Unscored

- ☐ Links have a discernible name ^

Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn how to make links accessible.](#) Unscored

- ☐ Lists contain only `<li>` elements and script supporting elements (`<script>` and `<template>`). ^

Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. [Learn more about proper list structure.](#) Unscored

- ☐ List items (`<li>`) are contained within `<ul>`, `<ol>` or `<menu>` parent elements ^

Screen readers require list items (`<li>`) to be contained within a parent `<ul>`, `<ol>` or `<menu>` to be announced properly. [Learn more about proper list structure.](#) Unscored

- ☐ The document does not use `<meta http-equiv="refresh">` ^

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more about the refresh meta tag.](#) Unscored

- ☐ `<object>` elements have alternate text ^

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more about alt text for object elements.](#) Unscored

- ☐ Select elements have associated label elements. ^

Form elements without effective labels can create frustrating experiences for screen reader users. [Learn more about the select element.](#) Unscored

- ☐ Skip links are focusable. ^

Including a skip link can help users skip to the main content to save time. [Learn more about skip links.](#) Unscored

- ☐ No element has a `[tabindex]` value greater than 0 ^

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more about the tabindex attribute.](#) Unscored

- ☐ Touch targets have sufficient size and spacing. ^

Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. [Learn more about touch targets.](#) Unscored

- ☐ Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table. ^

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more about the headers attribute.](#) Unscored

- ☐ `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe. ^

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more about table headers.](#) Unscored

- ☐ `[lang]` attributes have a valid value ^

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn how to use the lang attribute.](#) Unscored

- ☐ `autocomplete` attributes are used correctly ^

The `autocomplete` attribute values must be valid and correctly applied for screen readers to function correctly. [Learn more about valid autocomplete values.](#) Unscored

- ☐ Elements with `role="none"` or `role="presentation"` do not have conflicts ^

There are certain cases where the semantic role of an element with `role="none"` or `role="presentation"` does not resolve to none or presentation. To ensure the element remains removed from the accessibility tree, you should not add any global ARIA attributes to the element or make it focusable. [Learn more about presentation role conflict.](#) Unscored

- ☐ SVG elements with an `img` role have an accessible text alternative ^

Ensures SVG elements with an `img`, `graphics-document` or `graphics-symbol` role have an accessible text alternative. [Learn more about SVG alt text.](#) Unscored

- ☐ Tables have different content in the summary attribute and `<caption>`. ^

The summary attribute should describe the table structure, while `<caption>` should have the onscreen title. Accurate table mark-up helps users of screen readers. [Learn more about summary and caption.](#) Unscored

- ☐ All heading elements contain content. ^

A heading with no content or inaccessible text prevent screen reader users from accessing information on the page's structure. [Learn more about headings.](#) Unscored

- ☐ Uses ARIA roles only on compatible elements ^

Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. [Learn more about ARIA roles.](#) Unscored

- ☐ Image elements do not have `[alt]` attributes that are redundant text. ^

Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. [Learn more about the alt attribute.](#) Unscored

- ☐ Identical links have the same purpose. ^

Links with the same destination should have the same description, to help users understand the link's purpose and decide whether to follow it. [Learn more about identical links.](#) Unscored



Best Practices

GENERAL

 Uses deprecated APIs — 1 warning found

Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs.](#)

Deprecation / Warning	Source
Unload event listeners are deprecated and will be removed.	<code>chext_driver.js:60</code>

 Missing source maps for large first-party JavaScript

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more about source maps.](#) Unscored

URL	Map URL
netlify.app 1st Party	
/assets/three-CXfnSXGQ.js (ine-ace.netlify.app)	
Large JavaScript file is missing a source map	

TRUST AND SAFETY

 Ensure CSP is effective against XSS attacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#) Unscored

Description	Directive	Severity
No CSP found in enforcement mode		High

 Ensure proper origin isolation with COOP

The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. [Learn more about deploying the COOP header.](#) Unscored

Description	Directive	Severity
No COOP header found		High

Mitigate clickjacking with XFO or CSP

^

The X-Frame-Options (XFO) header or the frame-ancestors directive in the Content-Security-Policy (CSP) header control where a page can be embedded. These can mitigate clickjacking attacks by blocking some or all sites from embedding the page. [Learn more about mitigating clickjacking.](#) Unscored

Description	Severity
No frame control policy found	High

Mitigate DOM-based XSS with Trusted Types

^

The require-trusted-types-for directive in the Content-Security-Policy (CSP) header instructs user agents to control the data passed to DOM XSS sink functions. [Learn more about mitigating DOM-based XSS with Trusted Types.](#) Unscored

Description	Severity
No `Content-Security-Policy` header with Trusted Types directive found	High

BROWSER COMPATIBILITY

Baseline Features

^

Lists web features used on the page and their Baseline status as of 2026-05-01. [Learn more about Baseline.](#) Unscored

☒ Show 3rd-party resources (8)

Web-features	Baseline Status	Source
netlify.app 1st Party		
page-visibility-state	Limited Availability	(index):1
long-animation-frames	Limited Availability	(index):1

Web-features	Baseline Status	Source
layout-instability	Limited Availability	(index):1
background-clip-text	Limited Availability	(index):-1
requestidlecallback	Limited Availability	(index):1
with	Limited Availability	(index):1
scrollend	Newly Available (2025-12-12)	index-DhNgl8L-.js:16
masks	Newly Available (2023-12-07)	(index):-1
nullish-coalescing	Widely Available (2020-09-16)	(index):1
aborting	Widely Available (2019-03-25)	(index):1
js-modules	Widely Available (2018-05-09)	(index):-1
where	Widely Available (2021-01-21)	(index):-1
not	Widely Available (2021-01-21)	(index):-1

Web-features	Baseline Status	Source
color-scheme	Widely Available (2022-02-03)	(index):-1
request-animation-frame	Widely Available (2015-07-29)	motion-EMPuMf mp.js:9
flexbox	Widely Available (2015-09-30)	(index):-1
grid	Widely Available (2017-10-17)	(index):-1
web-animations	Widely Available (2020-09-16)	motion-EMPuMf mp.js:9
weak-references	Widely Available (2021-04-26)	(index):1
text-indent	Widely Available (2015-07-29)	(index):-1
Screen Recorder & Screenshot App for Chrome Scrnli Chrome Extension		
canvas-2d-alpha	Limited Availability	video-recorder-content.js :31
backdrop-filter	Newly Available (2024-09-16)	webcam.js:5656

Web-features	Baseline Status	Source
outline	Widely Available (2023-03-27)	video-recorder-content.js:29
will-change	Widely Available (2020-01-15)	video-recorder-content.js:29
canvas	Widely Available (2015-07-29)	video-recorder-content.js:31
canvas-2d	Widely Available (2015-07-29)	video-recorder-content.js:31
offscreen-canvas	Widely Available (2023-03-27)	audio-devices.html:1
aspect-ratio	Widely Available (2021-09-20)	content-script.js:13
Unattributable		
beforeunload	Limited Availability	content.bundle.js:1
forced-colors	Widely Available (2022-09-12)	chext_driver.js:97
slot	Widely Available (2020-01-15)	jquery.min.js:2

PASSED AUDITS (11)

Hide

Uses HTTPS



All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS](#).

Avoids third-party cookies



Third-party cookies may be blocked in some contexts. [Learn more about preparing for third-party cookie restrictions](#).

Allows users to paste into input fields



Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. [Learn more about user-friendly input fields](#).

Avoids requesting the geolocation permission on page load



Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. [Learn more about the geolocation permission](#).

Avoids requesting the notification permission on page load



Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. [Learn more about responsibly getting permission for notifications](#).

Displays images with correct aspect ratio



Image display dimensions should match natural aspect ratio. [Learn more about image aspect ratio](#).

Serves images with appropriate resolution



Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. [Learn how to provide responsive images](#).

Page has the HTML doctype



Specifying a doctype prevents the browser from switching to quirks-mode. [Learn more about the doctype declaration](#).

Properly defines charset



A character encoding declaration is required. It can be done with a <meta> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. [Learn more about declaring the character encoding](#).

No browser errors logged to the console



Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. [Learn more about this errors in console diagnostic audit](#)

No issues in the **Issues** panel in Chrome Devtools



Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

NOT APPLICABLE (3)

Hide

☐ Redirects HTTP traffic to HTTPS



Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. [Learn more.](#)
Unscored

☐ Use a strong HSTS policy



Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. [Learn more about using a strong HSTS policy.](#) **Unscored**

☐ Detected JavaScript libraries



All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#)
Unscored



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials.](#)

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

☐ Structured data is valid



Run the [Structured Data Testing Tool](#) to validate structured data. [Learn more about Structured Data.](#) **Unscored**

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (7)

[Hide](#)

Page isn't blocked from indexing



Search engines are unable to include your pages in search results if they don't have permission to crawl them. [Learn more about crawler directives.](#)

Document has a <title> element



The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

Document has a meta description



Meta descriptions may be included in search results to concisely summarize page content. [Learn more about the meta description.](#)

Page has successful HTTP status code



Pages with unsuccessful HTTP status codes may not be indexed properly. [Learn more about HTTP status codes.](#)

Links have descriptive text



Descriptive link text helps search engines understand your content. [Learn how to make links more accessible.](#)

Links are crawlable



Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. [Learn how to make links crawlable](#)

Document has a valid hreflang



hreflang links tell search engines what version of a page they should list in search results for a given language or region. [Learn more about hreflang.](#)

NOT APPLICABLE (3)

[Hide](#)

☐ robots.txt is valid



If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. [Learn more about robots.txt.](#) Unscored

○ Image elements have [\[alt\]](#) attributes ^

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#) Unscored

○ Document has a valid [rel=canonical](#) ^

Canonical links suggest which URL to show in search results. [Learn more about canonical links.](#) Unscored

Captured at Jul 18, 2026, 10:53
PM GMT+5:30
Initial page load

Emulated Desktop with
Lighthouse 13.3.0
Custom throttling

Single page session
Using Chromium 150.0.0.0 with
devtools

Generated by **Lighthouse** 13.3.0 | [File an issue](#)