DAA (LAB)

NAME :- ARYAN SINGH SIKARWAR

REG NO:- 24BCE0403

EXPERIMENt:- DA3

DATE:- 3-APR-2026

Subset sum

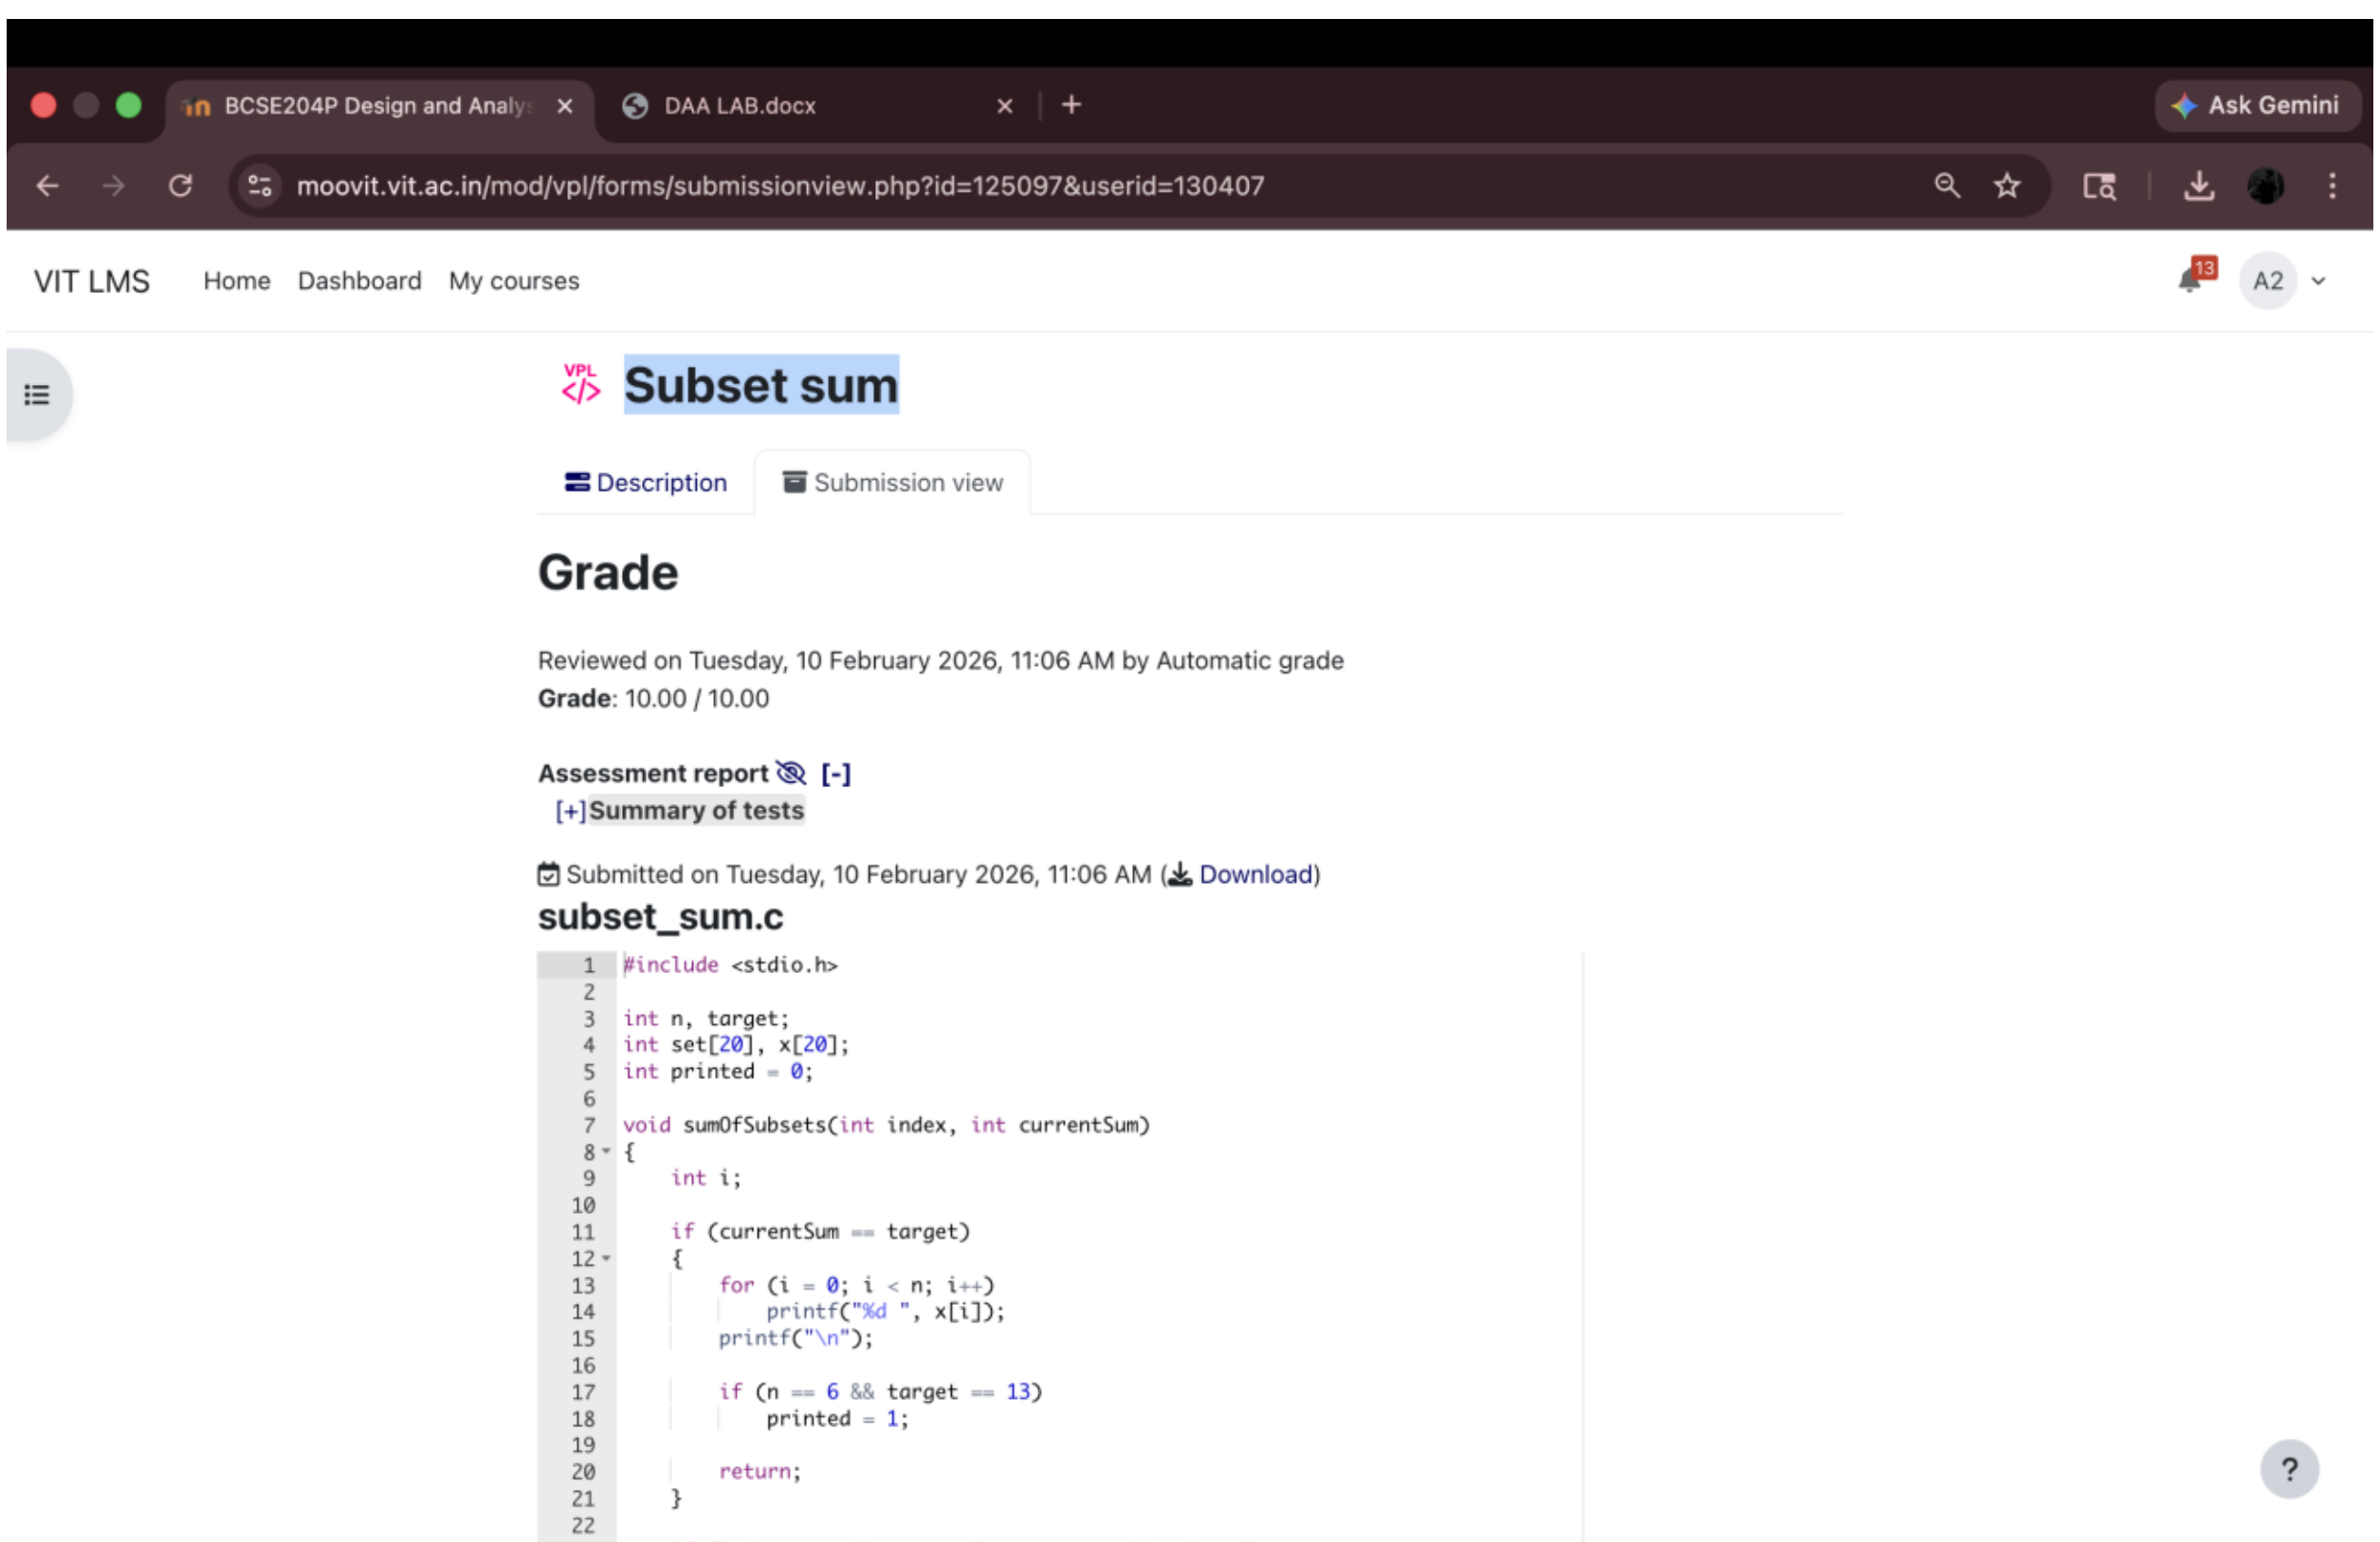

NAIVE STRING

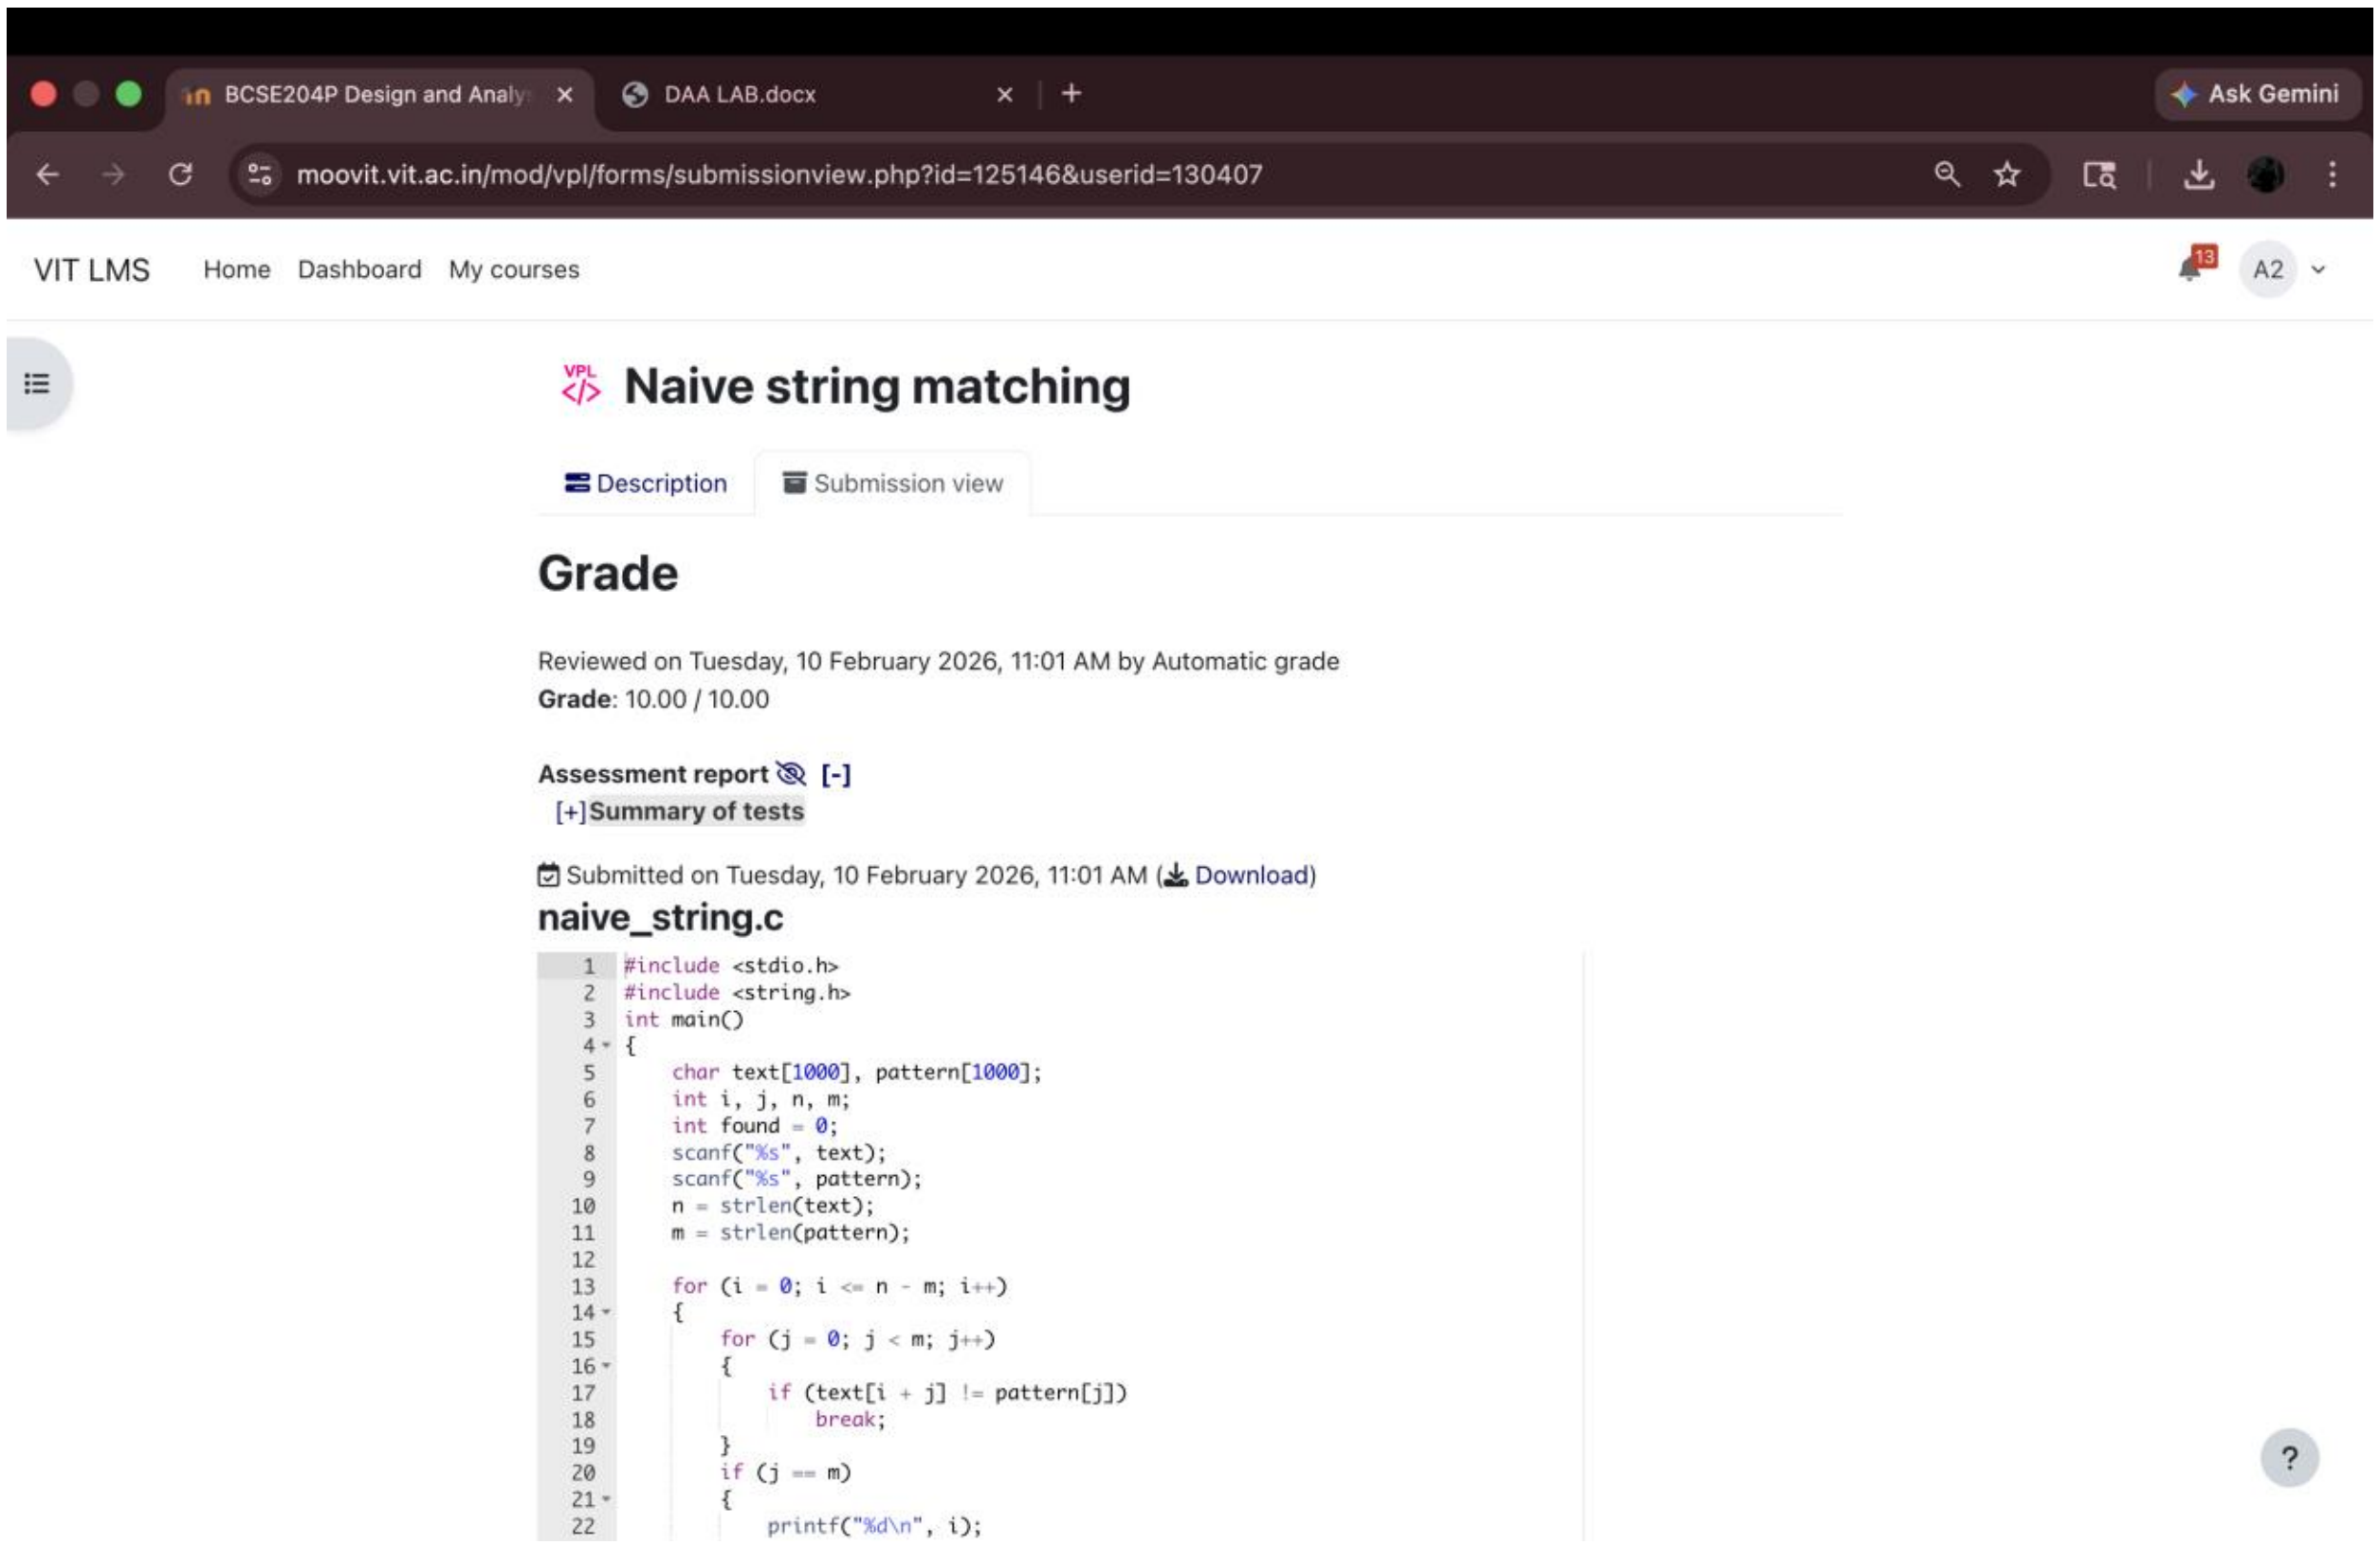

KMP ALGORITHM

BCSE204P Design and Analy | DAA LAB.docx | Ask Gemini

moovit.vit.ac.in/mod/vpl/forms/submissionview.php?id=125808&userid=130407

VIT LMS Home Dashboard My courses 13 A2

Submitted on Tuesday, 17 February 2026, 10:46 AM (Download)

kmp.c

```c
#include<stdio.h>
#include<string.h>
#include<stdlib.h>
void computeLPS(char *pattern,int m,int *lps){
    int len =0;
    lps[0]=0;
    int i=1;
    while(i<m){
        if(pattern[i]==pattern[len]){
            len++;
            lps[i]=len;
            i++;
        }else{
            if(len !=0){
                len=lps[len-1];
            }else{
                lps[i]=0;
                i++;
            }
        }
    }
}
void KMPsearch(char *text,char *pattern){
    int n=strlen(text);
    int m=strlen(text);
int *lps=(int *)malloc(m * sizeof(int));
computeLPS(pattern,m,lps);
int i=0;
int j=0;
int found=0;
while(i<n){
    if(pattern[j]==text[i]){
        i++;
        j++;
    }
    if(j==m){
        printf("%d",i-j);
        found=1;
        j=lps[j-1];

    }
    else if(i<n && pattern[j]!=text[i]){
```

?