




ORDER NOW

A circular graphic with the word "DISCOUNT" repeated around the perimeter and "25%" in the center.



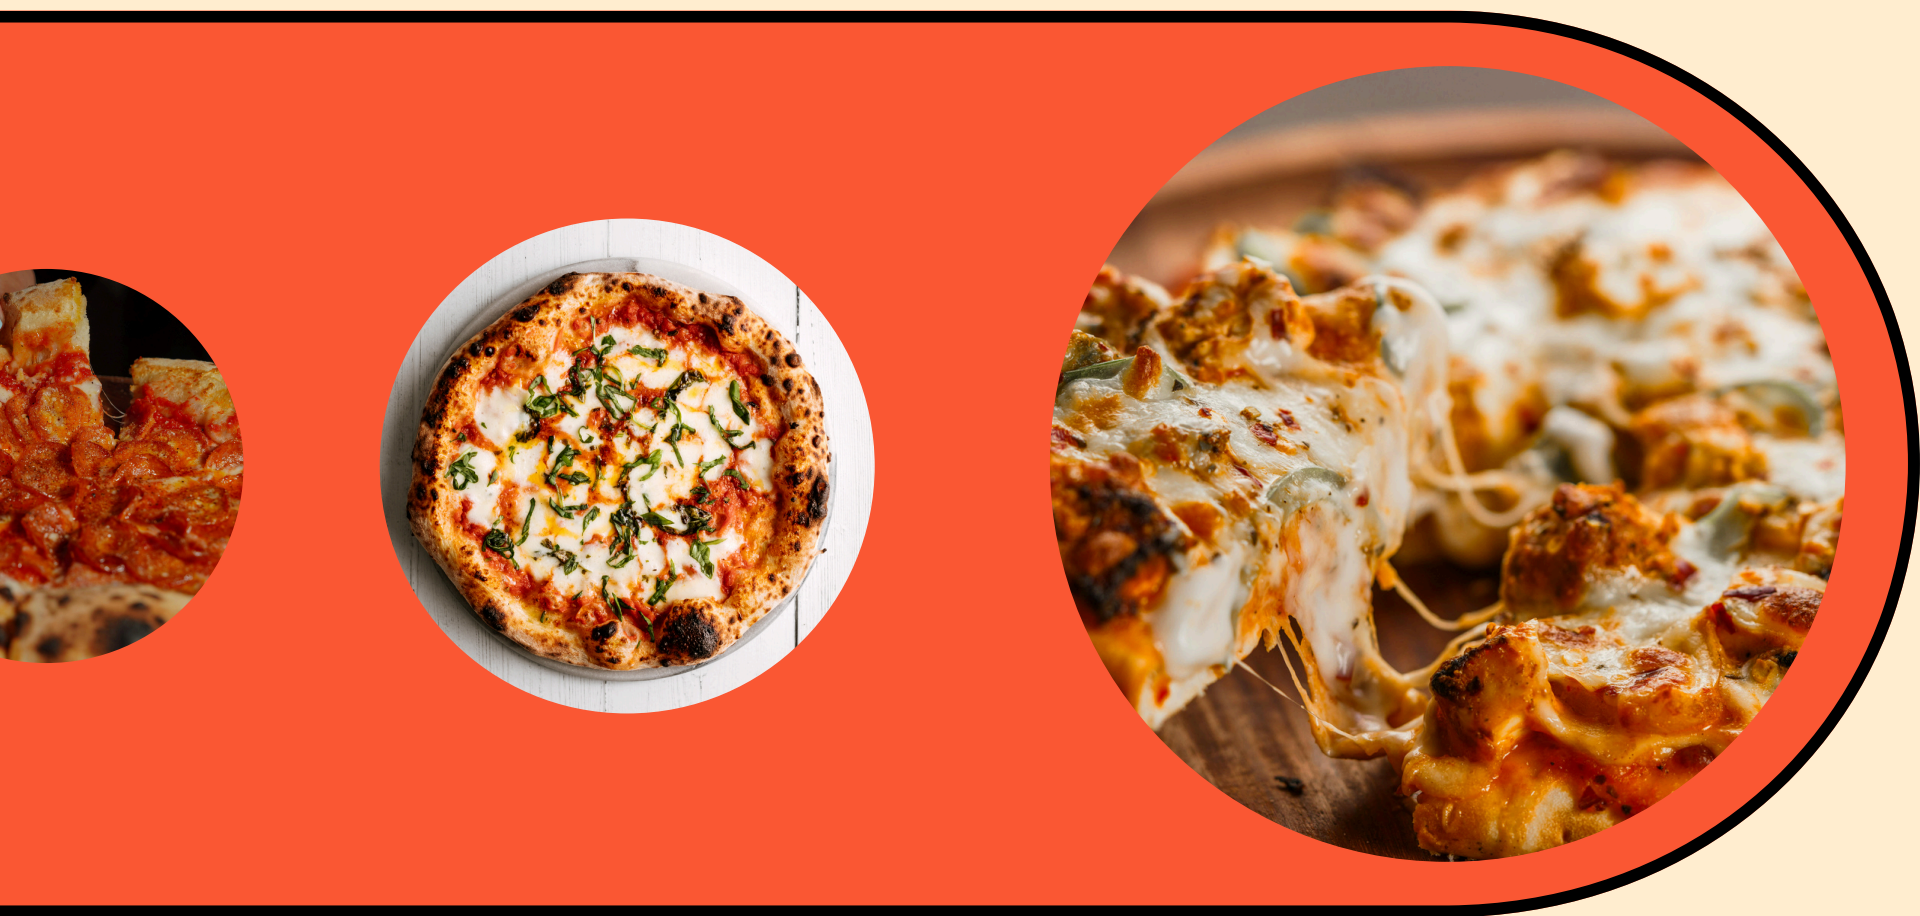

WELCOME OUR PIZZA

I am Arya Lahu Sonawane. In this Pizza Sales project, I applied SQL queries to analyze sales data and solve business-related questions to gain insights into pizza sales performance.

PROJECT APPROACH



In this project, different business-related questions were solved using SQL queries on the pizza sales dataset. Each query was written to analyze specific aspects of the data, such as total sales, popular pizza types, order patterns, and revenue generation. By solving these questions, I was able to gain a better understanding of the dataset and identify useful insights related to pizza sales performance. This process also helped strengthen my SQL skills in data analysis and query writing.

RETRIEVE THE TOTAL NUMBER OF ORDERS PLACED.

```
select * from orders;  
select count(order_id) as total_orders from orders;
```

Result Grid	
	total_orders
▶	21350



CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES.

```
SELECT
```

```
    ROUND(SUM(order_details.quantity * pizzas.price),  
          2) AS total_sales
```


```
FROM
```

```
    order_details
```

```
    JOIN
```

```
    pizzas ON pizzas.pizza_id = order_details.pizza_id;
```

Result Grid



	total_sales
▶	817860.05

IDENTIFY THE HIGHEST-PRICED PIZZA.

```
select pizza_types.name , pizzas.price
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
order by pizzas.price desc limit 1;
```

Result Grid   Filter Rows:		
	name	price
▶	The Greek Pizza	35.95



IDENTIFY THE MOST COMMON PIZZA SIZE ORDERED.

```
select pizzas.size, count(order_details.order_details_id) as order_count
from pizzas join order_details
on pizzas.pizza_id = order_details.pizza_id
group by pizzas.size
order by order_count desc;
```



Result Grid				
	size	order_count		
	L	18526		
	M	15385		
	S	14137		
	XL	544		
	XXL	28		

LIST THE TOP 5 MOST ORDERED PIZZATYPES ALONG WITH THEIR QUANTITIES.

```
select pizza_types.name,  
sum(order_details.quantity) as quantity  
from pizza_types join pizzas  
on pizza_types.pizza_type_id = pizzas.pizza_type_id  
join order_details  
on order_details.pizza_id = pizzas.pizza_id  
group by pizza_types.name  
order by quantity desc  
limit 5;
```

Result Grid   Filter Rows:		
	name	quantity
▶	The Classic Deluxe Pizza	2453
	The Barbecue Chicken Pizza	2432
	The Hawaiian Pizza	2422
	The Pepperoni Pizza	2418
	The Thai Chicken Pizza	2371

JOIN THE NECESSARY TABLES TO FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED.



```
select pizza_types.category,  
sum(order_details.quantity) as quantity  
from pizza_types join pizzas  
on pizza_types.pizza_type_id = pizzas.pizza_type_id  
join order_details  
on order_details.pizza_id = pizzas.pizza_id  
group by pizza_types.category  
order by quantity desc;
```

Result Grid				
	category	quantity		
	Classic	14888		
	Supreme	11987		
	Veggie	11649		
	Chicken	11050 ⁹		

Determine the distribution of orders by hour of the day.



```
select hour(order_time) as hour, count(order_id) as order_count from orders
group by hour (order_time);
```

Result Grid   F		
	hour	order_count
	11	1231
	12	2520
	13	2455
	14	1472
	15	1468
	16	1920
	17	2336
	18	2399
	19	2009
	20	1642
	21	1198
	22	663
	23	28
	10	8
	9	1

Join relevant tables to find the category-wise distribution of pizzas.

```
select category, count(name) from pizza_types
group by category;
```

Result Grid |   Filter Rows:


	category	count(name)
▶	Chicken	6
	Classic	8
	Supreme	9
	Veggie	9



Group the orders by date and calculate the average number of pizzas ordered per day.

```
SELECT
    ROUND(AVG(quantity), 0) as avg_pizza_ordered_per_day
FROM
    (SELECT
        orders.order_date, SUM(order_details.quantity) AS quantity
    FROM
        orders
    JOIN order_details ON orders.order_id = order_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```



Result Grid   Filter Rows:	
	avg_pizza_ordered_per_day
▶	138

Determine the top 3 most ordered pizza types based on revenue.



```
select  pizza_types.name,  
        sum(order_details.quantity * pizzas.price) as revenue  
from    pizza_types join pizzas  
on      pizza_types.pizza_type_id = pizzas.pizza_type_id  
join    order_details  
on      order_details.pizza_id = pizzas.pizza_id  
group by pizza_types.name  
order by revenue desc  
limit 3;
```

Result Grid   Filter Rows:		
	name	revenue
	The Barbecue Chicken Pizza	817860.0499999993
	The California Chicken Pizza	817860.0499999993
	The Chicken Alfredo Pizza	817860.0499999993

Calculate the percentage contribution of each pizza type to total revenue.



```
select pizza_types.category,  
(sum(order_details.quantity*pizzas.price) as revenue/  
from pizza_types join pizzas  
on pizza_types.pizza_type_id = pizzas.pizza_type_id  
join order_details  
on order_details.pizza_id = pizzas.pizza_id  
group by pizza_types.category order by revenue desc;
```

Result Grid   Filter Rows:		
	category	revenue
▶	Classic	220053.10000000001
	Supreme	208196.999999999822
	Chicken	195919.5
	Veggie	193690.450000000298

Analyze the cumulative revenue generated over time.

```
select order_date,  
sum(revenue) over (order by order_date) as cumulative_revenue  
from  
(select orders.order_date,  
sum(order_details.quantity * pizzas.price) as revenue  
from order_details join pizzas  
on order_details.pizza_id = pizzas.pizza_id  
join orders  
on orders.order_id = order_details . pizza_id  
group by orders.order_date) as sales;
```

Result Grid   Filter Rows:		
	order_date	cum_revenue
▶	2015-01-01	2713.85000000000004
	2015-01-02	5445.75
	2015-01-03	8108.15
	2015-01-04	9863.6
	2015-01-05	11929.55

Determine the top 3 most ordered pizza types based on revenue for each pizza category.

```
select name, revenue from
(select category,name, revenue,
rank()over(partition by category order by revenue desc) as rn
from
(select pizza_types.category, pizza_types.name,
sum((order_details.quantity) * pizzas.price) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.category, pizza_types.name) as a) as b
where rn <= 3;
```



Result Grid   Filter Rows:		
	name	revenue
▶	The Thai Chicken Pizza	43434.25
	The Barbecue Chicken Pizza	42768
	The California Chicken Pizza	41409.5
	The Classic Deluxe Pizza	38180.5
	The Hawaiian Pizza	32273.25
	The Pepperoni Pizza	30161.75
	The Spicy Italian Pizza	34831.25
	The Italian Supreme Pizza	33476.75
	The Sicilian Pizza	30940.5
	The Four Cheese Pizza	32265.700000000065
	The Mexicana Pizza	26780.75
	The Five Cheese Pizza	26066.5



THANK
YOU

ORDER NOW