


W05-P1: use React to implement static route /card_xx

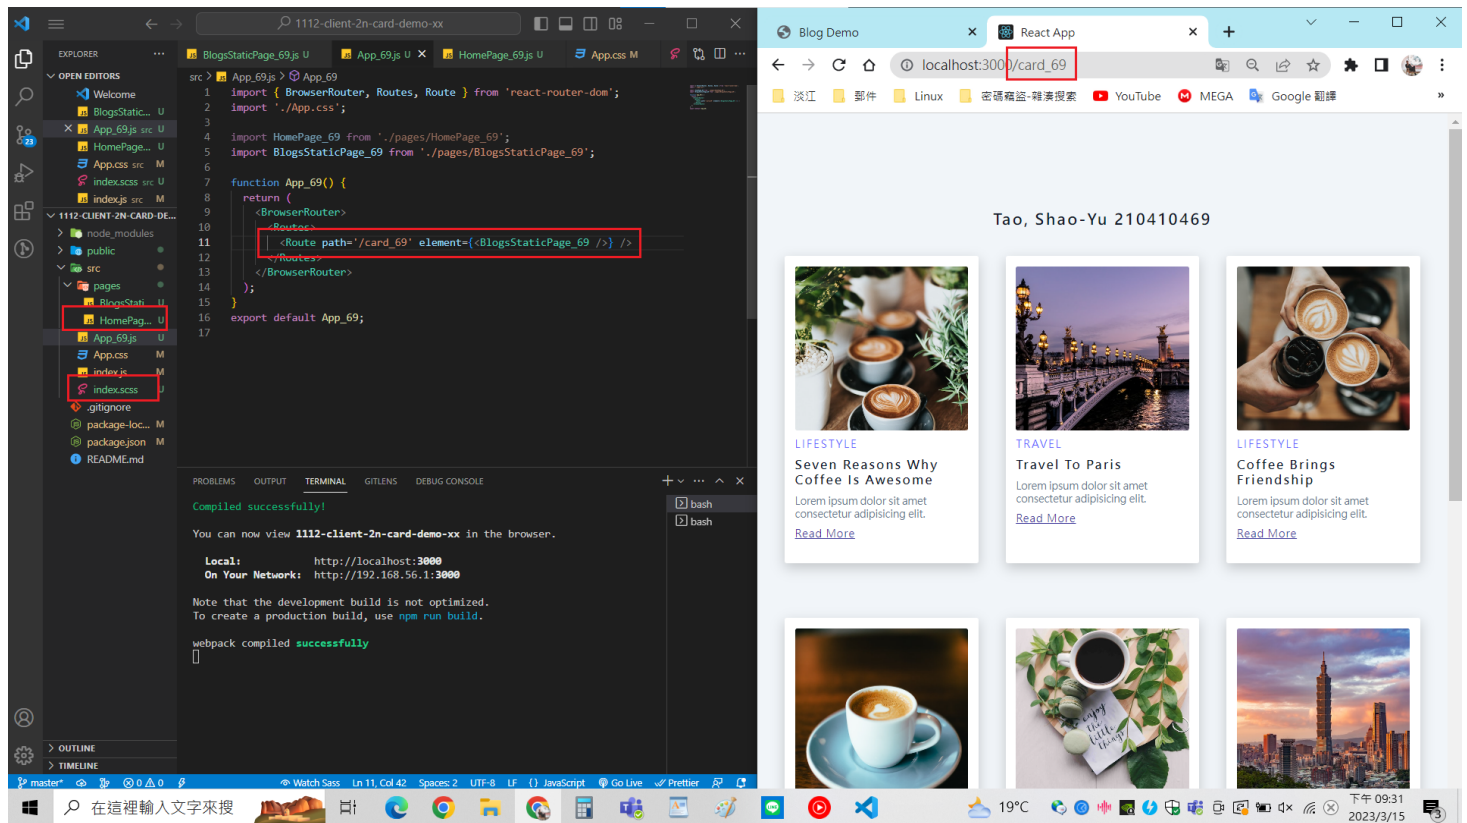

W05-P2: use local json array to implement route /card2_local_xx

1112-client-2n-card-demo-xx

EXPLORER

src > pages > BlogsLocalJsonPage_69.js > BlogsLocalJsonPage_69 > data.map() callback

1 import { useState } from 'react';
2 import Items from '../data/blogData2_69';
3
4 import blogsData from '../data/blogData2_69';
5
6 const BlogsLocalJsonPage_69 = () => {
7 const [name, setName] = useState('Tao, Shao-Yu');
8 const [id, setId] = useState('210410469');
9
10 const [data, setData] = useState(blogsData);
11 console.log('blog data', data);
12
13 return (
14 <section className='blogs'>
15 <div className='section-title'>
16 Fetch Blogs From Local Json Data --
17 Tao, Shao-Yu
18 210410469
19 </div>
20 <div>
21 <div className='blogs-center2'>
22 <div>
23 <div data.map(item => {
24 const { id, img, remote_img, category, title, desc } = item;
25 return (
26 <article key={id} className='blog'>
27
28 <div className='blog-content'>
29
30 {category} <i className='fa-solid fa-mug-saucer'></i>
31
32 <h3>{title}</h3>
33 <p>{desc}</p>
34 read more
35 </div>
36 </article>
37)
38 }
39 </div>
40 </div>
41 </div>
42 </section>
43);
44}


localhost:5000/api/...


https://one112-seve...

React App

localhost:3000/card2_local_69

Fetch Blogs From Local Json Data -- Tao, Shao-Yu 210410469


LIFESTYLE
Seven Reasons Why Coffee Is Awesome
[Read More](#)


TRAVEL
Travel To Paris
[Read More](#)

DevTools is now available in Chinese!

Always match Chrome's language Switch DevTools to Chinese Don't show again

Download the React DevTools for a better development experience: https://reactjs.org/link/react-devtools

blog data BlogsLocalJsonPage_69.js:11
(9) [Array(9)]
0: {category: 'lifestyle', desc: 'Lorem ipsum dolor sit amet consectetur adipisicing elit.', id: 1, img: '/images/photo-1.jpg', remote_img: 'https://ufyfzqtcdbeaugsoz.supabase.co/storage/v1/object', title: 'Seven Reasons Why Coffee Is Awesome'}
1: {id: 2, title: 'Travel To Paris', desc: 'Lorem ipsum dolor sit amet', title: 'Seven Reasons Why Coffee Is Awesome'}
2: {id: 3, title: 'Coffee Brings Friendship', desc: 'Lorem ipsum dolor sit amet', title: 'Seven Reasons Why Coffee Is Awesome'}
3: {id: 4, title: 'Coffee Make You Feel Good', desc: 'Lorem ipsum dolor sit amet', title: 'Seven Reasons Why Coffee Is Awesome'}
4: {id: 5, title: 'Coffee Make You Calm', desc: 'Lorem ipsum dolor sit amet', title: 'Seven Reasons Why Coffee Is Awesome'}
5: {id: 6, title: '101 Tower In Taipei', desc: 'Lorem ipsum dolor sit amet', title: 'Seven Reasons Why Coffee Is Awesome'}
6: {id: 7, title: 'Sun Rise From The Mountain', desc: 'Lorem ipsum dolor sit amet', title: 'Seven Reasons Why Coffee Is Awesome'}
7: {id: 8, title: 'Serene Lake With Trees', desc: 'Lorem ipsum dolor sit amet', title: 'Seven Reasons Why Coffee Is Awesome'}
8: {id: 9, title: 'Rocks Of Queen Head In Yehliu Taiwan', desc: 'Lorem ipsum dolor sit amet', title: 'Seven Reasons Why Coffee Is Awesome'}
length: 9
[[Prototype]]: Array(0)

W05-P3: implement route /card2_node_xx on both local and render (cloud) server

This screenshot shows a development environment with a code editor on the left and a browser preview on the right. The code editor displays the `BlogNodeServerPage_69.js` file. A red box highlights the `api_url` assignment: `let api_url = 'http://localhost:5000/api/card2_69';`. Another red box highlights the `fetchBlogDataFromNodeServer` function call: `const fetchBlogDataFromNodeServer = async () => { ... }`. The browser preview shows the rendered page at `localhost:5000/api/card2_node_69`. A red box highlights the `Fetch Blogs From Node Sever --Tao, Shao-Yu 210410469` text. The DevTools console shows the `result` object, which is an array of blog data. A red box highlights the `data` array: `data: Array(9)`.

This screenshot shows a development environment with a code editor on the left and a browser preview on the right. The code editor displays the `BlogNodeServerPage_69.js` file. A red box highlights the `api_url` assignment: `let api_url = 'https://one12-sever-card-demo-69.onrender.com/api/card2_69';`. The browser preview shows the rendered page at `localhost:3000/card2_node_69`. A red box highlights the `Fetch Blogs From Node Sever --Tao, Shao-Yu 210410469` text. The DevTools console shows the `result` object, which is an array of blog data. A red box highlights the `data` array: `data: Array(9)`.

W05-logs

Commits · as718296/1112_wp2_demo_69 · W05

https://github.com/as718296/1112_wp2_demo_69/commits/main

Search or jump to... Pull requests Issues Codespaces Marketplace Explore

as718296 / 1112_wp2_demo_69 (Public)

<> Code Issues Pull requests Actions Projects Wiki Security Insights Settings

main

Commits on Mar 19, 2023

- W05-P3: implement route /card2_node_xx on both local and render (clou... as718296 committed now [b83fb31](#)
- W05-P2: use local json array to implement route /card2_local_xx as718296 committed 1 hour ago [a02fe1b](#)

Commits on Mar 15, 2023

- W05-P1: use React to implement static route /card_xx as718296 committed 3 days ago [b12c790](#)

Commits on Mar 12, 2023

- W04-logs as718296 committed last week [3b27113](#)
- W04-P3: Fetch Github repo into Render, and display it as718296 committed last week [11d9739](#)
- W04-P2: implement /api/card2_xx route as718296 committed last week [9368484](#)

Windows taskbar: 18°C, 上午 02:44 2023/3/19