




Clients

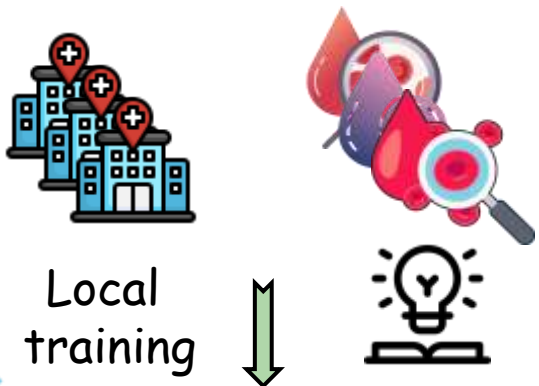

Reference Encoder

Extract
class-level
evidence

Diagnosis prototypes
and sample support



Diagnosis prevalence counts



Raw images never leave the hospital


prototypes
support

counts

Global Diagnostic Model

DPR provides the diagnostic head w_c
LPC provides the prevalence prior b_c
they establish a global diagnostic view:

$$l_c(x) = w_c^T \phi_0(T(x)) + \mathbf{1}[r > \tau] b_c$$

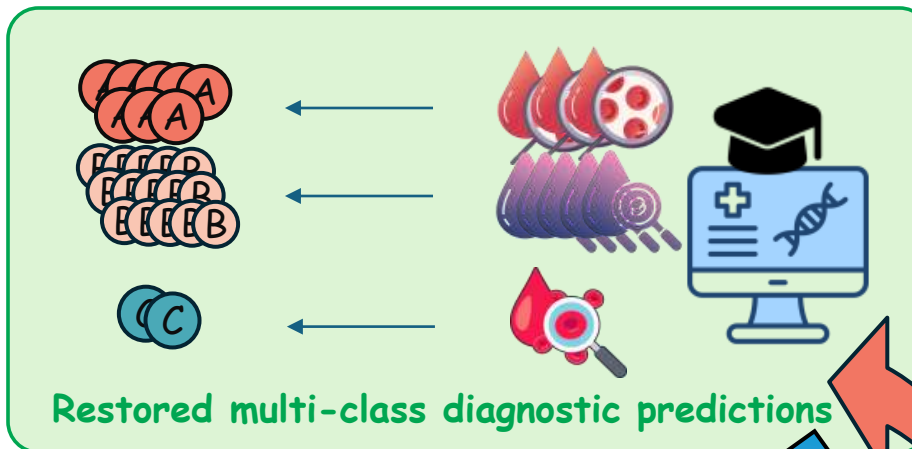

LAMP-Merge Server

Diagnostic Prototype Reconstruction

1. Reference-space Class
Prototype Extraction




Class prototypes

2. Support-aware
Evidence Aggregation



Reallocate weights

3. Prototype-induced
Diagnostic Head

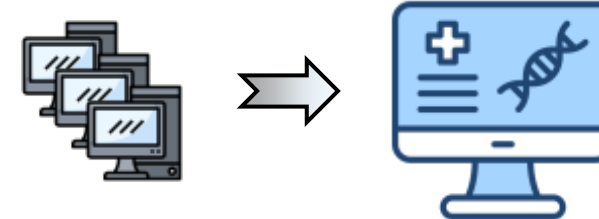


Long-tail Prevalence Calibration

1. Client-reported
Prevalence Prior



Prior distribution

2. Long-tail
Activation Criterion



activate

3. Centered Log-prior
Calibration



Class k
is common!

Global prevalence prior