

2014年4月12日

NTT 研究所 プレゼンテーション

Masataro Asai

To Start Press "n"

WARN Turn off your custom keyboard shortcuts

Made by guicho2.71828 (Masataro Asai)

1 What Is It?

An Alternative to

Org-based Presentation

Method

Proceed with "n"

2 Usage (on browsers)

n go to the next section/expand a list

p back to the previous section

s, or "go" jump to an arbitrary section (using minibuffer)

d debugging mode (shows content border)

⌘Ctrl-g or ⌘Esc cancel current key strokes

"help" shows the available commands in the minibuffer!

3 Usage (on emacs)

1. clone our repo
2. make to publish
3. show it on your browser!

4 Virtue

- Simplicity
 - `code.js` only has 200 lines
- Extensibility
 - you can write your own extension and its easy
 - set a function to `keyManager.<your-key-strokes>`
 - any char code c in the keystrokes must be $32 < c < 126$
 - * Space, !, ", ... A, B, C, ... x, y, z, {, |, ~
- LICENSE
 - GPLv3 ?? ; not attached a lisenca yet

5 Example: Expanding a List

- **the dots** tell "*here are more contents*" →
- **an arrow** tells "*here are expandable contents*" →
 - These remind you that there are
 - **still more sub-contents** you have to talk
 - and where it ends
- list
- list

6 Org-block templates

another-org-info knows are:

- jS – smaller
- jlar – larger
- jt – twocolumn
 - implemented using a part of CSS in twitter-bootstrap
- jn – footnote
- jr – float right
- jar – align right
- jlcr – "left,center,right" format with x-large fonts
- jE – latex 'equation' environment
- still more...

6.1 copy-paste it

to your .emacs

config.el

7 Dependency

- jQuery 1.10.2 (included)
- org-mode v8.1 (not precisely)

7.1 Utility

- `./make-periodically.sh [args]`
 - Watches the changes in the directory and make
 - A simple shell script
 - all arguments are passed to make
 - dependency : `inotifywait`, `notify-send`

8 Test

- Link
- This
- Is
- A Test

Mathjax formula:


$$E = mc^2$$

$$E = mc^2 + \frac{1}{2}mv^2 \quad (1)$$

8.1 Twocolumn Test

This is a LISP ALIEN IN A CAGE!

- HOOA!
- **HOOA!**
- HOOA!

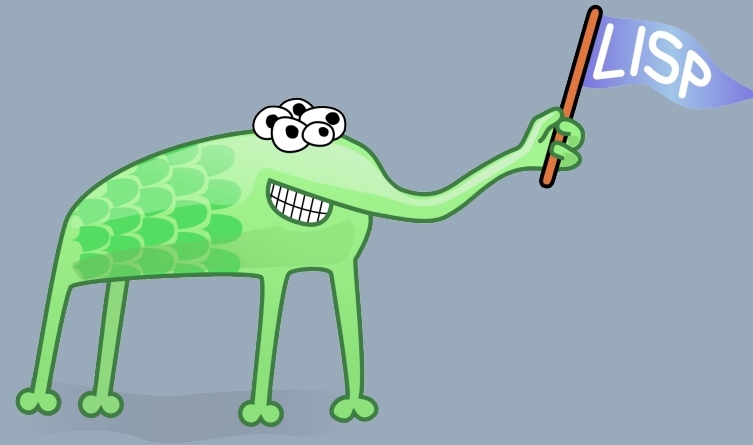

8.2 many columns test

a a a a a a a a a a	b b b b b b b b b b	c c c c c c c c c c	d d d d d d d d d d
a a a a a a a a a a	b b b b b b b b b b	c c c c c c c c c c	d d d d d d d d d d
a a a a a a a a a a	b b b b b b b b b b	c c c c c c c c c c	d d d d d d d d d d
a a	b b b b b	c c	d d d d d

9 A Slide with Too Little Contents

Hi, I'm small!

See the headline is correctly adjusted

10 Left-Center-Right template

x-large left

centered

right

This is a footnote

11 TODOs

- Features

- Table of contents
- `<dl>` does not expand
- ~~Showing current keystrokes~~ **DONE**
- auto-scroll/auto-zoom with big contents
- Showing current/total page number
- Changing Stylesheet
- Up-Section command
- Slide thumbnail
- ~~stopwatch/countdown timer~~ **DONE**
- link to `#section`

- Features inspired by other tools

- Content Search (in org-infojs)
- Drawing mode (in jessyink)
- 'Paused' mode (in reveal.js)
- ~~Export to PDF (also in reveal.js)~~
 - * implemented as the resume output
- Slide with an image covering entire background (slideshare)
- present one paragraph/word/letter at a time
 - * those in s5
- "C-M-x" style notation in the command definition