2014　4　12

NTT

Masataro Asai

To Start Press "n"

WARN Turn off your custom keyboard shortcuts

Made by guicho2.71828 (Masataro Asai)

1   What Is It?

An Alternative to

Org-based Presentation

Method

Proceed with "n"

2 Usage (on browsers)

n   go to the next section/expand a list

p   back to the previous section

s, or "go"   jump to an arbitrary section (using minibuffer)

d   debugging mode (shows content border)

¡Ctrl-g¿ or ¡Esc¿   cancel current key strokes

3   Usage (on emacs)

1. clone our repo
2. run (`org-html-export-as-html`) to publish
3. show it on your browser!

4 Virtue

- Simplicity
  - `code.js` only has 200 lines
- Extensibility
  - you can write your own extension and its easy
  - set a function to `keyManager.<your-key-strokes>`
  - any char code c in the keystrokes must be $32 < c < 126$
    * `Space,!,",...A,B,C,...x,y,z,{,|,~`
- LICENSE
  - GPLv3 ?? ¡ not attatched a lisence yet

5 Example: Expanding a List

- **the dots** tell "*here are more contents*" $\rightarrow$
- **an arrow** tells "*here are expandable contents*" $\rightarrow$
  - These remind you that there are
  - **still more sub-contents** you have to talk
  - and where it ends
- list
- list

6 Org-block templates

`another-org-info` knows are:

- ¡S – smaller
- ¡lar – larger
- ¡t – twocolumn
  - implemented using a part of CSS in twitter-bootstrap
- ¡n – footnote
- ¡r – float right
- ¡ar – align right
- ¡lcr – "left,center,right" format with x-large fonts
- ¡E – latex 'equation' environment
- still more...

6.1 copy-paste it

to your `.emacs`

<div align="center">

`config.el`

</div>

7 Dependency

- jQuery 1.10.2 (included)
- org-mode v8.1 (not presicely)

7.1 Utility

- ./make-periotically.sh [args]
  - Watches the changes in the directory and `make`
  - A simple shell script
  - all arguments are passed to `make`
  - dependency : inotifywait, notify-send

8 Test

- Link
- This
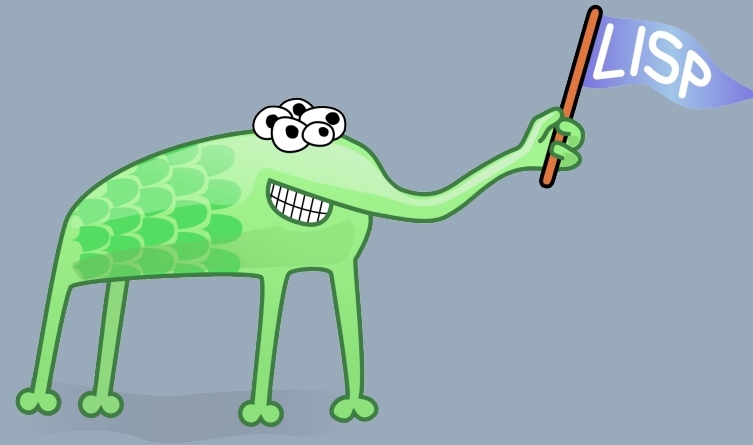- Is
- A Test

Mathjax formula:

$$E = mc^2$$

$$E = mc^2 + \frac{1}{2}mv^2 \tag{1}$$

8.1 Twocolumn Test

This is a LISP ALIEN IN A CAGE!

- HOOA!
- **HOOA!**
- HOOA!

8.2 many columns test

a a a a a a a a a a	b b b b b b b b b	c c c c c c c c c c	d d d d d d d d d
a a a a a a a a a a	b b b b b b b b b	c c c c c c c c c c	d d d d d d d d d
a a a a a a a a a a	b b b b b b b b b	c c c c c c c c c c	d d d d d d d d d
a a	b b b b b	c c	d d d d d

9 A Slide with Too Little Contents

Hi, I'm small!

See the headline is correctly adjusted

10 Left-Center-Right template

x-large left

<div align="center">centered</div>

<div align="right">right</div>

This is a footnote

11 TODOs

- Features
  - Table of contents
  - `<dl>` does not expand
  - ~~Showing current keystrokes~~ **DONE**
  - auto-scroll/auto-zoom with big contents
  - Showing current/total page number
  - Changing Stylesheet
  - Up-Section command
  - Slide thumbnail
  - stopwatch/countdown timer
  - link to #section

- Features inspired by other tools
  - Content Search (in org-infojs)
  - Drawing mode (in jessyink)
  - 'Paused' mode (in reveal.js)
  - Export to PDF (also in reveal.js)
  - Slide with an image covering entire background (slideshare)
  - present one paragraph/word/letter at a time
    * those in s5
- Implementation
  - "C-M-x" style notation in the command definition