
nODD Gen3 — pull widths (full standard deviation) versus pT

PROTOTYPE · truth-associated Kalman fit · constant 3 T · 20,000 single muons per backend / momentum

Three fixed pT points; selected |η| slices. All eight slices retained in data/CSV.

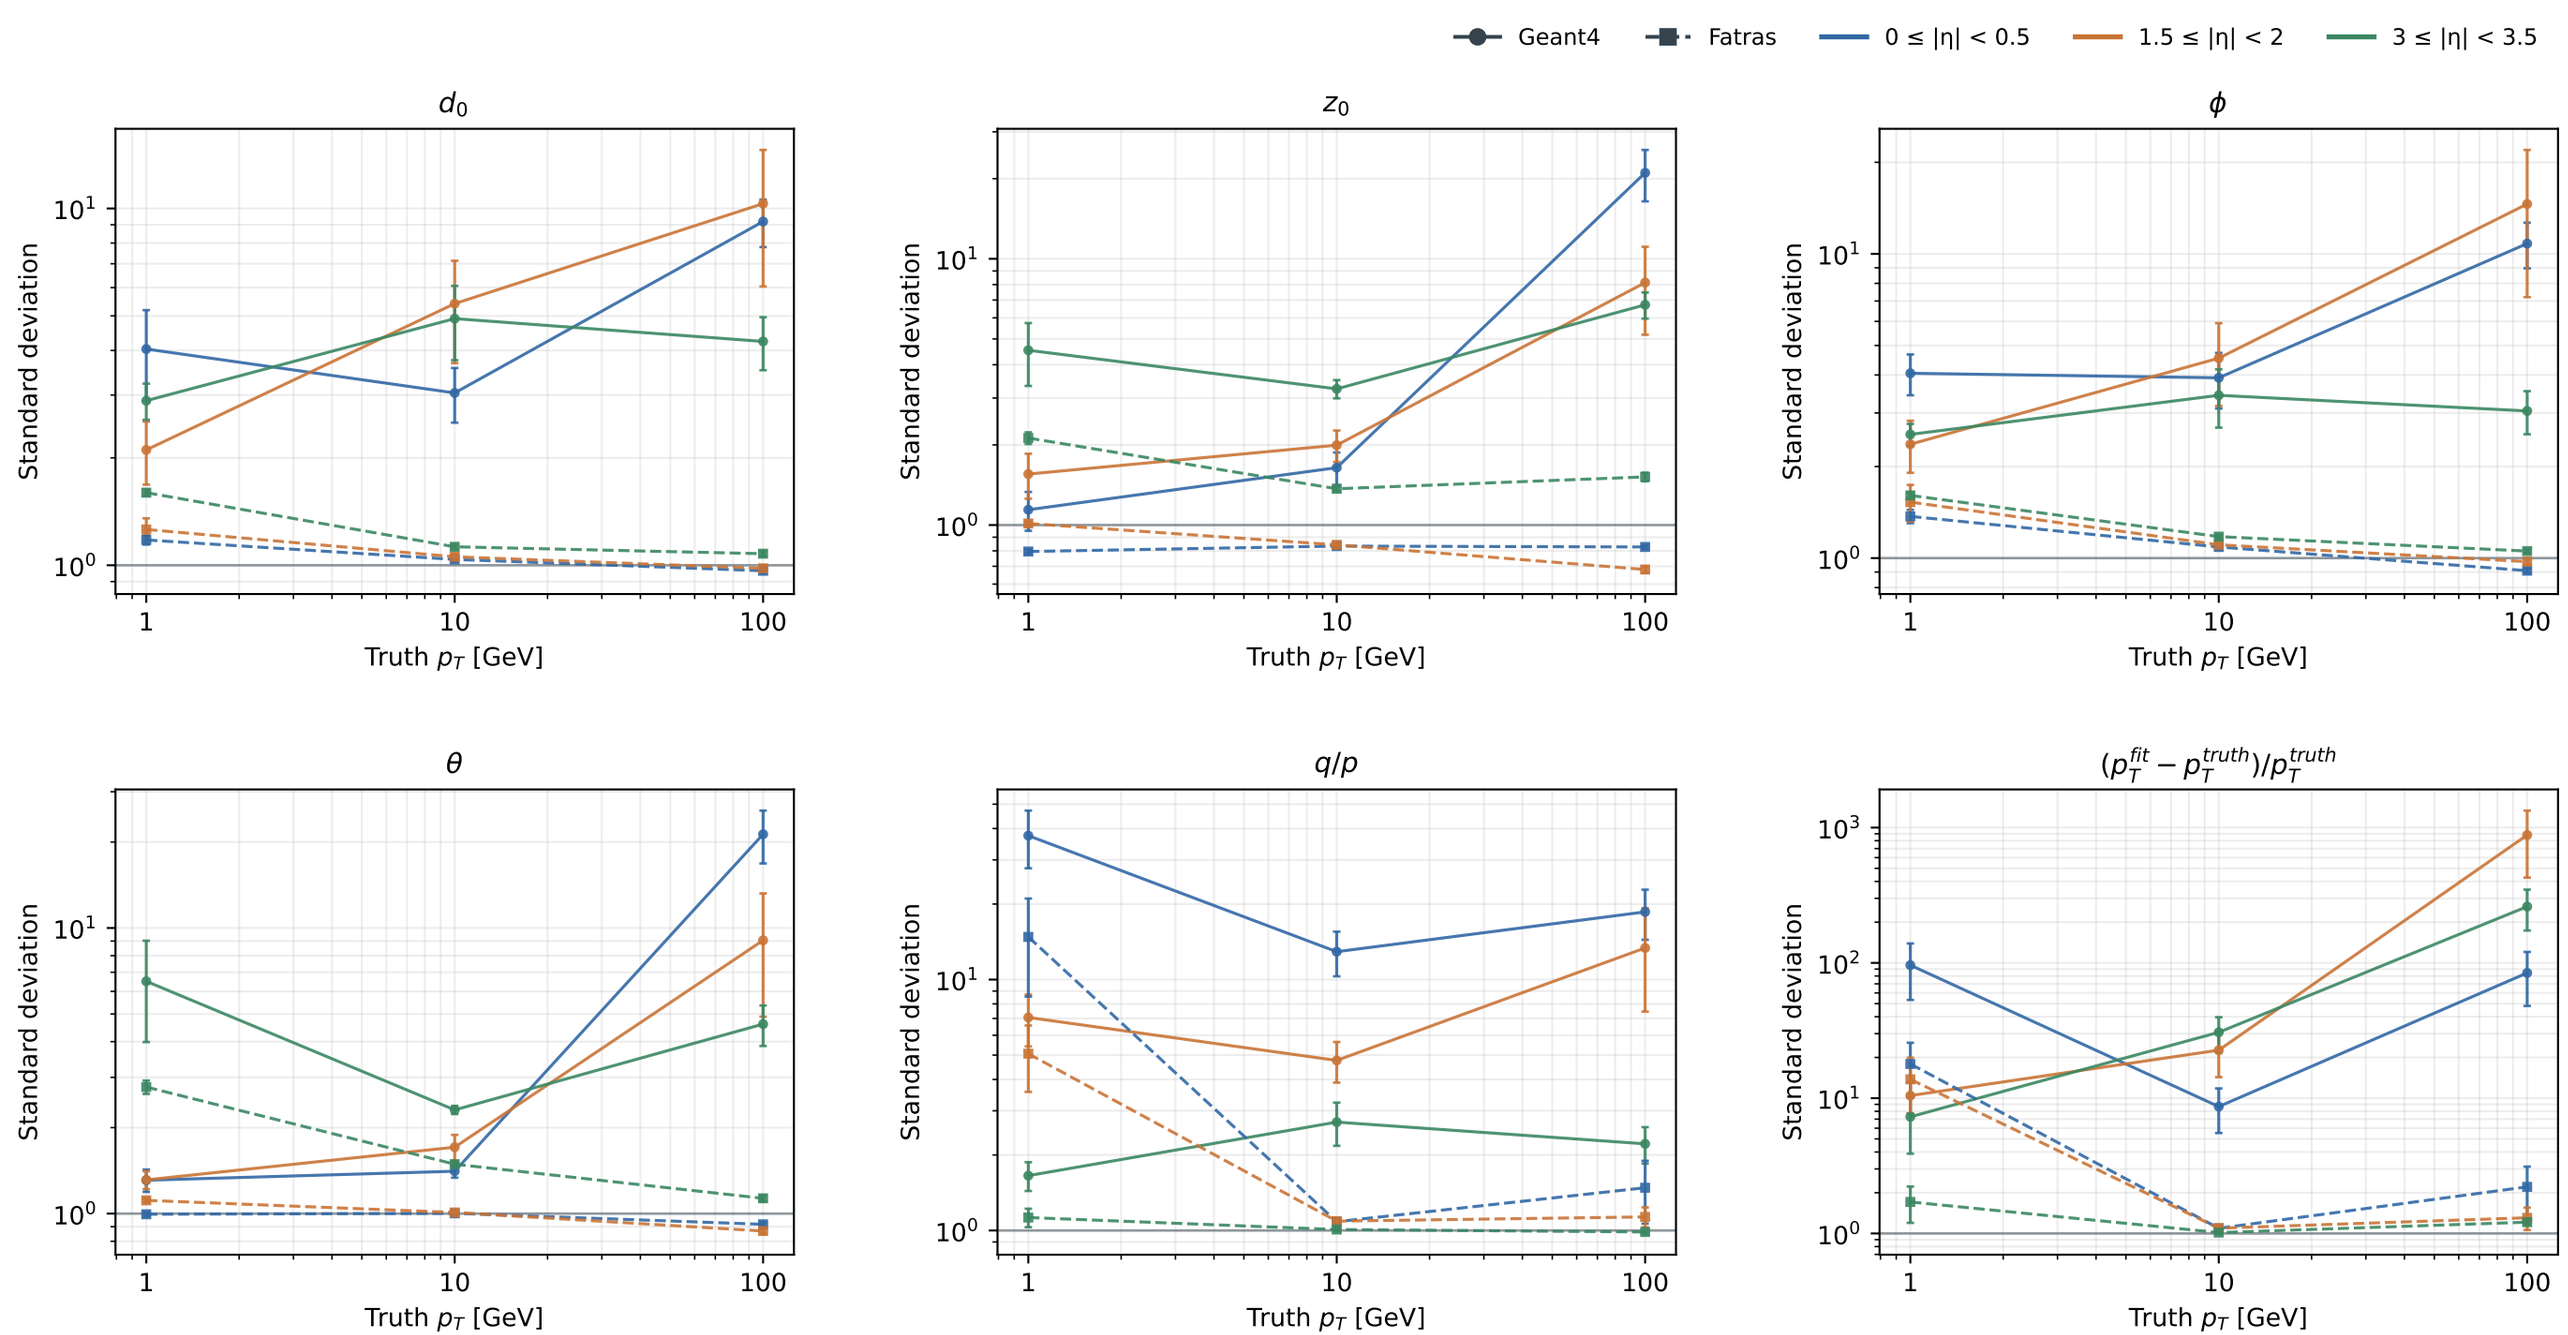

Ideal geometric digital response; PR100 map; independent Fatras hit errors. No residual cuts. Errors: event-bootstrap SE (mean: SD/√N). Missing bins have <30 finite tracks.