23 oct ①

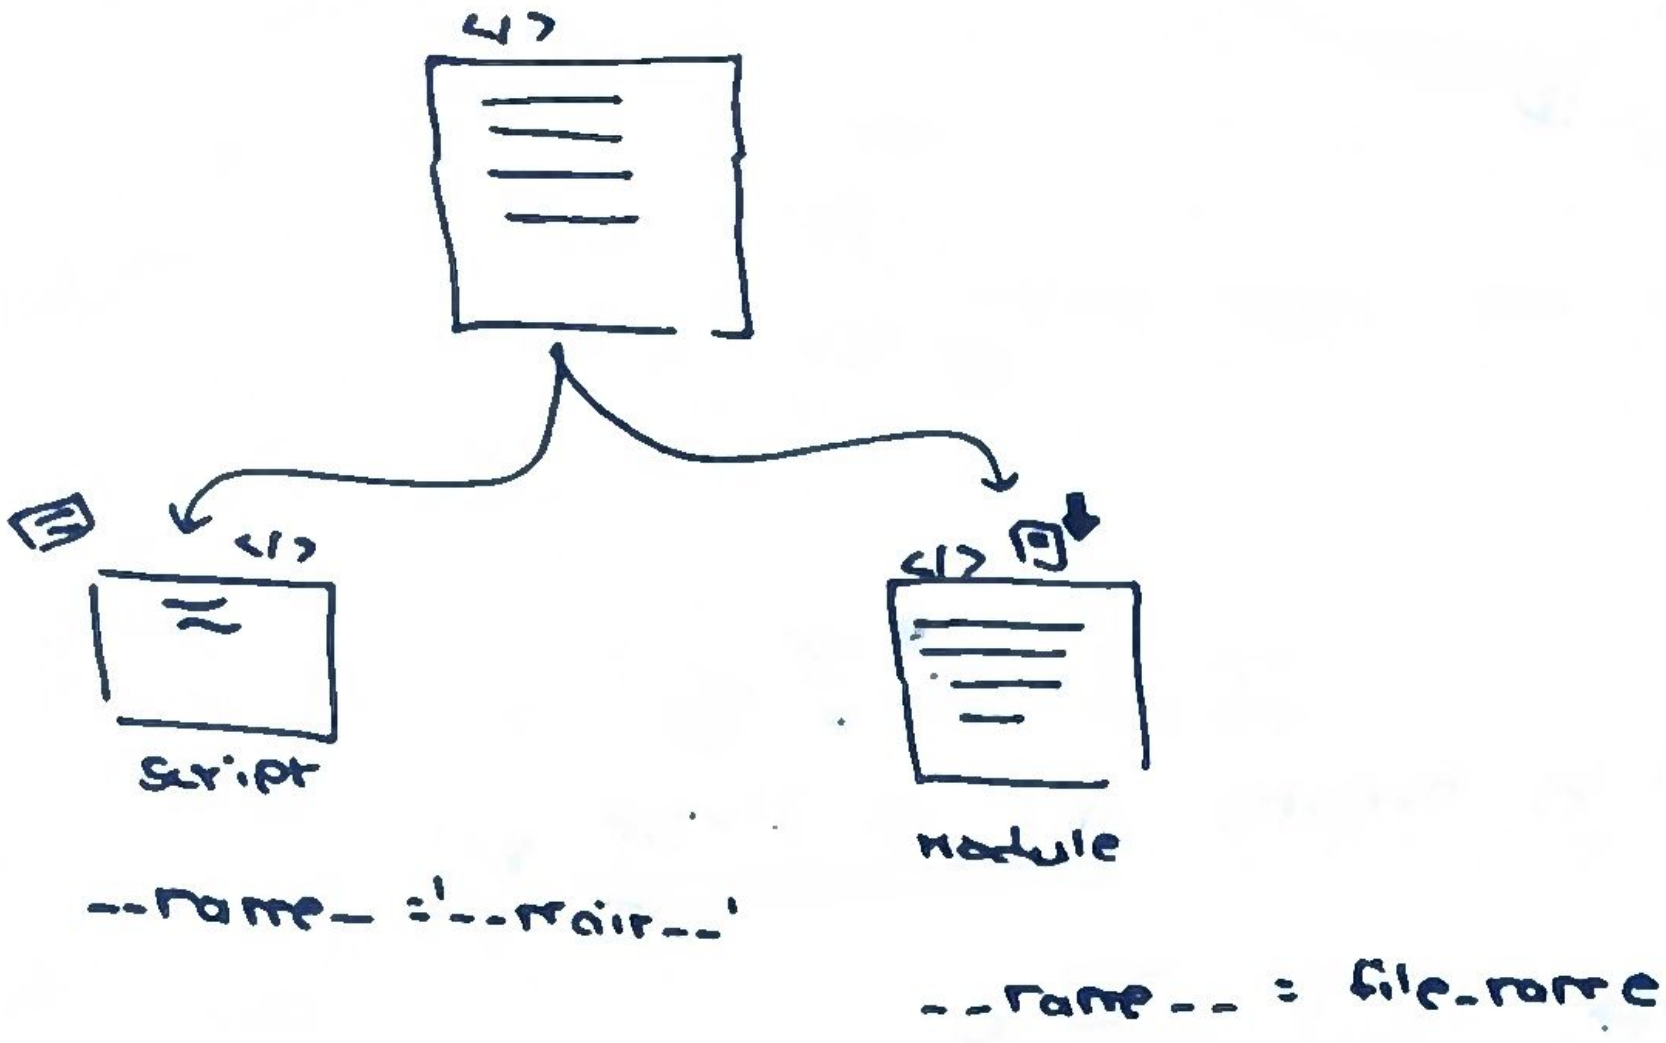

Revision_1

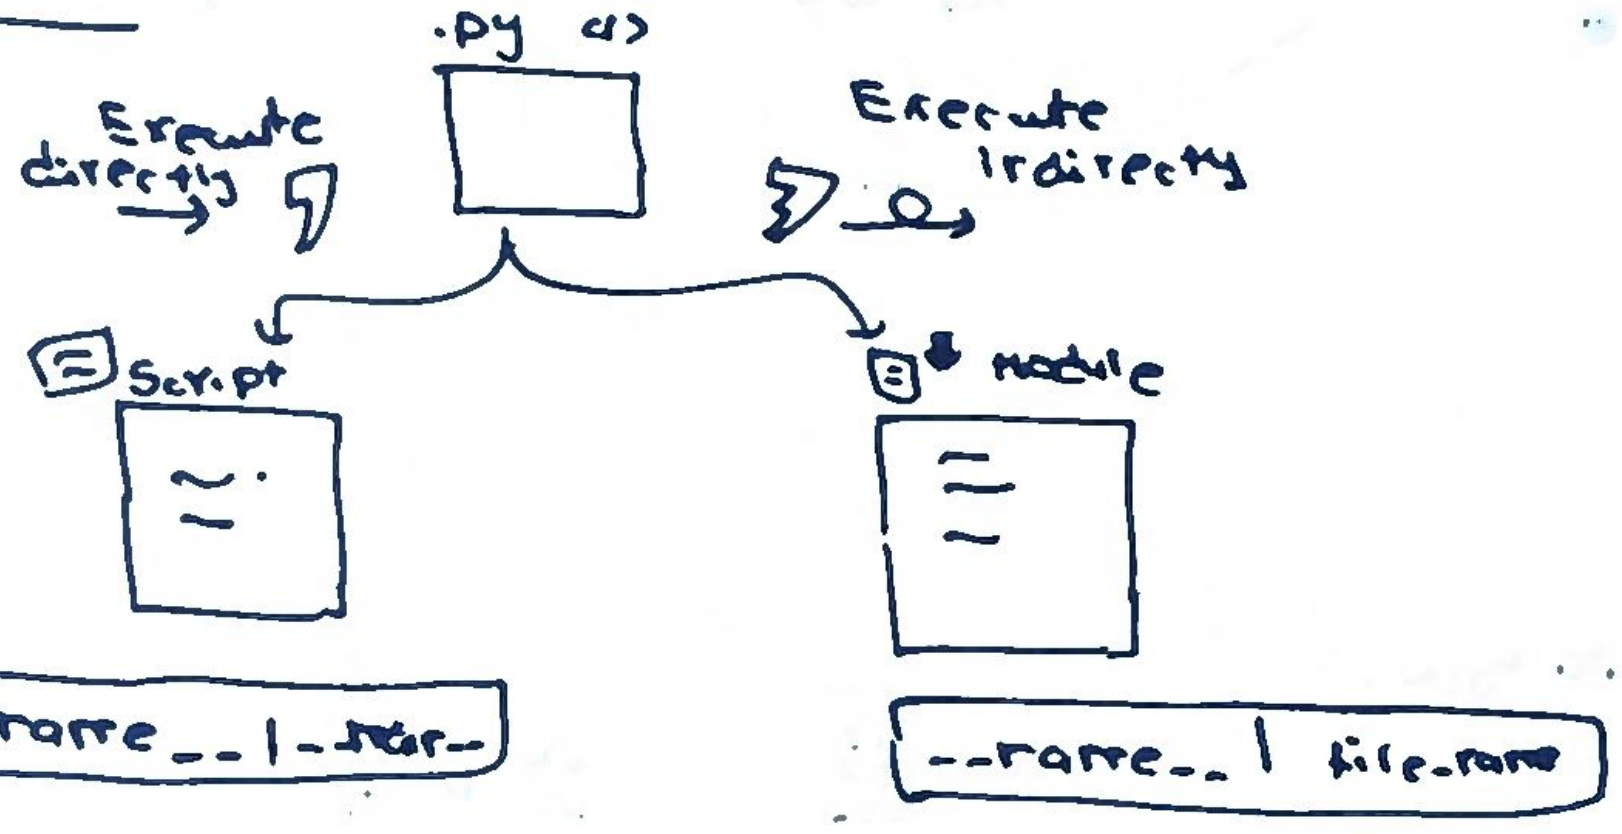

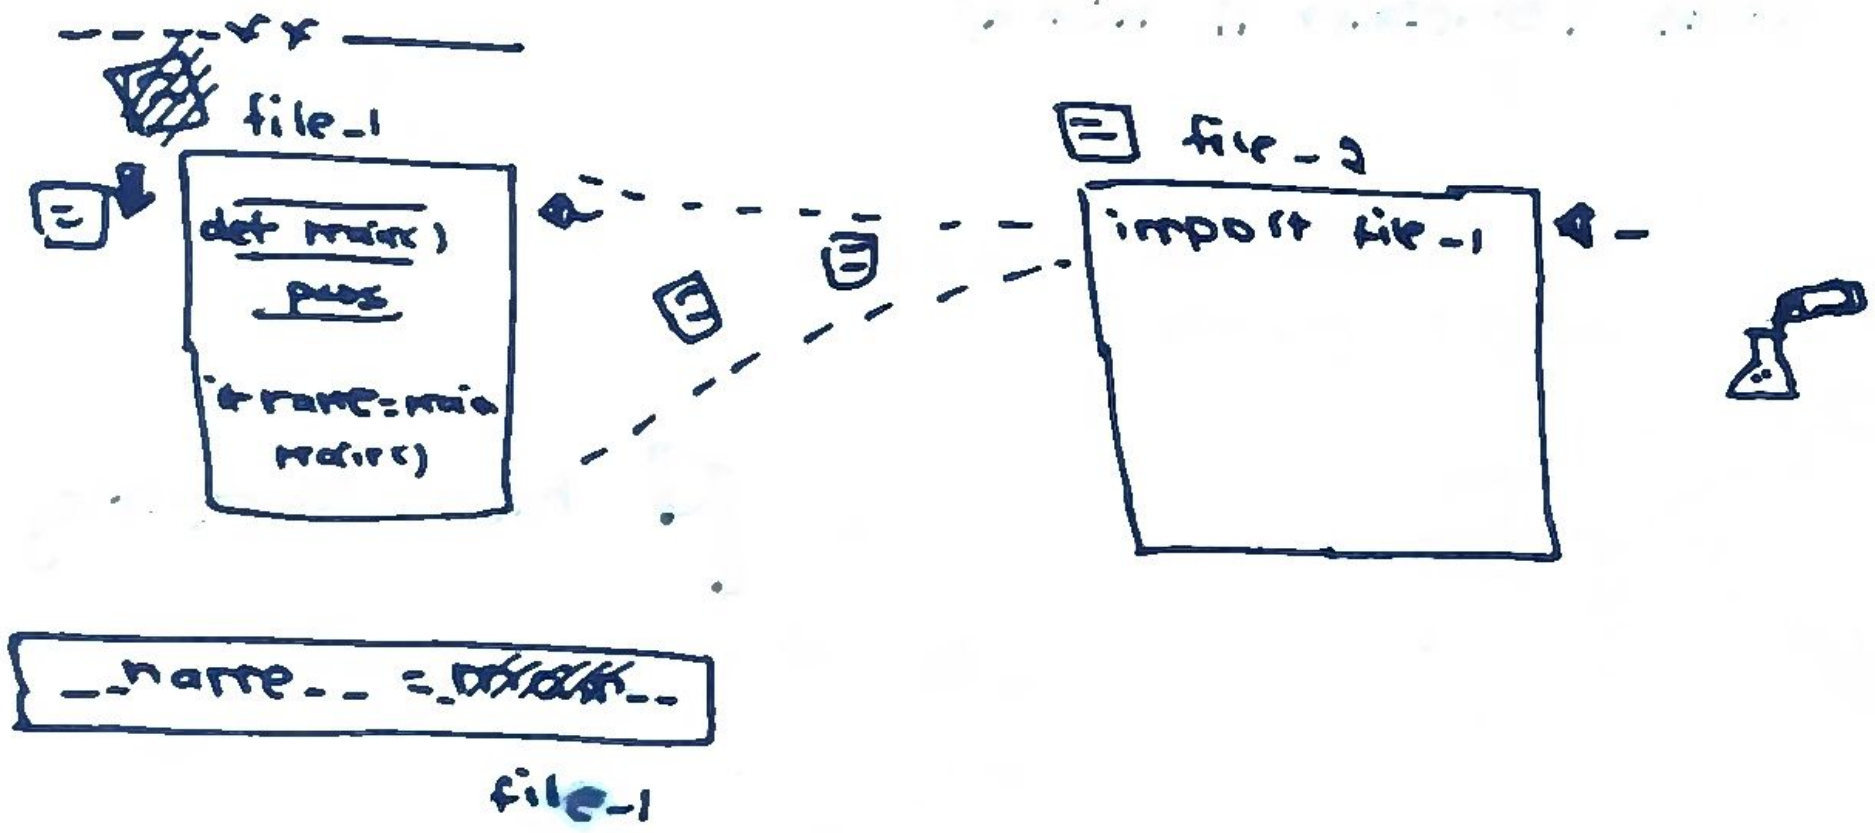

— CS80P Day1 24 Oct

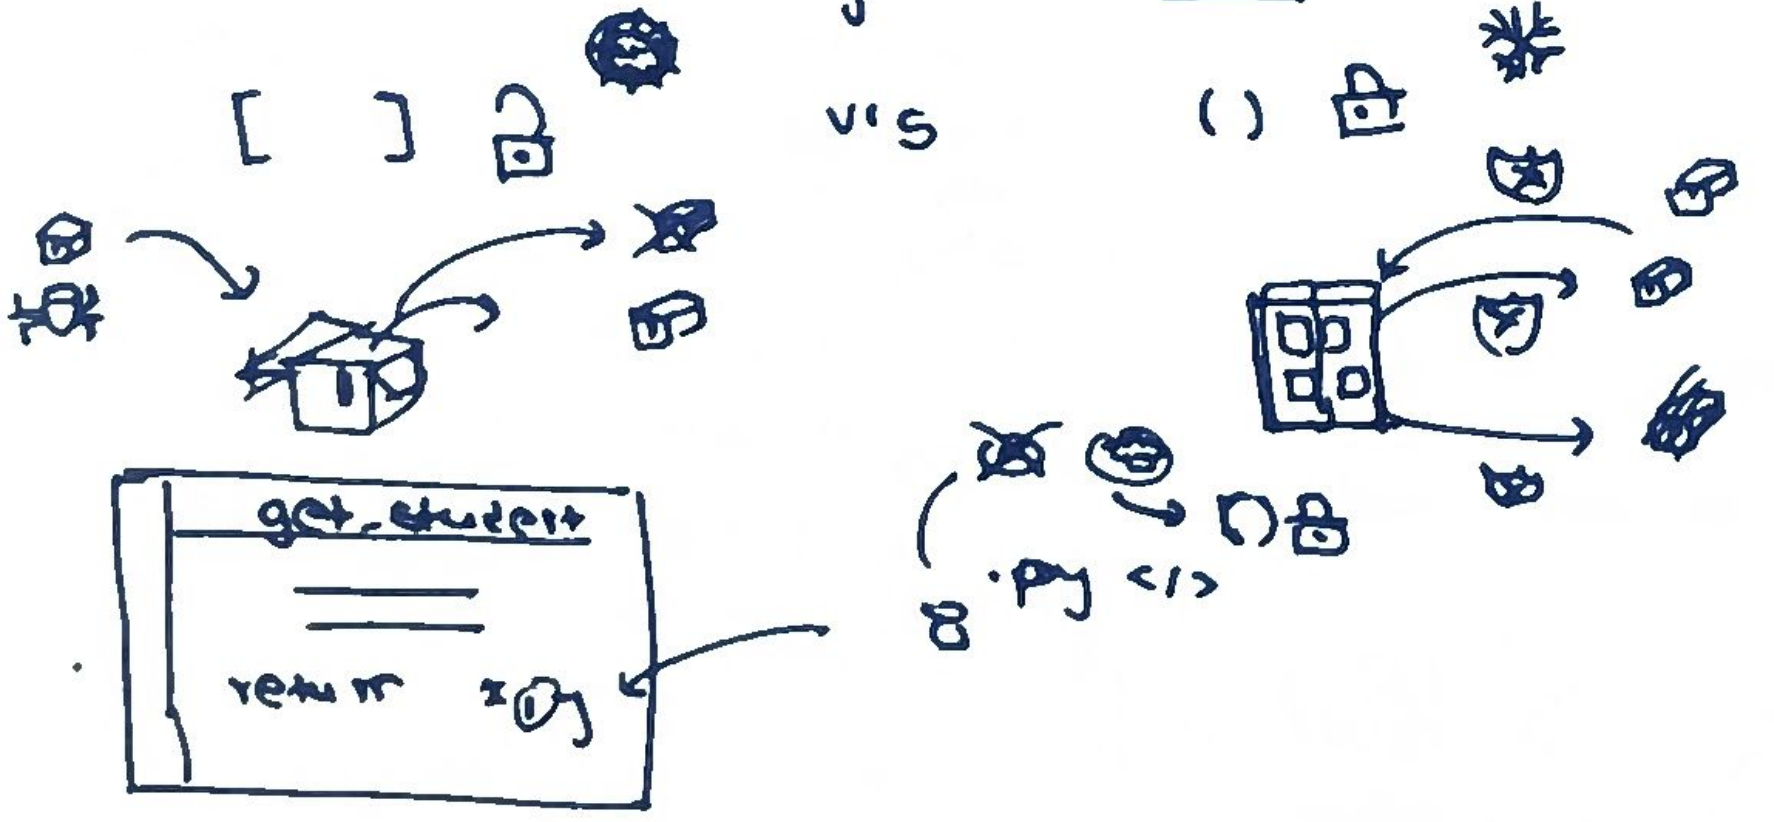



↳ when you want the value in the variable to not change

↳ why would you use a data type, allows

[■●▲]
(▲●●)

Revision



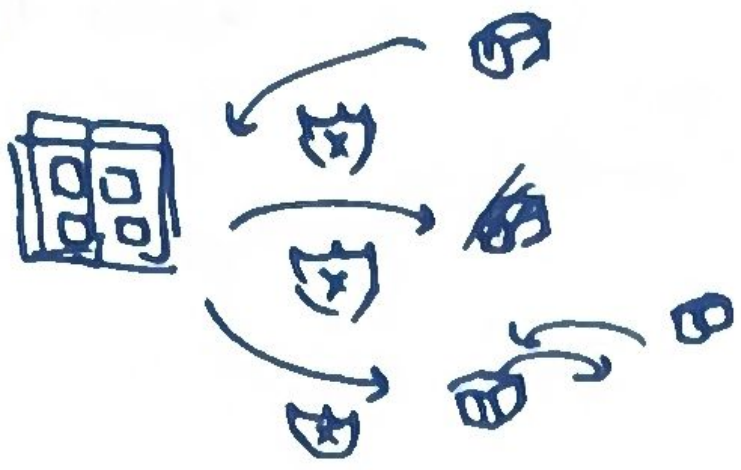

[ ] vs ( )

Student | (●, ●, ●)

↑ values stored in variable not to change ✱.

[ ] visual indicator for list

( ) v.i for tuple || For access you use [ ] ✱.

more values →



{ }

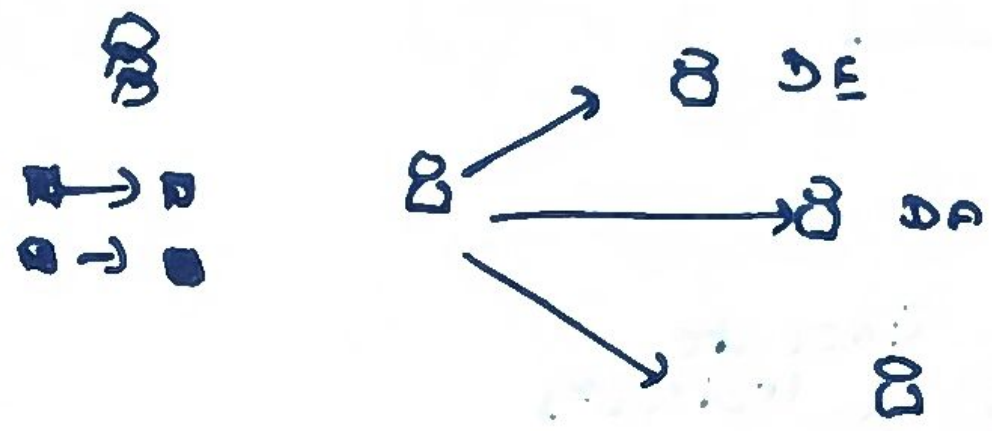

who's re

↑ upside

[ ] ( )

8py

slippery slop of asking for specit Data type.





class (Bluprint || mould)

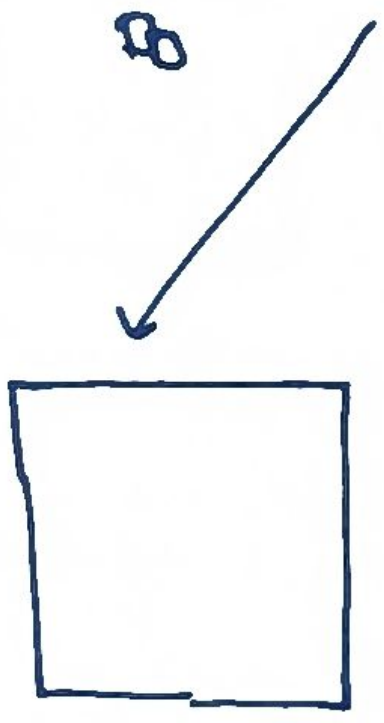

object using that blueprint

hack something

35:00 min

Revision - 1

Semantic

vs

values inside not to change

1 More

xx

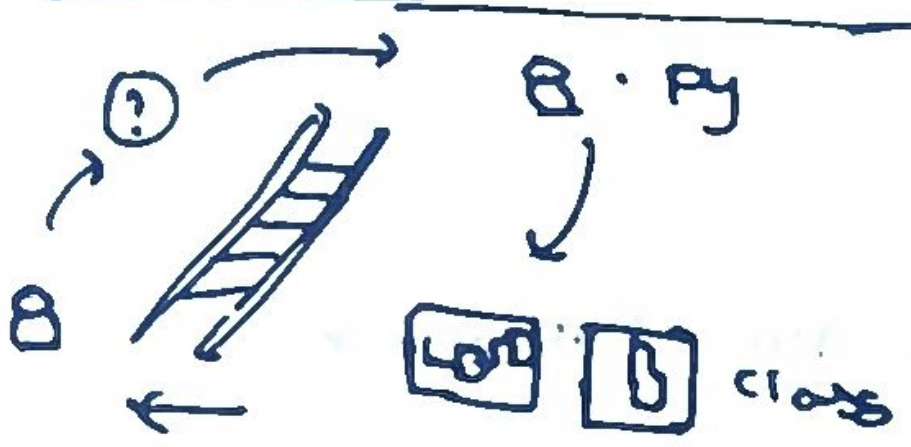

class

25th october

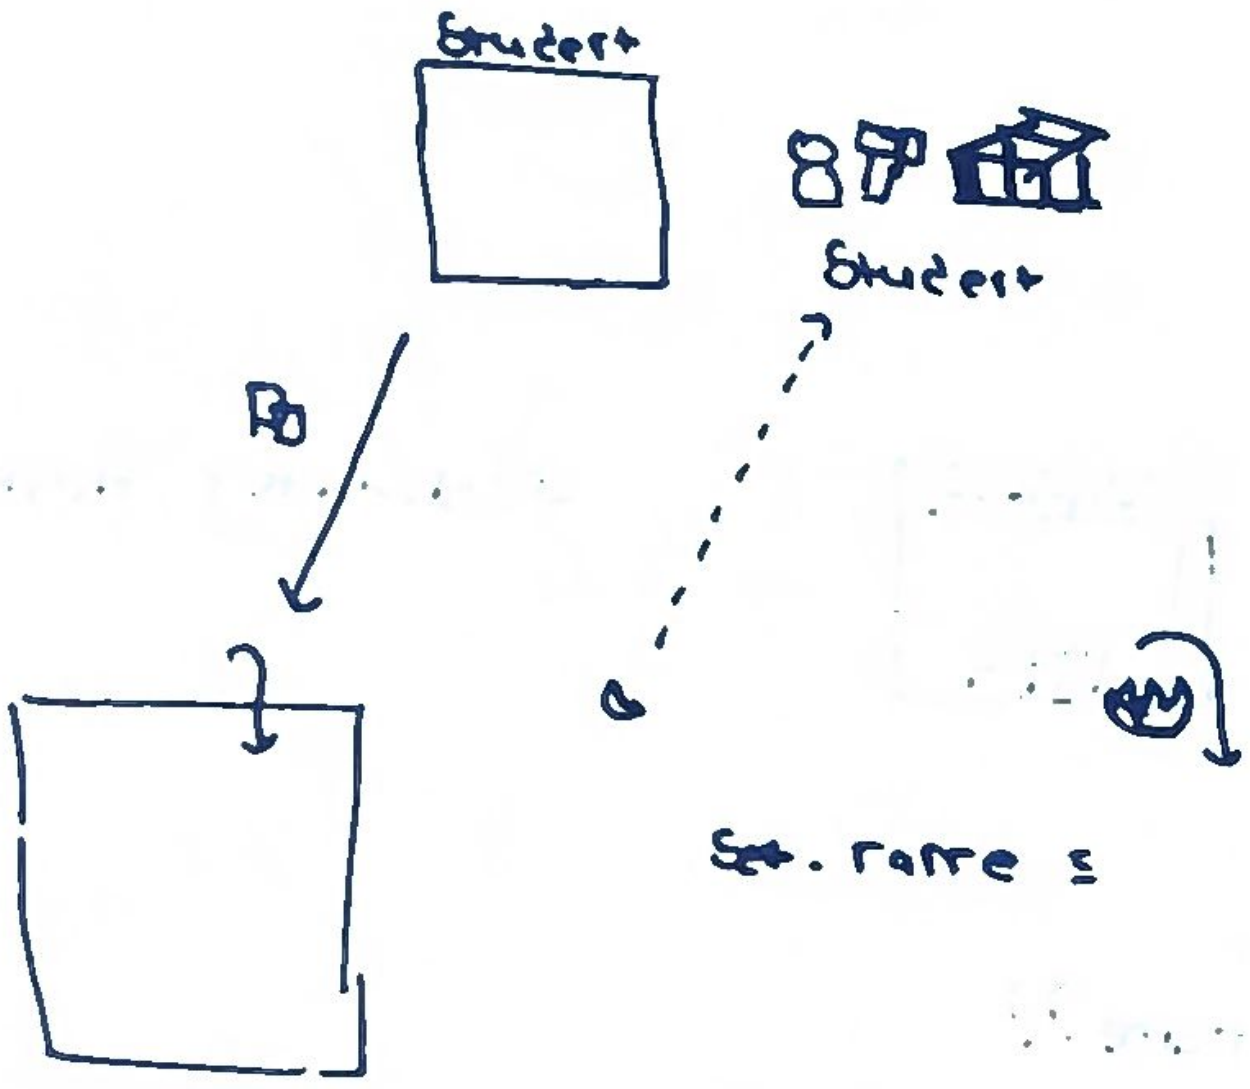

set.name =

ething variable into otherwise empty object



—xx

oop

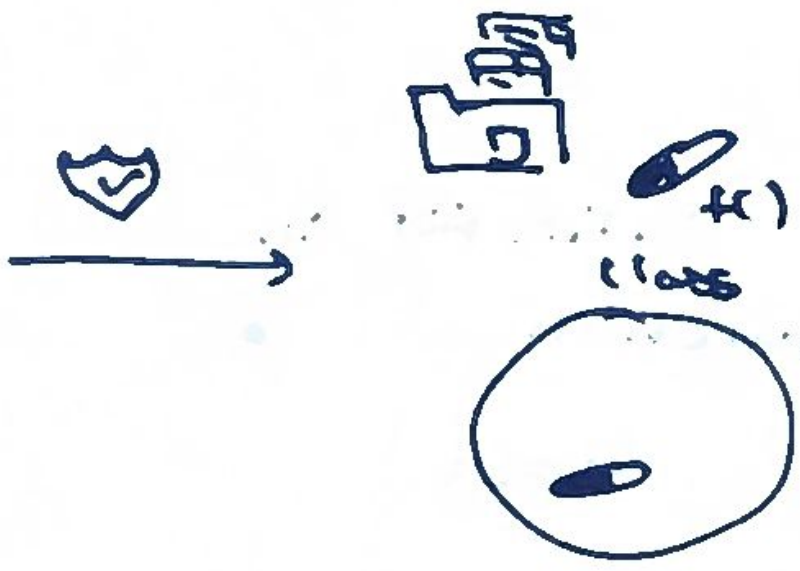

Encapsulate function inside class

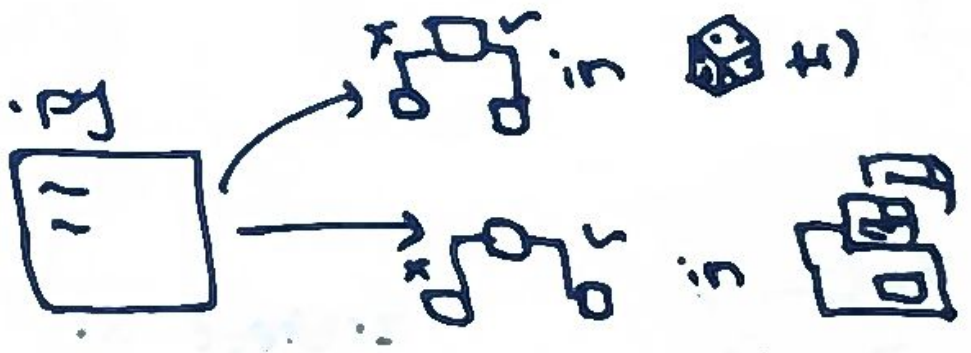

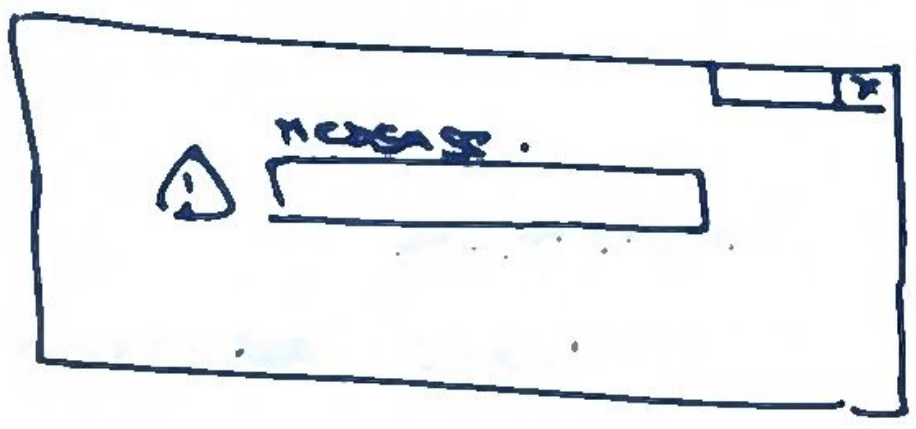

not wrong enough → exist

but wron enough → alert

Generic error

precise

by +☰ in ⚠

⚠ like f()



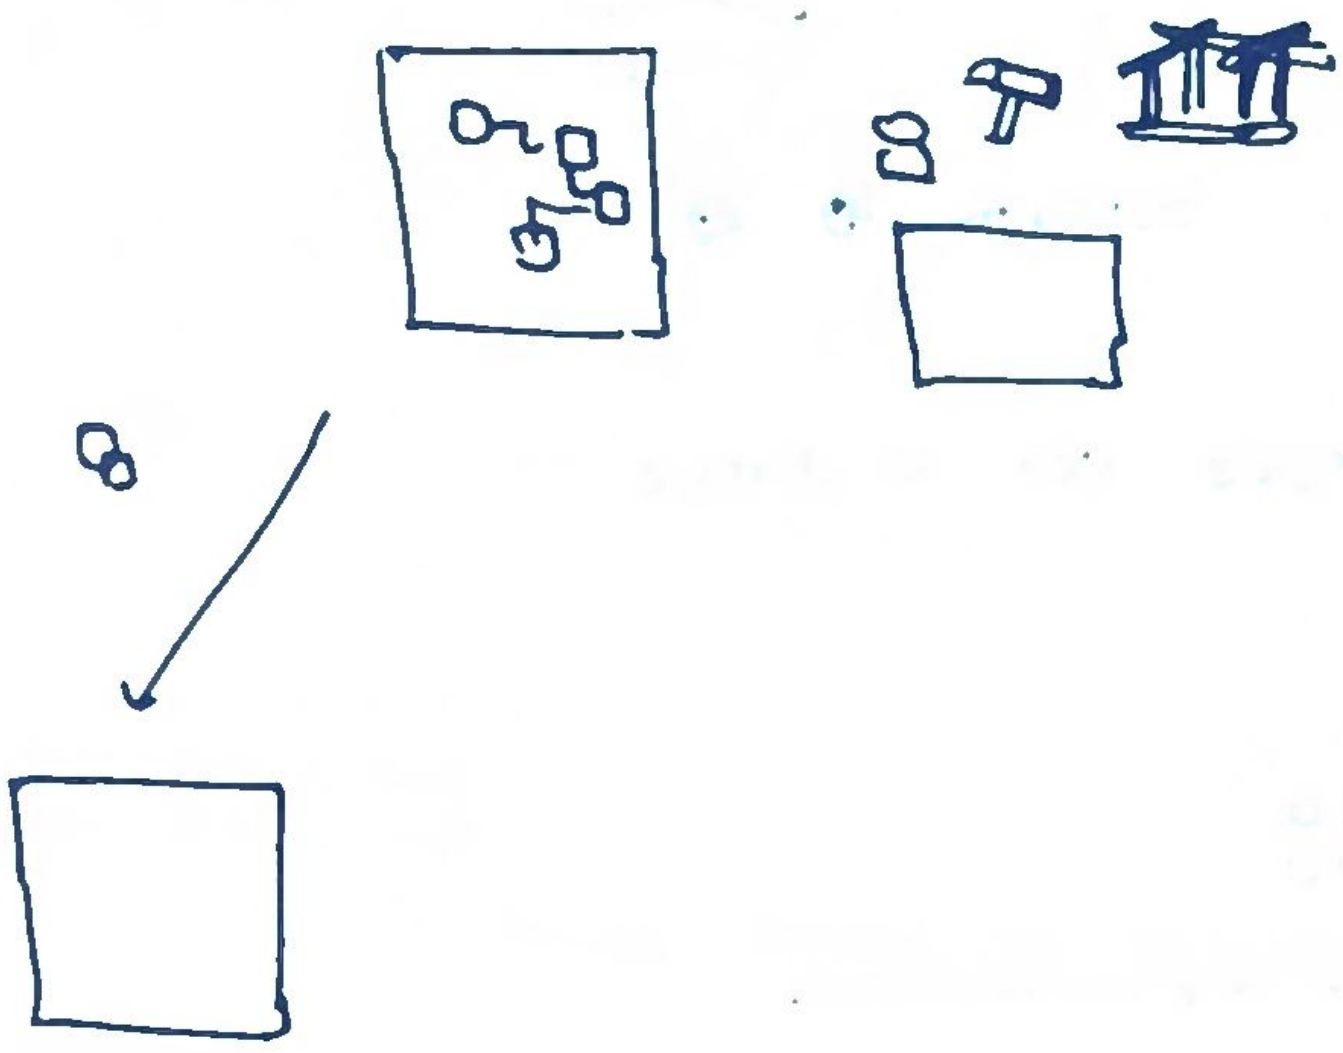

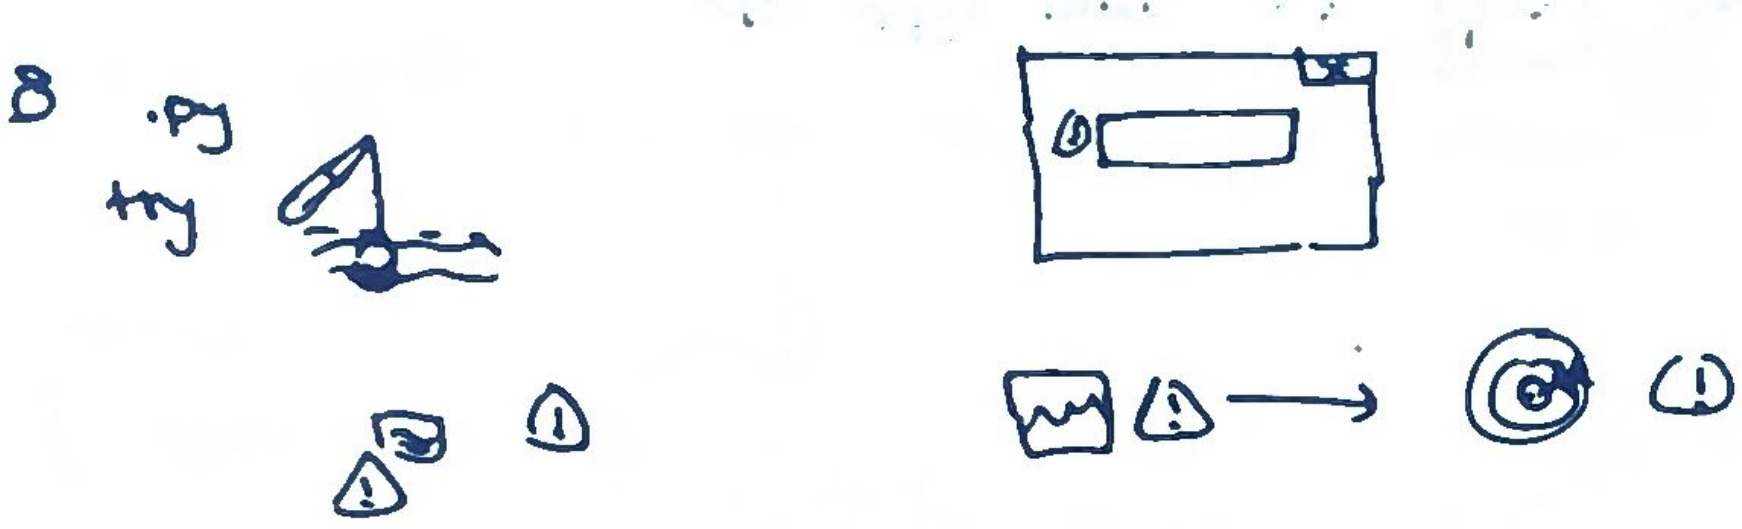

Ok I'll handle it

1:09:00 min

Revision xx_1_xx

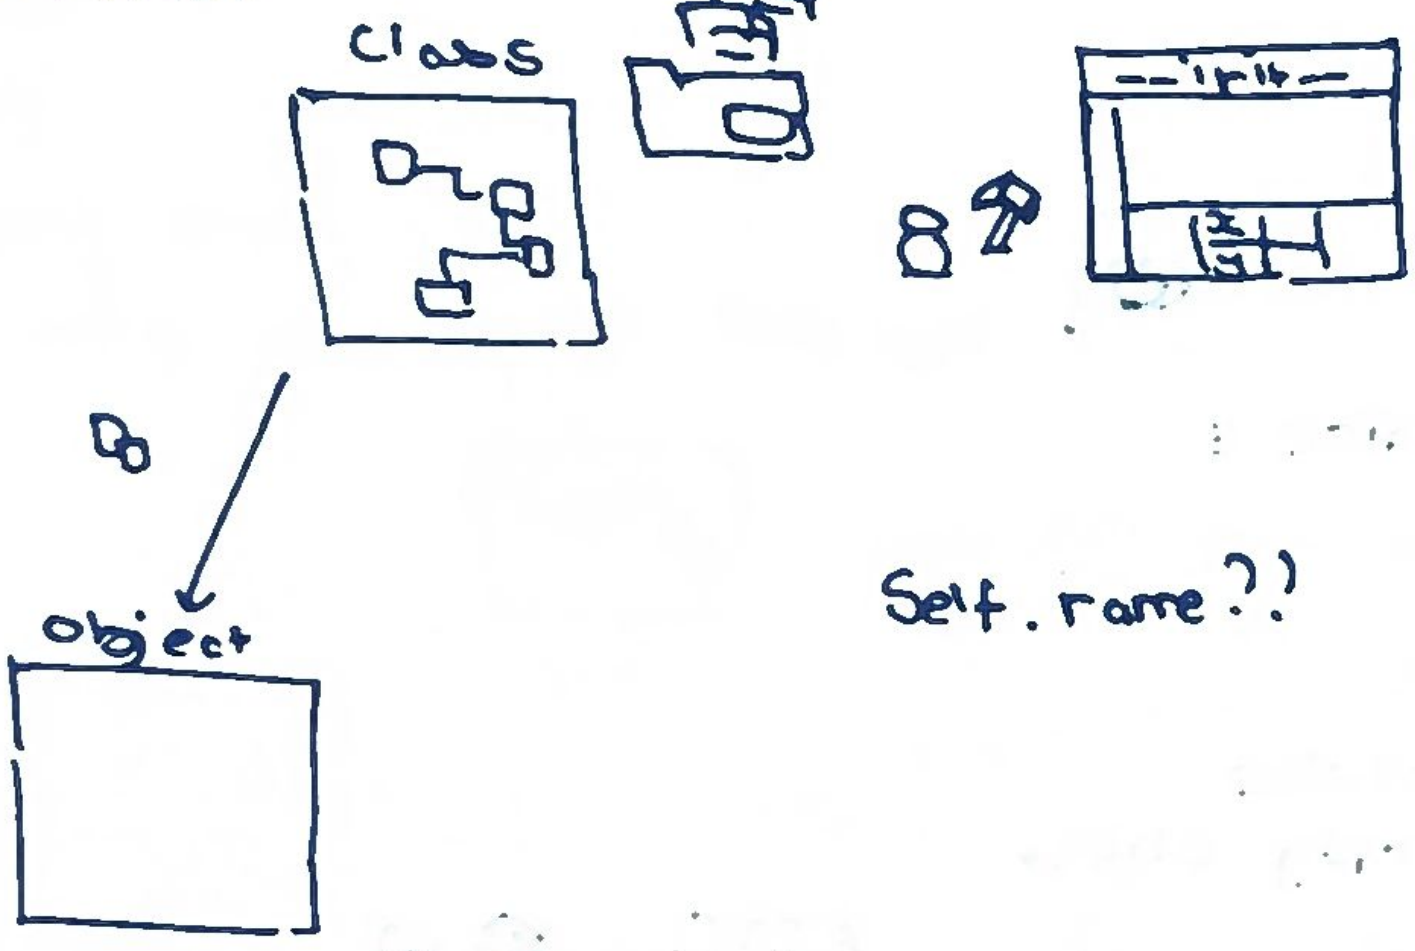

constructor method

Self.name??

using the blueprint or template

Instead of putting validation in some random function

→ we put inside class .

Raise

- assisting python in catching errors

error with generic msg

error with precise msg by passing arguments inside error

26 october

①

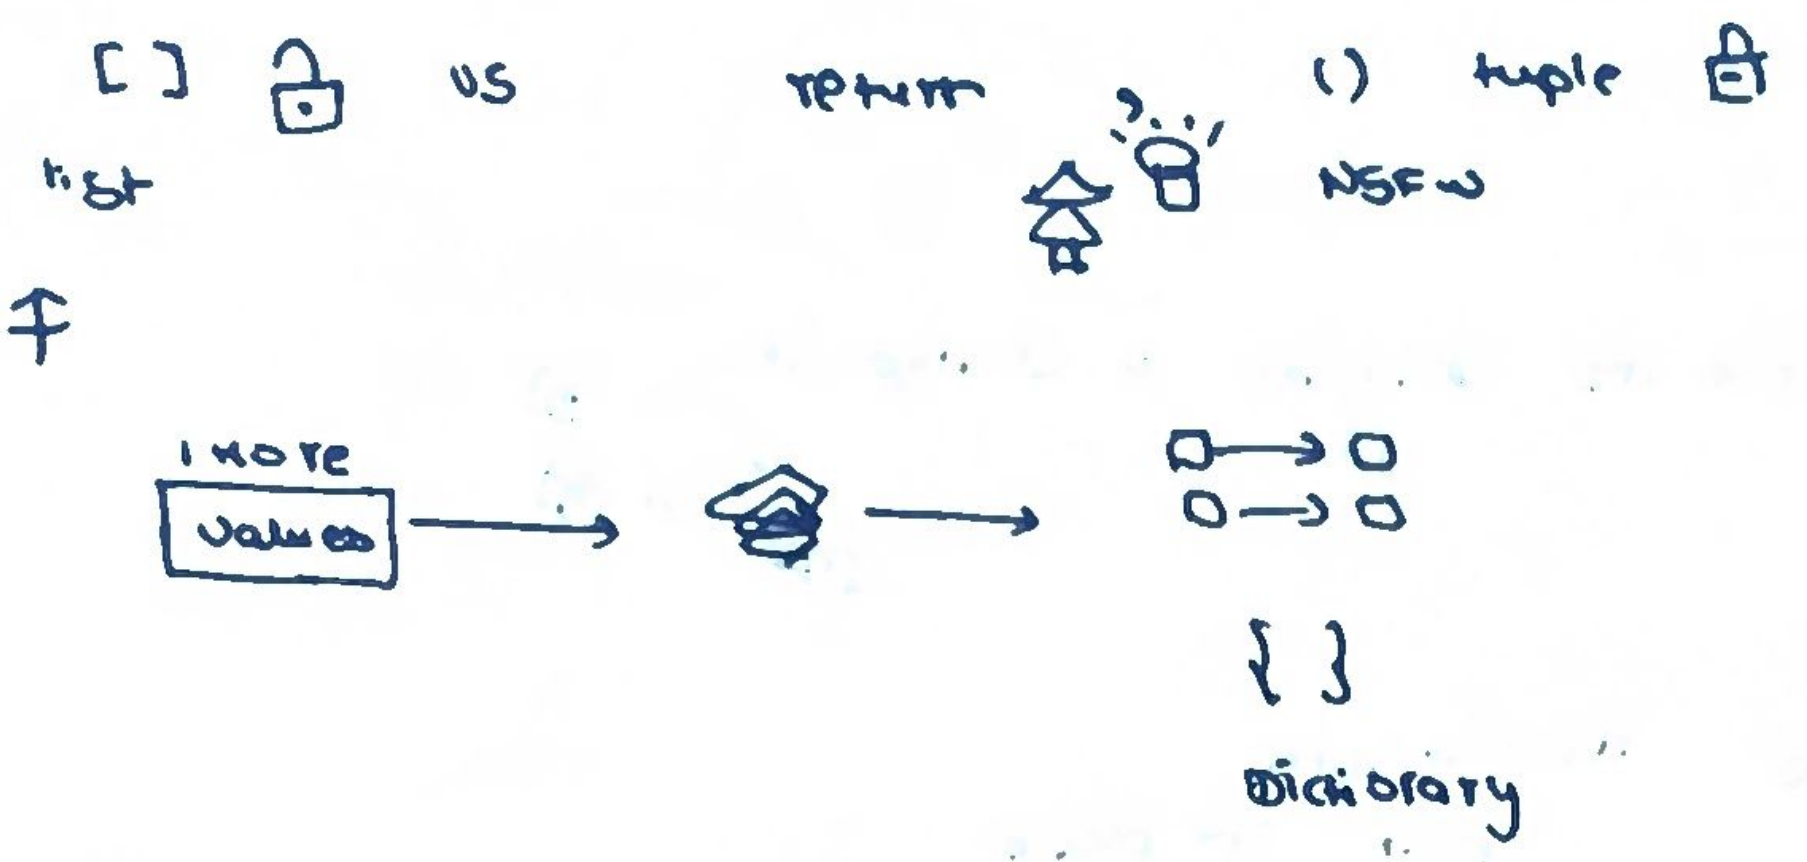

retention of units ,

semantic association

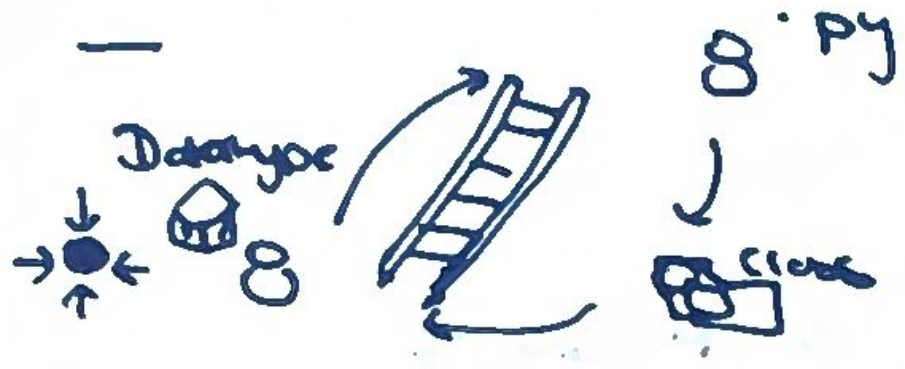

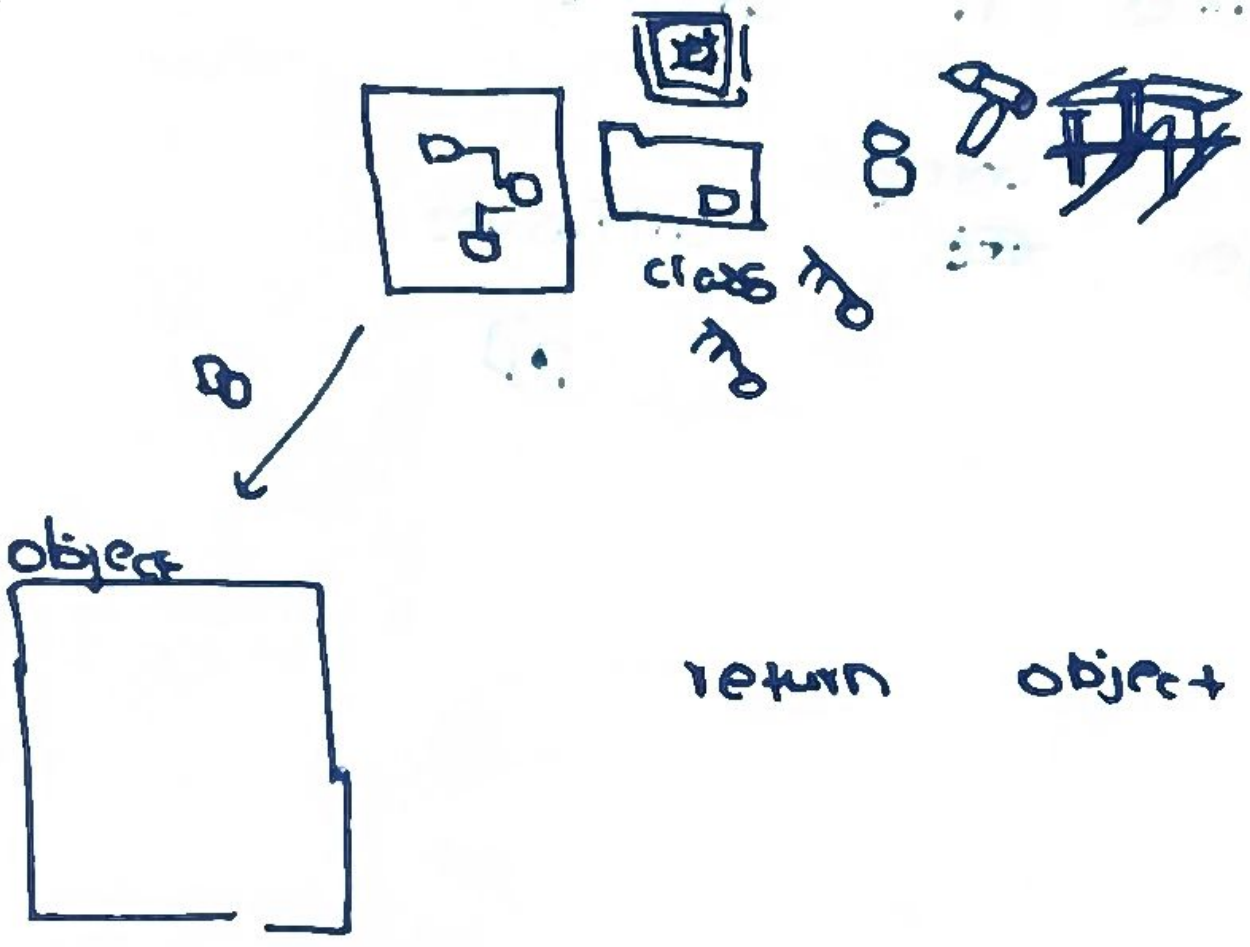

return object

Raise 8 . py Helping python to catch error

Not wrong enough	→ exist ☒
but wrong enough	→ alert ⚠

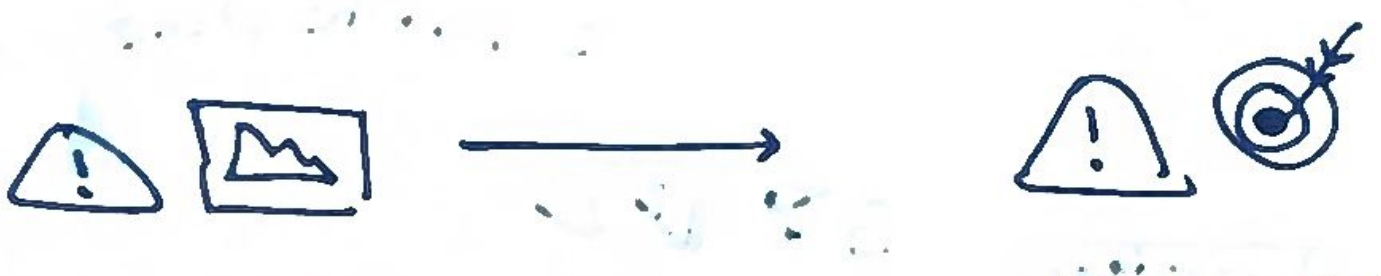

error with generic msg

error with precise msg

__str__ f() 'str'

|| custom f()



match code

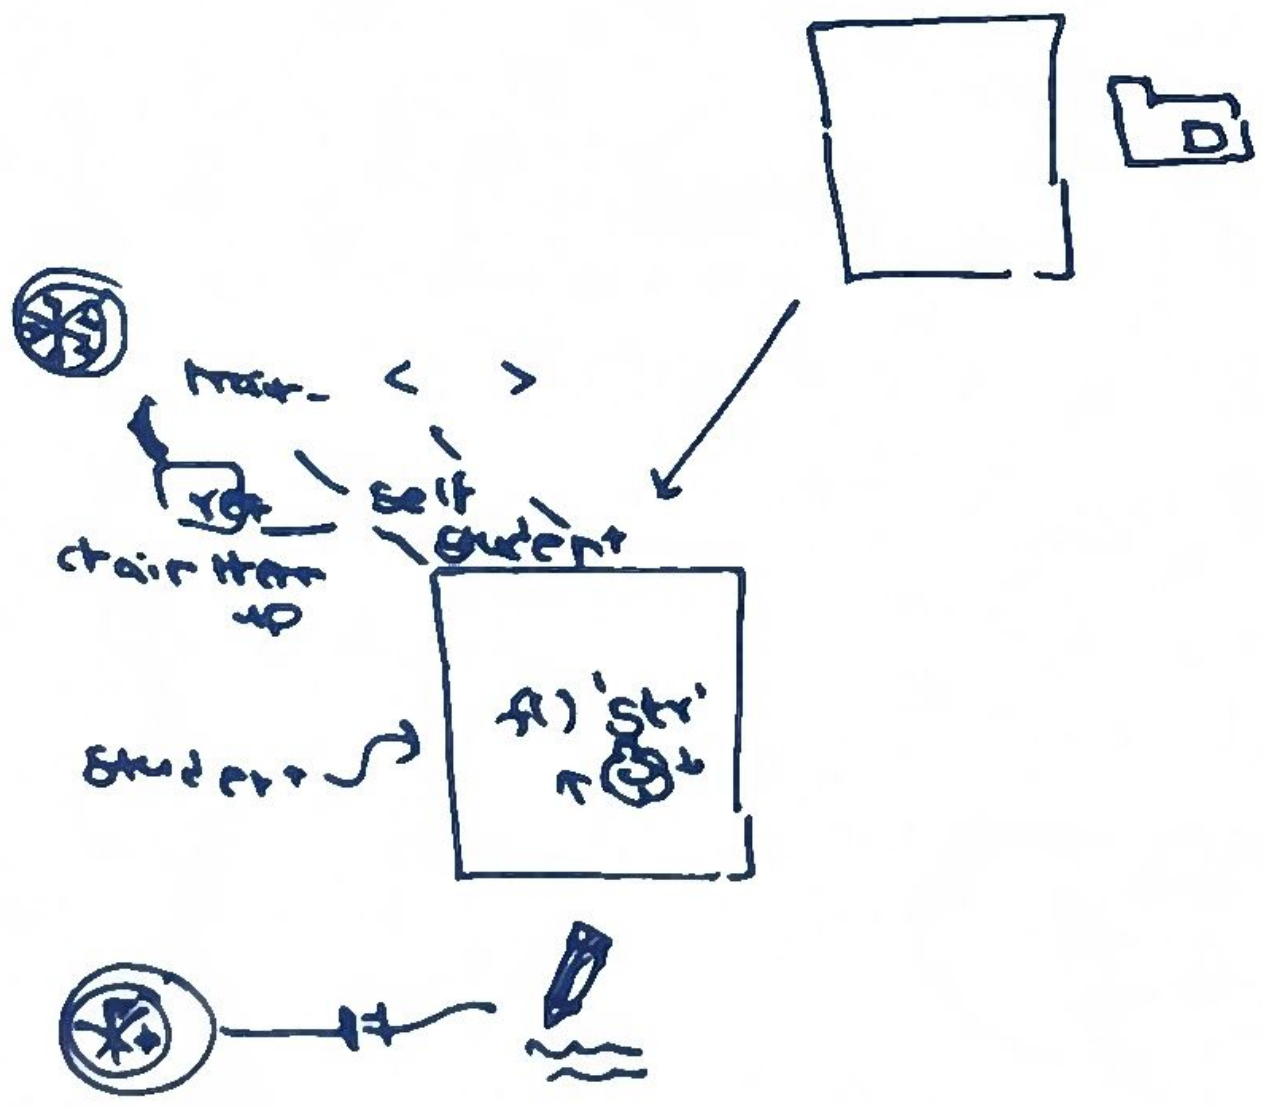

26 oct

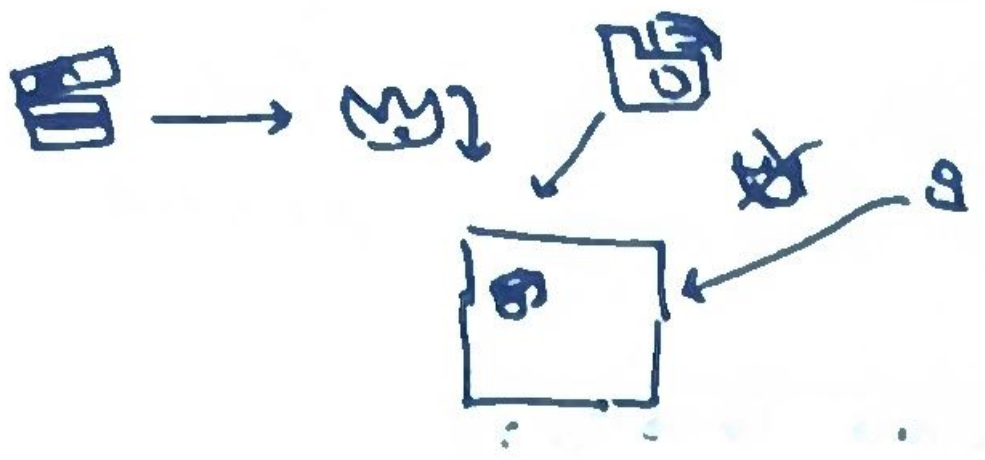

Nothing stop me from get in to the atribute & change it



property

atribute with more defence mechanism
put in place

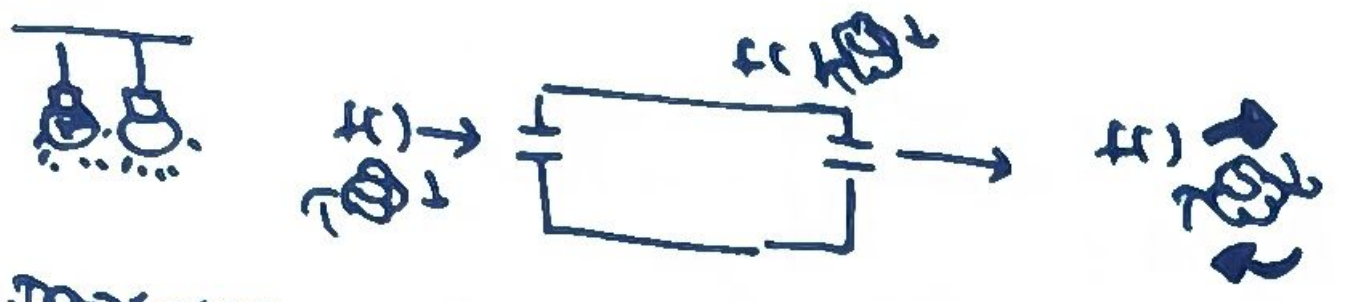

Decorator are function that takes in another fun & modify it

of that get some attribute

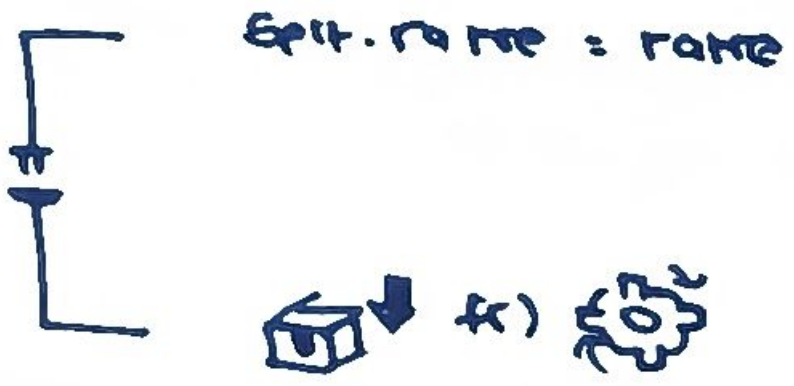

———xx———

Student.house

circumvent the
validation
I put in place

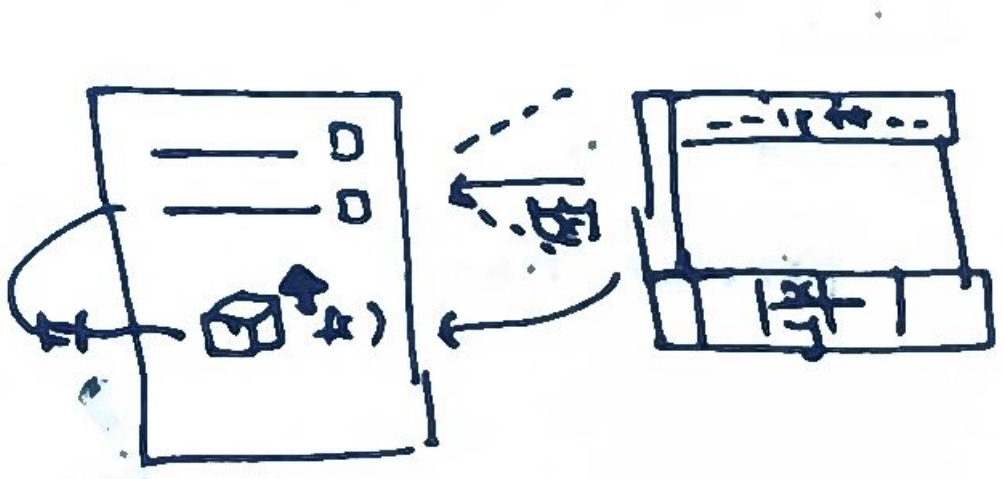

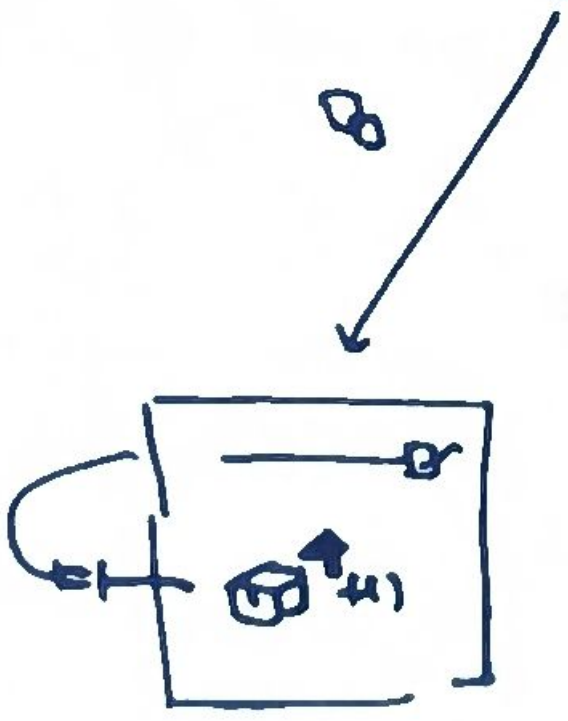

Revision-1

circumvent



To access the attribute you have to go through some function

= (set something

Revision-2

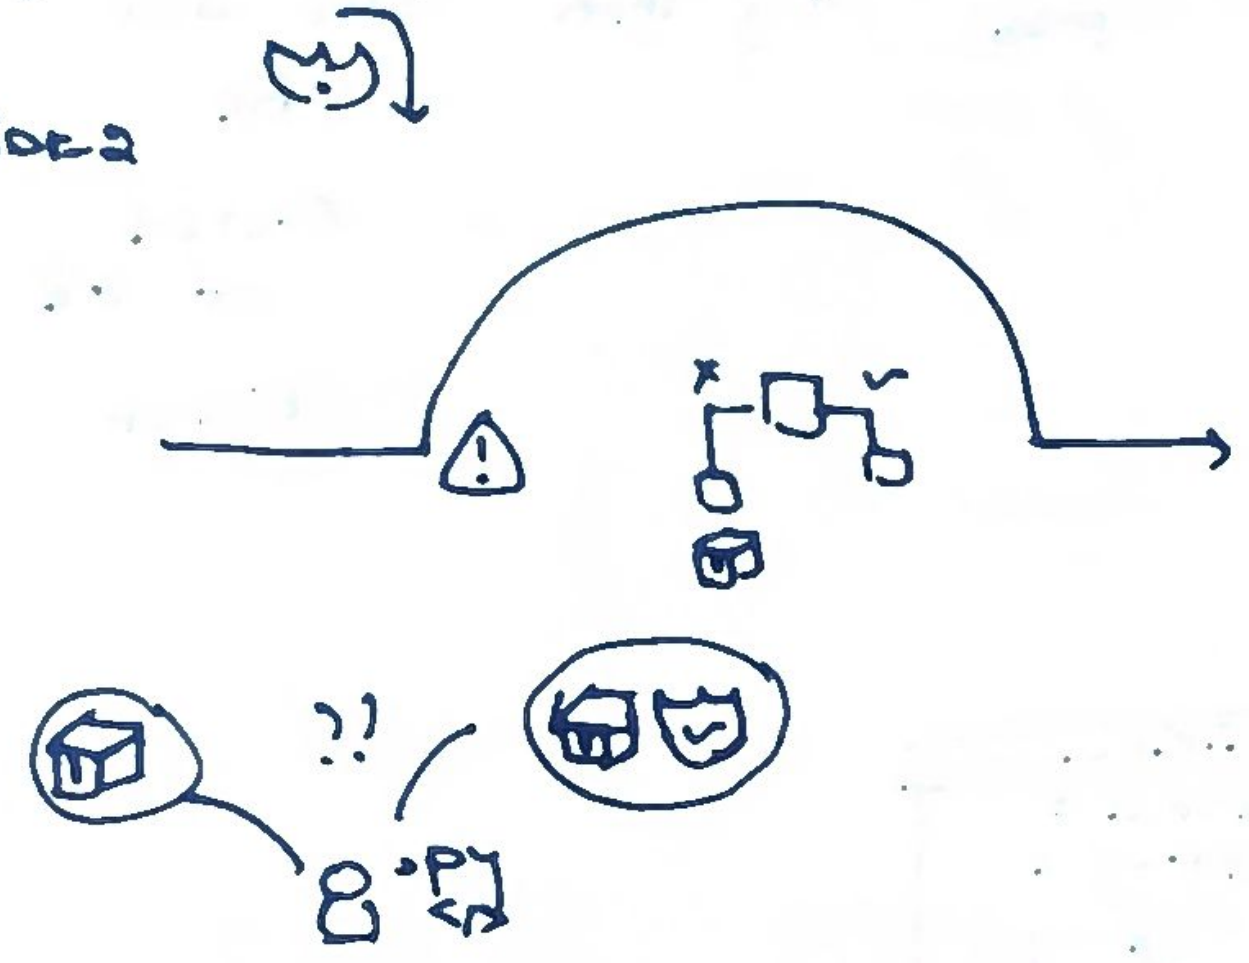

Go through the trouble of setting up validation

I don't want anyone circumvent that

+ upside semantic association of who's who

( ) vs [ ]

- DSFW [Explicit mention]

- visual indicator

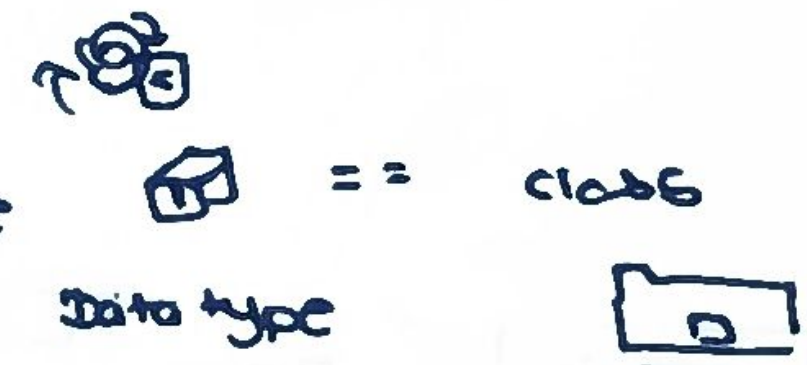

Create == class

Data type custom



custom method

constructor method

f()'str' method

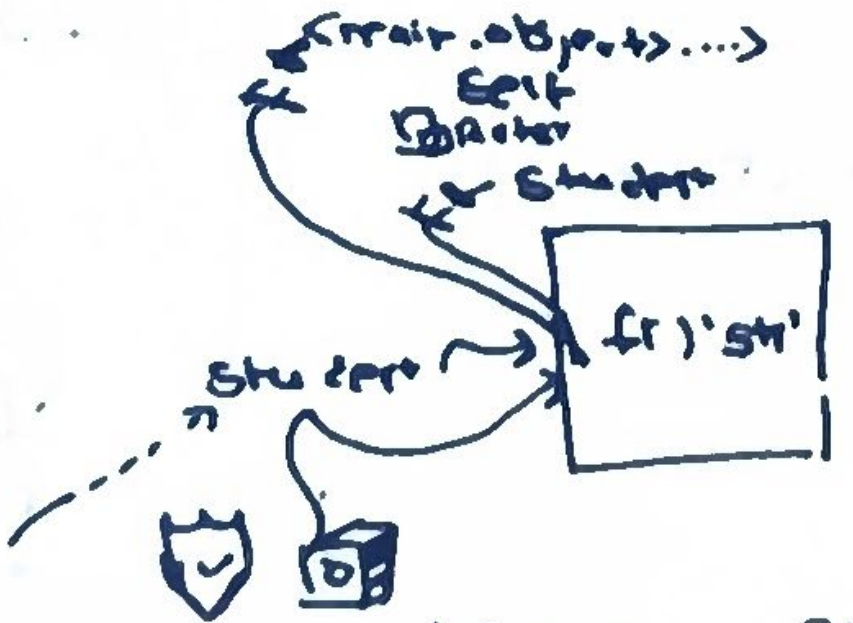

trigger str method when you are trying to access the object

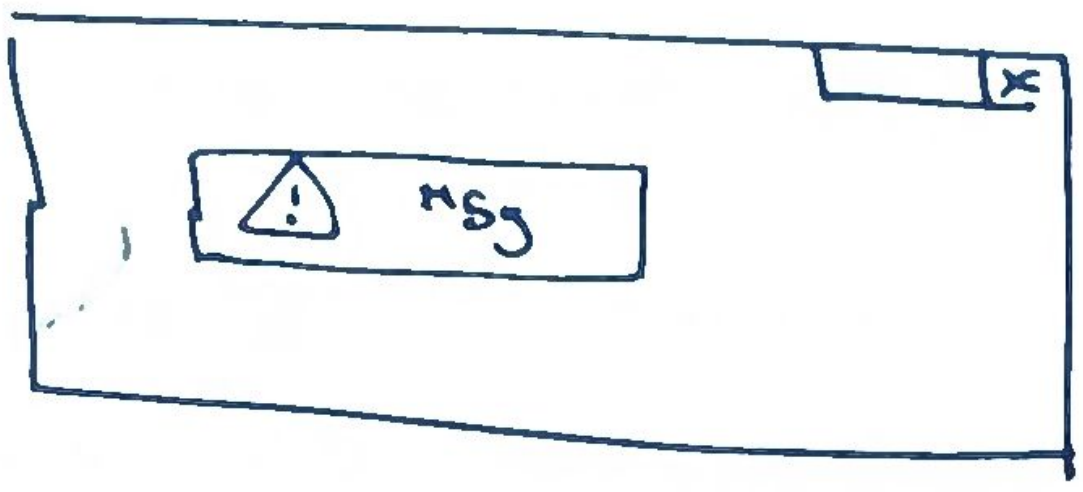

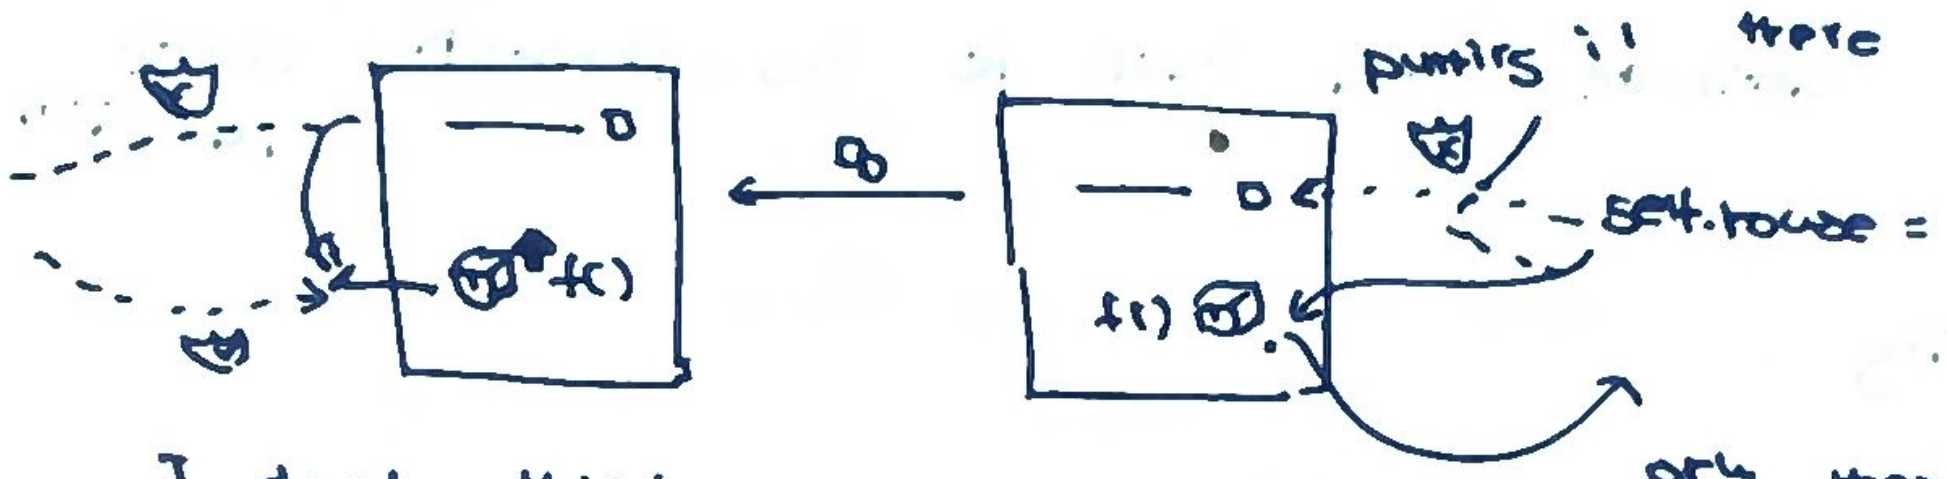

I don't think you have direct access

you have access through me

pass only then value will be checked or the object

set something

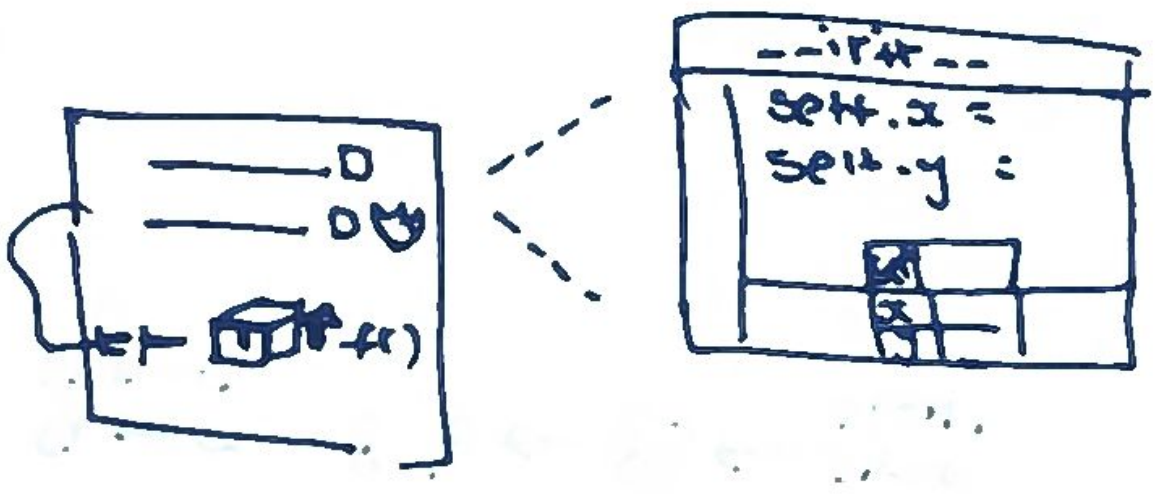

Set a value a variable that is a property you have to go through setter method

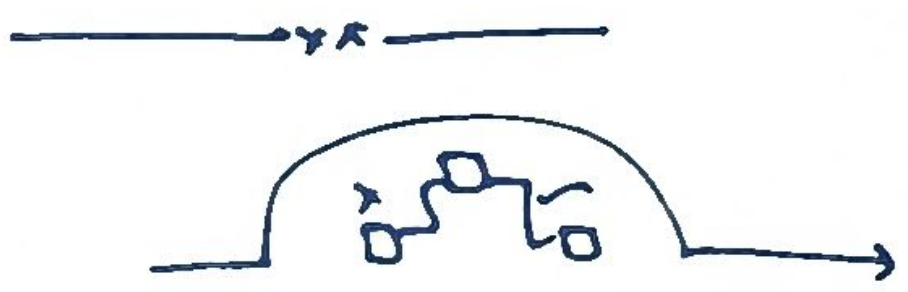

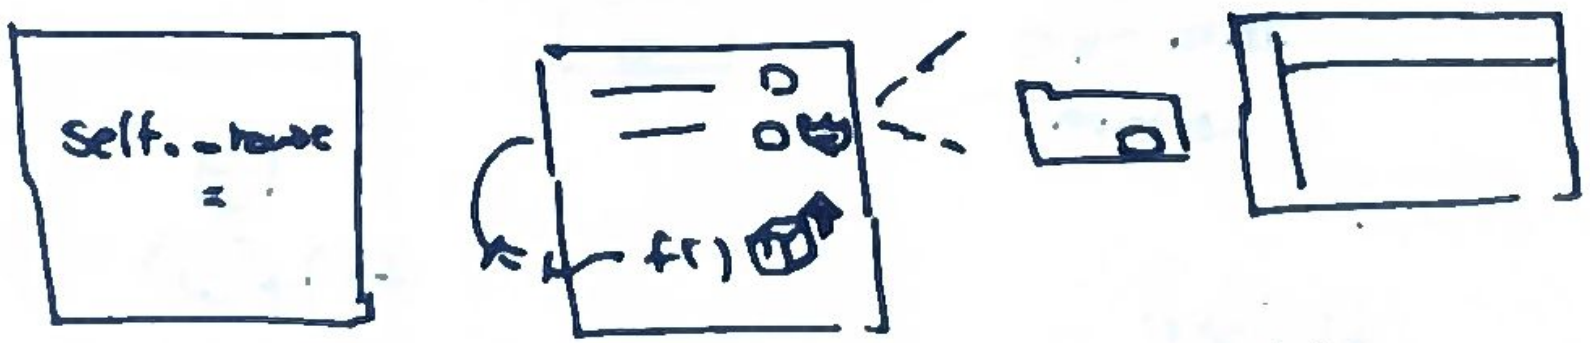

Python .py

_
__ } please don't touch it !!



() vs []

NSEW

f() "str"