Basics

Tupside

( ) vs [ ] vs

visual Indicator

HSFW

1 more values → set of the association → { } dictionary

who's who

□ → □
□ → □
□ → □
ke → hasesh
ste → werly



① class has a blueprint or mould

② object is using the blueprint to create



③ constructor method



④ will trigger 'str' trying to access a object

f() 'str'

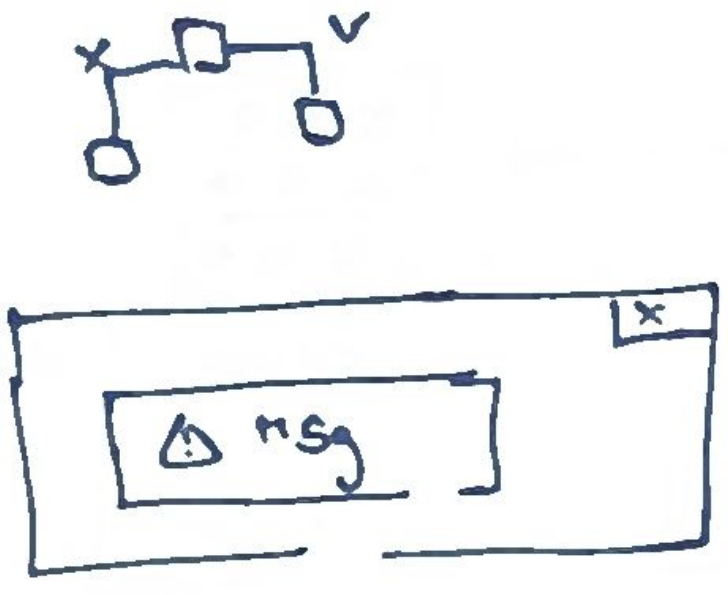

⑤ not wrong enough to exist the program ☒

But enough to warrant an alert ⚠

INTERMEDIATE

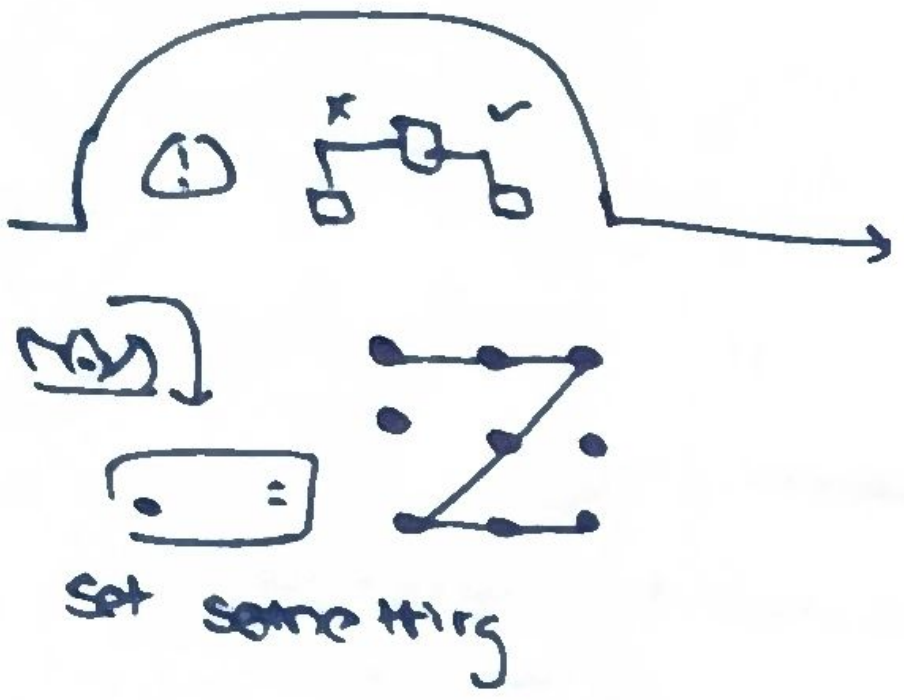

set something

I go through the trouble setting up validation.

I don't want someone to circumvent that

attribute vs property [attribute with more defence mechanism in it]

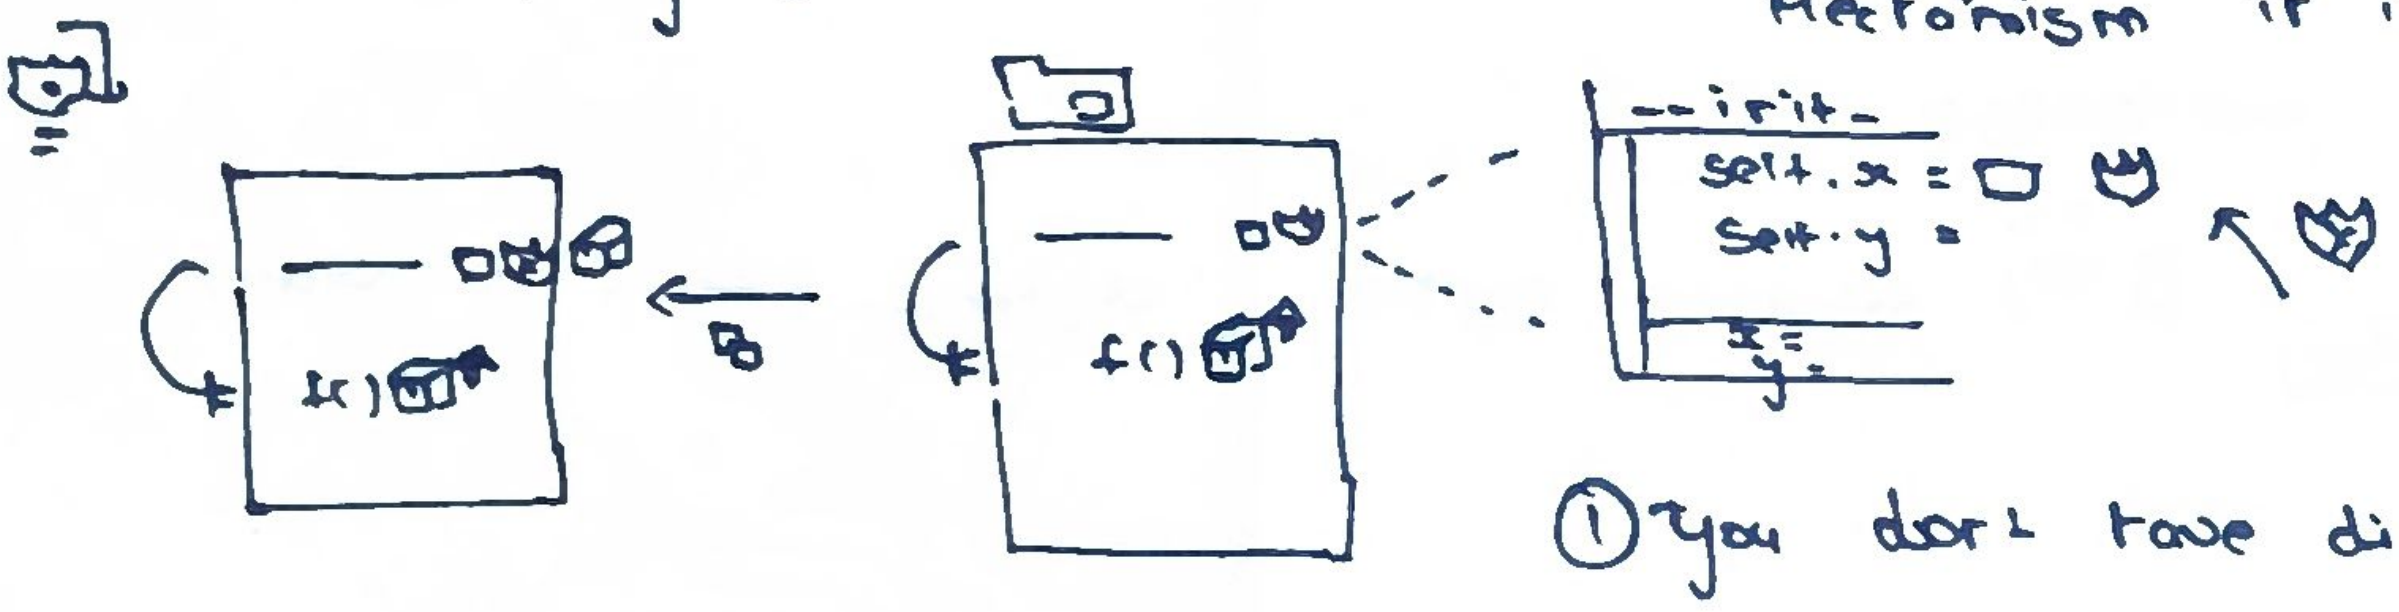

① you don't have direct access

you have to go throught the setter

f() function

② property vs f() function

collide if they have same name

③ solution

self._house = house

ⓐ



Bugs or Horror System

when u see self.__name

advanced



class has a "Blueprint"

v/s



class has a "container" to bundle up related data & functionality

class

vs





Scalability

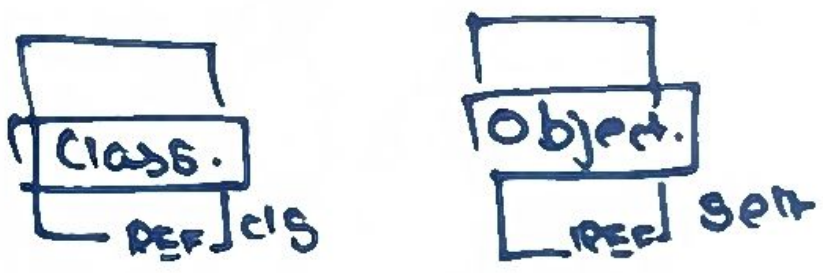
Class.
REF cls
Object.
REF self

way to organize function & data

Operator overloading



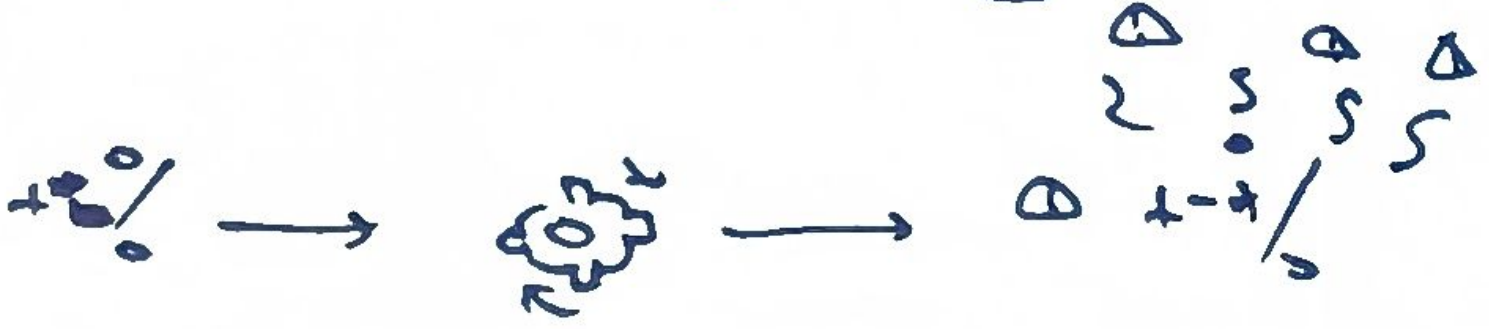

taking the built in operator & make it behave like how we want to behave

* * *

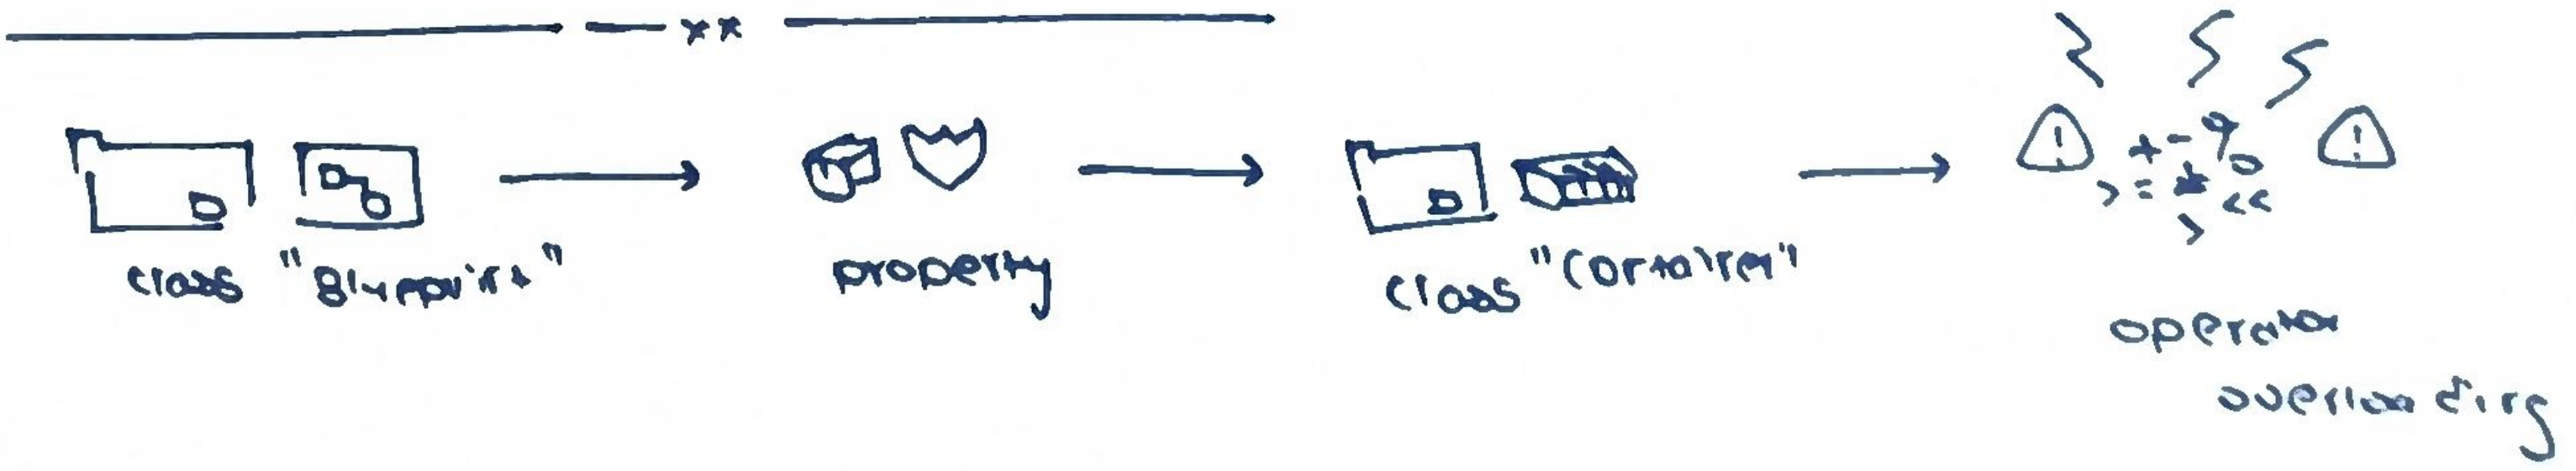
class "Blueprint"
property
class "container"
operator overloading

OOPs CS50p ,... 28 oct 25