



abstraction :: Hides the unnecessary details





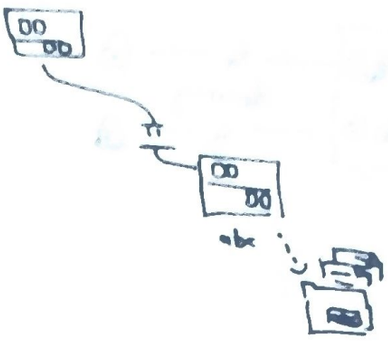


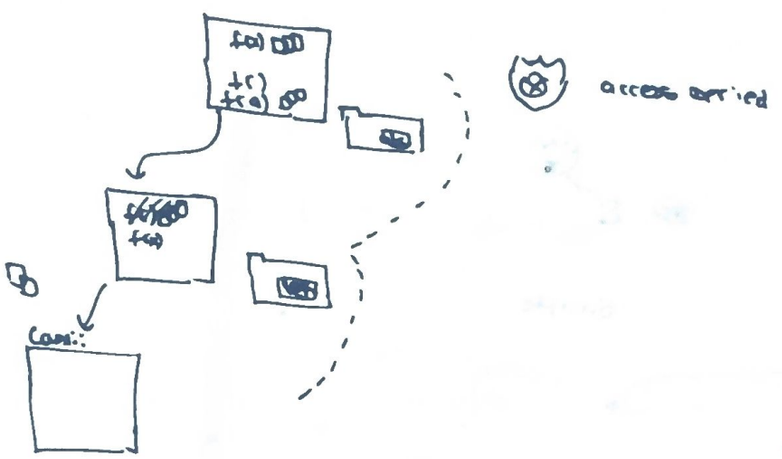


Car1. f(x) ✓ Vehicle ← abc


Car1. f() ✓ Vehicle ← abc


Car1. f(a) ⊗

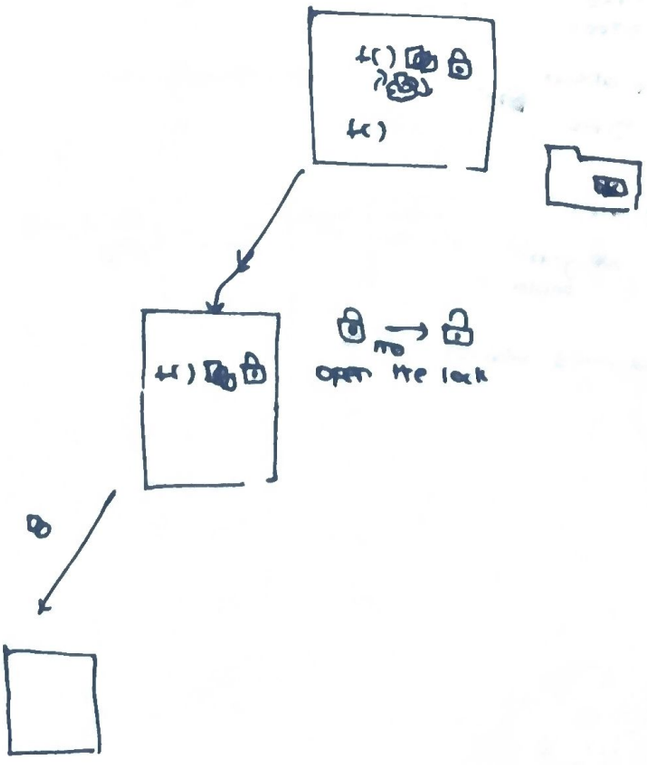


abstraction

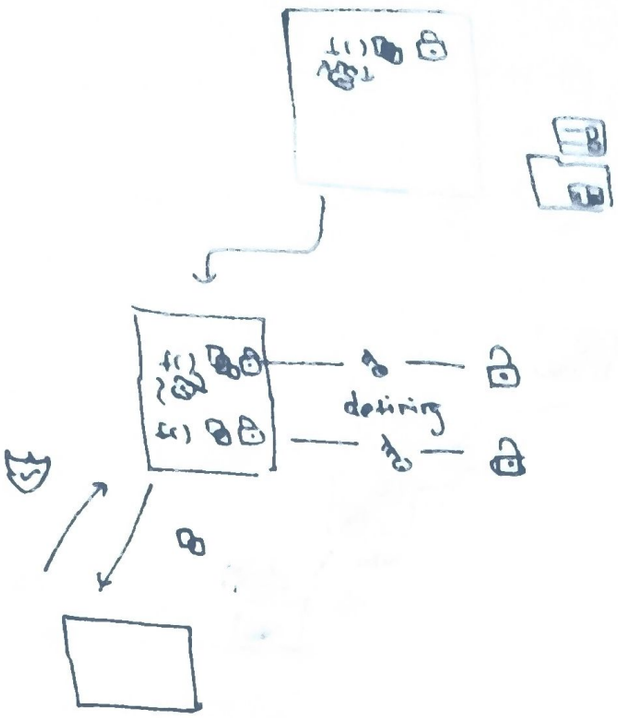

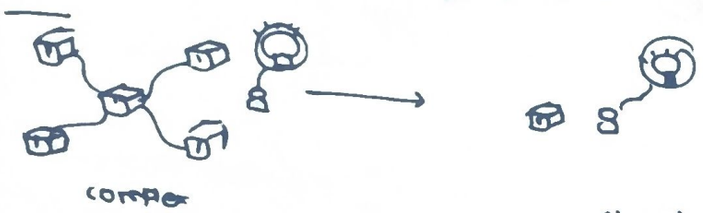

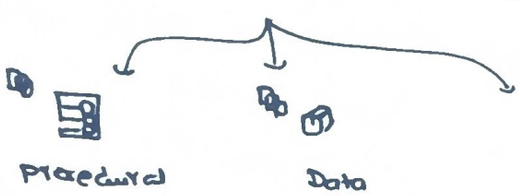


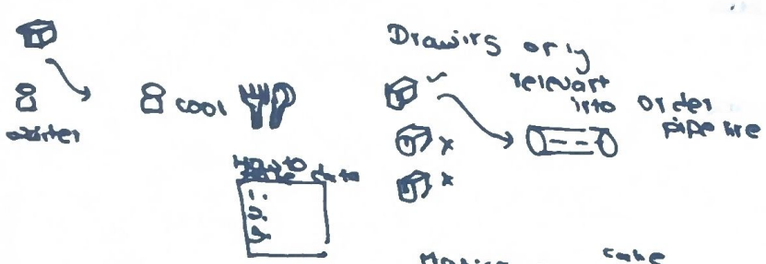


Describing an event that has specific action / instruction


- only care about file & type
- who you are? what do you from



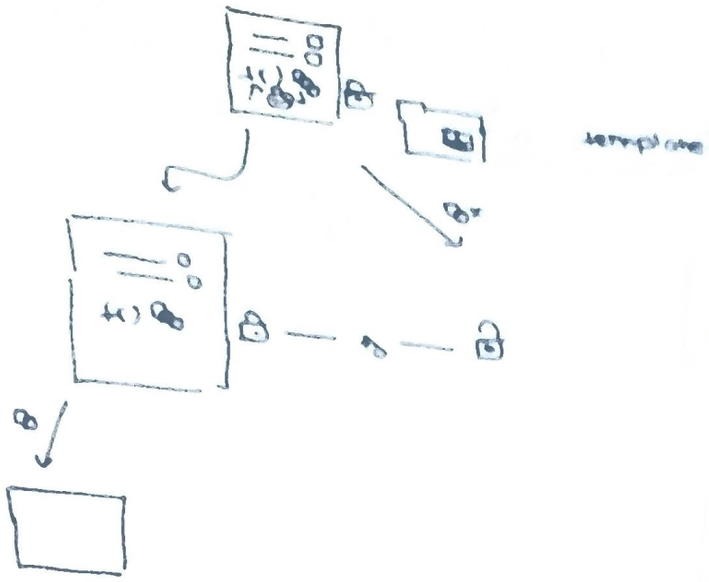

Static method

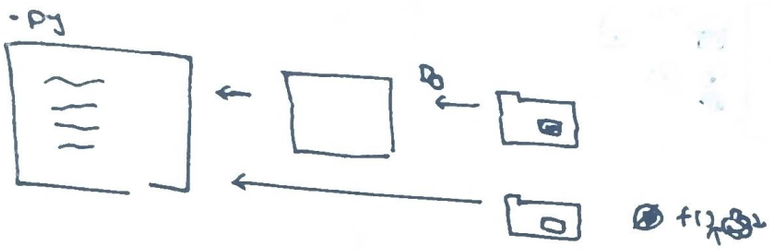

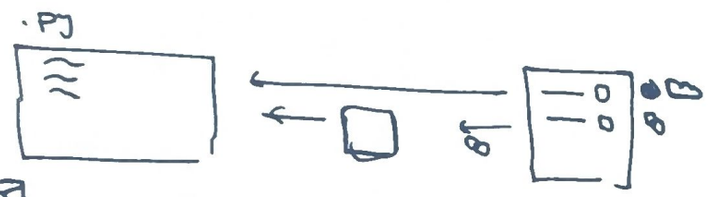


vs

class vs instance variable






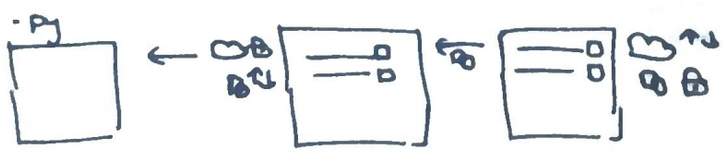


f()
Static method vs Instance f() method



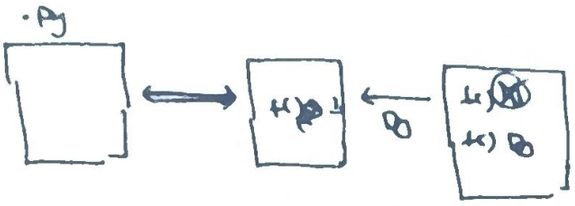





vs

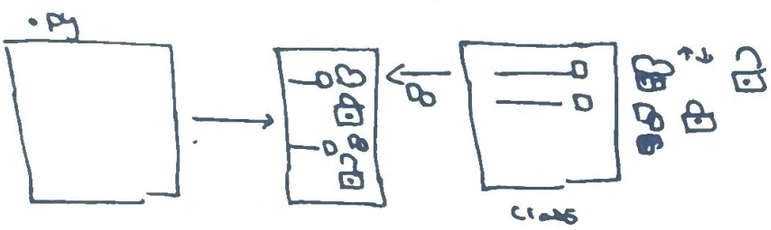


xx Revision - 3


3 abstract class & (template) abtract method

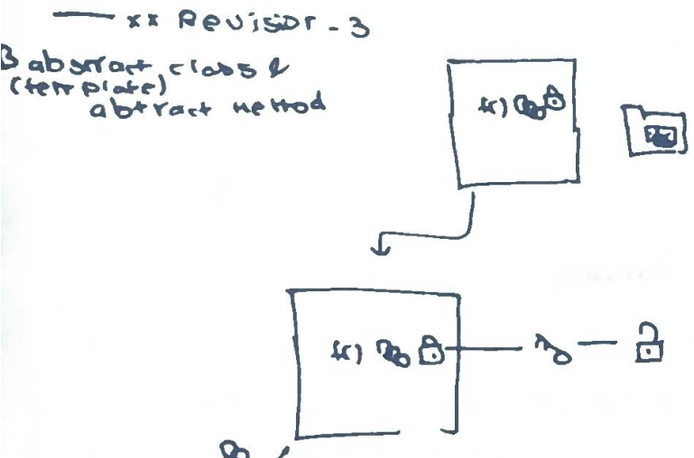


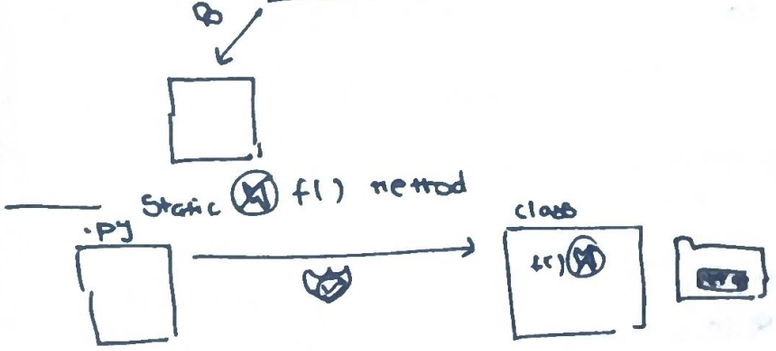

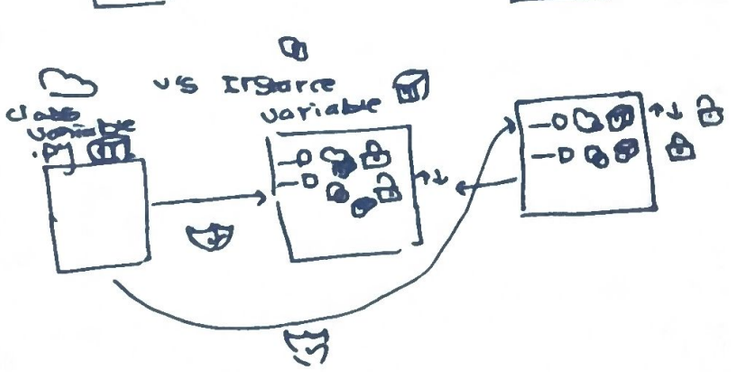



23 Oct

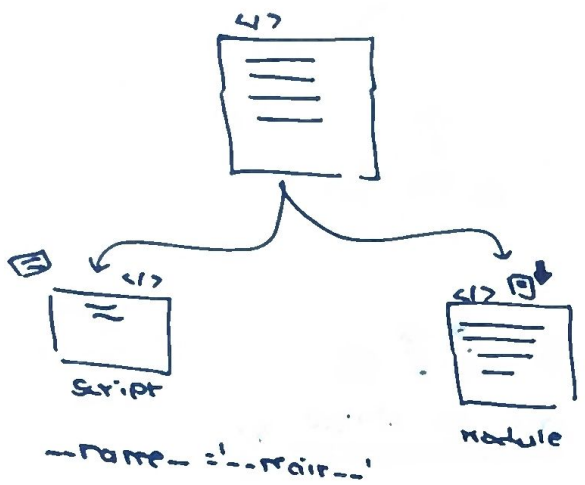

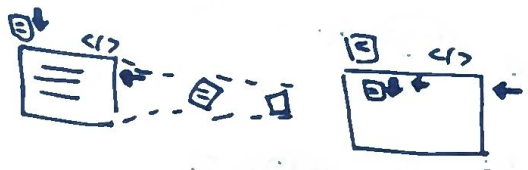

Revision -

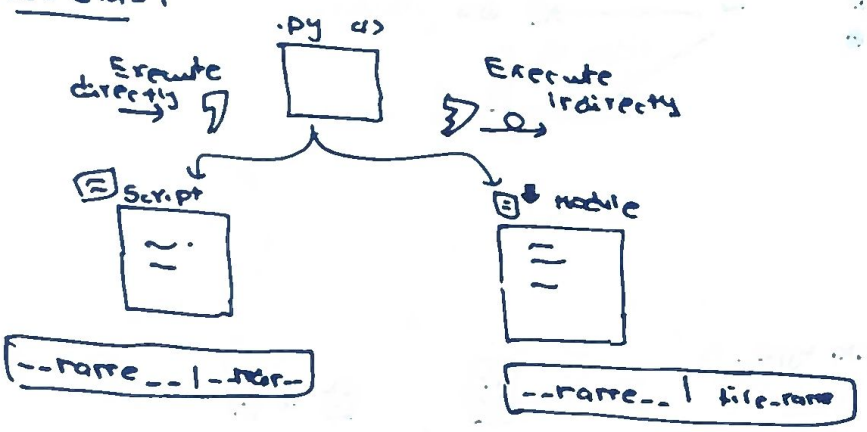

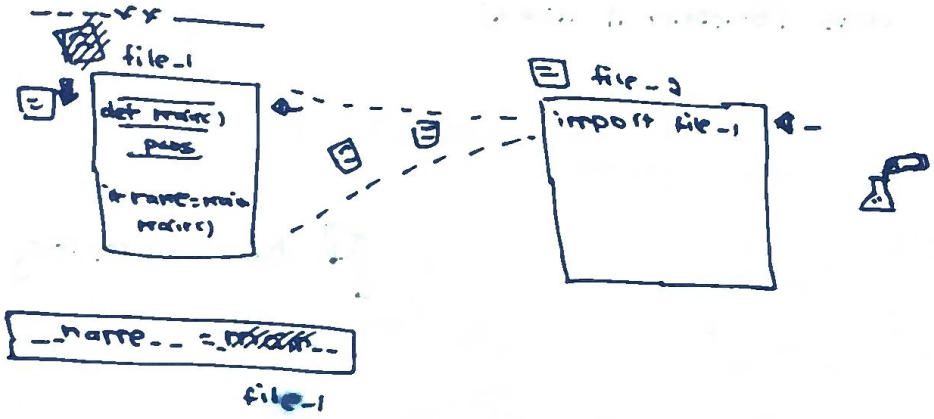



CSBOP

Day 1

24 Oct

[ ] vs ( )

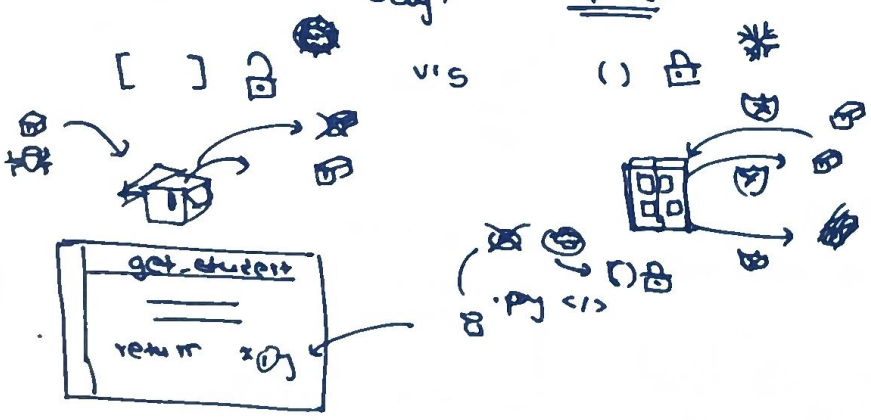




↳ when you want the value in the variable to not change

↳ why would you use a data type, allows

[●●▲]

(▲●●)

Revision

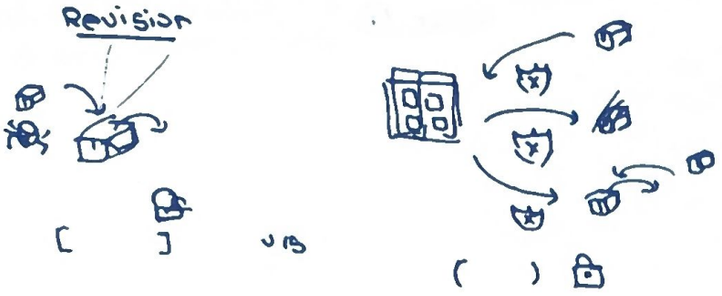

[ ] vs ( )

Number = (a, b, c)


↑ values stored in variable not to change *.

[ ] visual indicator for list

( ) v.i for tuple || access

For you use [ ] *.

more values →




DE DA who's re

↕ upside

[ ] ( )

slippery slop


or asking for specific Data type.




class (Blueprint || mould)








object (using that blueprint




hard something


36:00 min

Revision - 1

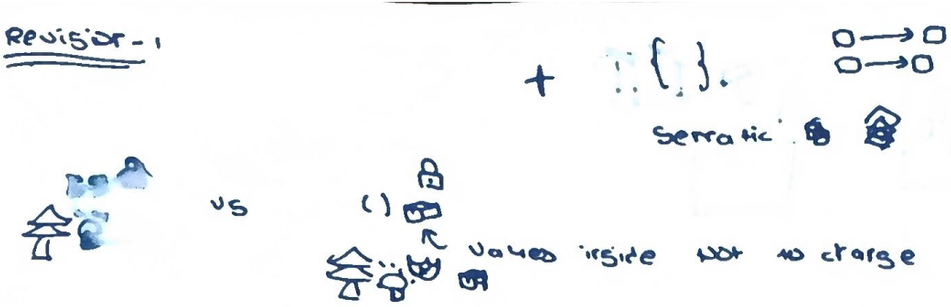


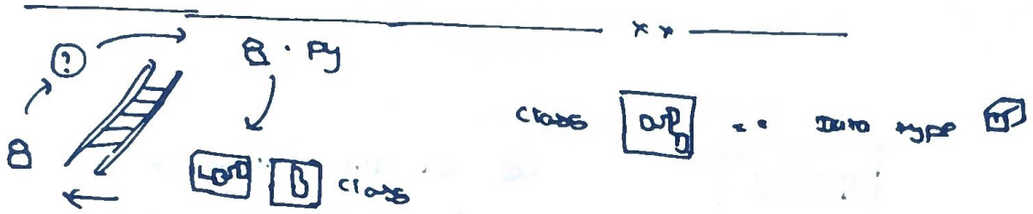


25th October

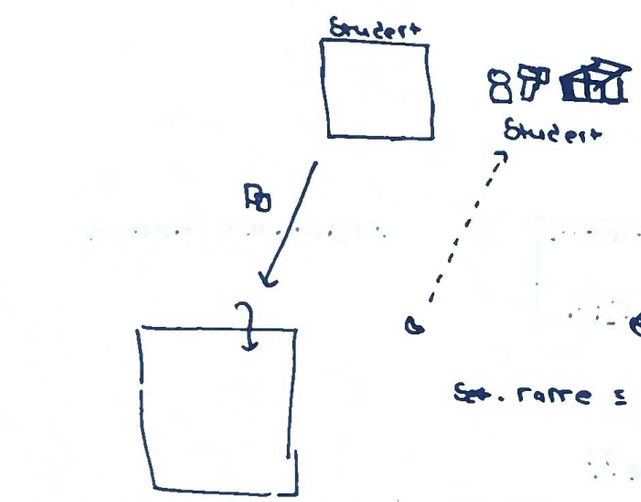

Etching variable into otherwise empty object

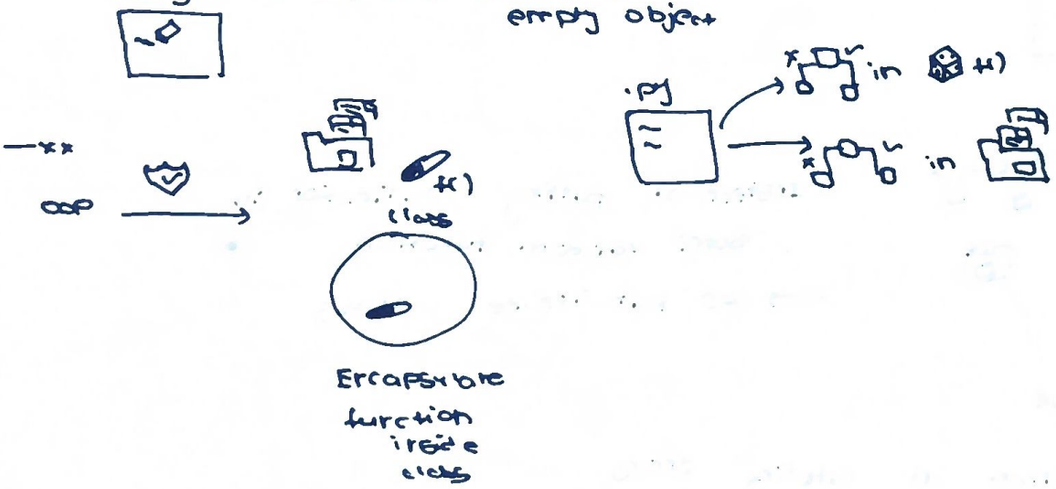

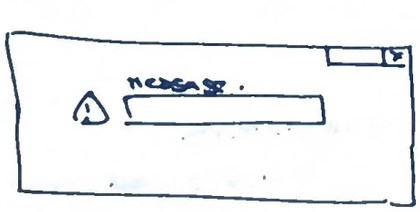



not wrong enough → error


but wrong enough → alert



by +|≈| in ⚠



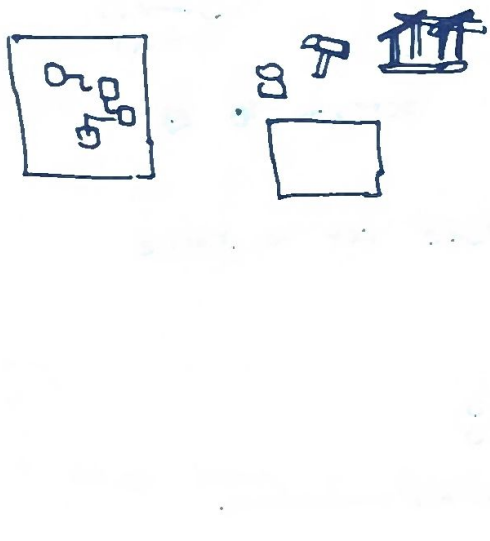


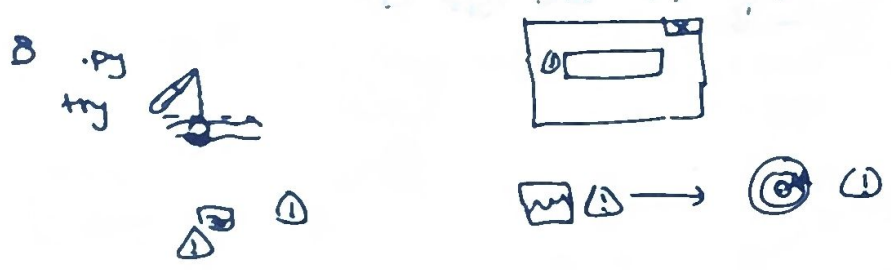

Ok I'll handle it


1:02:00 min

Revision xx_1_xx

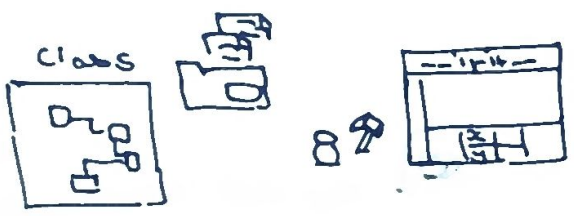

class

constructor method

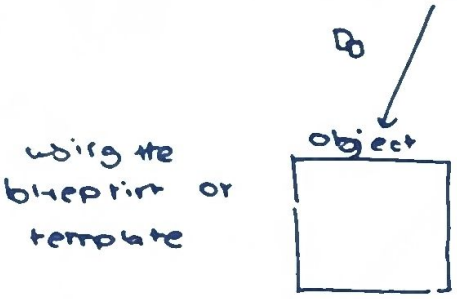

object

wiring the blueprint or template

Self.name ??



Instead of putting validation in some random function

→ we put inside class



Raise

- assisting python in catching errors



error with generic msg

error with precise msg by passing arguments inside error

26 october ①


[ ] list

us


return

() tuple

NSFW

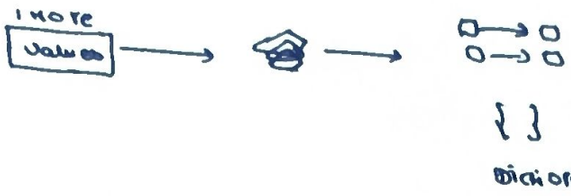



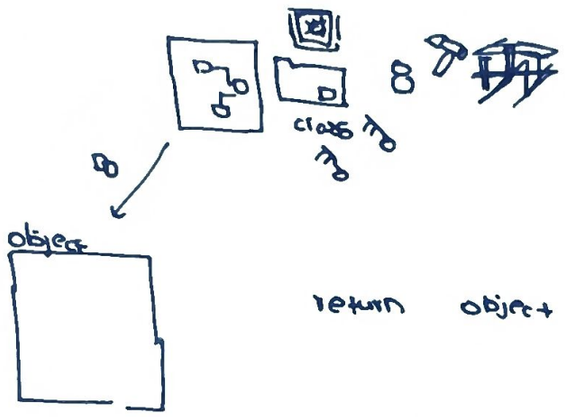

return object

Raise B.py Helping Python to catch error



error with generic msg



error with precise msg

Not wrong enough → exist

but wrong enough → alert