
15 October Day.


Functions



Readability || understanding

Hard to collab

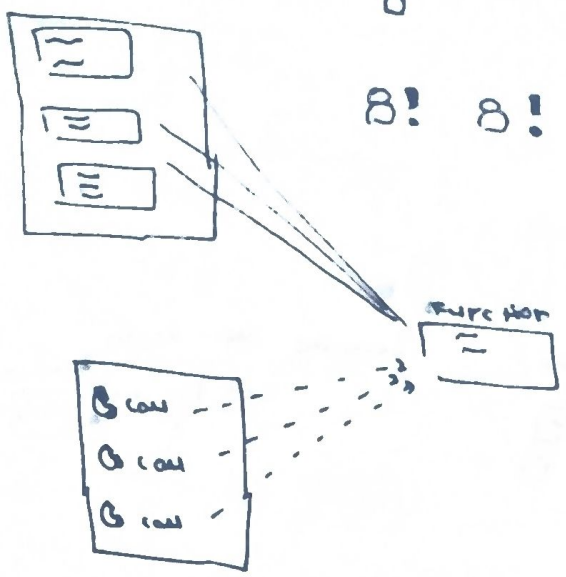





f() f() f()





Modularity


#1] Built in


#2] Standard library by Python team


#3] Third party by community

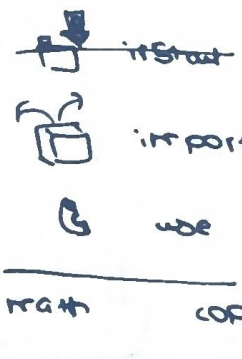


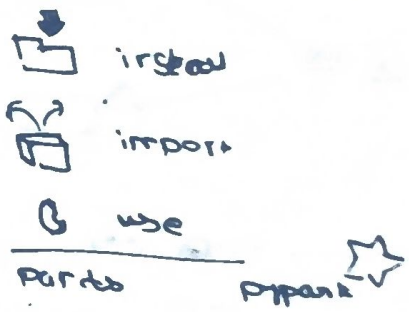


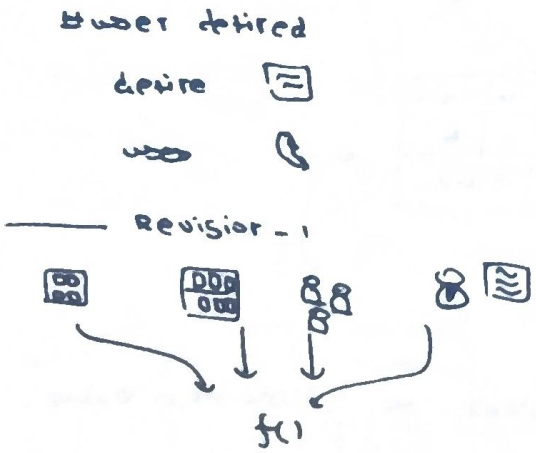


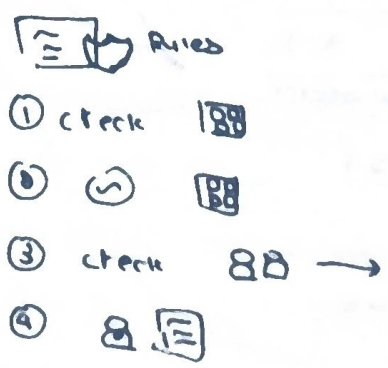


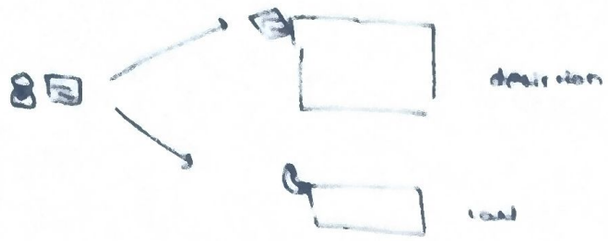


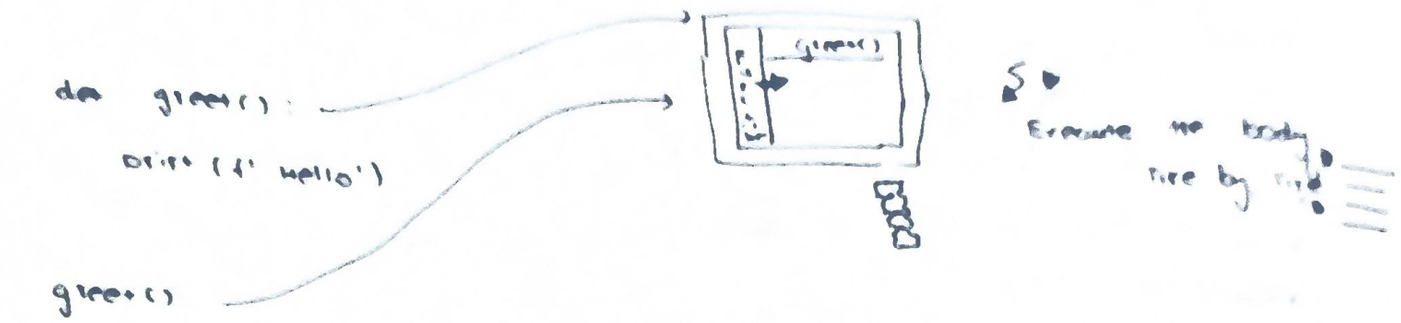


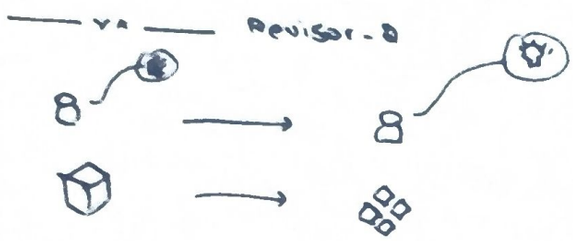

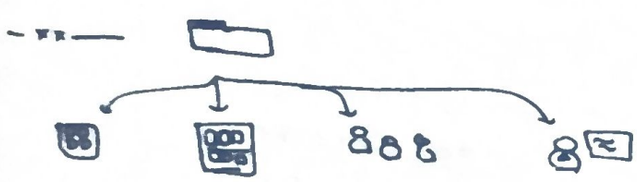

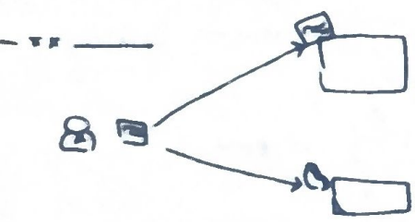

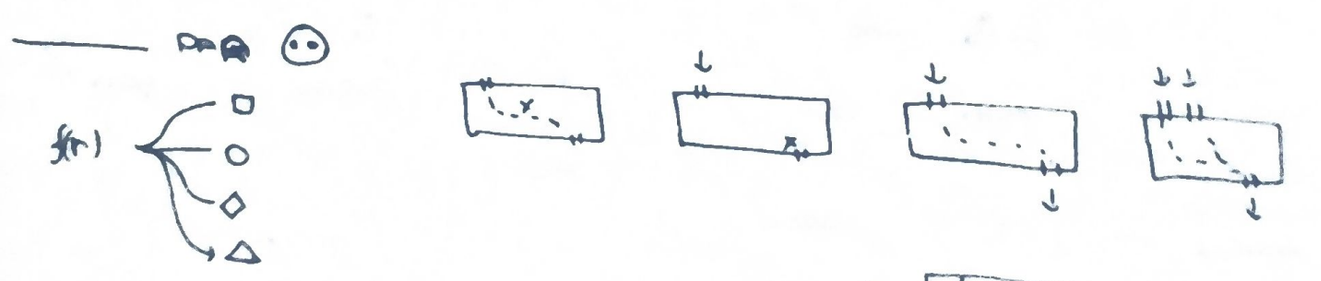


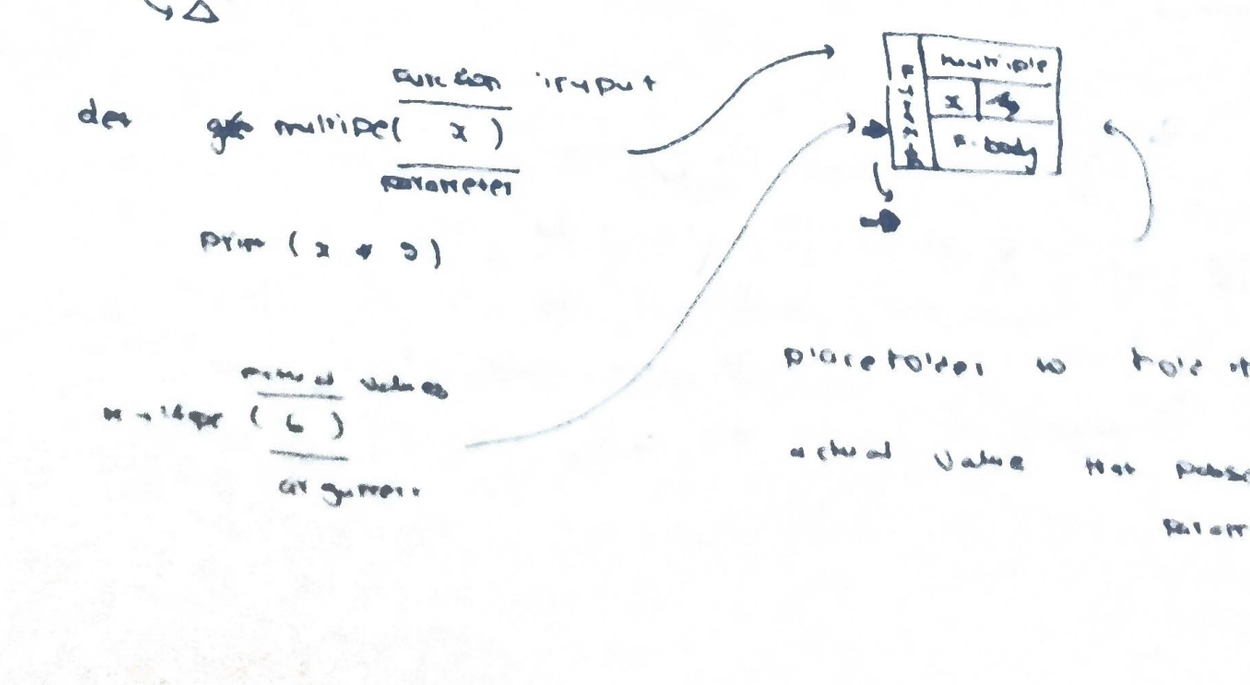

placeholder to hold the value

actual value that passed to parameter


fn( )

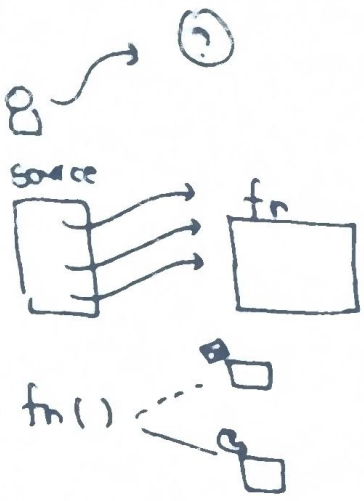

def multiple (x) :
p

multiple (6)
a


Revision - 3...

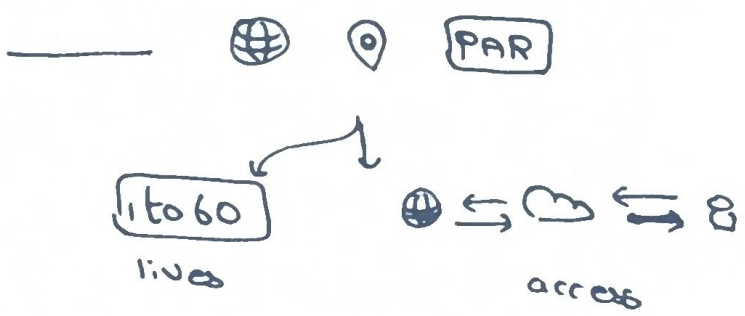



f = 2


def multiply - factor (x) :
    y = f * x
    print (y)


multiply - factor (3)

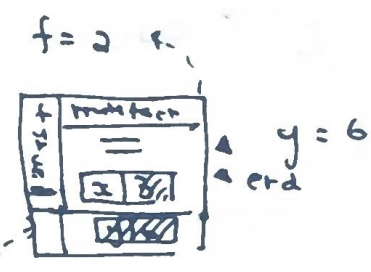

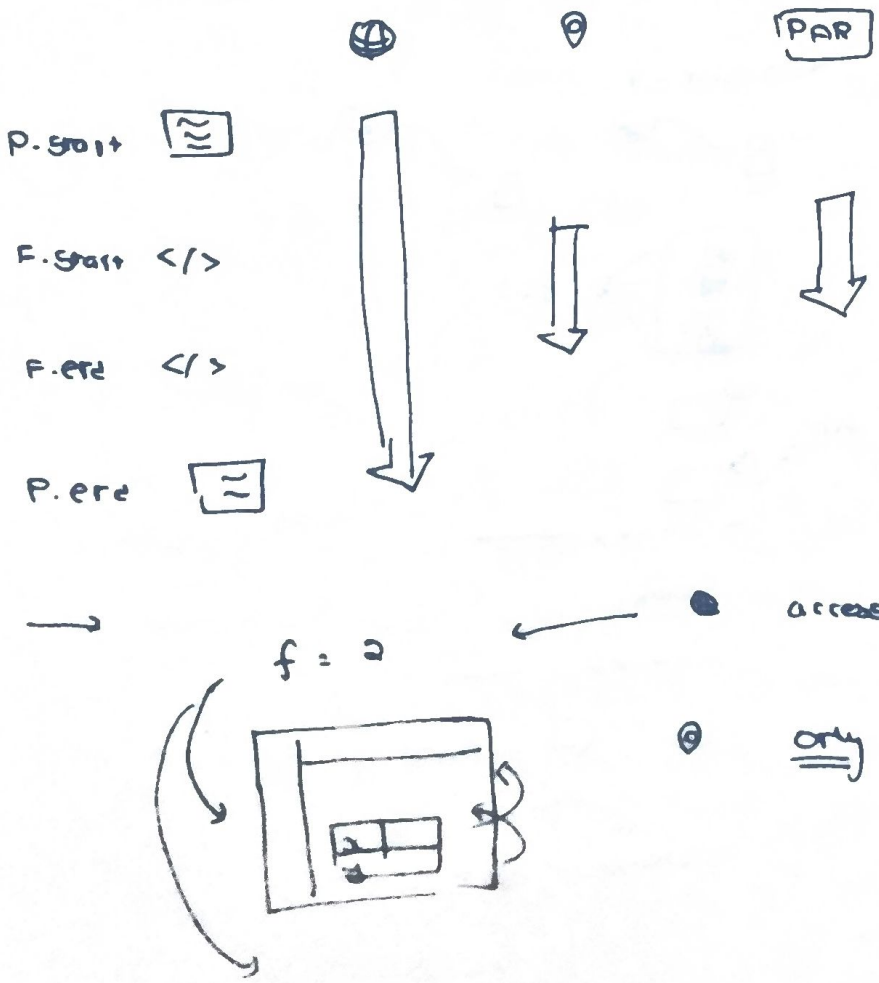


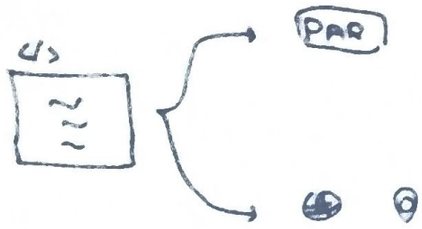

PAR




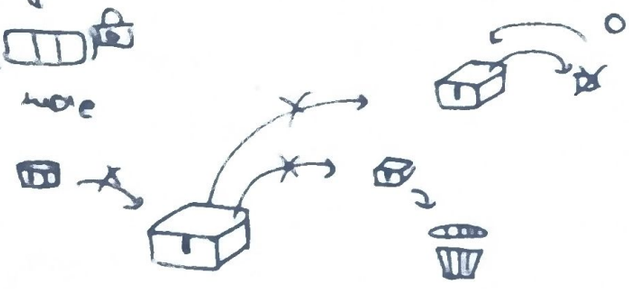

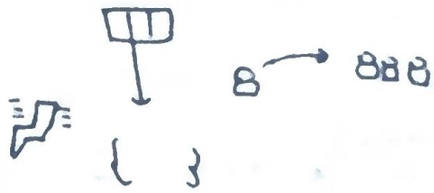



Set

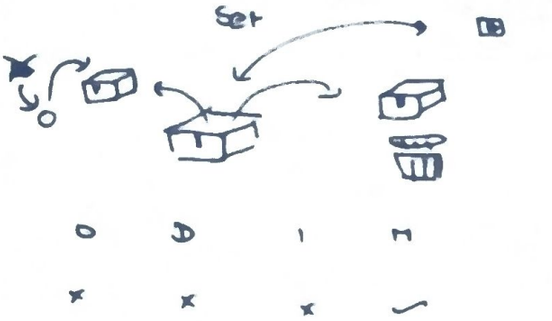


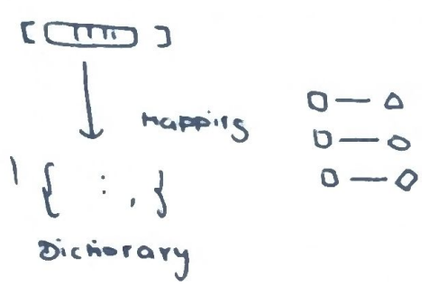
mapping
Dictionary






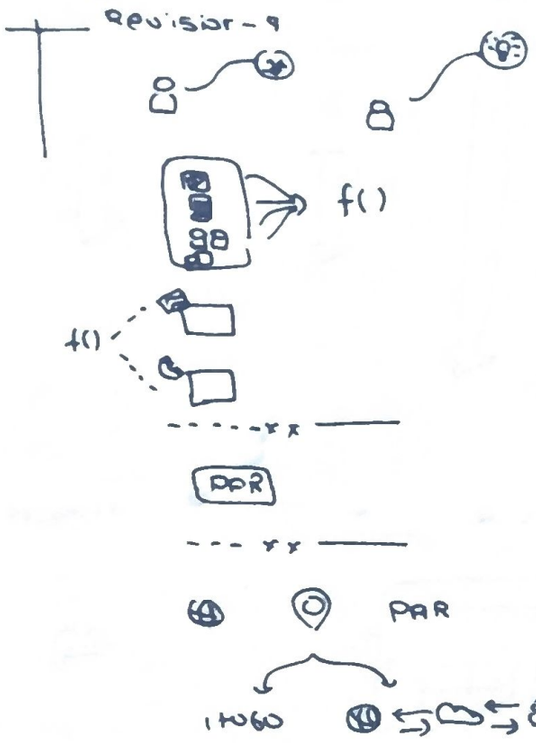




Revision-9
f()
f()
PAR
PAR


dir()


15 Oct Day 2

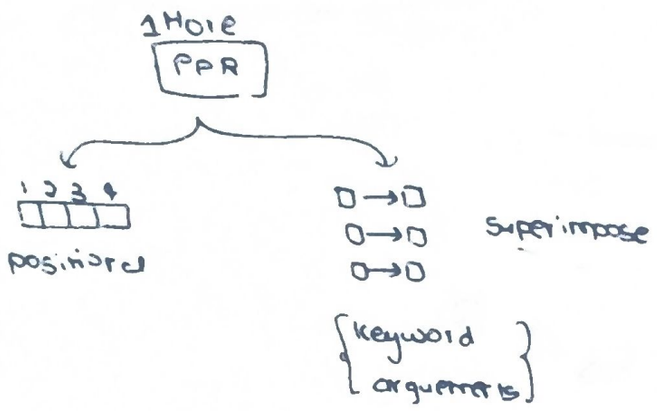


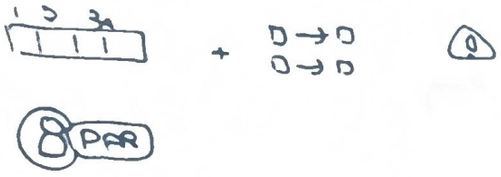




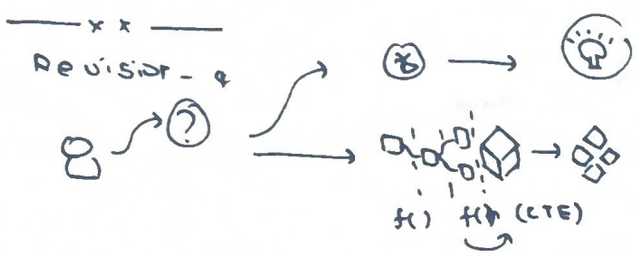

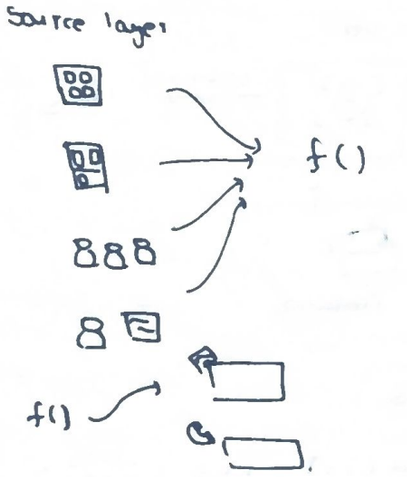

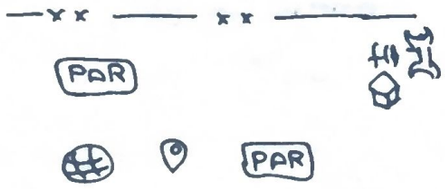

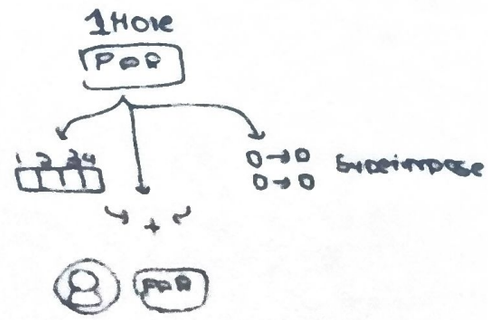



Programming language (set of instructions) man

Natural


High .py .js

low assembly

Machine 10100, Binary
00010

easy

Hard

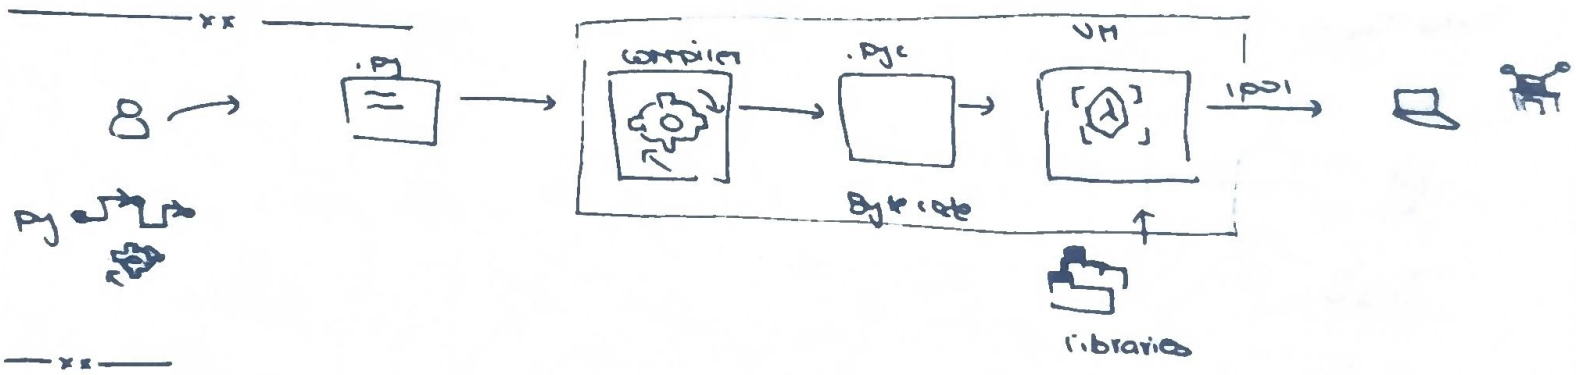

.py ?

powerful & simple

```
for i in range(0,5)
    print i
```

```
for (i=1 ; i<5 ; i++);
    print.is.sys (i)
```

Everything all at once & Everywhere ?

web

automation

DS


huge community → libraries

Tutorial

project


#1

High in demand

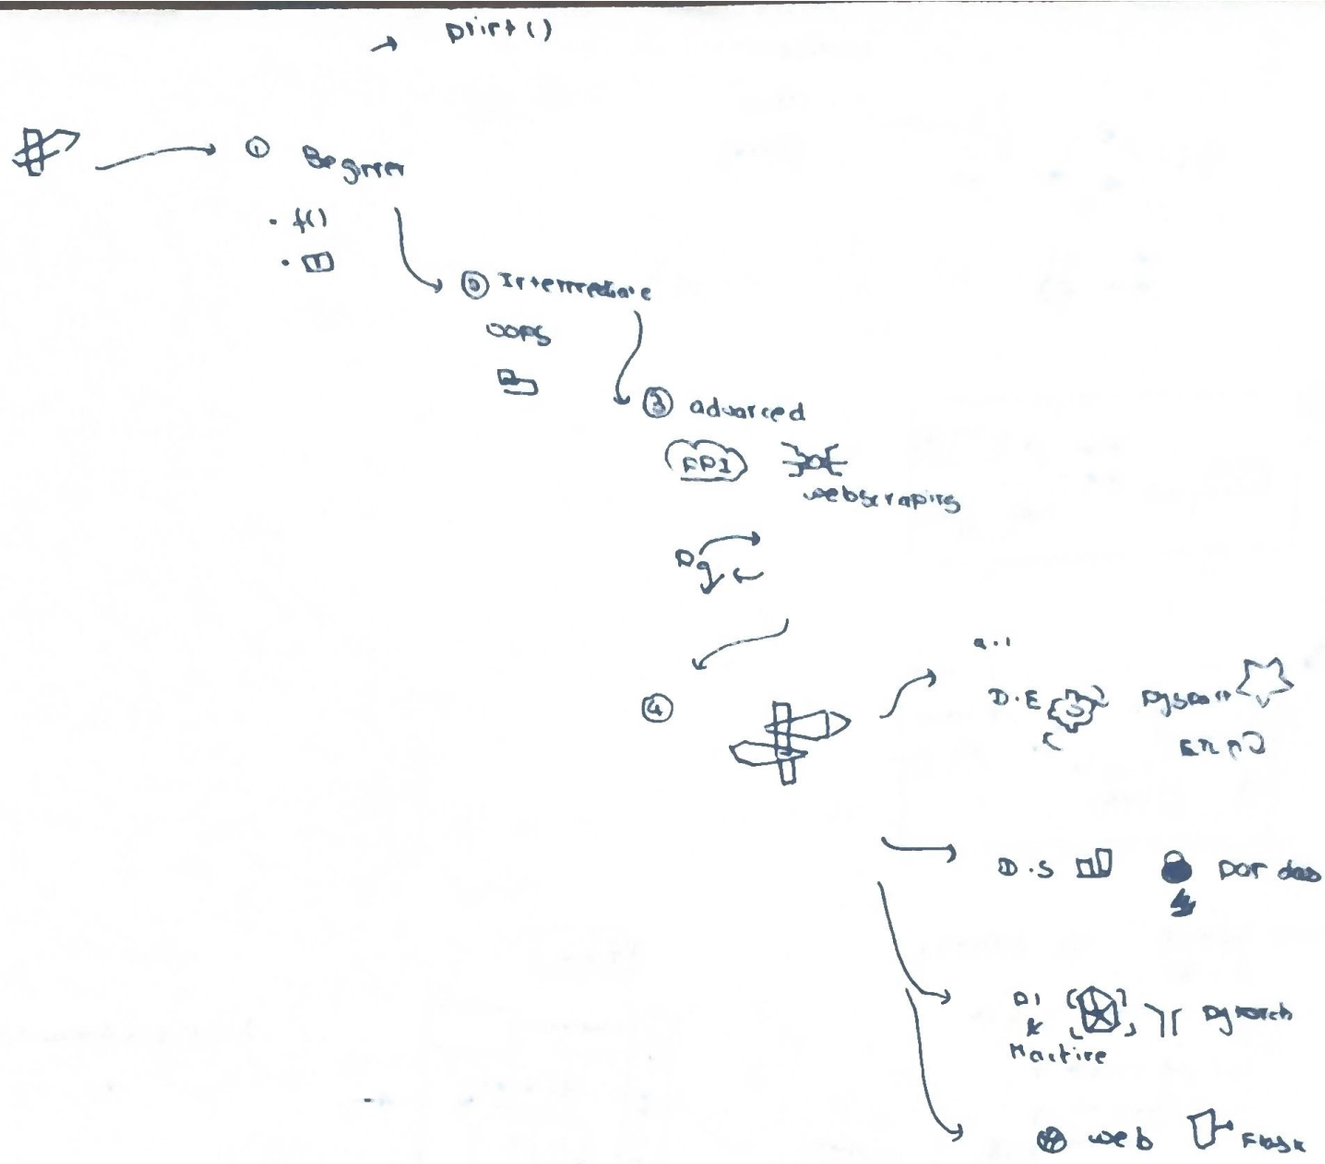



— xx —


def fun

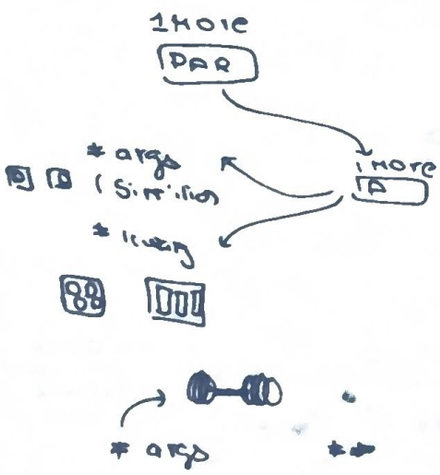


— Revision -1

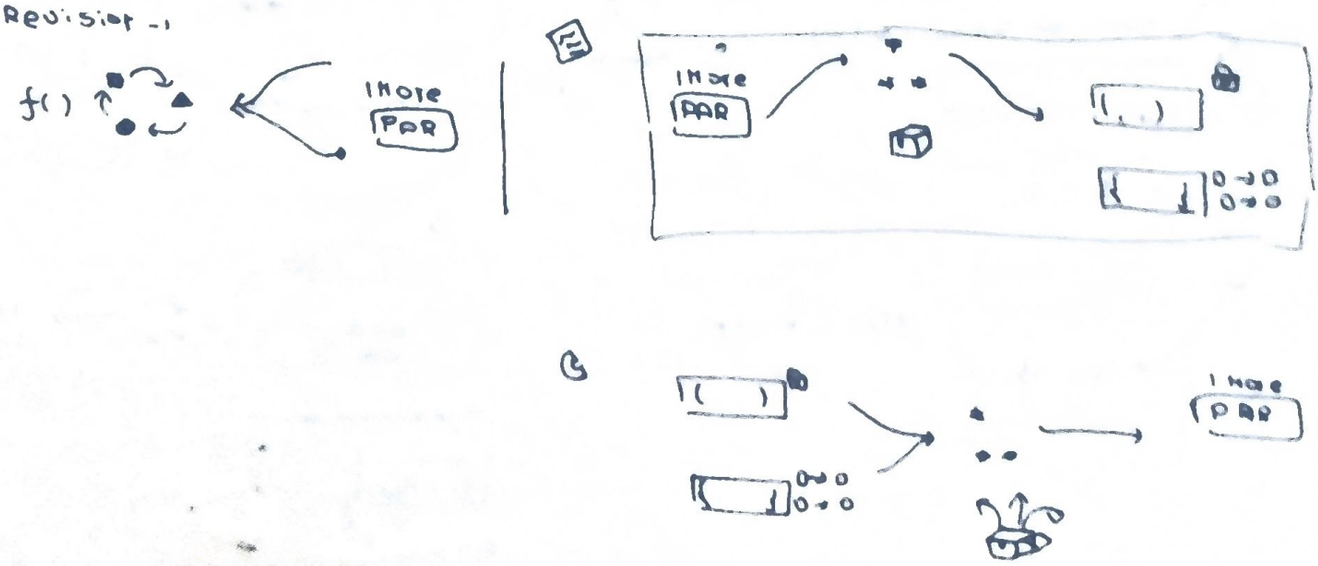

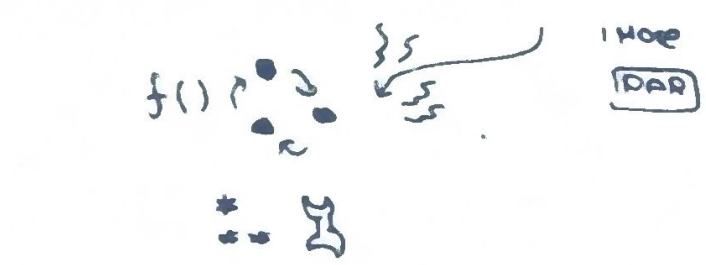


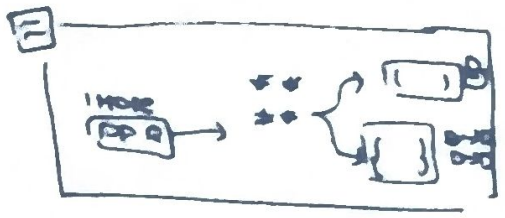

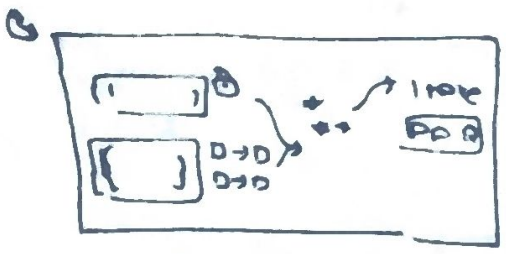



— return vs print()

```
t = 2
def multiply ( x )
    y : x * t
    print(y)
    return y%
multiply ( 3)
```

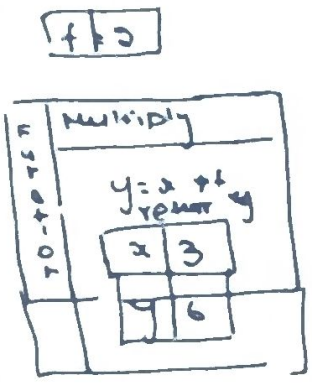


None (default)

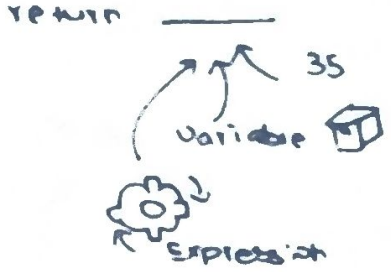

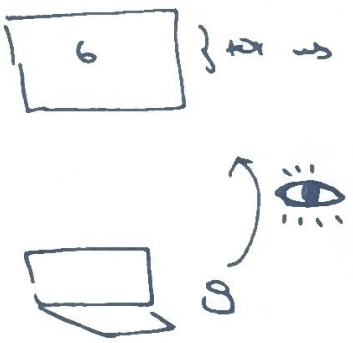



Revisor - 1








Revisor - 3

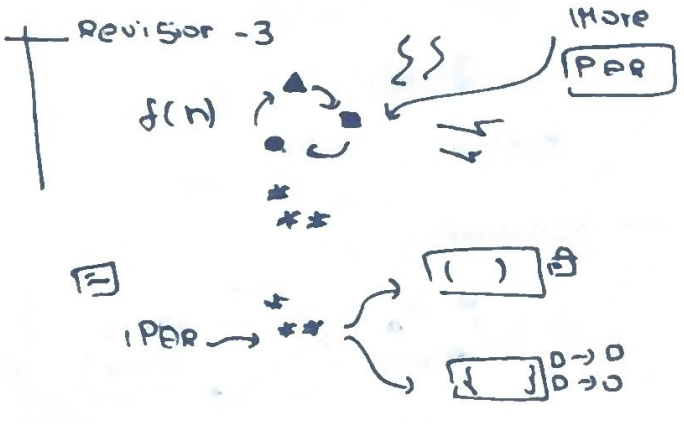

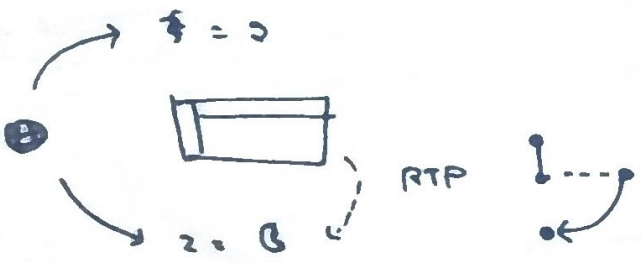


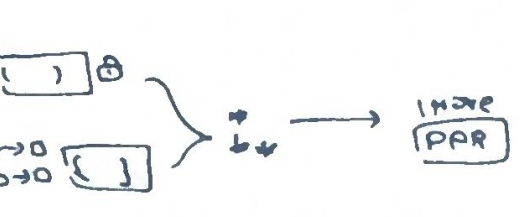

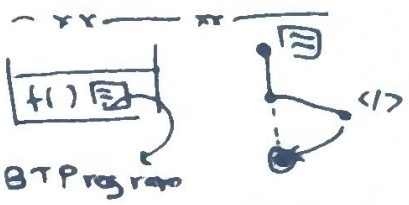

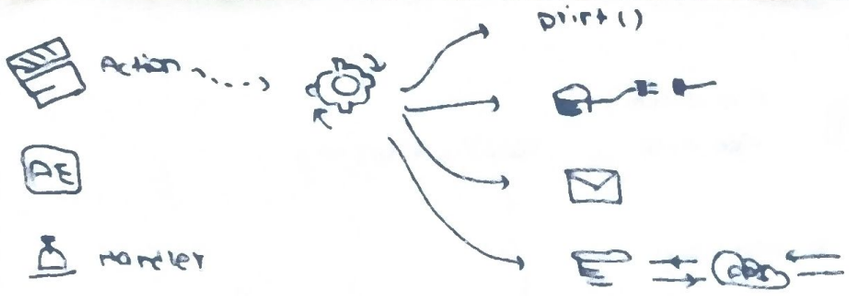

Task_1 : Store log messages in file::

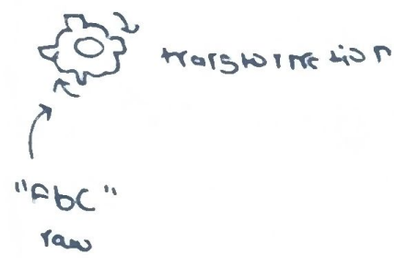


Task_2 : clean email & split it into user_name & domain








oper( ) ← 2 arguments

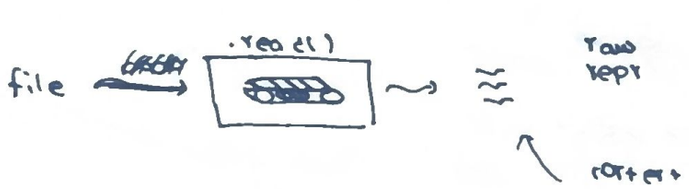




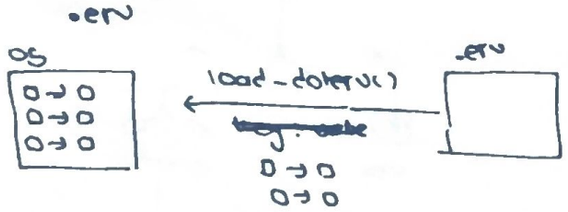

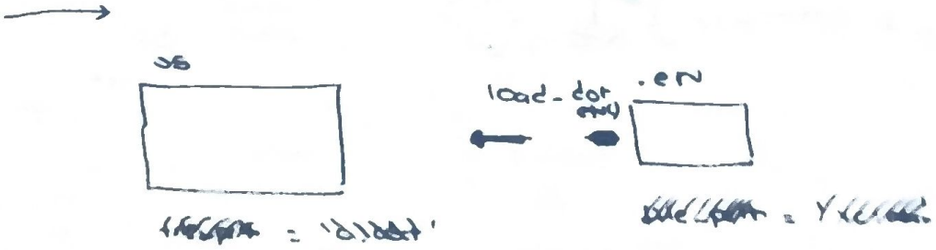

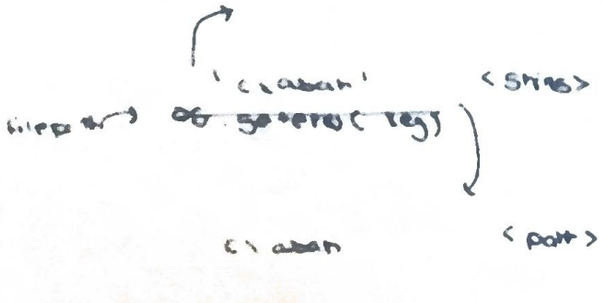


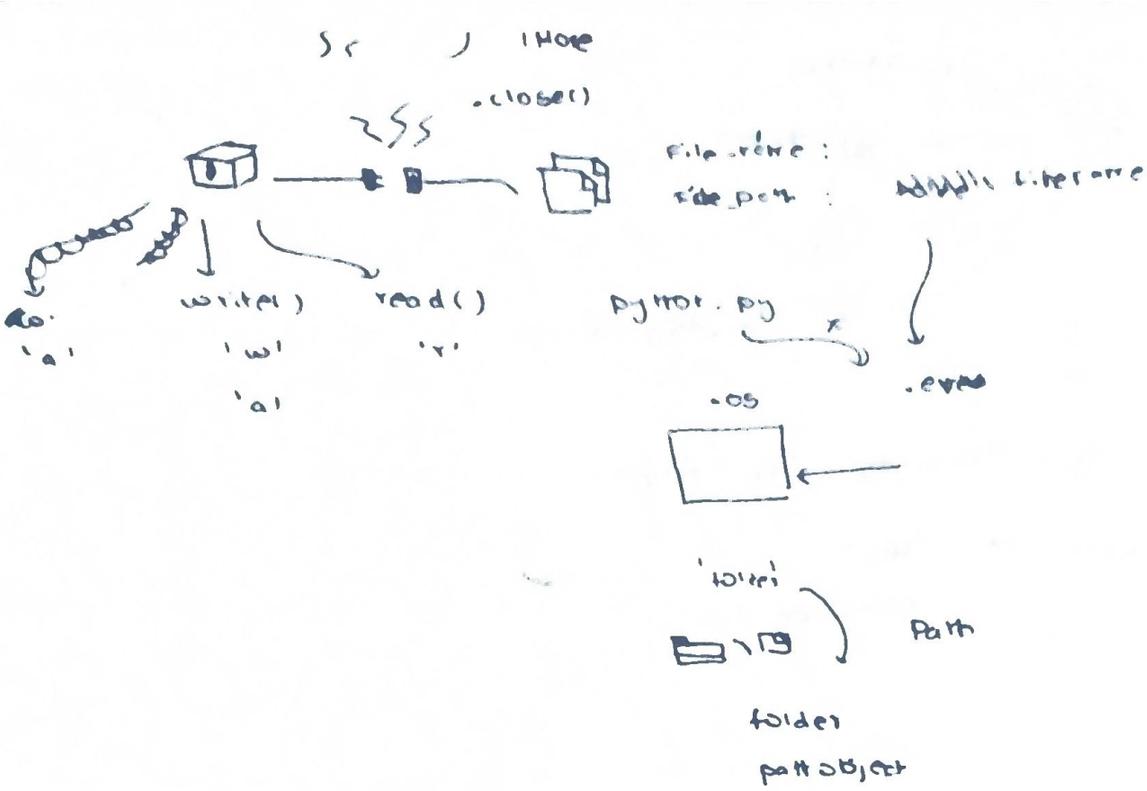





Orchestrator function workflow

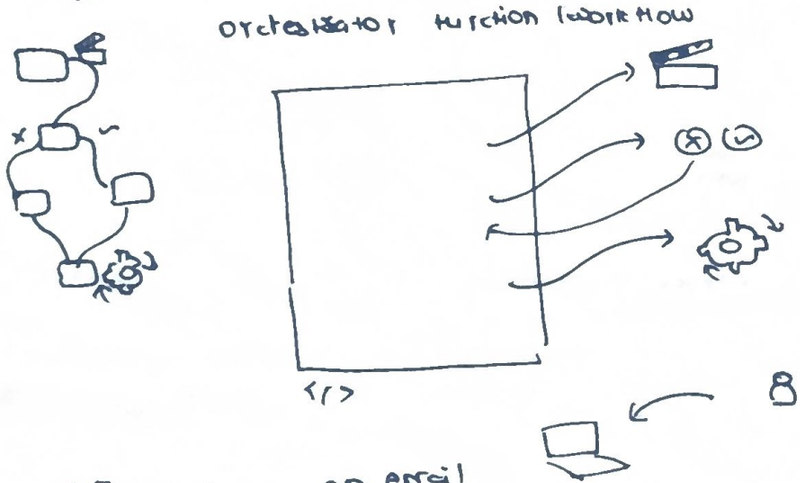


#1] Receive an email


#2] validate the email


#3] If invalid log


#4] If valid, clear & structure


#5) log

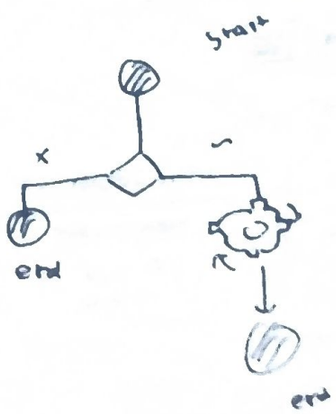

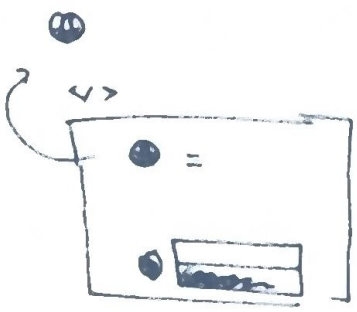

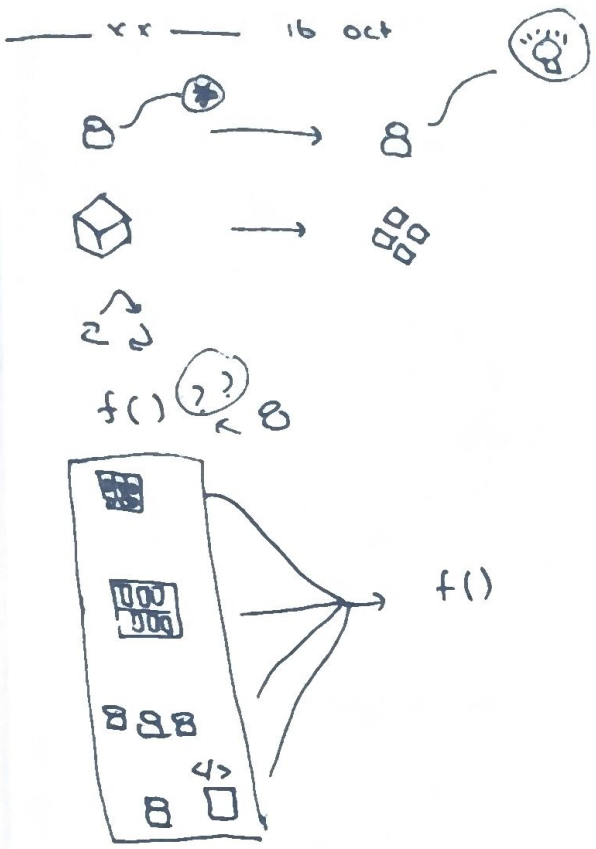

xx
16 oct
f()
f()
Route logic

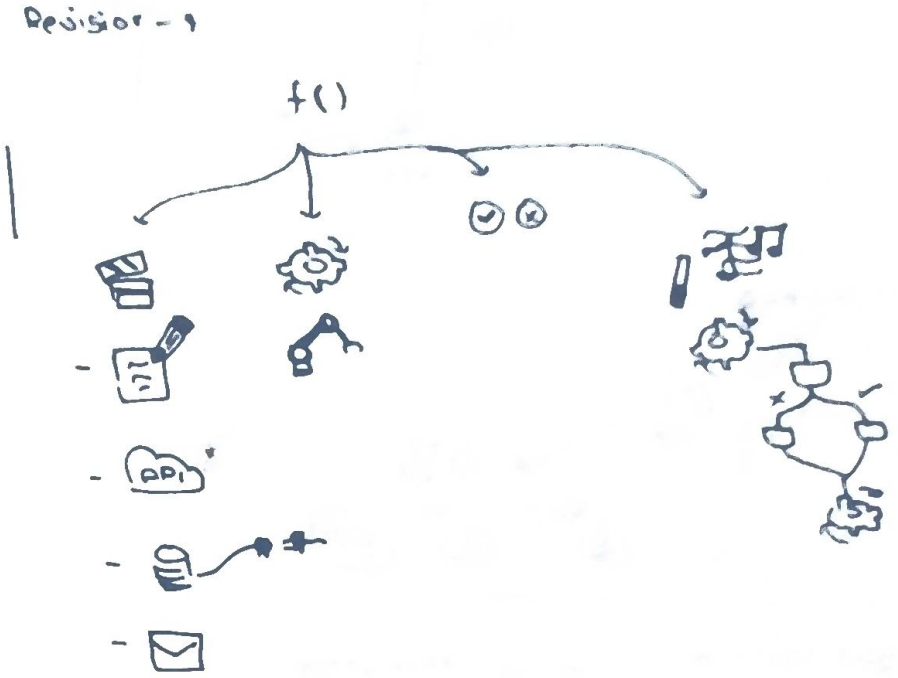

Revision - 1
f()
API

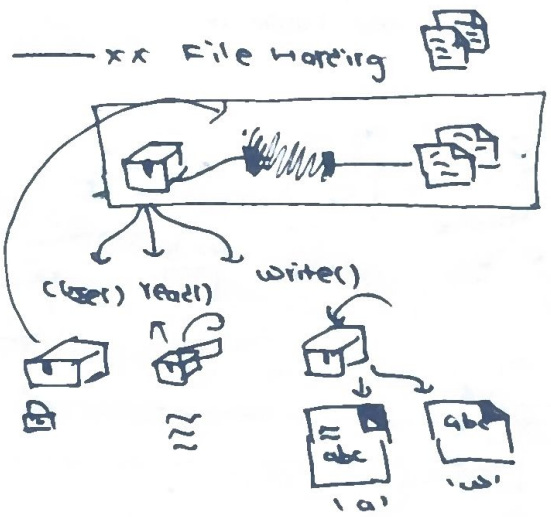

xx File Handling
write()
read()


content manager



IPAR

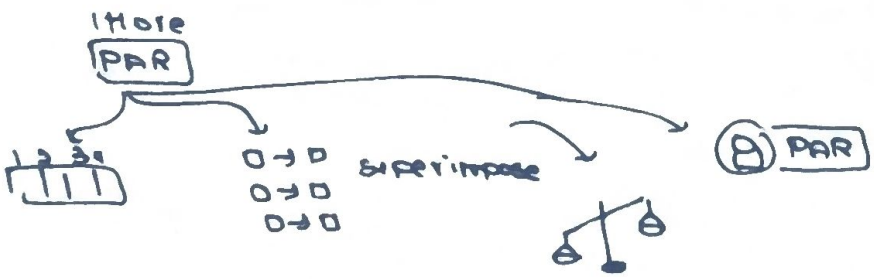
IMore
PAR
PAR
superimpose

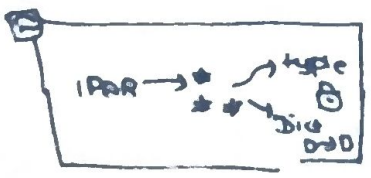

IPAR

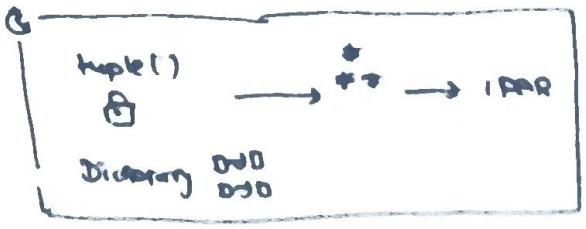
tuple()
IPAR
Dictionary



PAR
BTP

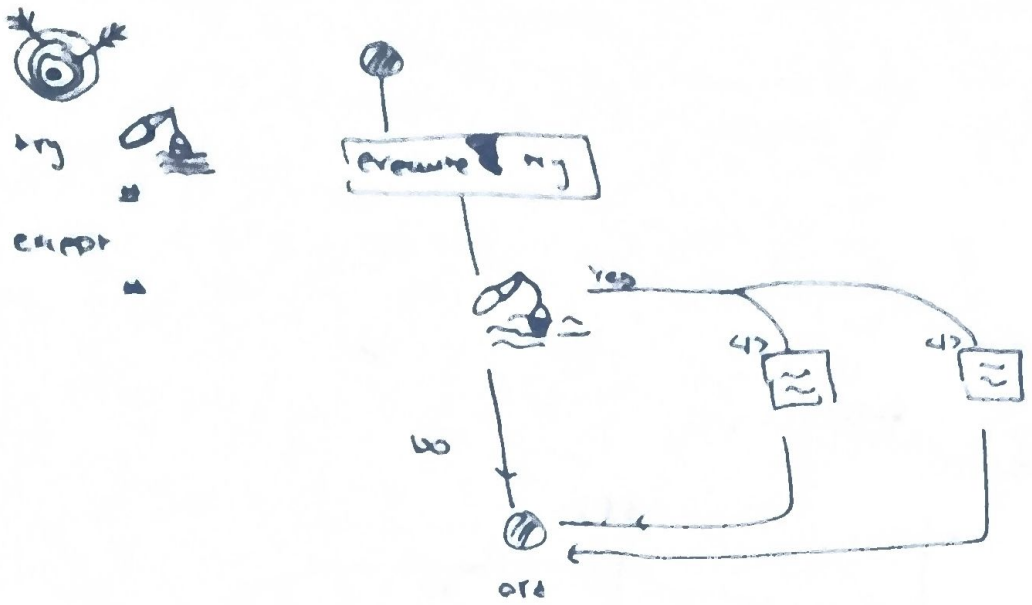


Revision-2

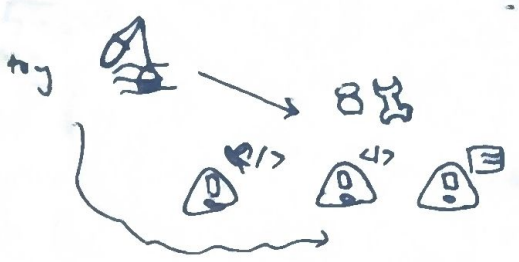


you don't want to get around the error → force error are handle it

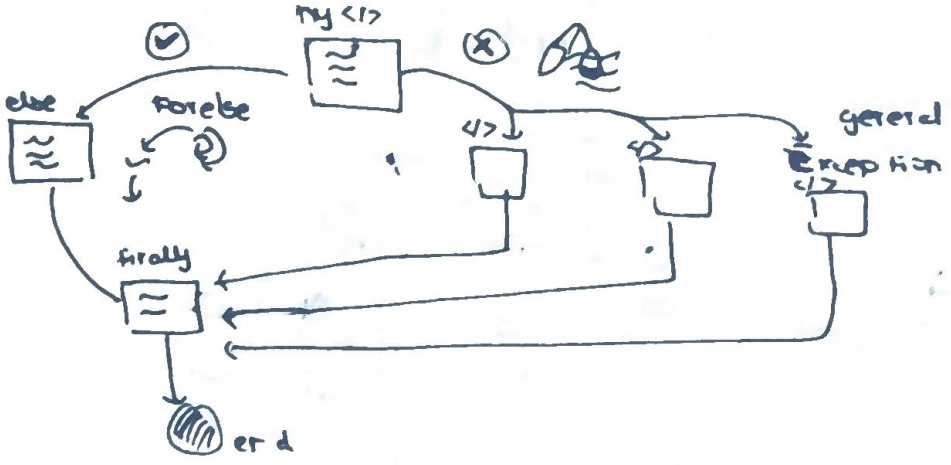


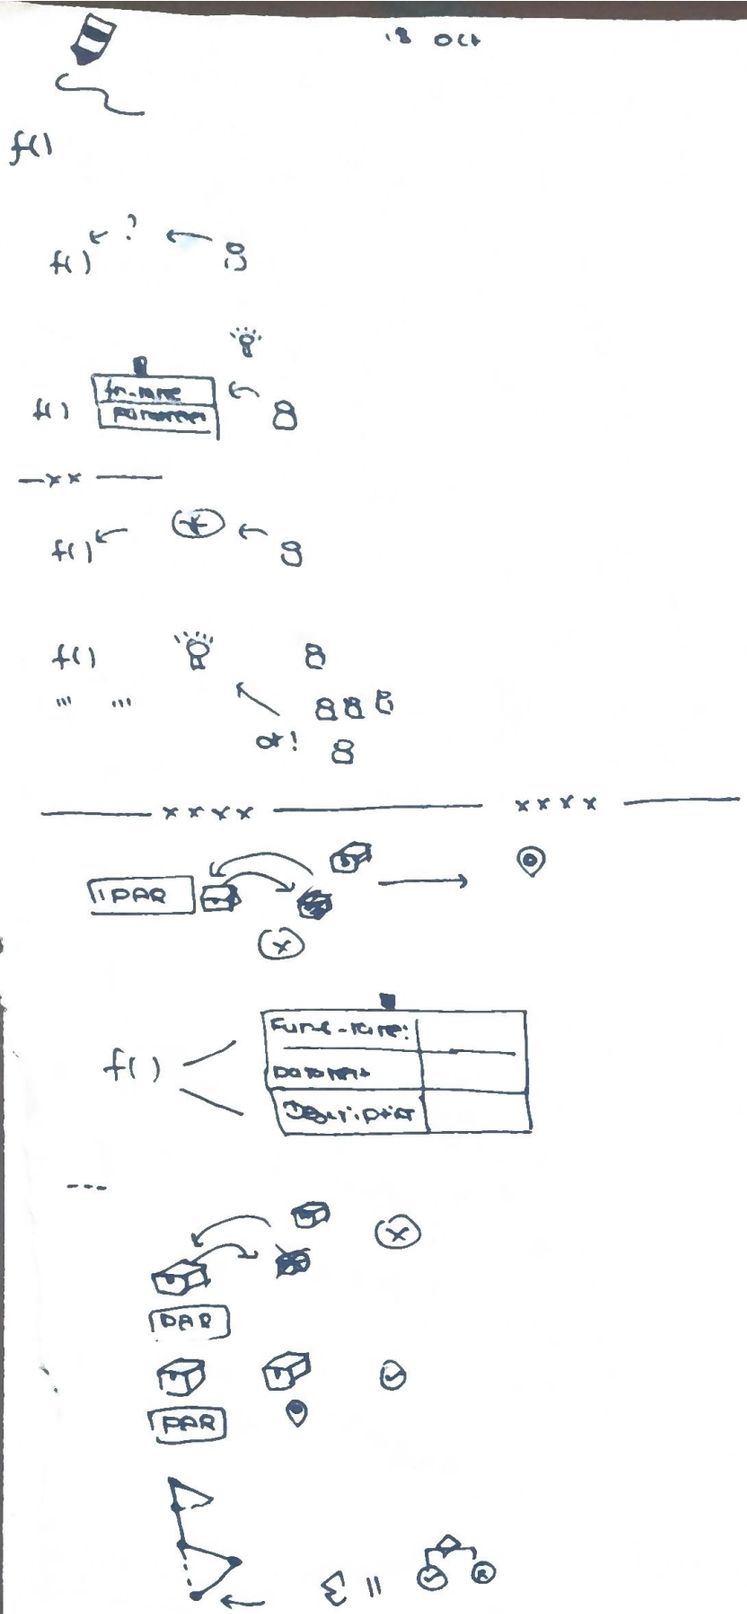


Function f() ① 18 October Sun

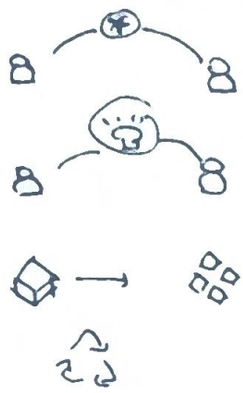



Source

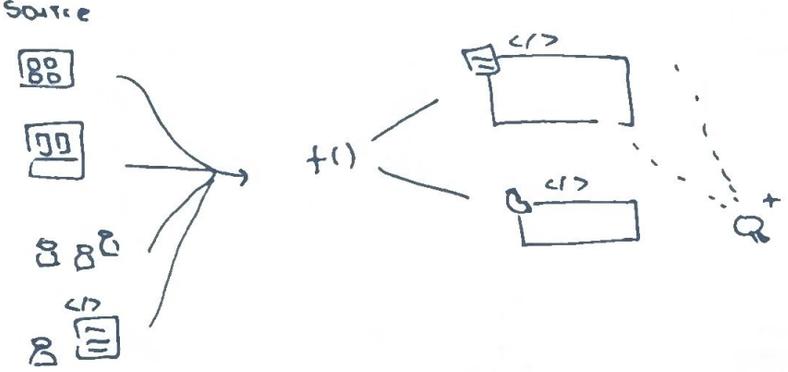

$

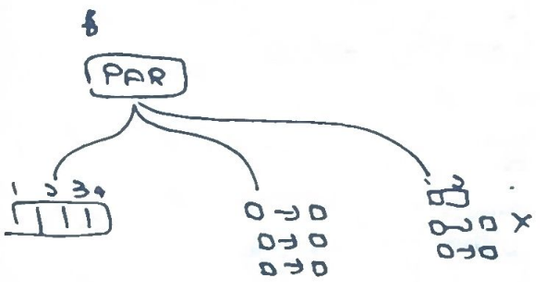

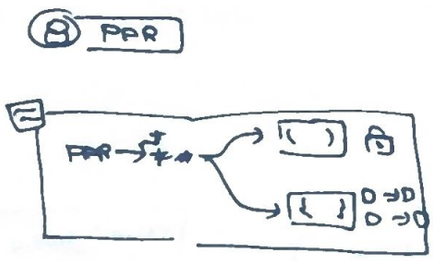

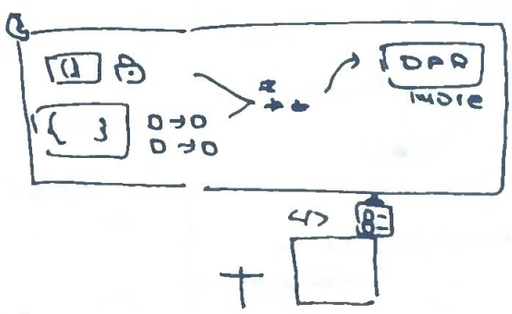


more PAR









f()

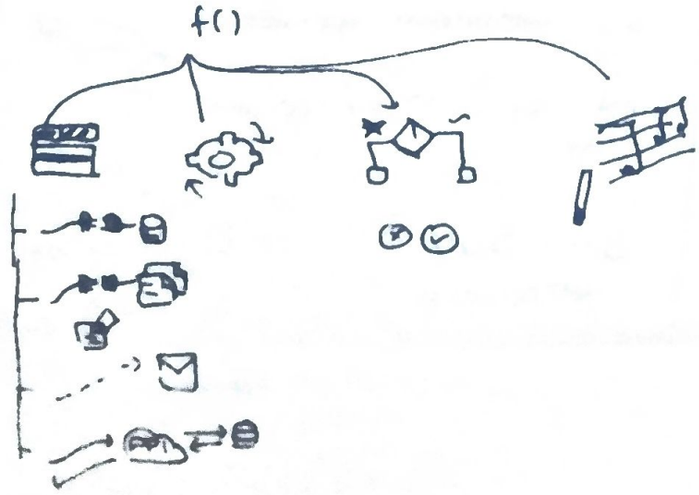


def calculate_discount (price, rate):

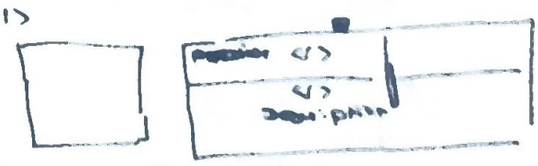




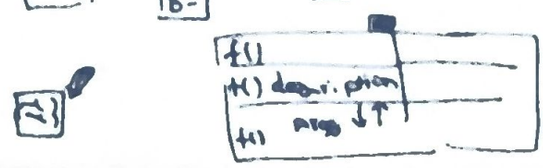

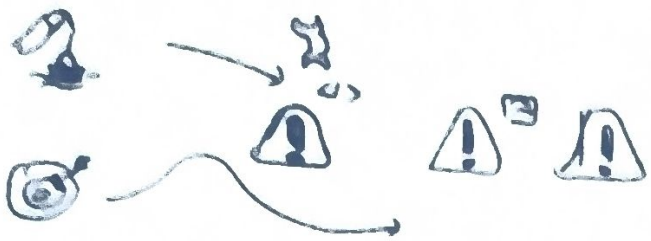





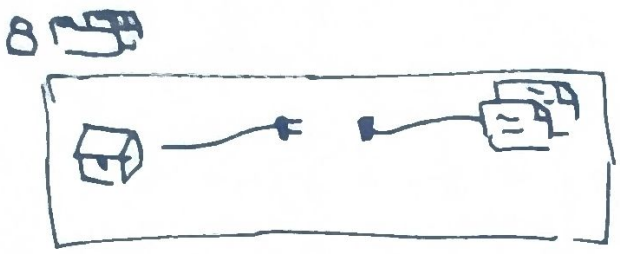



Revision -

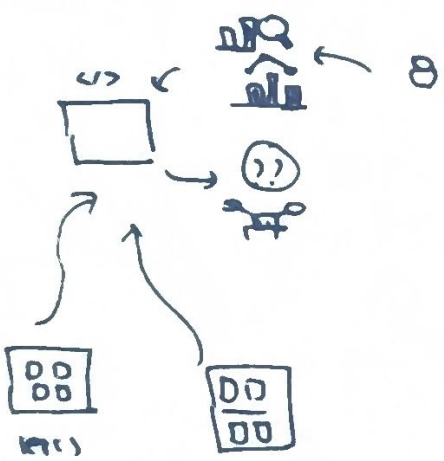

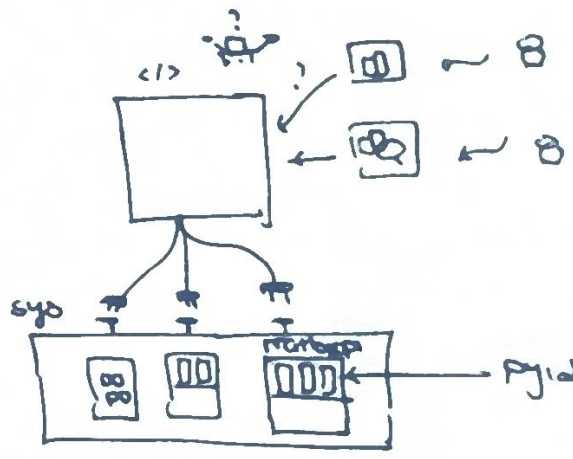

take softfills
from std library





conditional statements [making decision]

if if else elif



Loop [Repeating tasks]

For while




loop control

break

continue

pass

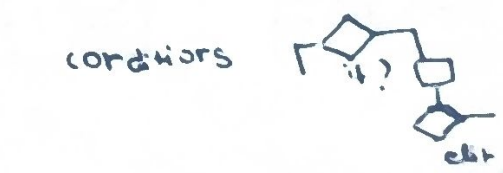

Boolean

f( )

>> comparison operator

and or logical operator

not

8 888

membership



Identity











if



if...else
(two way path)

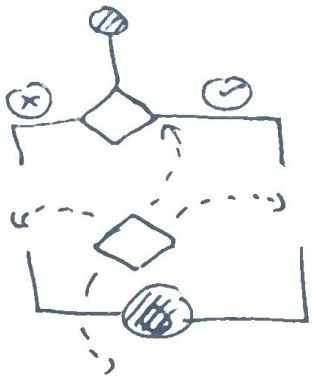


elif

logical operator

Nested if


if operator if


—— xx ——

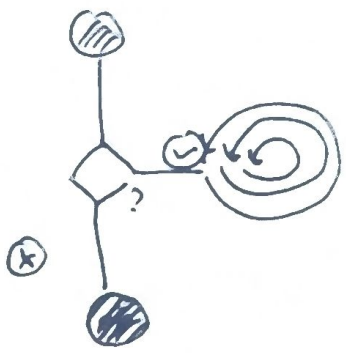


Eg:: clearing the room


For loop

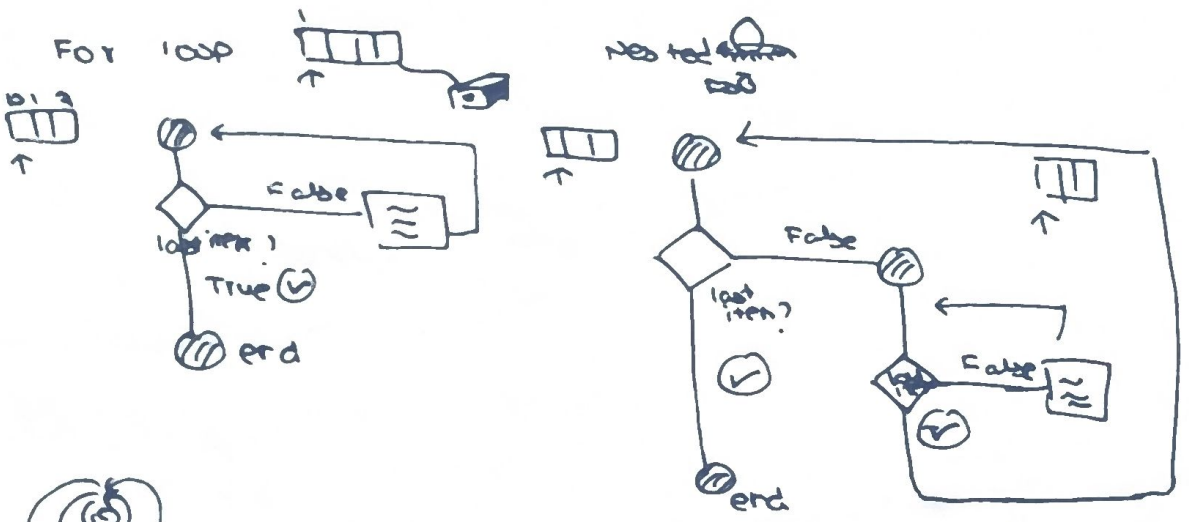


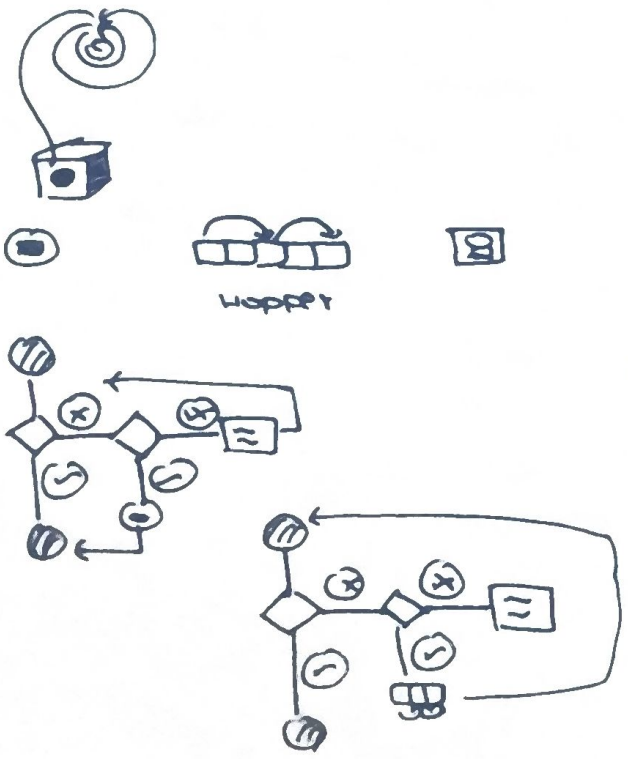

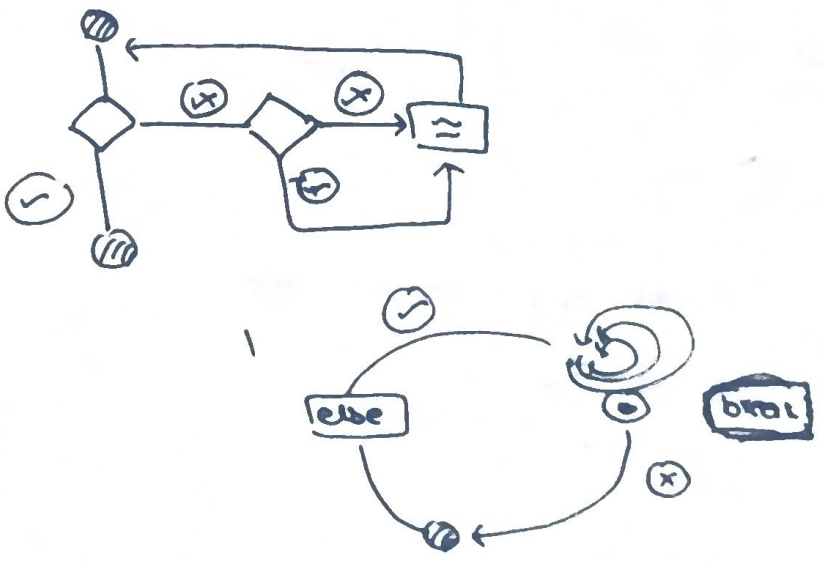








classical while
80's

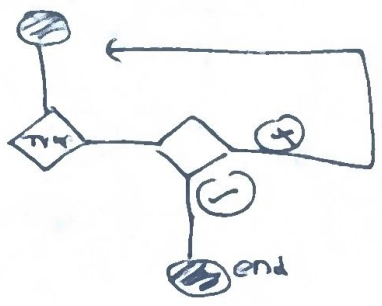

gen2 while
(while + break)

working models with



