

# Refactoring

[Updated]

# What is Refactoring?

- Refactoring is the process of changing a software system such that
  - the external behavior of the system does not change
    - e.g., functional requirements are maintained
  - but the internal structure of the system is improved
- This is sometimes called
  - “Improving the design after it has been written”
- Refactoring formalizes good programming practices

# Simple Examples

- Consolidate duplicate conditional fragments

*Before*

```
if (isSpecialDeal()) {  
    total = price * 0.95;  
    send();  
} else {  
    total = price * 0.98;  
    send();  
}
```

*After*

```
if (isSpecialDeal()) {  
    total = price * 0.95;  
} else {  
    total = price * 0.98;  
}  
send();
```

# Simple Examples

- Replace magic number with symbolic constant

## *Before*

```
double potentialEnergy(double mass, double height){  
    return mass * 9.81 * height;  
}
```

## *After*

```
static final double GRAVITATIONAL_CONSTANT = 9.81;  
double potentialEnergy(double mass, double height) {  
    return mass * GRAVITATIONAL_CONSTANT * height;  
}
```

# But, Refactoring is Dangerous!

- Although refactoring helps to reduce bugs, it can also introduce new bugs into the code
- Manager's point of view
  - if my programmers spend time “cleaning up the code” then that's less time implementing required functionality (and my schedule is slipping as it is!)
- To address these concerns
  - refactoring needs to be systematic, incremental, and safe

# Refactoring is Useful Too

- The idea behind refactoring is to
  - acknowledge that it will be challenging to get a design right the first time and, as a program's requirements change, the design may need to change
  - refactoring provides techniques for evolving the design in small incremental steps
- Benefits
  - often, code size is reduced after refactoring
  - confusing structures are transformed into simpler structures
    - which are easier to maintain and understand

# A “Cookbook” can be Useful

- Refactoring: Improving the Design of Existing Code
  - by Martin Fowler (and Kent Beck, John Brant, William Opdyke, and Don Roberts)
- Similar to the Gang of Four’s Design Patterns
  - provides “refactoring patterns”
- Also
  - <http://www.refactoring.com/catalog>
  - <http://sourcemaking.com/refactoring>

# Principles in Refactoring

- Fowler's definition
- Refactoring (noun)
  - a change made to the internal structure of software to make it easier to understand and cheaper to modify without changing its observable behavior
- Refactoring (verb)
  - to restructure software by applying a series of refactoring without changing its observable behavior

# Principles, continued

- The purpose of refactoring is
  - to make software easier to understand and modify
  - no functionality is added, but the code is cleaned up, made easier to understand and modify, and sometimes is reduced in size
- Contrast this with performance optimization
  - functionality is not changed; only internal structure
  - however, performance optimizations often involve making code harder to understand (but faster!)

# Principles, continued

- How do you make refactoring safe?
  - First, use refactoring “patterns”
    - Fowler assigns “names” to refactoring in the same way that the GoF’s book assigned names to patterns
  - Second, test constantly!
    - this ties into the agile design paradigm
    - you write tests before you write the code
    - after you refactor, you run the tests and check that they all pass
    - if a test fails, the refactoring broke something, but you know about it right away and can fix the problem before you move on

# Why Should you Refactor?

- Refactoring improves the design of software
  - without refactoring, a design will “decay” as people make changes to a software system
- Refactoring makes software easier to understand
  - because structure is improved, duplicated code is eliminated, etc.
- Refactoring helps you find bugs
  - Refactoring promotes a deep understanding of the code at hand, and this understanding aids the programmer in finding bugs and anticipating potential bugs
- Refactoring helps you program faster
  - because a good design enables progress

# When Should you Refactor?

- The Rule of Three
  - Three “strikes” and you refactor
- Refactor when you add functionality
  - do it before you add the new function to make it easier to add the function
  - or do it after to clean up the code after the function is added
- Refactor when you need to fix a bug
- Refactor as you do a code review

# Problems with Refactoring

- Databases
  - Business applications are often tightly coupled to underlying databases
  - code is easy to change; databases are not
- Changing interfaces
  - Some refactoring requires that interfaces be changed
  - if you own all the calling code, no problem
  - if not, the interface is “published” and can’t change

# Refactoring: Where to Start?

- How do you identify code that needs to be refactored?
- Look for “Bad Smells” in code
  - A chapter in Fowler’s book
  - Several online sources
    - <http://sourcemaking.com/refactoring/bad-smells-in-code>
- They present examples of “bad smells” and then suggest refactoring techniques to apply
- Tools such as Codegrip, Checkstyle, PMD, FindBugs, and SonarQube can automatically identify code smells

# Code Smells

## Bloaters

- Long Method
- Large Class
- Primitive Obsession
- Long Parameter List
- Data Clumps

## OO Abusers

- Alt. Classes
- Diff. Interfaces
- Refused Bequest
- Switch Statements
- Temporary Field

## Change Preventers

- Divergent Change
- Parallel Inheritance
- Hierarchies
- Shotgun Surgery

## Dispensables

- Comments
- Duplicate Code
- Data Class
- Dead Code
- Lazy Class
- Speculative Generality

## Couplers

|                          |                |
|--------------------------|----------------|
| Feature Envy             | Message Chains |
| Inappropriate Intimacy   | Middle Man     |
| Incomplete Library Class |                |

# Bad Smells in Code

- **Duplicated code**
  - Bad because if you modify one instance of duplicated code but not the others, you (may) have introduced a bug!
- **Long method**
  - Long methods are more difficult to understand
  - performance concerns with respect to short methods are largely obsolete
- **Large Class**
  - Large classes try to do too much, which reduces cohesion
- **Long Parameter List**
  - Hard to understand, can become inconsistent if the same parameter chain is being passed from method to method

# Duplicated Code

```
public class CustomerNameChanger
{
    public void ChangeName(CustomerDbContext context, int customerId, string name)
    {
        var customer = context.Customer.SingleOrDefault(x => x.CustomerId == customerId);
        if(customer == null)
            throw new Exception(string.Format("Customer {0} was not found.", customerId));


        customer.Name = name;
    }
}

public class CustomerAddressChanger
{
    public void ChangeAddress(CustomerDbContext context, int customerId, string address,
        string postalCode, string city)
    {
        var customer = context.Customer.SingleOrDefault(x => x.CustomerId == customerId);
        if(customer == null)
            throw new Exception(string.Format("Customer {0} was not found.", customerId));

        customer.Address = address;
        customer.PostalCode = postalCode;
        customer.City = city;
    }
}
```

Duplicated Code

# ***Long Method***

```
class OrderService {  
    public void processOrder(Order order) {  
        // validate order  
          
        // Calculate total price  
          
        // apply discount  
          
        // format receipt  
          
        // print receipt  
          
    }  
}
```

# ***Long Parameter List***

```
class PaymentService {  
    public void processPayment(String name, String email,  
                               String cardNumber, String expiry,  
                               double amount) {  
        // processing logic  
    }  
}
```

- Hard to remember parameter order
- Easy to pass wrong values
- Repeated across methods

# Bad Smells in Code

- **Divergent Change**

- Symptom: one type of change requires changing one subset of methods; another type of change requires changing another subset
- e.g., “I have to change these three methods every time I get a new database.”
- Related to cohesion

- **Shotgun Surgery**

- a change requires lots of little changes in a lot of different classes

# *Divergent Change*

```
public class Employee {  
    ...  
  
    public void updatePersonalInfo(String newName, String newEmail) {  
        this.name = newName;  
        this.email = newEmail;  
    }  
  
    // changed when UI or report formats evolve  
    public String formatForReport() {  
        return String.format("Employee Report: %s (%s) - Salary: $%.2f", name, department, salary);  
    }  
  
    public void sendEmailNotification(String message) {  
        // In real code: integrate with email service using 'email' field  
        System.out.println("Sending to " + email + ": " + message);  
    }  
  
    // changed when tax laws or pay rules update  
    public double calculatePay() {  
        double basePay = salary + (hoursWorked * 50.0); // overtime  
        return basePay * (1 - taxRate);  
    }  
}
```

So many reason to  
update this class!

# Shotgun Surgery

```
public void debit(int debit) throws Exception
{
    if(amount <= 500)
    {
        throw new Exception("Mininum balance shuold be over 500");
    }

    amount = amount-debit;
    System.out.println("Now amount is" + amount);
}

public void transfer(Account from,Account to,int cerditAmount) throws Exception
{
    if(from.amount <= 500)
    {
        throw new Exception("Mininum balance shuold be over 500");
    }

    to.amount = amount+cerditAmount;
}
```

Change in  
business logic  
i.e., minimum  
amount or  
change in  
message  
wording fires  
change in  
multiple places

# Bad Smells in Code

- **Feature Envy**

- a method requires lots of information from some other class
- Move it closer!

- **Data Clumps**

- attributes that clump together (are used together) but are not part of the same class

# Feature Envy

```
// This class "envies" the data inside Customer
public class Invoice {
    public double calculateDiscount(Customer customer) {
        // Lots of access to Customer's data, very little to its own
        if (customer.getTotalSpent() > 1000 && customer.getYearsAsMember() > 2) {
            return customer.getTotalSpent() * 0.15;
        } else if (customer.getTotalSpent() > 500) {
            return customer.getTotalSpent() * 0.10;
        }
        return 0.0;
    }
}

public class Customer {
    private double totalSpent;
    private int yearsAsMember;

    // getters only (no behavior)
    public double getTotalSpent() { return totalSpent; }
    public int getYearsAsMember() { return yearsAsMember; }
}
```

# Bad Smells in Code

- **Primitive Obsession**

- characterized by a reluctance to use classes instead of primitive data types  
Ex - using arrays for std\_ID, std\_name and std\_marks instead of student class.

- **Switch Statements**

- Switch statements are often **duplicated** in code; they can typically be replaced by the use of polymorphism (let OO do your selection for you!)

# Bad Smells in Code

- **Lazy Class**


- A class that no longer “pays its way”
- e.g., maybe a class that was downsized by a previous refactoring, or represented planned functionality that did not pan out

```
class Logger {  
    // Originally meant to do complex logging  
    // But now just prints a simple message  
    public void log(String message) {  
        System.out.println(message);  
    }  
}
```

Logger is barely doing anything; could be replaced by **System.out.println** directly.  
It adds extra complexity without benefit.

# Bad Smells in Code

- **Data Class (information holder)**
  - These are classes that have fields, getting and setting methods for the fields, and nothing else; they are data holders, but objects should be about data and behavior

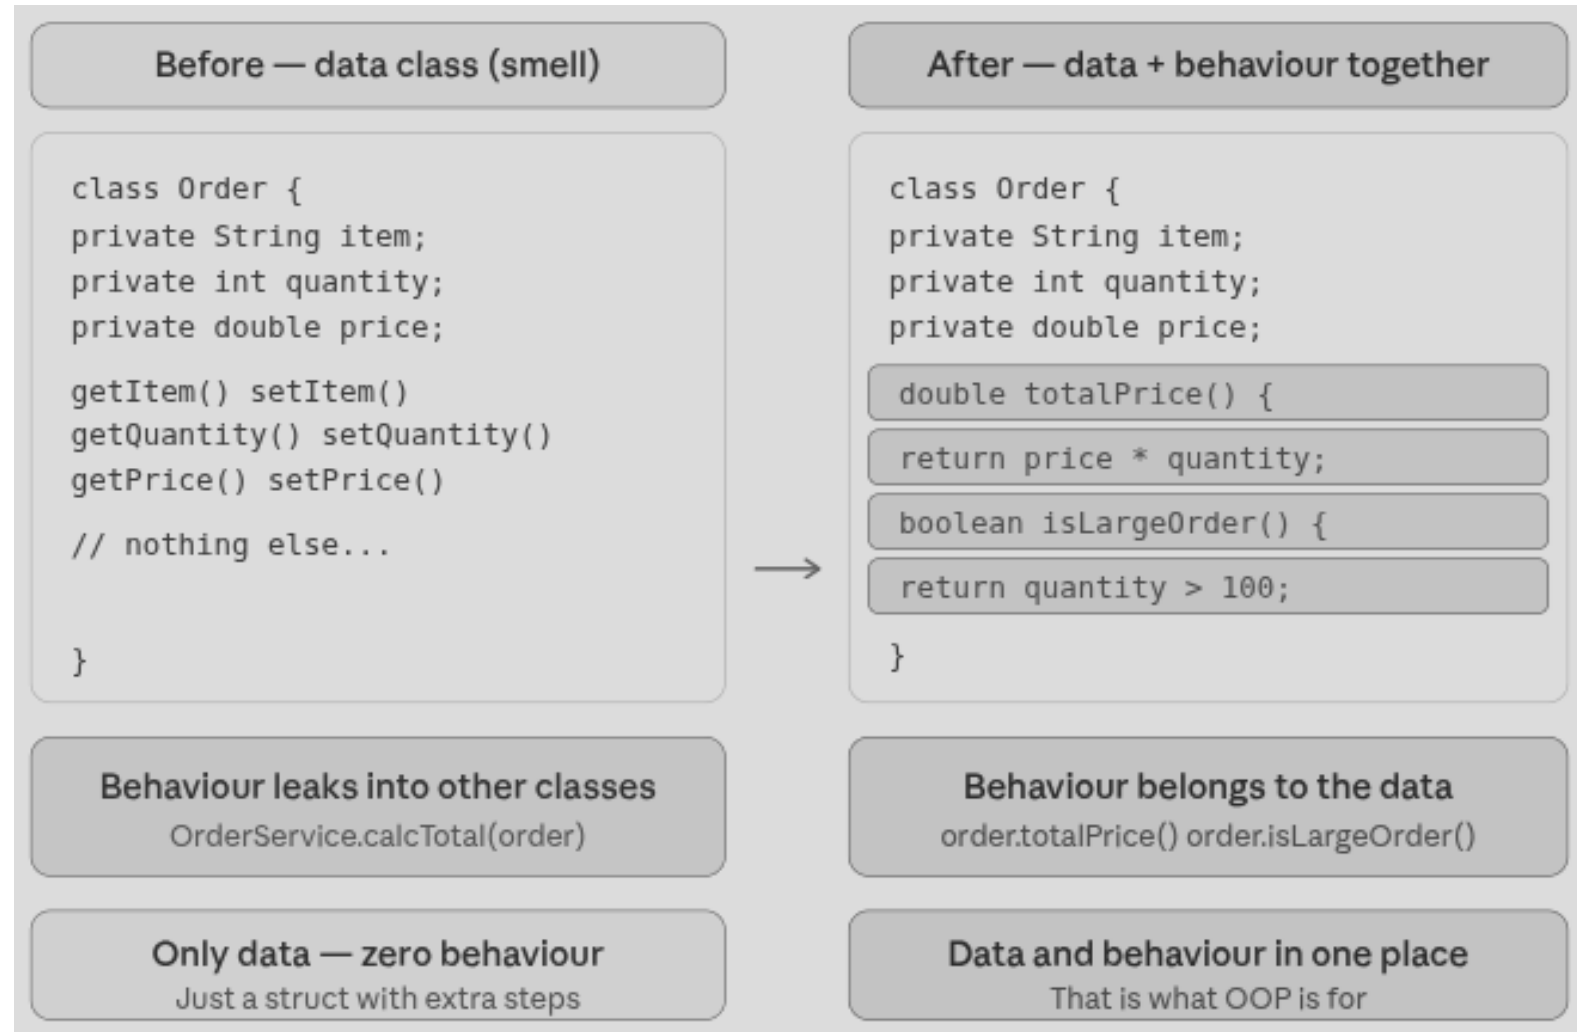

# Bad Smells in Code

- **Data Class (information holder)**

- These are classes that have fields, getting and setting methods for the fields, and nothing else; they are data holders, but objects should be about data and behavior

- Not all data classes are bad.
- They're only a problem when they **should have behavior but don't** or **their behaviour is scattered**

# Bad Smells in Code

- **Comments**
  - Comments are sometimes used to hide bad code
  - “...comments are often used as a deodorant”

# The Catalog of Refactoring Patterns

- Large list of refactoring patterns (<http://www.refactoring.com/catalog>)
  - Extract Method
  - Extract Variable
  - Extract Class
  - Replace Temp with Query
  - Move Method
  - Replace Conditional with Polymorphism
  - Introduce Null Object
  - Separate Query for Modifier
  - Introduce Parameter Object
  - Encapsulate Collection
  - Replace Nested Conditional with Guard Clauses

# Extract Method

- You have a code fragment that can be grouped together
- Turn the fragment into a method whose name explains the purpose of the fragment



```
def print_invoice(order):  
    print(f"Invoice for {order.customer_name}")  
  
    # calculate total – this block deserves its own name  
    total = 0  
    for item in order.items:  
        total += item.price * item.quantity  
    if order.customer_type == "premium":  
        total *= 0.9 # 10% discount  
  
    print(f"Total: ${total:.2f}")  
    print(f>Date: {order.date}")
```

# Extract Method

```
def print_invoice(order):  
    print(f"Invoice for {order.customer_name}")  
    print(f"Total: ${calculate_total(order):.2f}")  
    print(f>Date: {order.date}")  
  
def calculate_total(order):  
    total = sum(item.price * item.quantity for item in order.items)  
    if order.customer_type == "premium":  
        total *= 0.9  
    return total
```

# Extract Class

- When one class does the work of two, awkwardness results
- Instead, create a new class and place the fields and methods responsible for the relevant functionality in it

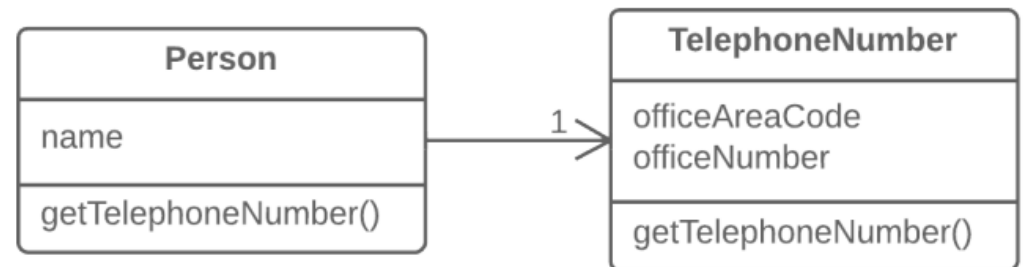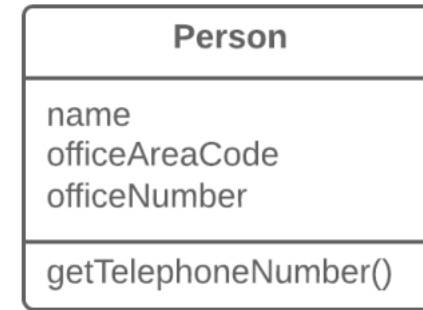

# Extract Variable


- You have an expression that's hard to understand
- Place the result of the expression or its parts in separate variables that are self-explanatory

```
class PriceCalculator {  
    public double calculatePrice(double quantity, double itemPrice) {  
        return quantity * itemPrice * (quantity > 100 ? 0.9 : 0.95);  
    }  
}
```

# Extract Variable

```
class PriceCalculator {  
    public double calculatePrice(double quantity, double itemPrice) {  
        double basePrice = quantity * itemPrice;  
        double discountRate = (quantity > 100) ? 0.9 : 0.95;  
  
        return basePrice * discountRate;  
    }  
}
```

```
class PriceCalculator {  
    public double calculatePrice(double quantity, double itemPrice) {  
        double basePrice = quantity * itemPrice;  
        boolean isBulkOrder = quantity > 100;  
        double discountRate = isBulkOrder ? 0.9 : 0.95;  
  
        return basePrice * discountRate;  
    }  
}
```



Even  
Better

# Replace Temp with Query

- You are using a temporary variable to hold the result of an expression
  - Extract the expression into a method
  - Replace all references to the temp with an expression
  - The new method can then be used in other methods

# Replace Temp with Query

```
class Order {  
    private int quantity;  
    private double itemPrice;  
  
    public double calculateTotal() {  
        double basePrice = quantity * itemPrice; // temp variable  
  
        if (basePrice > 1000) {  
            return basePrice * 0.95;  
        } else {  
            return basePrice * 0.98;  
        }  
    }  
}
```

- ***basePrice*** is a temporary variable
- Logic is tied to this method only
- Can't reuse ***basePrice*** elsewhere

# Replace Temp with Query

```
class Order {  
    private int quantity;  
    private double itemPrice;  
  
    public double calculateTotal() {  
        double basePrice = quantity * itemPrice; // temp variable  
  
        if (basePrice > 1000) {  
            return basePrice * 0.95;  
        } else {  
            return basePrice * 0.98;  
        }  
    }  
}
```




```
class Order {  
    private int quantity;  
    private double itemPrice;  
  
    public double calculateTotal() {  
        if (getBasePrice() > 1000) {  
            return getBasePrice() * 0.95;  
        } else {  
            return getBasePrice() * 0.98;  
        }  
    }  
  
    private double getBasePrice() {  
        return quantity * itemPrice;  
    }  
}
```

# Move Method

- A method is using more features (attributes and operations) of another class than the class on which it is defined
- Create a new method with a similar body in the class it uses most. Either turn the old method into a simple delegation or remove it altogether

# Move Method

```
class Engine {  
    private double distance;  
    private double fuelUsed;  
  
    public double getDistance() { return distance; }  
    public double getFuelUsed() { return fuelUsed; }  
}  
  
class Car {  
    Engine engine;  
  
    public double calculateFuelEfficiency() {  
        // Mostly using Engine data  
        return engine.getDistance()  
        / engine.getFuelUsed();  
    }  
}
```

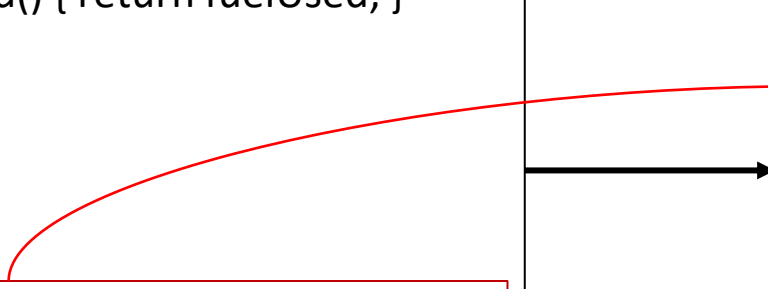

A red box highlights the `calculateFuelEfficiency()` method in the `Car` class. A red arrow points from this box to a new box in the `Engine` class on the right, indicating the method is being moved. A black arrow points from the `Car` class box to the `Engine` class box, indicating the overall direction of the refactoring.


```
class Engine {  
    private double distance;  
    private double fuelUsed;  
  
    public double getDistance() { return distance; }  
    public double getFuelUsed() { return fuelUsed; }  
  
    public double calculateFuelEfficiency() {  
        return distance / fuelUsed;  
    }  
}  
  
class Car {  
    Engine engine;  
    // Optional delegation  
    public double calculateFuelEfficiency() {  
        return engine.calculateFuelEfficiency();  
    }  
}
```

# Replace Conditional with Polymorphism

- You have a conditional that chooses different behavior depending on the type of an object
- Move each “leg” of the conditional to an overriding method in a subclass. Make the original method abstract.

```
double getSpeed() {  
    switch (_type) {  
        case EUROPEAN:  
            return getBaseSpeed();  
        case AFRICAN:  
            return getBaseSpeed() - getLoadFactor() * _numberOfCoconuts;  
        case NORWEGIAN_BLUE:  
            return (_isNailed) ? 0 : getBaseSpeed(_voltage);  
    }  
    throw new RuntimeException("Unknown Type of Bird")  
}
```

# Replace Conditional with Polymorphism

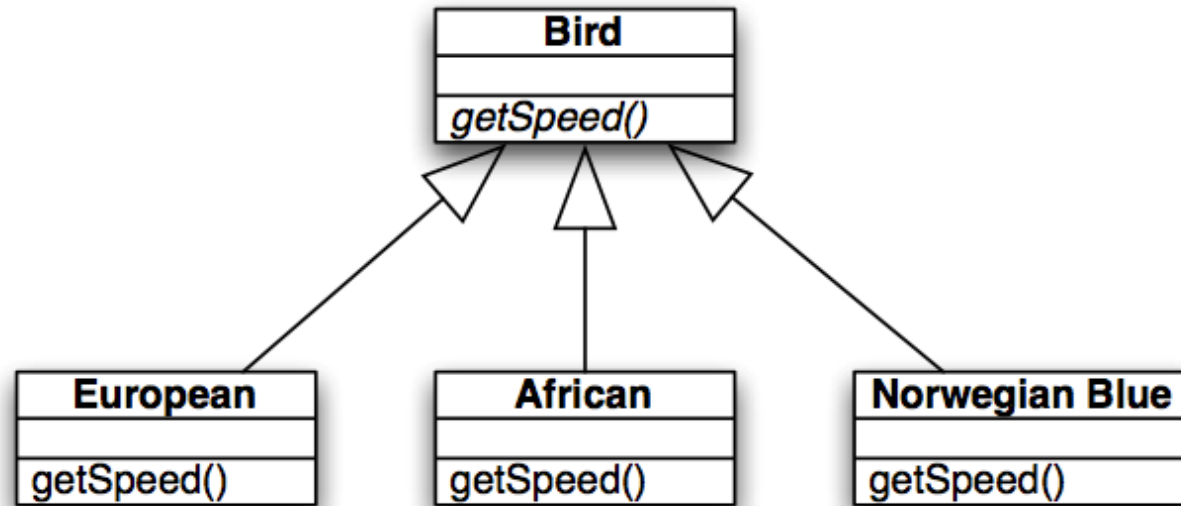

```
void printSpeed(Bird[] birds) {  
    for (int i=0; i<birds.length; i++) {  
        System.out.println(" " + birds[i].getSpeed());  
    }  
}
```

# Separate Query for Modifier

```
class Invoice {  
    private boolean readyForSummaries = false;  
    private double totalOutstanding;  
  
    public double  
    getTotalOutstandingAndSetReadyForSummaries() {  
        // calculate total  
        totalOutstanding = 500.0;  
  
        // side effect (modifying state)  
        readyForSummaries = true;  
  
        return totalOutstanding;  
    }  
}
```

## **getTotalOutstandingAndSetReadyForSummaries()**

It is a query method, but it is also changing the state of the object being called

This change is known as a “side effect” because it’s not the primary purpose of the method

# Separate Query for Modifier

```
class Invoice {  
    private boolean readyForSummaries = false;  
    private double totalOutstanding;  
  
    // Pure query (no side effects)  
    public double getTotalOutstanding() {  
        totalOutstanding = 500.0;  
        return totalOutstanding;  
    }  
  
    // Explicit modifier  
    public void setReadyForSummaries() {  
        readyForSummaries = true;  
    }  
}
```

It is generally accepted practice that queries should not have side effects so this refactoring says to split methods into query and modification.

Try as best as possible to avoid any side effects in query methods

# Introduce Parameter Object

- You have a group of parameters that go naturally together
  - Stick them in an object and pass the object
- The new class starts out as a data holder but will likely attract methods to it

```
class InvoiceService {  
  
    public double amountInvoicedIn(Date start, Date end) {  
        // logic using start and end  
        return 1000.0;  
    }  
  
    public double amountOverdueIn(Date start, Date end) {  
        // logic using start and end  
        return 200.0;  
    }  
}
```

PRIMITIVE  
OBSESSION  
TOO!

```

class DateRange {
    private Date start;
    private Date end;

    public DateRange(Date start, Date end)
    {
        this.start = start;
        this.end = end;
    }

    public Date getStart() { return start;
    }
    public Date getEnd() { return end; }

    // behavior can grow here later
    public boolean includes(Date date) {
        return !date.before(start) &&
            !date.after(end);
    }
}

```

```

class InvoiceService {
    public double
    amountInvoicedIn(DateRange range) {
        // logic using
        range.getStart(),
        range.getEnd()

        return 1000.0;
    }

    public double
    amountOverdueIn(DateRange range) {
        // logic using
        range.getStart(),
        range.getEnd()

        return 200.0;
    }
}

```

# Wrapping Up

- Refactoring is a useful technique for making non-functional changes to a software system that result in
  - better code structures
  - less code
  - Many refactorings are triggered via the discovery of duplicated code
  - The refactorings then show you how to eliminate duplication
- Bad Smells
  - Useful analogy for discovering places in a system “ripe” for refactoring

# Acknowledgments

- Dr. Emily Navarro, University of California, Irvine
- Professor Kenneth M. Anderson, University of Colorado at Boulder