Testing Rmarkdown

Atniraiza G

2024-11-07

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see http://rmarkdown.rstudio.com.
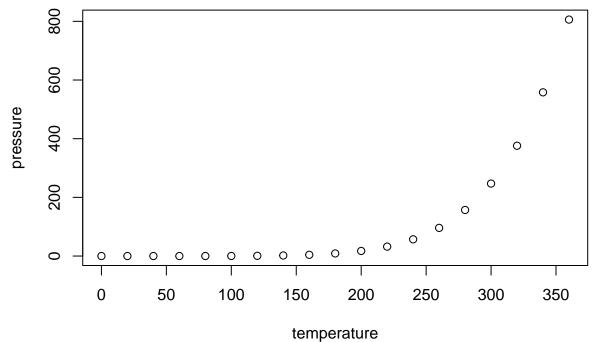
When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed           dist
##  Min.   : 4.0   Min.   :  2.00
##  1st Qu.:12.0   1st Qu.: 26.00
##  Median :15.0   Median : 36.00
##  Mean   :15.4   Mean   : 42.98
##  3rd Qu.:19.0   3rd Qu.: 56.00
##  Max.   :25.0   Max.   :120.00
```

Including Plots

You can also embed plots, for example:

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.

##This is where I try to create html from .Rmd

```r
breakfast <- c('sauted green beans', 'bread', 'fried chicken', 'pasta', 'granola')
am_mins <- c(0,15,0,10,12)
days <- c('Mon', 'Tue', 'Wed', 'Thu', 'Fri')
icha_unidays <- data.frame(breakfast, am_mins, row.names=days)
icha_unidays
```

```
##               breakfast am_mins
## Mon sauted green beans       0
## Tue               bread      15
## Wed       fried chicken       0
## Thu               pasta      10
## Fri             granola      12
```