


#1

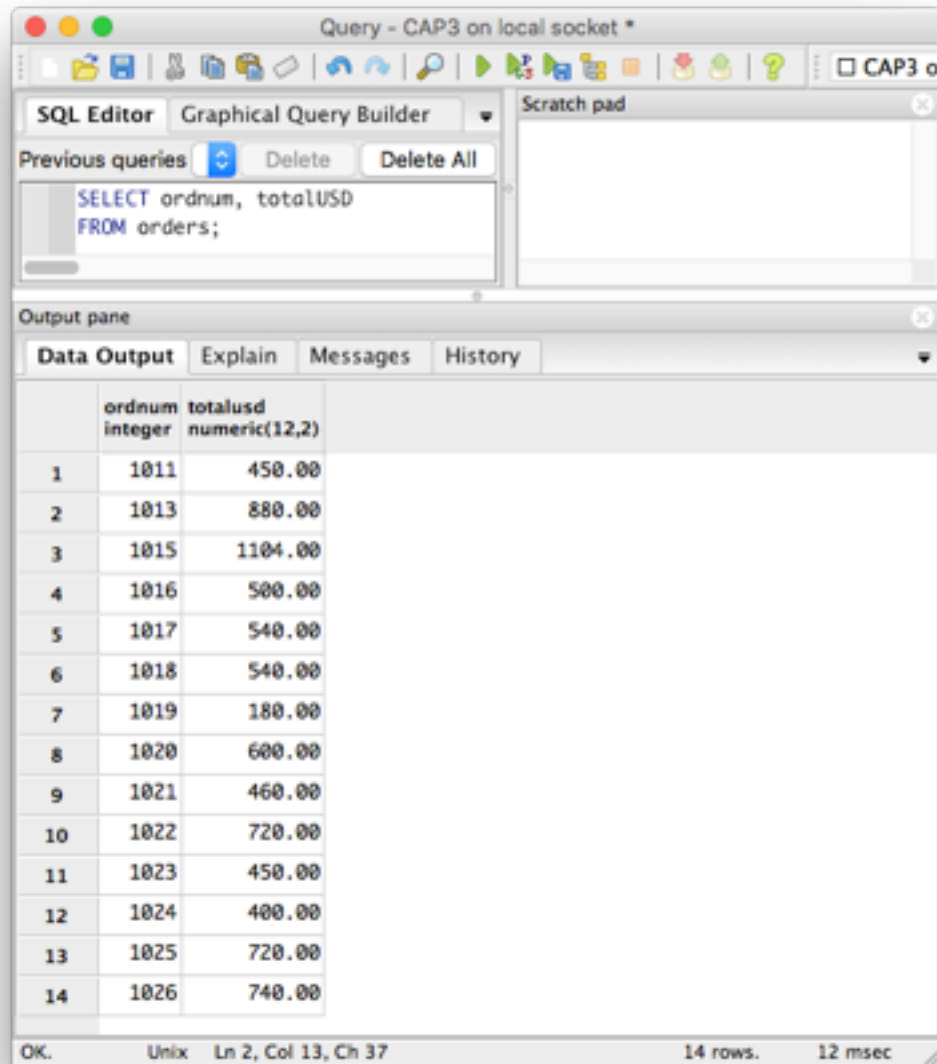

Query - CAP3 on local socket *

SQL Editor Graphical Query Builder

Previous queries [v] Delete Delete All

```
SELECT ordnum, totalUSD
FROM orders;
```

Scratch pad


Output pane

Data Output Explain Messages History

	ordnum integer	totalusd numeric(12,2)
1	1011	450.00
2	1013	880.00
3	1015	1104.00
4	1016	500.00
5	1017	540.00
6	1018	540.00
7	1019	180.00
8	1020	600.00
9	1021	460.00
10	1022	720.00
11	1023	450.00
12	1024	400.00
13	1025	720.00
14	1026	740.00

OK. Unix Ln 2, Col 13, Ch 37 14 rows. 12 msec

#2

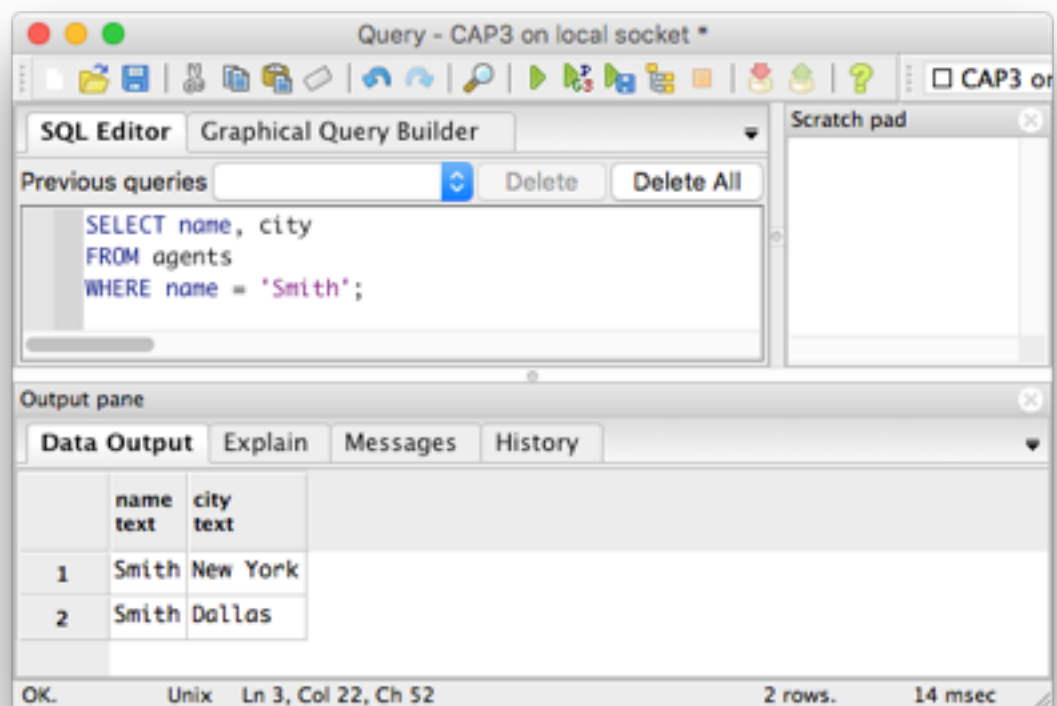

Query - CAP3 on local socket *

SQL Editor Graphical Query Builder

Previous queries [v] Delete Delete All

```
SELECT name, city
FROM agents
WHERE name = 'Smith';
```

Scratch pad


Output pane

Data Output Explain Messages History


	name text	city text
1	Smith	New York
2	Smith	Dallas

OK. Unix Ln 3, Col 22, Ch 52 2 rows. 14 msec

#3

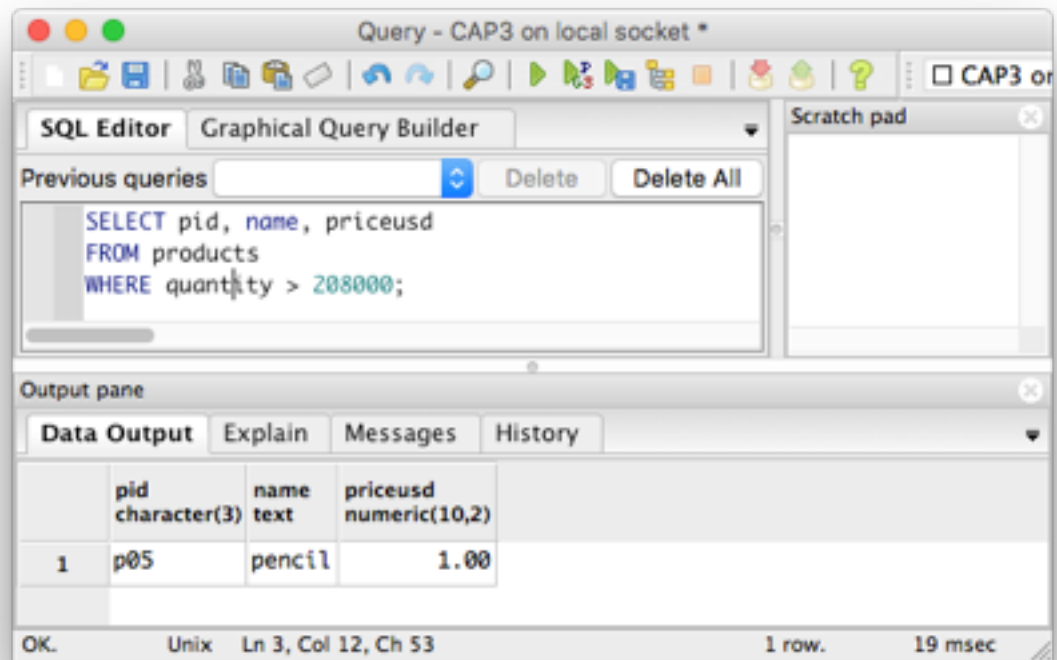

#4

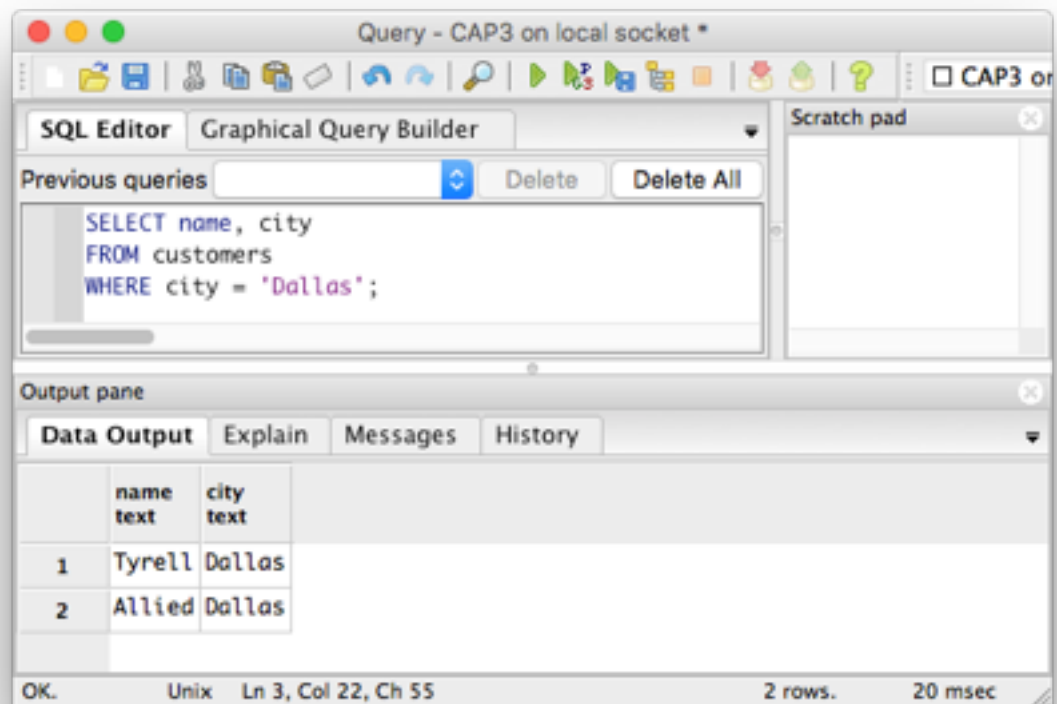

#5

Query - CAP3 on local socket *

SQL Editor Graphical Query Builder

Previous queries [dropdown] Delete Delete All

```
SELECT name, city
FROM agents
WHERE city NOT IN('New York', 'Tokyo');
```

Scratch pad

Output pane

Data Output Explain Messages History

	name text	city text
1	Jones	Newark
2	Otasi	Duluth
3	Smith	Dallas
4	Bond	London

OK. Unix Ln 3, Col 40, Ch 70 4 rows. 16 msec

#6

Query - CAP3 on local socket *

SQL Editor Graphical Query Builder

Previous queries [dropdown] Delete Delete All

```
--6
SELECT*
FROM products
WHERE city NOT IN('Dallas', 'Duluth')
AND priceusd <= 1.00;
```

Scratch pad

Output pane

Data Output Explain Messages History

	pid character(3)	name text	city text	quantity integer	priceusd numeric(10,2)
1	p02	brush	Newark	203000	0.50
2	p07	case	Newark	100500	1.00

OK. Unix Ln 4, Col 38, Ch 64 2 rows. 19 msec

#7

Query - CAP3 on local socket *

SQL Editor Graphical Query Builder

Previous queries Delete Delete All

```
--7
SELECT*
FROM orders
WHERE mon IN('jan', 'mar');
```

Scratch pad

Output pane

Data Output Explain Messages History

	ordnum integer	mon character(3)	cid character(4)	aid character(3)	pid character(3)	qty integer	totalusd numeric(12,2)
1	1011	jan	c001	a01	p01	1000	450.00
2	1013	jan	c002	a03	p03	1000	880.00
3	1015	jan	c003	a03	p05	1200	1104.00
4	1016	jan	c006	a01	p01	1000	500.00
5	1022	mar	c001	a05	p06	400	720.00
6	1023	mar	c001	a04	p05	500	450.00
7	1024	mar	c006	a06	p01	800	400.00

OK. Unix Ln 2, Col 8, Ch 12 7 rows. 18 msec

#8

Query - CAP3 on local socket *

SQL Editor Graphical Query Builder

Previous queries Delete Delete All

```
--8
SELECT*
FROM orders
WHERE mon IN('feb')
AND totalusd < 500;
```

Scratch pad

Output pane

Data Output Explain Messages History

	ordnum integer	mon character(3)	cid character(4)	aid character(3)	pid character(3)	qty integer	totalusd numeric(12,2)
1	1019	feb	c001	a02	p02	400	180.00
2	1021	feb	c004	a06	p01	1000	460.00

OK. Unix Ln 1, Col 4, Ch 4 2 rows. 17 msec

#9

