


EtherChannel Static (Manual):

- o Switchports can be configured to bypass LACP or PAgP protocols.
- o It is simply changing the mode to **ON** both sides of the Switches.
- o This mode is used to manually configure EtherChannel or Port Channel.
- o This mode can be used if device on other end does not support PAgP or LACP.

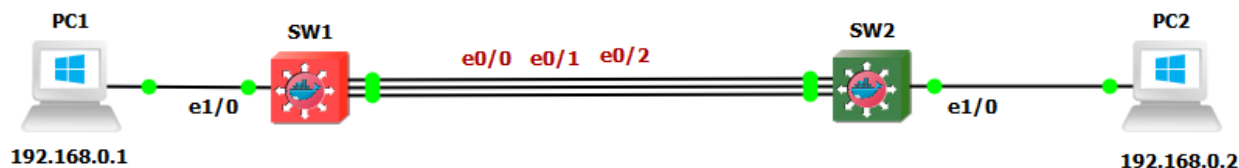

SW1 On Configuration

```

SW1(config)#default interface range e0/0-2
SW1(config)#no interface port-channel 1
SW1(config)#interface range ethernet 0/0-2
SW1(config-if-range)#switchport trunk encapsulation dot1q
SW1(config-if-range)#switchport mode trunk
SW1(config-if-range)#channel-group 1 mode on
SW1# show etherchannel summary
SW1# show etherchannel detail
SW1# show etherchannel port-channel
SW1#show spanning-tree vlan 1
  
```

SW2 On Configuration

```

SW2(config)#default interface range e0/0-2
SW2(config)#no interface port-channel 1
SW2(config)#interface range e0/0-2
SW2(config-if-range)#switchport trunk encapsulation dot1q
SW2(config-if-range)#switchport mode trunk
SW2(config-if-range)#channel-group 1 mode on
SW2# show etherchannel summary
SW2# show etherchannel detail
SW2# show etherchannel port-channel
SW1#show spanning-tree vlan 1
  
```

```

Number of channel-groups in use: 1
Number of aggregators:          1
  
```

Group	Port-channel	Protocol	Ports		
1	Po1(SU)	-	Et0/0(P)	Et0/1(P)	Et0/2(P)