



VLAN Hopping Attack:

- o Attacker connects to a VLAN to gain access to traffic on other VLANs.
- o Attacker send spoofed trunk negotiation & interface configured as a trunked.
- o Disable any automated trunk negotiation (DTP) on Cisco Switches.
- o Never leave a port in "dynamic desirable", "dynamic auto" or "trunk" mode.
- o Hardcode all the access ports as access port and disable DTP everywhere.
- o Shutdown all the interfaces in Cisco Switches which are not in use.

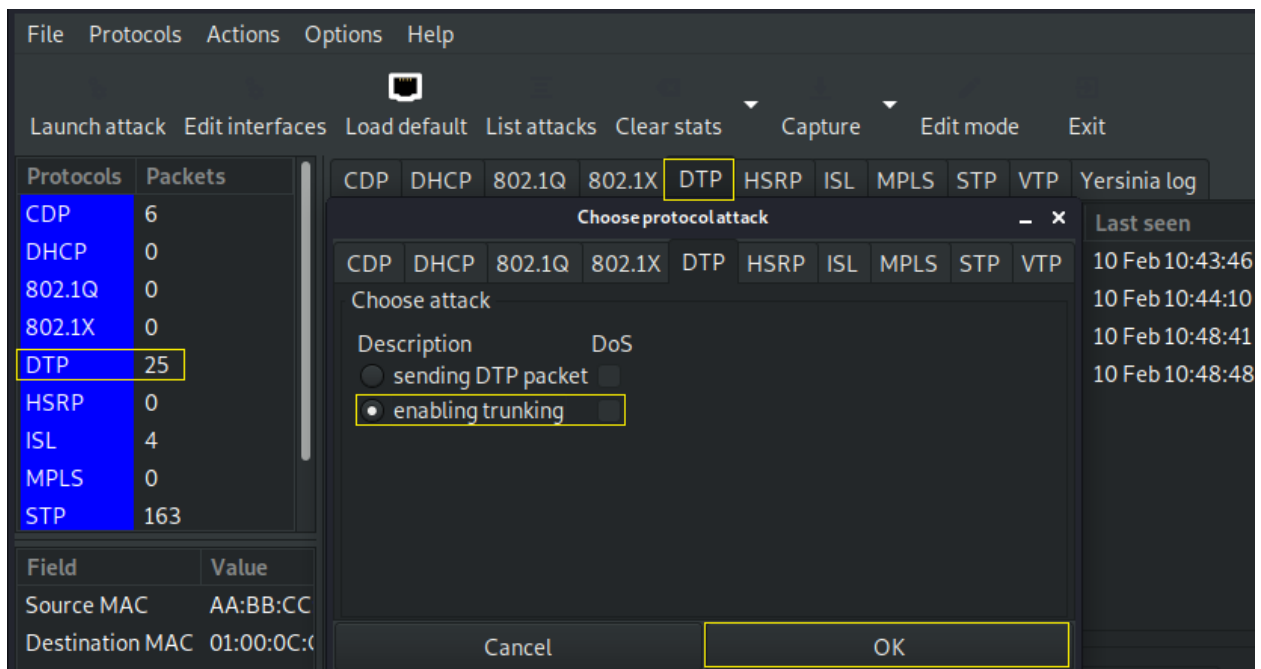

Open Yersinia from Terminal type `root@kali:~# yersinia -G` and lunch attack.

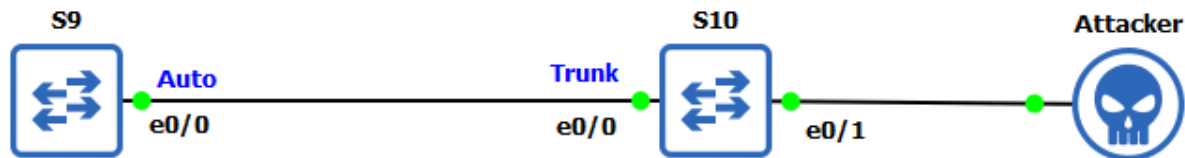

```
s10#show interfaces trunk
```

Port	Mode	Encapsulation	Status	Native vlan
Et0/0	desirable	n-802.1q	trunking	1
Et0/1	auto	n-802.1q	trunking	1