


`math.Point3D.divide`

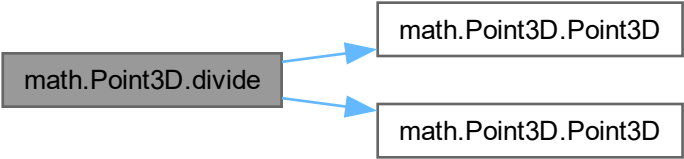

```
graph LR; A["math.Point3D.divide"] --> B["math.Point3D.Point3D"]; A --> C["math.Point3D.Point3D"];
```

The diagram illustrates the return type of the `math.Point3D.divide` method. A gray rectangular box on the left contains the text `math.Point3D.divide`. Two blue arrows originate from the right side of this box, pointing to two separate white rectangular boxes on the right. Both of these boxes contain the text `math.Point3D.Point3D`, indicating that the method returns a new `math.Point3D` object.

`math.Point3D.Point3D`

`math.Point3D.Point3D`