


frames.FluidHoverPanel.Fluid
HoverPanel

input.CommandStrParser.jexecute

frames.FluidHoverPanel.set
Locked

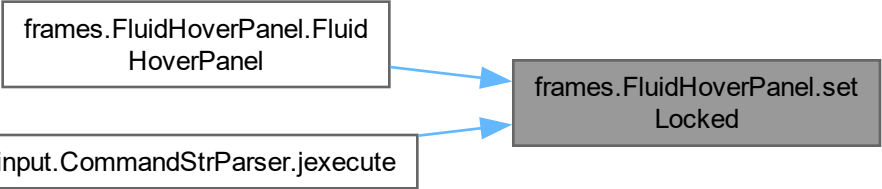

```
graph LR; A[frames.FluidHoverPanel.Fluid HoverPanel] --> C[frames.FluidHoverPanel.set Locked]; B[input.CommandStrParser.jexecute] --> C;
```

The diagram illustrates a call graph with two source nodes on the left and one target node on the right. The top source node, labeled 'frames.FluidHoverPanel.Fluid HoverPanel', has a blue arrow pointing to the target node. The bottom source node, labeled 'input.CommandStrParser.jexecute', also has a blue arrow pointing to the same target node. The target node is labeled 'frames.FluidHoverPanel.set Locked' and is shaded gray, while the source nodes are white with black borders.