


`math.Quaternion.inverse`

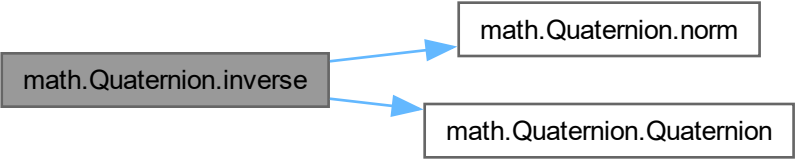

```
graph LR; A["math.Quaternion.inverse"] --> B["math.Quaternion.norm"]; A --> C["math.Quaternion.Quaternion"]
```

The diagram illustrates the dependencies of the `math.Quaternion.inverse` function. A central gray box labeled `math.Quaternion.inverse` has two blue arrows pointing to the right. The top arrow points to a white box labeled `math.Quaternion.norm`, and the bottom arrow points to a white box labeled `math.Quaternion.Quaternion`.

`math.Quaternion.norm`

`math.Quaternion.Quaternion`