


Tasks'

1. **Open Server Manager on your Windows Server VM, add the DNS Server role, and take a screenshot showing the DNS role installed.**
   ➢

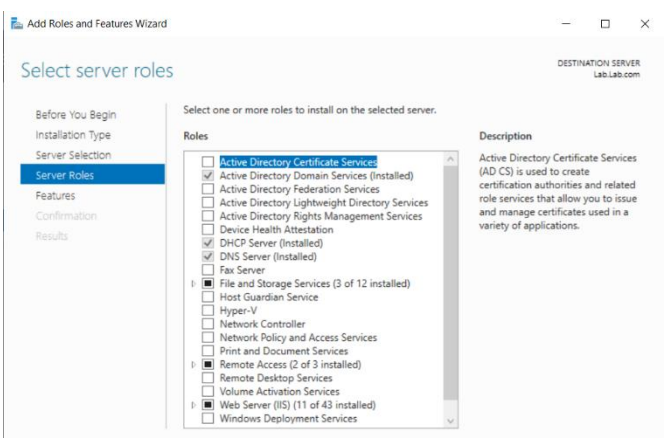

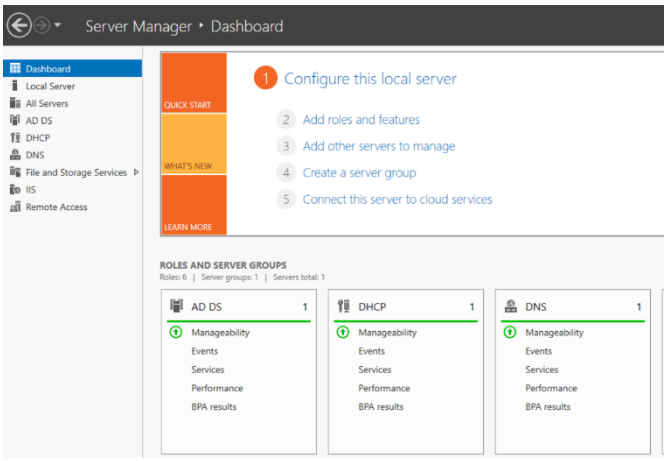


2. **In DNS Manager, create a new Forward Lookup Zone named foodies.local and add an A record for zomato.foodies.local pointing to 192.168.1.50.**
   ➢

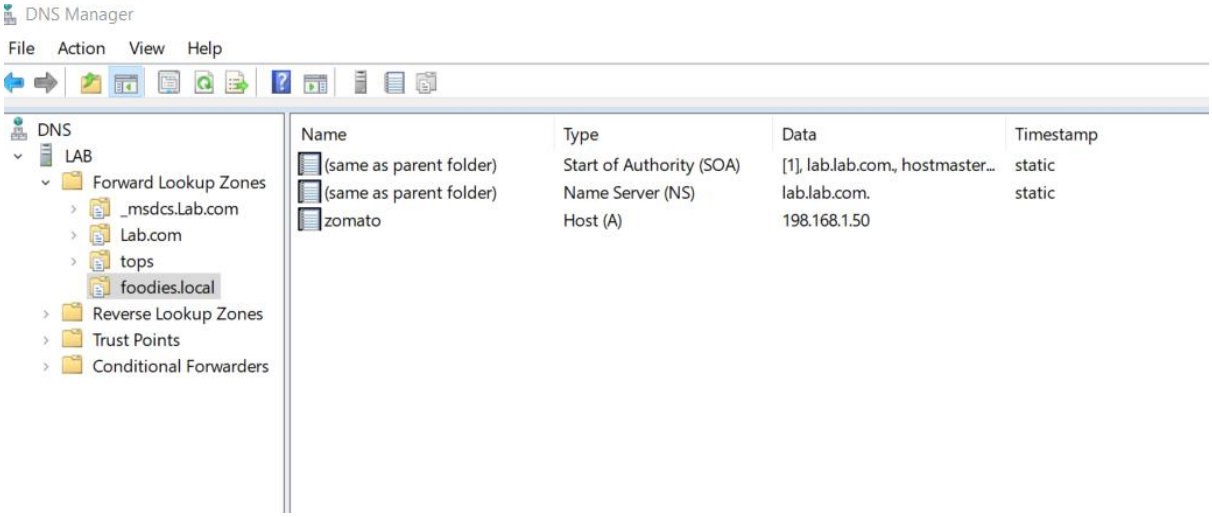


3. **Add a CNAME record in the foodies.local zone so that swiggy.foodies.local points to zomato.foodies.local.

Hint: Use the 'New Alias (CNAME)' option and test both names with nslookup.**
   ➢

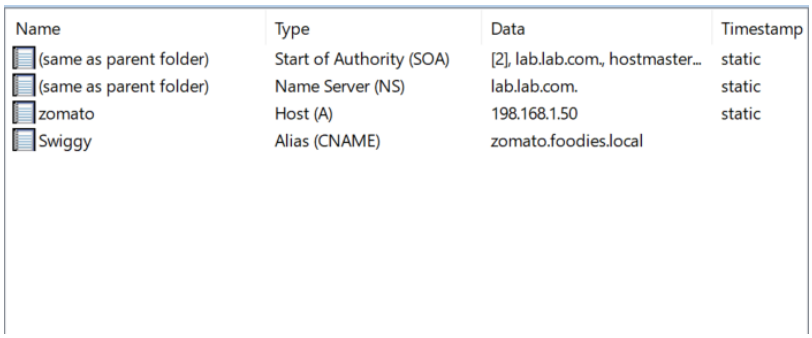

Name	Type	Data	Timestamp
(same as parent folder)	Start of Authority (SOA)	[2], lab.lab.com., hostmaster...	static
(same as parent folder)	Name Server (NS)	lab.lab.com.	static
zomato	Host (A)	198.168.1.50	static
Swiggy	Alias (CNAME)	zomato.foodies.local	

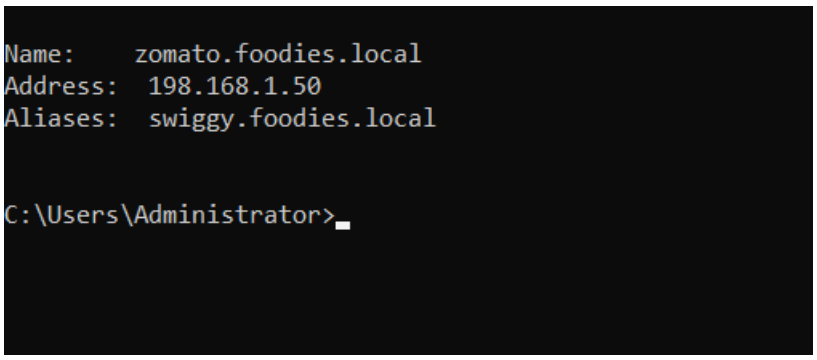

4. **Simulate a DNS resolution: On a client machine, use nslookup to resolve swiggy.foodies.local and zomato.foodies.local, then explain what happens and why in 3-4 lines.**
   ➢

When querying swiggy.foodies.local using nslookup, the DNS server resolves the CNAME alias to its target host zomato.foodies.local and returns the corresponding IP address (192.168.1.50). Querying zomato.foodies.local directly returns the same IP address from its A record. This happens because a CNAME (Canonical Name) record acts as an alias, allowing multiple domain names to point to a single target server without needing duplicate IP configurations.