

Master Thesis

in

Mobile Systeme

Creating a website with Info-Terminal and Live
CCTV Stream for the Smart Home Laboratory
at Hochschule Furtwangen University

Supervisor : Prof. Dr. Elmar Cochlovius
Co-Supervisor : Judith Jakob, M.Sc.
Submitted on : 30.08.2017
Submitted by : Ashiq Mohamed Akbar Ali (252641)
Gartenstr. 9, 78120 Furtwangen
ashiq.mohamed.ali@hs-furtwangen.de

Title

Creating a website with Info-Terminal and Live CCTV Stream for the Smart Home Laboratory at Hochschule Furtwangen University

Abstract

In the era of the Internet, it has become a norm or to an extend very much required for every institution to make its presence through a website. The Smart Home Laboratory at Hochschule Furtwangen University is not exception. The laboratory, which is under renovation, is nearing its completion and is expected to be fully functional soon. Hence, this laboratory requires a website that will let public to learn more about the laboratory through the information provided on this website. This website is built by using WordPress content management system. On top of that, it has been developed with an Info-Terminal — an automated slide show — that will give an insight about the laboratory interactively to the visitors. This website also has been programmed to stream live footage of an IP Camera, that is mounted in the laboratory. Through this thesis, a few websites of smart home labs of other institutions has be researched and available plugins in the WordPress marketplace has been analyzed, in order to create and design the website with the Info-Terminal. This thesis also outlines the implementation steps for the tasks involved in the development process right from the beginning till the end.

Keywords

Smart Home Lab, Website, WordPress, Info-Terminal, Live CCTV Stream

Acknowledgement

All praise to God — the Creator, the Nourisher, the Cherisher, the Sustainer and the Provider.

Before I could even started with my thesis work itself, I required helps and supports of others. As no one one can stand alone on his own, as he continually require the help and support of others, it is important to thank them and appreciate their gratefulness. In my opinion, the thanks we give to others don't equates to the help, support and encouragement they have given. But what I do believe is our thanks will encourage them to continue their help to others without a period.

By saying that, I would like to thank foremost my professor as well as my supervisor, Prof. Dr. Elmar Cochlovius for an interesting thesis topic. Without his help and supervising, this thesis wouldn't have been possible. His continual support and feedback has helped this work to take the course and shape in the last six months. And my second supervisor, Miss Judith Jakob, for her support and encouragement through out this thesis work.

Next, I would like to thank my friends and acquaintances and housemates - Suprita, Bhargav, Preethi, Noor, Darshan, Siva, Subbu, Sachin, Mati, Alex, Deshi, Max, Mothanna, Omar, and Muhammad. They have helped and encouraged me in so many ways and for so many days. I owe them all a lot which I cannot repay.

Lastly, I want to thank my parents and siblings. For their patience and understanding in letting me pursue my dream.

Contents

Abstract	I
Acknowledgement	III
List of Figures	X
List of Tables	XI
List of Abbreviations	1
1 Introduction	3
1.1 Aim and Objectives	4
1.2 Project Management	4
1.3 Documentation	5
2 Background Works	7
2.1 Website Analysis	7
2.1.1 FZI Forschungszentrum	7
2.1.2 KIT iZEUS	9
2.1.3 IoTLab Reutlingen	11
2.1.4 Duke Smart Home Program	12
2.1.5 MIT Mobile Experience Laboratory	14
2.1.6 Avea Smarthomes Re:Thinking	15
2.1.7 Comparison and Evaluation	16
2.2 WordPress Plugins Analysis	18
2.2.1 Meta-Slider	18
2.2.2 MotoPress Slider	19

2.2.3	SiteOrigin Slider	19
2.2.4	Smart Slider 3	20
2.2.5	WD Slider	21
3	Approach	23
3.1	Implementation Overview	23
3.2	Web Pages	24
3.3	Info-Terminal	25
3.4	Live Stream	27
4	Technologies	29
4.1	WordPress	29
4.2	PHP	30
4.3	MySQL	31
4.4	Nginx	31
4.5	Microsoft Surface Hub	31
5	Server Setup and WordPress Installation	33
5.1	Ubuntu Server Configuration	33
5.2	Nginx HTTP Server Installation	35
5.3	MySQL Database Installation	37
5.4	PHP Preprocessor Installation	38
5.5	WordPress Installation	40
5.6	Routing WordPress to external URL	47
5.7	Restrict Website Access to Internal Network	47
6	Website Designing	49
6.1	Enabling Page Builder Plugin	49
6.2	Adding row, column and widget	50
6.3	Adding text, image and button	52
6.4	Adding Scroll Effect	52
6.5	Adding ScrollReveal Effect	53
7	Implementation of the Info-Terminal	57
7.1	Getting Started	57

7.2	Slider Settings	58
7.3	Inserting Slider Into Web Page	60
7.4	Creating and Setting Slide	60
7.5	Adding Home Button	61
7.6	Adding Header	62
7.7	Adding Images	63
7.8	Creating Overview Buttons	63
7.9	Creating Component Buttons	66
7.10	Creating Panel Buttons	68
7.11	Creating Use-Cases Buttons	71
7.12	Creating Breadcrumb	73
8	CCTV Live Stream	75
8.1	Introduction	75
8.2	Pre-Configuration	76
8.3	Identifying the cgi-bin Module	78
8.4	Designing the Web Page	81
9	Integrating Unity 3D-Model	89
9.1	Uploading Unity Files	89
9.2	Rendering HTML for Unity Web Player	91
9.3	Alternative way to upload Unity 3D-Model Files	93
10	Blogging with WordPress	95
11	Conclusion	101
11.1	Future Works	102
	Bibliography	103
	Statutory Declaration	109
	Appendices	A
.1	Comparisons of the evaluated websites	C
.2	CD-ROM	E

List of Figures

3.1	Implementation overview	23
3.2	The main components of the website	24
4.1	Microsoft Surface Hub	32
5.1	SHLAB02 WLAN network to connect to Ubuntu Server	34
5.4	Nginx Default Start Screen	36
5.5	WordPress language selection	45
5.6	Main WordPress setup page	46
5.7	Administration page of WordPress	46
6.1	Enabling Page Builder Plugin	50
6.2	A row representing a horizontal column on the website	50
6.4	Window showing a list of widgets to be inserted in to row i.e. column	51
6.6	Button Classes field where 'ps2id' has to be entered	53
6.7	Adding the destination URL for a button	53
6.8	Adding Row Id to the Target Element	54
6.9	Scripts n Styles screen option	54
6.10	Adding JavaScript to bottom of page	55
6.11	Adding Class Name to HTML Element	56
7.1	Creating a new slider	58
7.2	Autoplay Icon Settings	59
7.3	New slide tile icon	60
7.4	Slide settings	61
7.5	Text layer widget	61
7.7	Image widget	63

7.8	Overview buttons	63
7.9	Designing header element	64
7.10	Adding CSS Class	65
7.11	Designing component buttons	67
7.12	Panel buttons	69
7.13	Use-cases buttons	71
7.14	Breadcrumb	73
8.1	PremiumBlue IP-Camera	75
8.2	SearchIPCam.exe	76
8.3	Login in into IP-Camera web interface	77
8.4	IP-Camera WLAN settings	78
8.5	Wlan Credentials	78
8.6	Developer Mode panel Sources	79
8.7	Scripts n Styles Column	82
8.8	HTML form with 3 input text fields and a submit button	82
8.9	Camera Module HTML View	84
9.1	Login into backend using PuTTY	91
9.2	File Manager Plugin	93
10.1	Blog entries	97
10.2	New blog (post) entry	97
10.3	Text field for blog post title	97
10.4	Text editor setting to 'Visual' mode	98
10.5	Publishing blog post	98
10.6	Permalink below 'Title' text field	98
10.7	Main navigation menu	99
10.8	Menu screen	99
10.9	Adding a menu to link blog post	100
10.10	Menu structure column	100

List of Tables

8.1	Camera Control Commands	80
-----	-----------------------------------	----

List of Abbreviations

2D 2 Dimensional

3D 3 Dimensional

AJAX Asynchronous JavaScript

API Application Programming Interface

CCTV Closed Circuit Television

CDN Content Delivery Network

CGI Common Gateway Interface

CMS Content Management System

CSS Cascading StyleSheet

HTML HyperText Markup Language

HTTP HyperText Transfer Protocol

IP Internet Protocol

JS JavaScript

LAN Local Area Network

Nginx Engine X

PHP Hypertext Preprocessor

RDBMS Relational Database Management System

RSS Rich Site Summary

SEO Search Engine Optimization

SFTP Secure File Transfer Protocol

SQL Structured Query Language

SSH Secure Shell

SSID Service Set Identifier

TCP Transmission Control Protocol

UDP User Datagram Protocol

URI Uniform Resource Identifier

URL Uniform Resource Locator

VM Virtual Machine

WP WordPress

WYSIWYG What You See is What You Get

XSS Cross Site Scripting

Chapter 1

Introduction

The Smart Home Laboratory has been established at Hochschule Furtwangen University, Campus Furtwangen a few years ago. This laboratory can be found at B2.01. Currently, this laboratory does not have an official website yet. Hence, through this master thesis, a website has to be created by using the CMS, called WordPress.

This website allows the university's professors and students, as well as public to access and learn about the smart home lab interactively through any web browsers. In order to achieve that, the website will be equipped with an Info-Terminal, which will display all the available systems, devices, as well as sensors and actors in the lab.

Here is a description of Info-Terminal. The Info-Terminal is an automated tour i.e. endless presentation. It will provide information regarding the components, panels and use cases in the Smart Home Laboratory. Additionally, it has controllers such as play, pause, next, previous and home buttons. Other than that, there are thumbnails at the bottom to navigate and view all the slides available in the info terminal. This will allow the users to have an overview of the smart home laboratory and navigate it interactively.

Other than that, a live stream of CCTV recording has been programmed and added to the website. This CCTV can be found in the lab. The website enables the privileged users to view live recording through the website. In addition to that, a 3D-Model made through the Unity technology has been integrated into the WordPress.

The Info-Terminal has to be programmed as such that it can be viewed through a touch display called Microsoft Surface Hub, which can be found in the lab. Though the website as well as the Info-Terminal has been programmed and designed to be viewable across all devices, it has been a little more consideration to be best suited on the Microsoft Surface Hub.

1.1 Aim and Objectives

The main aim of this master thesis is to create a website using WordPress, which contains Info-Terminal and displays live CCTV recordings.

Here is an overview of objectives that has been achieved in this thesis work:

- Preparation of expose, documentation structure, literature sources, time-planning and calendar-planning
- Research on smart home lab websites and contents of other universities
- Server setup and installation of WordPress
- Tutorials on WordPress, its theme and plugins
- Structuring, designing and adding the contents to the website
- Building the Info-Terminal based on the systems and devices available in the lab.
- Connecting CCTV recording to the website
- Integrating 3D Unity model
- Setting up email server
- Ensuring security and safety of the server and the website

1.2 Project Management

The thesis has to be done in six months period. It has been started on the first of March and has to be completed and submitted by the end of August 2017. This includes finishing up the practical part and the documentation on it.

The thesis is started officially with creating expose and defining aims as well as constructive objectives. At the beginning stage, the project management part for this thesis has been planned. As planned, status reports and thesis planning

has to be submitted every two weeks on the odd calendar week. Other than that, meeting and discussions have been held every four weeks to discuss on the outcome and further works that has to be carried out.

In the project management phase, the time planning and calendar planning has been organized accordingly with the tasks that has to be carried out through out six months time period. Before the implementation of website has been started, context diagrams has been created as a summarization of the practical tasks that were to be done. Apart from that, the contents for the documentation has been structured to mediate the report writing at the later stage.

1.3 Documentation

This documentation consist of following chapters:

Chapter 2 discusses the related background works and researches

Chapter 3 outlines the ideas and approaches involved in solving the problem

Chapter 4 discusses the technologies used in order to create the website

Chapter 5 explains the server setup and installation of required software

Chapter 6 shows the important steps involved in designing the website

Chapter 7 shows steps involved in creating Info-Terminal

Chapter 8 outlines on work involved in streaming CCTV live recording

Chapter 9 shows how to integrate 3D unity model into a WordPress powered website

Chapter 10 explains step-by-step on how to enable blogging on the website

Chapter 11 summarizes this thesis work with future outlook

Chapter 2

Background Works

The background works involved in this thesis in order to create the Smart Home Lab website divided into two parts. The first part is the analysis of selected Smart Home Lab websites of other institutions. The second part is the analysis of the WordPress plugin in order to create the Info-Terminal.

2.1 Website Analysis

In this work, altogether six websites have been analyzed. These include FZI Forschungszentrum, KIT iZEUS, IoTLab Reutlingen, Duke Smart Home Program, MIT Mobile, and MIT Smart Living. In general, criteria such as the layout, contents, main navigation menu, media supported, responsiveness and languages supported have been analyzed.

2.1.1 FZI Forschungszentrum

Website Information

- URL: <https://www.fzi.de/en/home/>
- Web server: Apache
- Application server: PHP 5.4.45
- CMS: Typo3

Web Layout

The website [1] uses normal layout, not screen-wide. The theme look modern, but the normally used one. The Header contains institution logo on the right, and the top part has option to change language, link to contact page and search bar. Lower part of the header has main navigation menu (Home, News, Research, Our Offer, Work For Us, and About Us). The header is fixed, but collapse when user scroll down.

Body is two column sized. In all pages except home page, the small left column has sub menu respective to that individual page and large right column has the content. On the main page, the the left column is relatively bigger which has slideshow and latest news feed. Right column is relatively small and has list of upcoming events and quicklinks.

Footer is small sized. It has sub menu on the left (Home, Privacy, Legal Notice, Sitemap, Search) It also has social media plugins on the (Xing), RSS feeds and contact links.

Contents

Contents presented on the website are the home page (featured article/news, upcoming events, latest news, quicklinks), newsfeed, research (research sector, research focuses, projects etc), offers, work for us (carrier page), about us, privacy, legal notice, and sitemap. As analyzed, the website has a lot of contents, perhaps it could have been organized in a better way.

Menu

There are 3 types of menu:

- Main navigation menu situated at the header (Home, News, Research, Our Offer, Work For Us, and About Us)
- Sub menu respective to individual pages which is different from one another located at right column of the body part
- Footer menu located the footer (Home, Privacy, Legal Notice, Sitemap, Search).

Media

The website supports the following medias, such as images, slide show, videos, contact form, search bar, social media button.

Responsiveness

The web page is responsive. The header is compressed. The main navigation menu is shifted to the bottom of the page with a link to the menu located at the header. The two column body part is changed to single column on window resize. The sub menu on the individual pages are merged with main navigation menu in hierarchical order, which is situated at the bottom of the page.

Languages

The website supports German and English languages.

2.1.2 KIT iZEUS

Website Information

- Url: <http://www.izeus.kit.edu/62.php>
- Web server: Apache 2.4.10
- Application server: PHP
- Server: Debian

Web Layout

The web layout of this website [2] is classic normal one. It is not wide and not stretched. The institution logo is located in the header at the top. The sub-menu can be spotted small in the upper right part of the header. The main frame is divided into three columns. The left column contain the main navigation menu. The center column serves as the main content. Lastly, the right column fixed banner. The footer is small and has copyright statement.

The web layout is classic without fancy popup animations, graphics, slider etc. It has to also noted that it is most common and user friendly where most users know how to navigate.

Contents

Contents presented on the website are the home page, energy smart home lab, information materials, project consortium (partners and KIT chairs), publications, press review, links, contact, legals and sitemap. The content look organized, clear to be viewed and read. Navigating through the contents is also easy, but it appears not to be updated anymore.

Menu

The website contains two menus:

- Small top right menu (Home, Lang Pref, Legals, Sitemap, Link to KIT)
- Main Menu on Left Column (Home, Energy Smart Home Lab, Information Material, Project Consortium, Publications, Press Review, Links, Contact)

Analysis: Both navigation are visible on all pages, static, easy to use, simple hovering effect, highlight on active link.

Media

The website supports the following media, video, images, banners, PDFs, and external links. However, no animation, picture gallery and image slider can be spotted.

Responsiveness

The website is not responsive. It is best viewed with desktop and laptop. Having said that, it is not mobile- or tablet-friendly and not recommended for Microsoft Surface Hub.

Languages

The website has German as the primary language and supports English as an alternative language. The website is designed will on both the languages.

2.1.3 IoTLab Reutlingen

Website Information

- URL: <http://iotlab.reutlingen-university.de>
- Web server: Apache
- Application server: PHP 5.5.36
- CMS: Joomla!

Web Layout

The website [3] uses a modern web layout and the web page is full-width stretched. The header contains brand logo and horizontal main navigation menu. The header also contains toggle button to open / close main navigation menu. It is fixed and the both menus are duplicated.

The website is created using Joomla! content management system. The home page is single columned with newsfeed. Whereby, the other pages are double column, with right column containing sub-menu and left column showing the main content. Other than that, fixed social media icons (e.g. facebook and twitter) can be found on right edge of the website.

The footer contains copyright statement, impressum link, link to university homepage, link and info about CMS, and link / info about CMS theme. The web layout doesn't look systematic and well organized even though it uses modern web templating. The users might face difficulty to get information or contents they are looking for.

Contents

The website contains the contents such as new feeds on home page, master projects listing (current and finished master projects, team, introduction), publications, thesis, blogs (containing 3 categories: IoTLab-Blog, Mobile Computing and Distributed), systems, contact form, and commenting for blog article.

Menu

The website has three menus:

- One menu located on the web page header (Home, Master Project, Publications, Thesis, Blog), but Hidden on mobile / tablet mode.
- Sidebar Menu which has to be toggle opened/closed using button (Duplicate of the main menu located on the header with additional menu "Intern")
- Menu located at left column of pages (Duplicate of the menu with some additional menus such as Cooperation, News, Events etc.)

The menus are duplicated which is inconvenient and confusing for the user to navigate around.

Media

The website contains images, slide shows, and video. It also supports PDFs, banner and animation.

Responsiveness

The website is responsive and adapts to various screen sizes. The contents are readable and viewable using different devices. It is mobile- and tablet-friendly.

Languages

The website supports only English language.

2.1.4 Duke Smart Home Program

Website Information

- URL: <https://smarthome.duke.edu/>
- Web server: Apache 2.4.7
- Application server: PHP 5.5.9-1
- CMS: Drupal 4.7
- Server: Ubuntu 4.20

Web Layout

The website [4] uses modern yet simple web layout. The web page is fill-width stretched. The header is divided into three layers. The first layer is smallest and

contains two external links. The second layer big and has brand logo and search bar. And the third layer is smaller and has main navigation menu.

The main view of website is divided into two columns. The left column is the main column containing contents. The right column is small and has sub-menu respective to each pages. The footer part is medium sized contains copyright statement, institution logo and a link to contact us.

For analysis, in overall web design looks fine, but unable to scroll through the page using scroll wheel.

Contents

The website consists of following pages. The home page contains picture, about the program, links targeted to different audience, 3 recent research projects. Other than that, there are about, research, our smart dorm, industry, students and contact us pages. The contents are well presented and organized.

Menu

Two types of menu:

- Main navigation menu located at the header of the website (About, research, our smart dorm, industry, students, contact us)
- Sub-menu different for individual pages located at right column next to the main layout.

The menu are well located and easy for the user to navigate.

Media

The website has images, video, map and banner. However, no gallery, slider and contact form can be spotted.

Responsiveness

The website is fully responsiveness and mobile-friendly. The main navigation menu appears as a left drawer which can be toggled opened and closed.

Language

English is the primary and the only language offered by this website.

2.1.5 MIT Mobile Experience Laboratory

Website Information

- URL: <http://mobile.mit.edu>
- Web server: Apache 2.2.22
- Application server: PHP 5.4.45
- CMS: WordPress 4.3.1
- Theme: WordPress Construct (MEL Edition)
- Server: Debian 7u8

Web Layout

The website use a modern web layout. It is wide screen but not stretched. The contents are arranged in tile-based design. The header contain the institution logo with home page link. The main navigation menu can be found on the header as well.

The main layout is single columned. It has breadcrumb at the top part of the main layout. The projects and event+classes pages have filtering option on the left side. The main navigation menu in the footer is a duplicate from the header' menu. The footer also contains copyright statement, institution and department logo containing external links to their website respectively.

The look of the website is different than normal website as all the contents are arranged in the tiled format.

Contents

The main page contains featured news, upcoming recents+classes, short introduction and contact us section. Other than that, the pages as such, about us, projects that can be filtered according to topic, events+classes that can be filtered according to month/year, team members and sponsors can be found on this website.

Menu

There are two menus on this website:

- Main navigation menu located at the header (Home, about, projects, events+classes, team, sponsor)
- Footer menu, same as the main navigation menu

The menu looks simple, decent, easy to navigate and direct forward.

Media

The website supports all normal media files. Additionally, slide show, images that can be zoomed-in, breadcrumb, and project has 'related projects' link.

Responsiveness

The website is not responsive as tested. It is not scaling to fit the size of mobile and tablet screens. The user has to browse the website in desktop mode in the mobile devices.

Languages

The website supports only English as primary and the only language.

2.1.6 Avea Smarthomes Re:Thinking

Website Information

- URL: <http://mobile.mit.edu/smartliving/>
- Web server: Apache 2.2.22
- Application server: PHP 5.4.45
- CMS: WordPress 4.3.1
- Theme: WordPress Time (Smart living edit)
- Server: debian 7u8

Web Layout

The web layout of this website [5] looks modern. It is wide but not stretched. The header has two sections. First, a broad section for brand logo centralized. Second

part has the main navigation menu. The main layout of website is single columned with simple layout. The footer contains copyright statement centralized.

The website has a simple web interface without much fancy items.

Contents

The website has the following pages, home page with slide show, project brief containing project introduction, methodology and projects listing (FLOC, SOL-CHARGE, BOX OF HOLDINGS, COOKBOX.NET) and team.

Menu

There is only one main navigation menu at the header:

Media

The website contains media such as images, slide show and video.

Responsiveness

The website is responsive, but some of the elements could be positioned well (e.g. header). The main navigation menu becomes as a drop down list in the tablet and mobile mode. Since the web page is single column, there is not much change in the body part.

Languages

The website supports only English language.

2.1.7 Comparison and Evaluation

Based on the analysis, a few conclusion and evaluation can be drawn. First, all the website uses PHP as their server-side programming language. All the websites except for KIT iZEUS, use content management system for their website. Two of them use WordPress; one uses Drupal and Joomla each. For KIT iZEUS, it can't be determined whether they are using a CMS or not. All of them seemed

to use an Unix based operating system for the physical server and Apache web server.

For this project, Unix based server operating system, Ubuntu will be used. For the server-side programming, PHP will be used. It has been decided that WordPress content management system will be used for this website, which is found to be the most used and preferable among the website developer. Instead of Apache, Nginx web server has been used because of two reasons. First Nginx is more lightweight, hence uses less hardware resources. Second, it can handle requests more effectively compared to Apache under high load.

Layout of all the websites analyzed are mixture of modern and classic layout. Some of them are wide, and some of them are stretched. Based on the analysis, modern web layout with wide not stretched screen looks suitable for web page design. As a common practice based on usability testing, placing the main menu of website on the header part is recommended. Along side with the menu, the institution logo also will be placed to left of the header.

The content column layout, it varies from single, double and three column view. Three of the websites, namely IoTLab, MIT Mobile and MIT Smart Living use single column. FZI Forschungszentrum and Duke Smart Home Programm websites use two column view. Only KIT iZEUS uses 3 column column view. Based on the analysis, for this website single column view will used. One of the advantage is that, the main content can be displayed at the center of the screen. Secondly, it removes the distraction and focuses the visitors towards the important part of the website.

For the footer section, all the websites have the copyright statements included in that part. Some of website has menu link duplicated in the footer part, which is in my opinion not really required. As for this website, footer will coded with copyright statement. Additionally, a *Impressum* link will be added to right of the footer.

Except for KIT iZEUS and MIT Mobile websites, all other websites are responsive. With gaining usage of mobile devices, this website will be designed responsively. This website should be able to be viewed across multiple devices with different screen sizes. Responsive website will be able to adapt its content

based on the user's device.

Lastly, all the website are designed in English language. Only KIT iZEUS provide German as an alternative language to English. The main reason is to implement once and cover majority of the audience. Hence, our website will be programmed primarily in English language.

2.2 WordPress Plugins Analysis

The Info-Terminal has been created with a WordPress plugin. Among many available plugins, slider [6] is a great option to create a stunning gallery of slides containing images, texts, buttons, video etc. There are plenty slider plugins available in the WordPress plugin marketplace. This section will summarize the analysis of the slider plugins that have been tested.

Even though more than 10 plugins have been installed and tested, for the sake brevity, only 5 of them will be discussed, which includes the slider that have been chosen among them to create the Info-Terminal. The five slider plugins are Meta-Slider, MotoPress-Slider, SiteOrigin-Slider, SmartSlider 3, and WD-Slider.

The analysis has taken into consideration aspects such as general properties such as autoplay-capacity and transition effects; available controllers to control the slide which includes play/pause button, next/previous button and thumbnails; the user-interface of the admin page; ease of use in order to create the slider; responsiveness; search engine optimization; customization through CSS and JavaScript; adding layers and layer effects; and load time for 3 slides.

2.2.1 Meta-Slider

Meta Slider [7][8] is created by Team Updraft and available free of cost. It enables the creation of unique, SEO optimized slideshow or slider. It is easy to use and has a user-friendly admin page. This include drag-n-drop functionality, setting slide caption and linking the slide etc.

It provides four different types of templates: Flex Slider2, Nivo Slider, Responsive Slider, and Coin Slider. This slider is responsive and support full-width slideshow. The images can be intelligently cropped before adding to slides. Fur-

ther more the transition effect and speed can be configured through the admin page. The slider is fast, where it takes about 1.23-2.08 seconds to load a slider containing 3 slides.

Even though, it is minimal, lightweight and offers good features as mentioned above, it has not been chosen to build the Info-Terminal due to limited advanced settings to control the slide, no available controllers and unavailability of customization option through CSS and JavaScript.

2.2.2 MotoPress Slider

The MotoPress Slider [9][10] by MotoPress is a responsive and easy solution to build sliders. It has drag-n-drop features, touch and swipe navigation for touch devices, and fully responsive mobile-friendly layout. This slider creates search engine optimized slider as well. The slider can be built full-width with this plugin.

This is the only slider which support layer effects and styles in the free version. The layer effect is the effect of the elements on the slides such as text, images, button etc. The layer effect can improve the user experience. Other than that, it offer easy configuration and customization through JavaScript and CSS. It also support embedding background videos as well as video from providers such as YouTube and Vimeo.

The admin interface can be said just above average. The load time for 3 slides using MotoPress slider can take up to 6.9 seconds, which is relatively high. Despite of providing extensive slideshow settings (e.g. size, animation, controller, appearance), the slider crashes quite often during the development process. This leads to loss of coding and unsaved work. Due to this, this slider has been opted out.

2.2.3 SiteOrigin Slider

SiteOrigin Slider [11][12] comes pre-bundled with the SiteOrigin Builder plugin. As the name suggest, it has been developed by SiteOrigin and available free of cost. It provides an easy way to integrate a simple slider into pages that used

the SiteOrigin Builder or the widget areas. The slider is responsive and allows unlimited number of slideshows and slides.

The slider provides controller options for animation speed, timeout and navigation color. Other than that, it can be customized by using CSS. The plugin allows adding background image or video in addition to foreground images or videos. The admin page to create the slider is intuitive and can be said above average as for user-friendliness.

The performance measurement for loading 3 slides using this slider plugin lies in between 1.38 to 2.37 seconds. The slider, however, doesn't provide settings to change the controllers, autoplay, size, and animation effects. It also not possible to create a full-width slider with this plugin. Hence, this plugin has not been used to create the Info-Terminal

2.2.4 Smart Slider 3

Smart Slider 3 [13][14] is another slider plugin created by Nextend. It is a recently released plugin as a successor to Smart Slider 2. It is free slider plugins with many features and ease of use. One of the main advantage of this plugin is the user-friendliness of the admin page. The admin page of this slide is very intuitive, interactive as well as easy to learn. The slider can built full-width.

This plugin offers many features such as slide builder, slide library, and editor. Other than that, it is also fully responsive and mobile-friendly. It offer various settings options such as for the slider size, controllers, autoplay, and animation. These settings can also be customized. Additionally, the slider can be customized through the JavaScript and CSS.

Various elements can be added to the slides including texts, images, buttons, video or our own HTML codes, which enables the building of our own elements. All the elements can be further customized through CSS in addition to the settings such as sizing and positioning provided.

The performance measurement to load 3 slider takes up to 4.21 seconds. Even though, it is not the fastest, considering the amount of customization it allows, the slider has been chosen to build the Info-Terminal. Further more, in the paid version of this slider plugin, the layer effect can be added to slider elements. This

feature can be considered for the future development.

2.2.5 WD Slider

WD Slider by WedDorado [15] is yet another slider plugin that has been tested and considered for the Info-Terminal. The slider created through this plugin can be added into the web page or as widget. It supports images and videos.

In addition to that, it has a lot options to control the slide show such as slide transition, slide timing, autoplay, aligning and image cropping. The plugin has features such adding watermark, music. It is responsive and allows full-width. Developers can customize the slides through CSS and JavaScript.

The admin panel of this plugin is moderately friendly. The free version has limited scope despite of allowing unlimited numbers of slideshows and slides. The plugin also doesn't support layer effect for animation. The loading time for 3 slides is quite high as measured, 5.18 seconds. For these reasons, it has not been chosen to build the Info-Terminal.

Chapter 3

Approach

3.1 Implementation Overview

Figure 3.1: Implementation overview


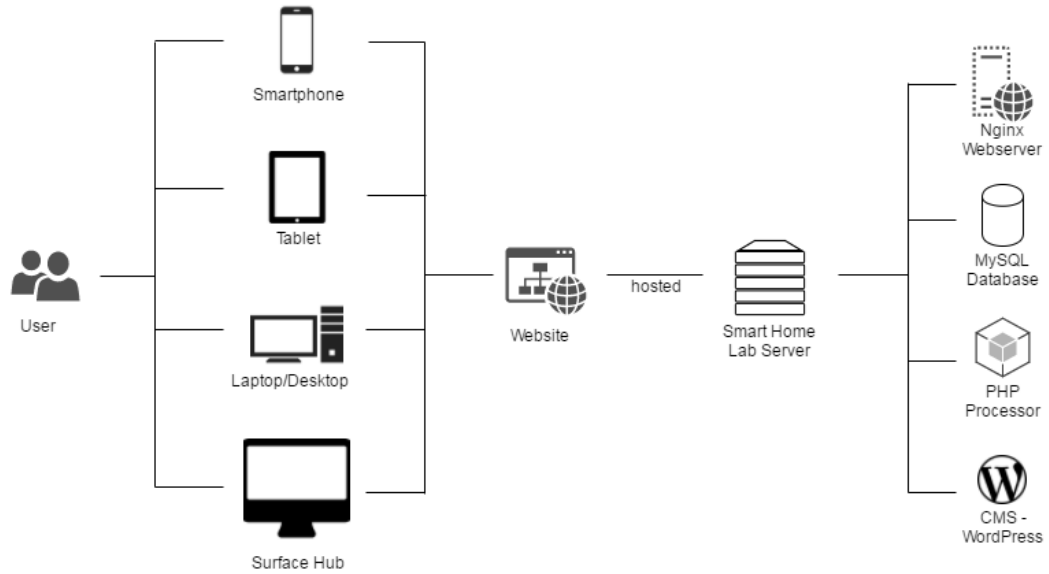


Figure 3.1 shows the general implementation of the website for the smart home laboratory. The website is hosted in a physical server, which is located inside the smart home laboratory. This physical server is running the operating system, Ubuntu Server 16.04.2 LTS. In this server, the following software have been installed. They are Nginx HTTP or web server, MySQL database server, PHP application server and WordPress. The website is accessible by various devices by users.

Figure 3.2: The main components of the website

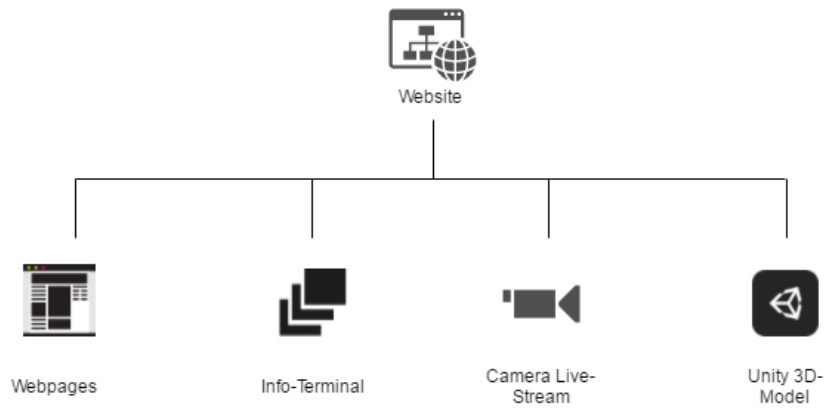

The website in general consists of four parts as shown in Figure 3.2. They are:

Web pages represent normal web pages such as Home, About, Components, Panels etc.

Info-Terminal a full screen web page with slider that displays an automated tour

Live Stream a web page that has been embedded with live video stream and controllers of an IP Camera

3D-Model a web page that has been integrated with Unity 3D-Model

3.2 Web Pages

Header

The web pages are designed with the header consisting of main navigation menu. To the left of main navigation menu, the logo of the institution can be found. To the right of the main navigation menu, a downward arrow can be found. The logo will take user the home page, where else the downward arrow will slide the web page to content part.

Single Column View

The main body part is programmed to be single column view. The reason is to minimize clutters and distractions through widgets or banners, and at the same time to give extra focus and emphasize on the main contents.

Sectioning

The web pages has been separated by sectioning. Each section has been equipped with two arrows – downward and upward. The idea here is to display a similar group of information in one section. Each section are sized to fit the screen size of HD and FHD screens.

Navigation Arrows

As mentioned before, each section has two arrows to assist the user to navigate from one section to another. By clicking the upward button will scroll the page automatically to previous section, and clicking the downward button will scroll the web page to next section automatically.

Footer

Another aspect of the web pages is the footer. The footer as the name itself suggest is to be found at the end of every web page. The footer is divided into two sections. The left section of the footer consists of the copyright statement. The right section of the footer contains a link to *Impressum* page.

3.3 Info-Terminal

Full-Screen Mode

The info-terminal is programmed to work optimally in full screen mode. It is the only web page, where the header and footer have been removed. The info-terminal consists of only the body part filling the whole screen from left to right and top to bottom.

Screen Ratio

The info-terminal has been sized to the ratio of 16:9. The reason for choosing the ratio 16:9 is, most of devices' screen are built in this ratio. For example, the Full-HD screen with resolution 1920 x 1080 pixel and HD screen with the resolution 1366 x 768 pixel have this ratio. According to [16], this screen ratio counts to more than 50% of the used devices as of July 2017. It has found to be wiser and reasonable to choose this screen ratio.

Screen Size

The screen size of info-terminal is designed with a resolution of 1920 x 1080 pixel. The reason behind sizing it at this resolution is the Microsoft Surface Hub has the same resolution. As the info-terminal main designing targeting to be used on the Surface Hub, it has been sized at this resolution. However, it has been programmed to responsive, which allows it to resize itself according to fit screens of other resolutions.

Autoplay

The info-terminal slider has been equipped with autoplay functionality. The autoplay functionality is turned on by default. It is also possible to switch it off, or on, by using the play button located at the top right of the screen.

Navigating

The info-terminal can be navigate on its own on autoplay mode. Additionally, users can navigate it manually on their own. Here, they can use the left and right arrows which can be found on the left and right edges respectively. Other than that, the slider can be swiped as well in order to perform the navigation.

Thumbnails

The thumbnails are one of the feature in the info-terminal. The thumbnails are located at the footer of the slider. Users can see the snippets of the slide on the thumbnails and jump to the slide by clicking it. The thumbnails strip aren't

designed with swipe functionality as it conflicts with swipe action on the main slider view.

Home Button

To the top left of the screen, a home button has been placed. This button will take the user to home page. As the info-terminal doesn't have the header, which contains the main navigation menu, it is essential to provide a button that users back to the home page.

Breadcrumb

Breadcrumb is the hierarchical navigation link which will be displayed as the user navigate from one level to to another. Breadcrumbs gives user a hint on which level they are right as well as letting them jump to higher level with a single click.

Location Map

On the bottom left of the info-terminal, a small lab image has been added. This image displays the location where the components that are being displayed on the current slide can be found in the lab.

3.4 Live Stream

Security Login

In order to view the live stream of the camera, the web page has been programmed to request the users to provide the IP address, username and password at the beginning. This is to ensure the safety and privacy. Hence, a HTML form has been designed with three fields for each information together with a submit button. Upon submission, the provided information will be validated.

Live Footage

The live footage has been embedded into HTML multimedia tag. It has been programmed to continuously request for the latest footage from the IP Camera

and update the screen as soon as the response footage has been received. The communication happens asynchronously in background.

Controllers

In addition to viewing the live footage, users also can control the IP camera. For this purpose, nine buttons, each containing an arrow to where the camera should move, have been designed and added to the web page. Using this button, users can control the camera in real time. For each of this button, JavaScript and AJAX programming has been added to communicate with the IP camera.

Chapter 4

Technologies

4.1 WordPress

WordPress, WP is one of the famous CMS that is powering almost 25% of the websites globally [17]. It is an Open Source project created, developed and maintained by the community. Hence, it can be downloaded, used, modified and distributed freely without any license fees.

The WordPress can be downloaded from their official website, wordpress.org. The current stable version of WordPress is 4.8, as at time of writing. Initially, it started as blogging system and became a full content management system with thousands of plugins, widgets and themes.

To run WordPress, the server should be equipped with PHP version 7 or greater, MySQL database server version 5.6 or greater or MariaDB version 10.0 or greater, and HTTP support. As for web server, it is recommended to use either Apache or Nginx. They are reliable, have a lot of features, and works well with PHP and MySQL [18].

For Smart Home Lab website, WordPress will be ran using Nginx web server with PHP and MySQL. The Installation and configuration of them before installing WordPress will be discussed in the next chapter.

With WordPress, various website can be developed right from simple blogs to major websites comprising custom made plugins and widgets. This is one of the advantage of using WordPress is handling the flexibility and complexity while being easy to use [19].

Using WordPress enables the web developer to concentrate on the contents and structuring the websites, rather than developing the backend and frontend from scratch, which is time consuming and increased time to market.

Other than that, WordPress also provides multilingual pack consisting of 70 languages. This enable the website to developed in multiple languages, primarily in English and German languages. This not only changes the contents of the website as viewed by the web user, but also the administrator dashboard.

WordPress also provides excellent security for its users [20]. Their security implementation consists of protection against Injection, Broken Authentication, XSS, Insecure Direct Object Reference, Security Misconfiguration etc. Their themes, plugins as well as hosting providers are tested and secured.

Using WordPress also make it easy for others to develop and continue the development of the website in the future, as everything can be managed in an easy web interface. And through this documentation, most of the essential information regarding the installation, configuration and contents development will be provided.

4.2 PHP

PHP stands for Hypertext Preprocessor [21]. It is a general-purpose scripting language for generating dynamic web contents. It is commonly used for web development and can be embedded into HTML. The PHP scripts are executed on the server-side and the clients are unaware of the script and its execution. The result of the executed PHP will be sent to client in HTML format [22].

PHP scripts are processed by PHP parser or PHP interpreter. This parser will be installed in the web server such as Apache, IIC, lighttpd or Nginx as a CGI. The PHP parser is open source software, which can be downloaded from their official website¹.

PHP is not only limited to deliver web contents like HTML, but can be used to output text, images, PDFs and flash-videos. One of the PHP advantages is it supports and works well with various databases. For this website, the database

¹<http://php.net>

called MySQL is used and will be discussed in the next section.

4.3 MySQL

MySQL is RDBMS. The Community Edition of MySQL is open source database system which can be downloaded from the official website². MySQL uses SQL [23] to query, filter, add, modify and delete data in the database. The data in the database will be arranged in table form. MySQL is used in majority of the websites and content management system such as WordPress.

4.4 Nginx

Nginx is a high-performance web server [24]. It is also act as reverse proxy, IMAP/POP3 proxy server, load balancer and accelerator. It works with HTTP, TCP as well as UDP based services. The main advantages of Nginx are its high performance, stability, rich feature set, simple configuration and low resource consumption [25].

The architecture of Nginx uses scalable event-drive asynchronous architecture. Not only it uses small amount of memory, but the memory usage is predictable under load. It success relies in the ability to handle thousands of requests at the same time. For this project, Nginx web server will be used, where it communicates with PHP parser to run WordPress and MySQL database.

4.5 Microsoft Surface Hub

Even though, the website designed for this thesis encompasses all range of devices from desktop to mobile devices, the main focus has been the Microsoft Surface Hub (see Figure 4.1) [26][27].

Surface Hub is a collaborative device from Microsoft. It has a 55-inch touch display with 1920 times 1080 pixel resolution. The main aim of the device is to encourage team work between people and increase their productivity. It has been

²<https://dev.mysql.com/downloads/>

Figure 4.1: Microsoft Surface Hub



adapted with various technologies such as wide angle view display, camera and responsive pen [28].

The Surface Hub runs Windows 10 Team, which is a customized version of Windows 10 Enterprise operating system [29]. Apart from, as the operating system name itself suggest, using it for collaboration and team work, the Surface Hub operating system creates new session every time when it is started. It doesn't save or store the data and session from previous time. In addition to that, it also doesn't have internal file system.

The Surface Hub has a really good cameras, speakers and microphone. With the software Skype for Business from Microsoft, which is installed on the device, the Surface Hub can be said as one of the best device for video conferencing.

Chapter 5

Server Setup and WordPress Installation

In this project, WordPress is setup on Nginx HTTP web server running PHP preprocessor and MySQL database server. This chapter will explain on how to configure Ubuntu server, setup Nginx, PHP, MySQL database as well as WordPress.

5.1 Ubuntu Server Configuration


The Smart Home Lab has its own server running Ubuntu Server 16.04.2 LTS. On this server, a VM application has been installed. This VM runs a separate virtual Ubuntu Server on the host. This VM has been allocated with its own processing power, memory and disk space. Local machine can connect to the virtual Ubuntu Server using the Wi-Fi network, SHLAB02 as shown in Figure 5.1.

On the local machine, first, a SSH key or commonly known as public/private key should be generated. This can be done using the PuTTY Key Generator application as shown in Figure 5.2a. This application can be downloaded at the URL given in the footnote¹. The current stable version of Putty Key Generator is 0.68, as at time of writing.

The keys can be generated by clicking generate button and by moving the mouse cursor randomly at the blank area as shown in Figure 5.2b. After that,


¹<http://www.chiark.greenend.org.uk/~sgtatham/putty/latest.html>

Figure 5.1: SHLAB02 WLAN network to connect to Ubuntu Server

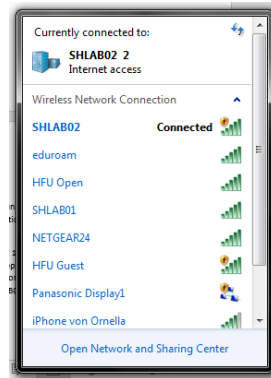

(a) PuTTY SSH Key Generator

(b) Generating random key in PuTTY

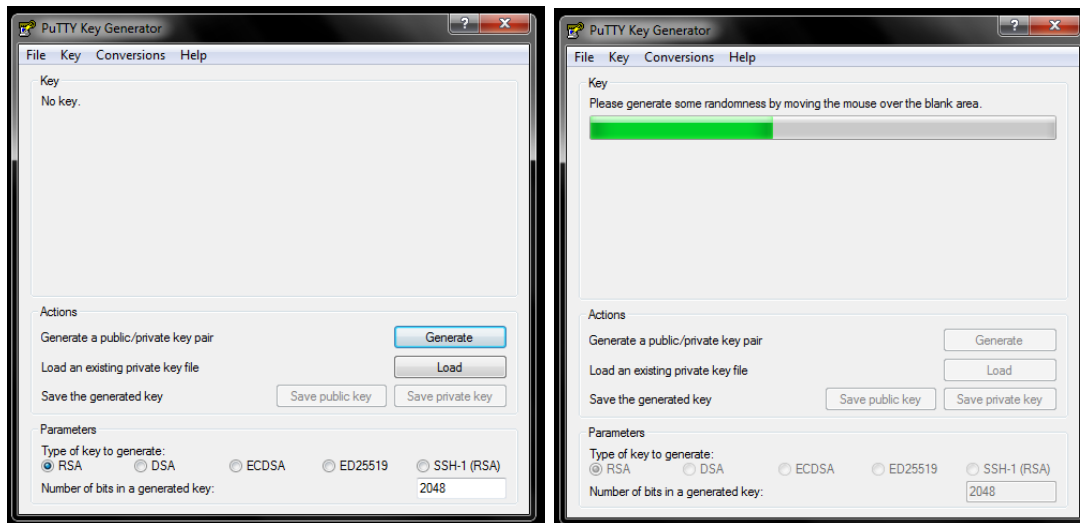


the Key Passphrase and Confirm Passphrase must be given. This Passphrase must be noted down or remembered for future usage when connecting to the server every time. The Passphrase is `BSY2qjtu$#`


The generated Public Key and Private Key must be saved. The generated Public Key will be provided to the virtual Ubuntu Server running on the server. Where else the generated Private Key must be saved in the local machine that will be used to connect to the server.

To connect to the server, the PuTTY application will be used. This application can be downloaded at the same link as the PuTTY Key Generator link given above. The PuTTY application will be provided with Host Name (or IP Address) of the server, which is `user@192.168.0.20` and Port number, which is 22 as shown in the Figure 5.3a. After that the generated Private Key from previous step must be given in the 'Private key file for authentication' field as shown

(a) Host Name and Port

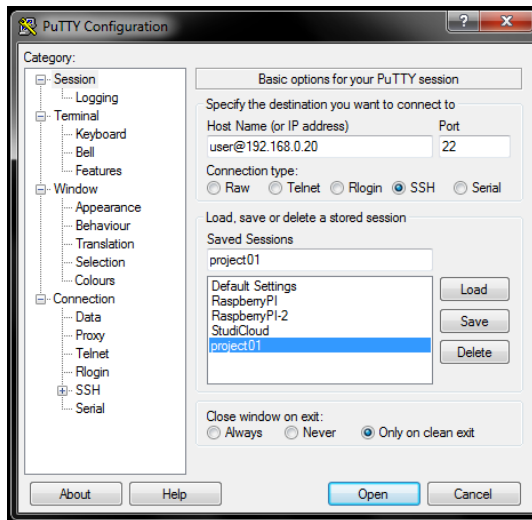

(b) Attaching Private Key

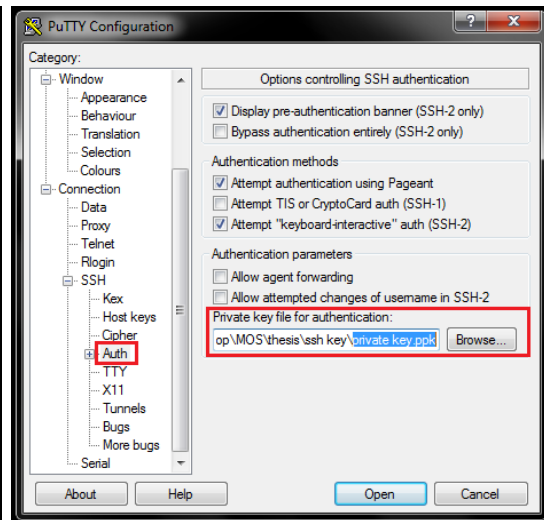

in Figure 5.3b. This field can be found under Connection \rightarrow SSH \rightarrow Authentication tab. Lastly ‘X11 forwarding’ must be enabled. Connection to the server can be established by pressing ‘Open’ button.

After successfully connecting, the passphrase, BSY2qjtu\$# that have been entered while generating the Public/Private keys must be entered in the terminal to proceed.

5.2 Nginx HTTP Server Installation

Nginx is a powerful, versatile and efficient HTTP or web server. Nginx web server can be installed in Ubuntu using the `apt` package.

Step 1: Installing Nginx

The following has been used to install Nginx.

```
1 $ sudo apt-get update
2 $ sudo apt-get install nginx
```

Step 2: Enabling Nginx

The Ngnx, by default, will be configured and started running automatically after the installation. If the server runs firewall, the Nginx should be enabled manually.

The Nginx will however register itself with the server firewall, which is `ufw` upon installation. The following command has to be ran in the terminal to start the Nginx manually.

```
1 $ sudo ufw allow 'Nginx HTTP'
```

Step 3: Checking Nginx Status

The status of Nginx HTTP server can be checked by using the following command.

```
1 $ sudo ufw status
```

Running this command will output the following.

To	Action	From
—	—	—
OpenSSH	ALLOW	Anywhere
Nginx HTTP	ALLOW	Anywhere
OpenSSH (v6)	ALLOW	Anywhere
Nginx HTTP (v6)	ALLOW	Anywhere

The output on the second and third column which are 'ALLOW' and 'Anywhere' respectively indicates that the Nginx is running. The successful installation of Nginx can be further tested using any web browser by entering the host's IP address, which in this case `http://192.168.0.20`. The following page will be displayed as shown in the Figure 5.4.

Figure 5.4: Nginx Default Start Screen

Welcome to nginx!

If you see this page, the nginx web server is successfully installed and working. Further configuration is required.

For online documentation and support please refer to nginx.org.
Commercial support is available at nginx.com.

Thank you for using nginx.

5.3 MySQL Database Installation

After installing Nginx HTTP server, database server has been installed to manage the storing of the website content. In this project MySQL database server has been used.

Step 1: Installing MySQL

The following command has to be entered to install MySQL database on the Ubuntu server.

```
1 $ sudo apt-get install mysql-server
```

During the installation, root password will be prompted or asked. Here, the password `d_XKdEoCwX,4En0` has been given. Here are the MySQL database credentials for future reference:

- username: root
- password: `d_XKdEoCwX,4En0`

Step 2: Securing MySQL Database

This section will discuss on how to secure the MySQL database server. To get started, the following command has to be entered in the terminal.

```
1 $ sudo mysql_secure_installation
```

Running this command will take us through security setup of MySQL database server which consist of a series of questions. Here are the three questions and the settings that have been given for the future reference. The rest of settings have been given 'yes' as the answers.

```
1 VALIDATE PASSWORD PLUGIN can be used to test passwords
2 and improve security. It checks the strength of password
3 and allows the users to set only those passwords which are
4 secure enough. Would you like to setup VALIDATE PASSWORD plugin?
5
6 Press y|Y for Yes, any other key for No: y
7
```

```
8
9 There are three levels of password validation policy:
10 LOW      Length >= 8
11 MEDIUM Length >= 8, numeric, mixed case, and special characters
12 STRONG Length >= 8, numeric, mixed case, special characters and
    dictionary file
13
14 Please enter 0 = LOW, 1 = MEDIUM and 2 = STRONG: 1
15
16
17 Using existing password for root.
18
19 Estimated strength of the password: 100
20 Change the password for root ? ((Press y|Y for Yes, any other key
    for No) : n
```

5.4 PHP Preprocessor Installation

Nginx web server does not contain native PHP preprocessor. A package called **php-fpm**, which stand for "fastCGI process manager" must be installed on the Ubuntu server. This package tells Nginx to pass the PHP request to **php-fpm** for processing. Second package that has to be installed is **php-mysql**, which allows PHP to communicate with the database server.

Installing php-fpm and php-mysql

The following command has been entered to install **php-fpm** and **php-mysql**.

```
1 $ sudo apt-get install php-fpm php-mysql
```

Securing PHP configuration

Initial installation of PHP has to be secured by commenting out the `cgi.fix_pathinfo` line and setting its value to 0 in the PHP configuration file, **php.ini**.

```
1 $ sudo nano /etc/php/7.0/fpm/php.ini
2
```

```
3 /etc/php/7.0/fpm/php.ini
4 ...
5 cgi.fix_pathinfo=0
6 ...
```

Save and close the nano editor. Next, the PHP preprocessor has to be restarted so that the changes will take effect by entering the following command.

```
1 $ sudo systemctl restart php7.0-fpm
```

Configuring Nginx to use PHP Preprocessor

In this section, a few settings changes on the Nginx will be shown in order to ask Nginx to use PHP preprocessor. The server settings of Nginx can be opened using the following command.

```
1 $ sudo nano /etc/nginx/sites-available/default
```

After opening the server settings, `index.php` has to be added to index line in the server block. In addition to that, two new block `location ~\php$` and `location ~ /\.ht {` has to be introduced.

```
1 server {
2     ...
3     index index.php
4
5     location ~ /\.php$ {
6         include snippets/fastcgi-php.conf;
7         fastcgi_pass unix:/run/php/php7.0-fpm.sock;
8     }
9
10    location ~ /\.ht {
11        deny all;
12    }
13 }
```

After adding those lines to the Nginx configuration files, the configuration file has to be checked for error. If no error is reported, the web server can be restarted

safely as shown below.

```
1 $ sudo nginx -t
2 $ sudo systemctl reload nginx
```

Testing PHP Preprocessor

The installation and configuration of PHP preprocessor can be tested by introducing `info.php` to the server root directory. A PHP information file can be created by using the following command.

```
1 $ sudo nano /var/www/html/info.php
```

In the PHP file, following lines have to be added. After adding those lines, save and close the file.

```
1 <?php
2     phpinfo();
```

Now the PHP preprocessor can be tested using web browser by entering the URL, `http://192.168.0.20/info.php`. After testing the PHP preprocessor, it is important that `info.php` file has to be deleted to prevent anyone from learning the PHP configurations.

5.5 WordPress Installation

After installing Nginx, PHP and MySQL, we can begin with WordPress installation. Please make sure to log in into server-side using PuTTY. Before we can install the WordPress, there are few settings / configurations that have to be done, which includes:

- Setting up database table and database user
- Configuring Nginx server
- Installing additional PHP modules to handle WordPress
- Generating secret keys
- Downloading latest stable version of WordPress
- Configuring WordPress

Step 1: Creating MySQL Database and User

First, we need to prepare a database table and user in the installed MySQL. The database table and user will then be used by WordPress to store data and access them.

Start MySQL database by issuing the following command:

```
1 $ mysql -u root -p
```

Enter the password `d_XKdEoCwX,4En0` for the user `root` when prompted.

Create a new database table `wordpress` by issuing following command. And don't forget the semicolon at the end of the line.

```
1 mysql > CREATE DATABASE wordpress DEFAULT CHARACTER SET utf8  
COLLATE utf8_unicode_ci;
```

Next, create a new user to operate the above created `wordpress` database. The following command will create a new user `wordpressuser` with password `ABcd1234#`.

```
1 mysql > GRANT ALL ON wordpress.* TO 'wordpressuser'@'localhost'  
IDENTIFIED BY 'ABcd1234#';
```

This will create the new user with given password, as well as granting the user the all accesses to the database `wordpress`. Finally, flush the privileges so that the MySQL aware of the changes we have made and exit MySQL.

```
1 mysql > FLUSH PRIVILEGES;  
2 mysql > EXIT;
```

Step 2: Adjust Nginx's Configuration

There are two modifications that have to be made to the Nginx web server to handle WordPress correctly:

1. Instruct server not to log requests for the static files with extensions such as `.css`, `.gif` etc.
2. Insert `index.php` into `try_files`

Open the Nginx configuration file using **sudo** privileges:

```
1 $ sudo nano /etc/nginx/sites-available/default
```

We can request server not to log requests to the static files by issuing command **log_not_found off**. It is a best practice not to log requests to static files.

```
1 server {
2     ...
3     location = /favicon.ico {
4         log_not_found off;
5         access_log off;
6     }
7     location = /robot.txt {
8         log_not_found off;
9         access_log off;
10        allow all;
11    }
12    location ~* \.(css|gif|ico|jpeg|jpg|js|png)$ {
13        expires max;
14        log_not_found off;
15    }
16    ...
17 }
```

For the second task, passing **index.php** as **try_files** is done so that the server will return home page instead of 404 error as a default option. To do this, following line has to put inside **location /** block.

```
1 server {
2     ...
3     location / {
4         #try_files $uri $uri/ =404;
5         try_files $uri $uri/ /index.php$is_args$args;
6     }
7     ...
8 }
```

When these changes have been made, save the configuration file and exit **nano** editor by pressing **Ctrl-x**. Check for the syntax errors of the new configurations.

If no error is been reported, restart the Nginx.

```
1 $ sudo nginx -t
2 $ sudo systemctl reload nginx
```

Step 3: Installing additional PHP extensions

PHP preprocessor has been installed and setup with minimal setting in the previous section. Here, additional modules or extensions will be installed, which is required by WordPress [30]. Use to following command to install the required additional extensions:

```
1 $ sudo apt-get update
2 $ sudo apt-get install php-curl php-gd php-mbstring php-mcrypt
   php-xml php-xmlrpc
```

After finish installing the extensions, restart the `php-fpm` process.

```
1 $ sudo systemctl restart php7.0-fpm
```

Step 4: Generating secret keys

Secret keys have to be generated to provide security for the WordPress. The secret keys are provided by WordPress through their secure key generator. To get secret keys from WordPress key generator, issue the following command on the terminal:

```
1 $ curl -s https://api.wordpress.org/secret-key/1.1/salt
```

Or another workaround is to use the web browser. Enter the URL `https://api.wordpress.org/secret-key/1.1/salt` and press enter. Save the generated secret keys, which must be used in the next step.

Step 5: Downloading WordPress

Download the latest version of stable WordPress from `https://wordpress.org` website. After downloading, extract the downloaded content.

```
1 $ cd /tmp
```

```
2 $ curl -o https://wordpress.org/latest.tar.gz
3 $ tar xzvf latest.tar.gz
```

By default, WordPress has provided a sample copy of the WordPress configuration file. This file can be found under directory and file name `tmp/wordpress/wp-config-sample.php`

Copy the provided configuration file to used in our website. And Create a new directory `upgrade`, so that WordPress can upgrade its software in the future without any permission issue.

```
1 $ cp /tmp/wordpress/wp-config-sample.php
    /tmp/wordpress/wp-config.php
2 $ mkdir /tmp/wordpress/wp-content/upgrade
```

Finally, copy the contents into root server directory. This are the contents used by the Nginx web server to serve when request is made to the website.

```
1 $ sudo cp -a /tmp/wordpress/. /var/www/html
```

Step 6: Configuring WordPress

Open the WordPress configuration file:

```
1 $ nano /var/www/html/wp-config.php
```

In the file, find the 'secret key' section, which appears as follow and paste the generated secret keys from Step 4.

```
1 ...
2 define('AUTHKEY', 'put your unique phrase here');
3 define('SECURE_AUTHKEY', 'put your unique phrase here');
4 define('LOGGED_IN_KEY', 'put your unique phrase here');
5 define('NONCE_KEY', 'put your unique phrase here');
6 define('AUTH_SALT', 'put your unique phrase here');
7 define('SECURE_AUTH_SALT', 'put your unique phrase here');
8 define('LOGGED_IN_SALT', 'put your unique phrase here');
9 define('NONCE_SALT', 'put your unique phrase here');
10 ...
```

After pasting the generated secret keys, the MySQL database credentials have

to be given. These credentials have been created in the Step 1.

```

1 ...
2 define( 'DB_NAME', 'wordpress' );
3
4 /** MySQL database username */
5 define( 'DB_USER', 'wordpressuser' );
6
7 /** MySQL database password */
8 define( 'DB_PASSWORD', 'ABcd1234#' );

```

Lastly, we need to give permission to Nginx web server to write where it needs to. Otherwise, WordPress will be asking FTP credentials when any actions need to be performed. This can be done through following setting:

```

1 define( 'FS_METHOD', 'direct' );


```

Save the `wp-config.php` file and exit the nano editor.

Step 7: Complete WordPress Installation

We need to complete the WordPress installation now through the web browser. Open the web browser and enter the URL `192.168.0.20`. First, we need to select the language.

Figure 5.5: WordPress language selection

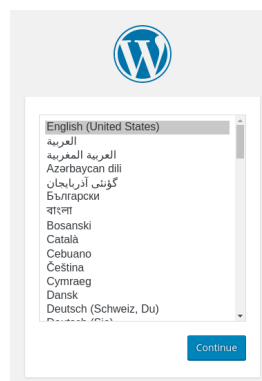


After that, we need to provide a few information on the main setup page such as *Site Title*, *Username*, *Password* and *Email*.

These are information given on the page shown above:

- Site Title: Smart Home Lab

Figure 5.6: Main WordPress setup page

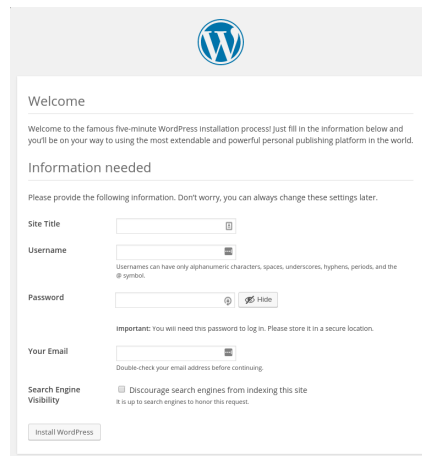

Welcome

Welcome to the famous five-minute WordPress installation process! Just fill in the information below and you'll be on your way to using the most extendable and powerful personal publishing platform in the world.

Information needed

Please provide the following information. Don't worry, you can always change these settings later.

Site Title

Username
Usernames can have only alphanumeric characters, spaces, underscores, hyphens, periods, and the @ symbol.

Password

Important: You will need this password to log in. Please store it in a secure location.

Your Email
Double-check your email address before continuing.

Search Engine Visibility ☐ Discourage search engines from indexing this site
It is up to search engines to honor this request.


- Username: ashiqmoh
- Password: oSm0cCCAguIMsalrZd(#2i5(
- Email: ashiqmoh@192.168.0.20

The installation can be completed by clicking 'Install WordPress' button. Upon installation, the administration side of the website can be accessed by entering following URL:

```
1 http://192.168.0.20/wp-admin
```



Provide the username and password stated above and login. The administration side of the website appears as shown in the figure below.

Figure 5.7: Administration page of WordPress

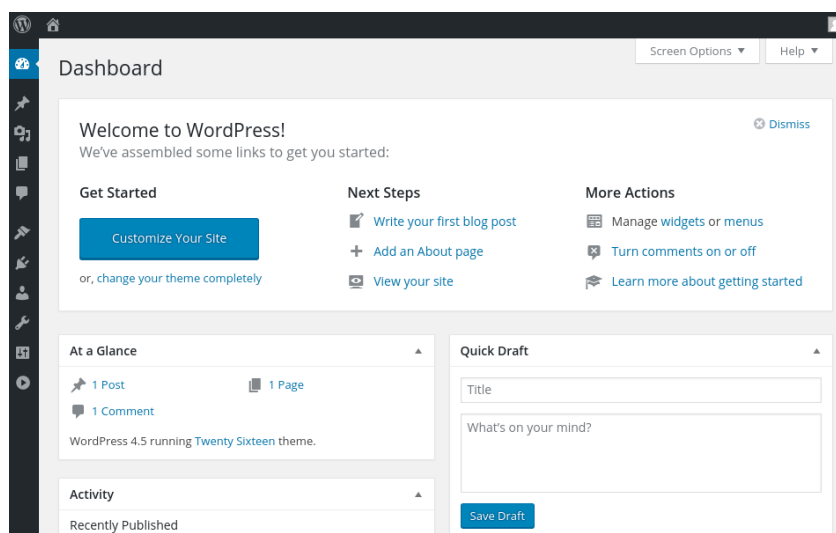

5.6 Routing WordPress to external URL

The website i.e. WordPress, that has been installed inside one of the virtual machine in the Smart Home Lab physical server, by default can be accessed internally only through the IP address 192.168.0.20. To make the website accessible from external network through an URL address, the following steps have to be done.

Go to the general settings of the WordPress by clicking  button from the left navigation menus. Then, click on the  button from the sub-menus.

Here, the following fields can be changed from 192.168.0.20 to the desired URL address:

- WordPress Address (URL)
- Site Address (URL)

Both the text fields have been changed to the URL address:

```
1 http://web.smarthome.hs-furtwangen.de
```

By doing this, the website can be accessed externally.

5.7 Restrict Website Access to Internal Network

The access to the website from external network can be revoked and restrict it to be accessible only from within the lab network by reversing the process described in the Section 5.6. The *WordPress Address (URL)* and *Site Address (URL)* text fields have to be changed to the IP address 192.168.0.20.

Chapter 6

Website Designing

The Smart Home Lab website consists of 5 web pages. Those are:


- Home
- The Lab
- Components
- Panels
- Use Cases

These web pages have been created and designed within the WordPress [31] by using a WordPress plugin called 'Page Builder By SiteOrigin'. This chapter will discuss on how these web pages has been created and designed, as well as the important steps and settings involved in it.

6.1 Enabling Page Builder Plugin

Firstly, the 'Page Builder by SiteOrigin' [32, 33] has to be downloaded and activated in the WordPress. This can be done through the 'Plugins' section in the admin side of the WordPress. After downloading and activating the plugin, the Page Builder plugin will automatically add a tab on the top right of the page editor (refer Figure 6.1), when a new page has been created. The usage of Page Builder can be enabled simply by clicking on this tab.


Figure 6.1: Enabling Page Builder Plugin

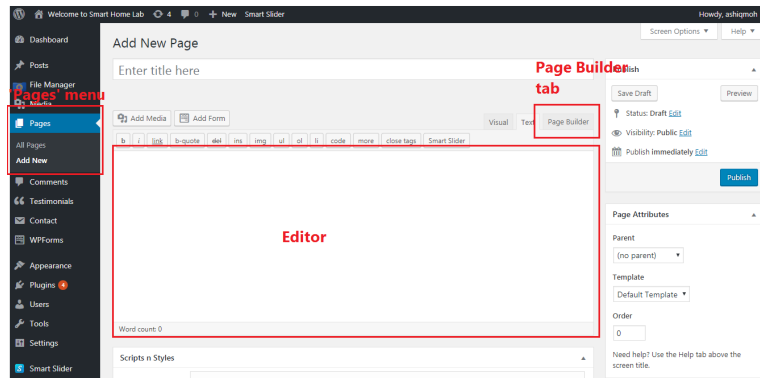

6.2 Adding row, column and widget

When Page Builder plugin has been enabled, the editor will display a series of buttons on the top of the editor. One of the important thing here is the 'Add Row' option. A row in the page builder signifies a horizontal section in a web page as shown in the Figure 6.2. Each of this section is a row.


Figure 6.2: A row representing a horizontal column on the website

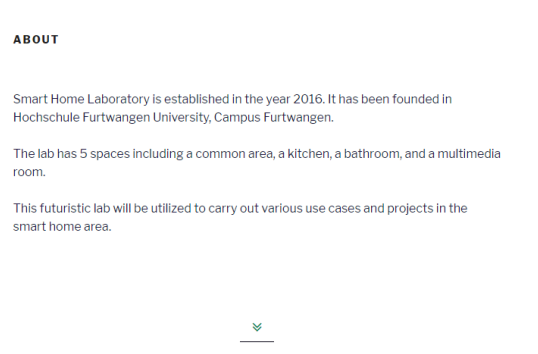


When the 'Add Row' button (see Figure 6.3a) is clicked, a new window (see Figure 6.3b) will be opened asking to set the column. Here, the number of columns as well as the individual size of the column has to be given in.

After a row and a column (optionally multiple columns to a row) have been added, the editor will display a box within it. Within this box, widgets can be added by clicking the 'Add Widget' button next to the 'Add Row' button. When this button is clicked, a new window (see Figure 6.4) will pop up prompting which widget to be added into the created row i.e. column. The list of widgets consists of, for an example, 'SiteOrigin Editor', 'SiteOrigin Button', 'SiteOrigin Button'

(a) Adding Row

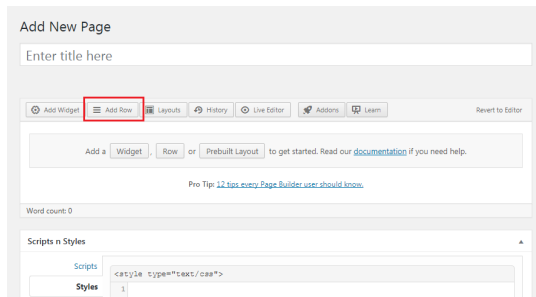


(b) Adding Column

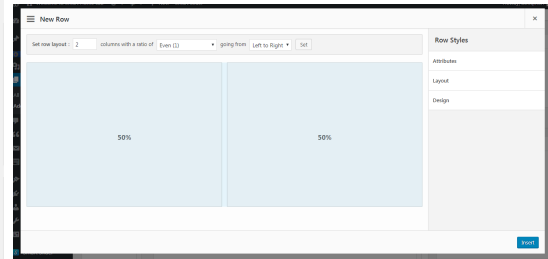


etc. To add normal text into the web page, one need to insert the 'SiteOrigin Editor' widget into the row. For a short note, multiple widgets can be inserted into a single row i.e. column.

Figure 6.4: Window showing a list of widgets to be inserted in to row i.e. column

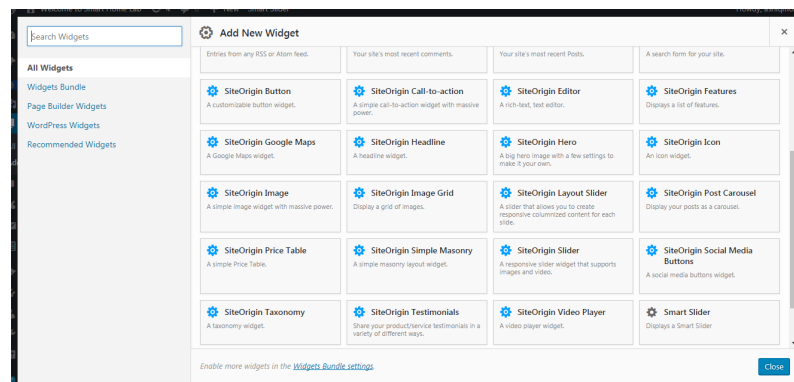


Here is an example of screenshot of page builder row before and after adding a widget. In this example, the SiteOrigin Editor widget has been added.

(a) Row before adding widget

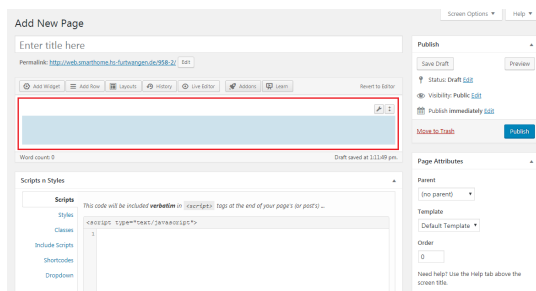

(b) Row after adding widget

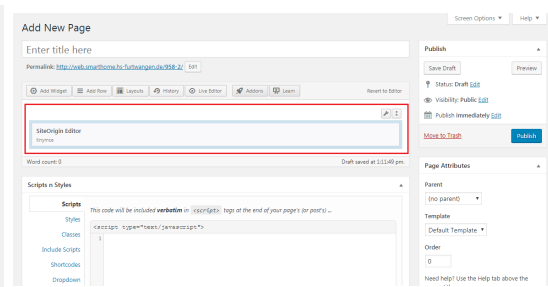

6.3 Adding text, image and button

Text can be added into the web page through the SiteOrigin Editor plugin. After the SiteOrigin Editor plugin has been inserted into the row/column, a menu list will appear when one hover the mouse over it. In the menu list, the 'edit' option has to be clicked to open the editor. In the editor, the text that has been intended to be added to web page can be typed. Text here can represent the header text and the normal paragraph text.

Next, in order to add an image, the SiteOrigin Image plugin can be used. After inserting the plugin, through the edit option, a new window will be opened. Here, the URL of image as well as other settings such as image size, image alignment, image title etc. can be entered.

The button which are found on the web pages are added through the SiteOrigin Button plugin. Same as step above, after adding the plugin, one has to click on the 'edit' option on mouse over. Here, one has to define the destination URL which will be opened when the button is clicked. Optionally, the text or icon that should appear on the button can be added. There are also other options for alignment layout designing of the button.


6.4 Adding Scroll Effect

As can be noticed, clicking on the button scroll the content to a specific part of the web page. To enable the scroll effect, a few steps have to be taken.

First, a plugin called 'Page Scroll to Id' has to be added and activated in the WordPress. After adding and activating, buttons that have been added has to be given the class name 'ps2id'. The class name of a button can be given by the 'edit' option mentioned in the previous section. In the edit section, under the 'Other attributes and SEO', the class name can be given in the 'Button Classes' field as can be seen in the Figure 6.6.


Lastly, the destination URL has to be set. The destination URL has to be entered in two places. First in button edit section, under the 'Destination URL' field as can be seen in the Figure 6.7. Secondly, the same destination URL has to be given to 'Row ID' field of the target element. The step to provide the target

Figure 6.6: Button Classes field where 'ps2id' has to be entered

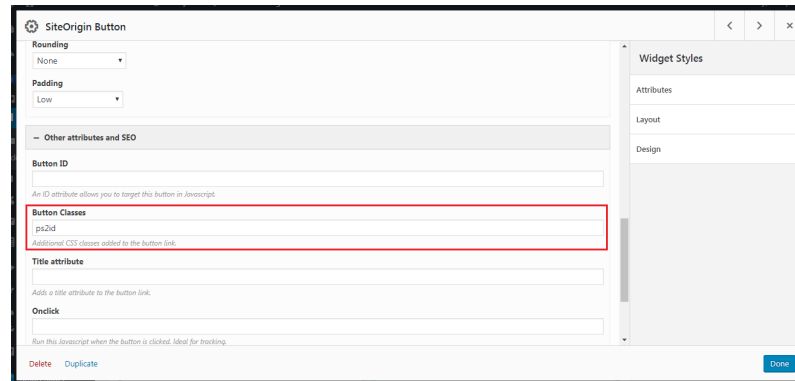

element an id is shown in the Figure 6.8. By assigning the button and the target element the id, the button will scroll the web page to target element.

Figure 6.7: Adding the destination URL for a button

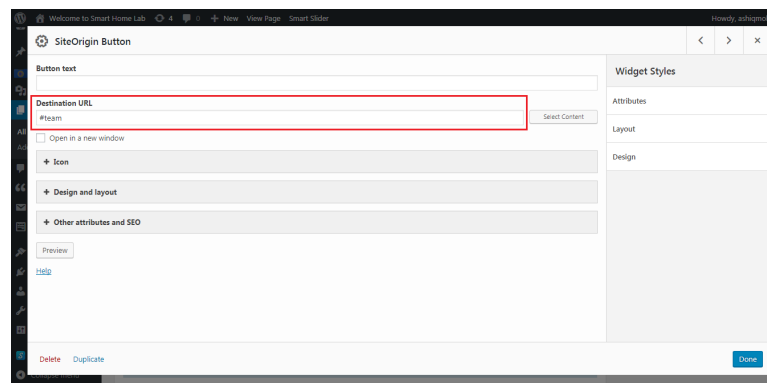

6.5 Adding ScrollReveal Effect


ScrollReveal effect is an effect that can be added to the content of a web page, where the content will get an animation or effect that it is being revealed to the users as they scroll down or up through the page. This effect can be added to any website through importing a JavaScript library, ScrollReveal written by Julian Lloyd¹.

This section will explain how to add this effect to a WordPress page. First, a plugin called 'Scripts n Styles'² has to be added and activated in the WordPress. After activating the plugin, the 'Page' section in the WordPress will receive a new

¹<https://scrollrevealjs.org/>


²<https://wordpress.org/plugins/scripts-n-styles/>

Figure 6.8: Adding Row Id to the Target Element

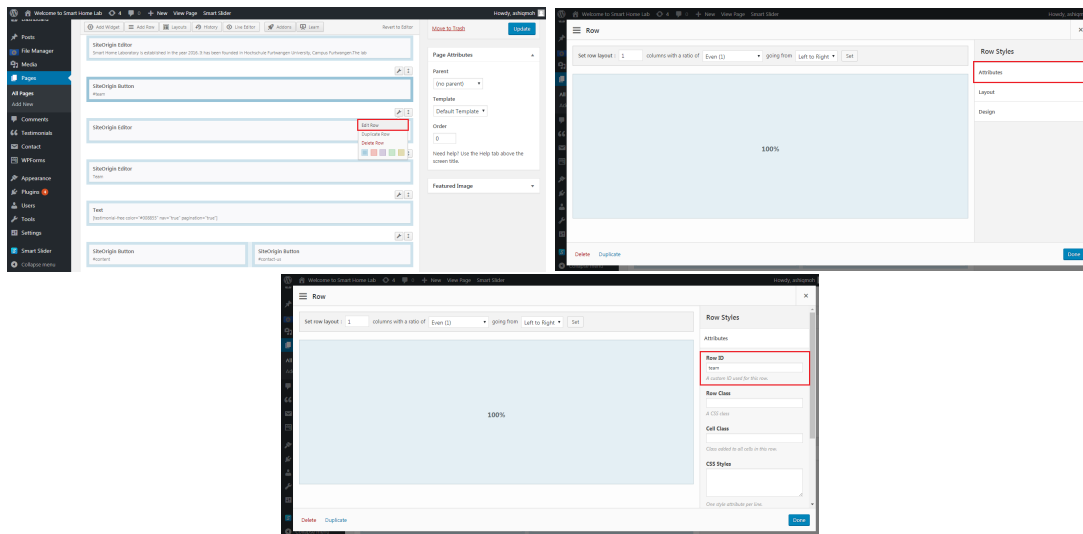

screen option under the editor, where JavaScript and CSS code can be added as shown in the Figure 6.9.

Figure 6.9: Scripts n Styles screen option

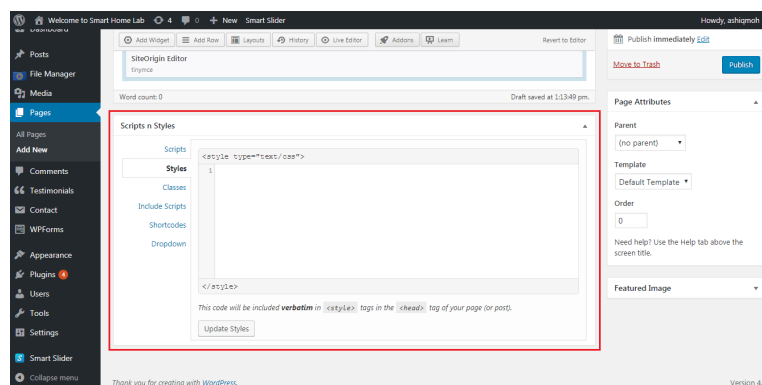


Here, the script tab has to be clicked so that our own JavaScript can be added to the current page. There, the plugin offers two option of adding JavaScript codes to current web page. Either at the header part of web page at the top, or at body part of the web page at the bottom. Here, the codes required to enable ScrollReveal effect will be added at the body of the web page at the bottom.

The JavaScript codes that has been added will do two tasks. First, it will import the ScrollReveal library script from CDN and insert it to current web page.

Secondly, the JavaScript code will be written to declare and initiate the Scroll-Reveal object, so that any HTML element assigned will receive the effect. Here,

Figure 6.10: Adding JavaScript to bottom of page

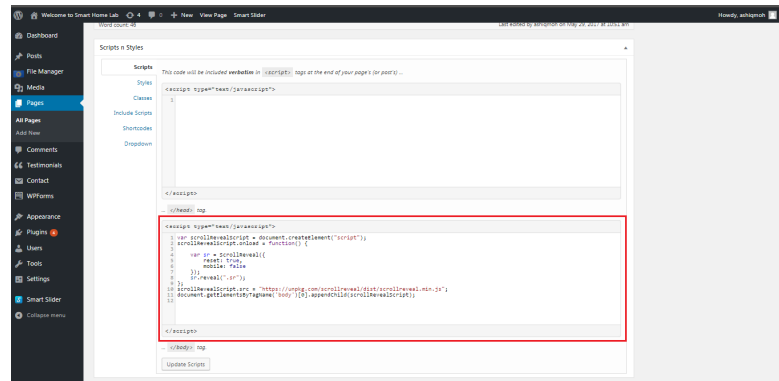

the elements with class name 'sr' has been assigned to get the ScrollReveal effect. The class name in JavaScript is identified with the punctuation mark '.' in the beginning. This has been done using the method `.reveal('.sr');`.


```

1 var scrollRevealScript = document.createElement("script");
2 scrollRevealScript.onload = function() {
3
4     // declare and initiate ScrollReveal object
5     var sr = ScrollReveal({
6         reset: true,
7         mobile: false
8     });
9     // assign element that should receive the effect
10    sr.reveal(".sr");
11 };
12 // import ScrollReveal library from CDN
13 scrollRevealScript.src =
14     "https://unpkg.com/scrollreveal/dist/scrollreveal.min.js";
15 // insert the imported library into the web page
16 document.getElementsByTagName('body')[0].appendChild(scrollRevealScript);

```

The final step that has to be taken in order to enable the effect is to add the class name, in this case 'sr' to the HTML elements. This class name will be entered in the 'Row Class' field as shown in the Figure 6.11.

Figure 6.11: Adding Class Name to HTML Element

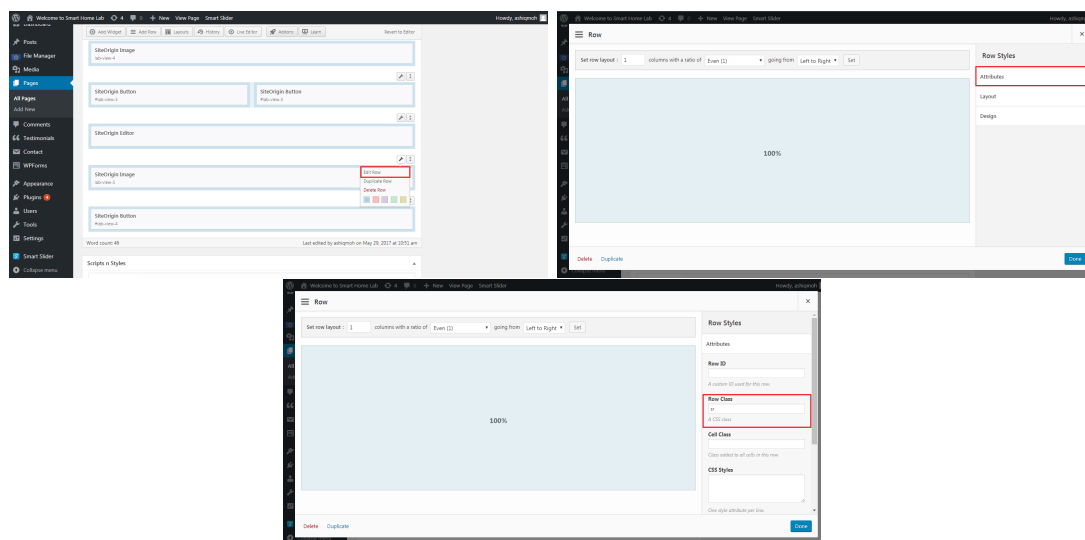

Chapter 7

Implementation of the Info-Terminal

The info-terminal has been created by using a WP plugin called SmartSlider3¹. SmartSlider3 is a free plugin available in the WordPress plugin repository. It enables the creation and designation of slider [34] easily with a lot of features.

7.1 Getting Started


First, the SmartSlider3 plugin has to be added and activated in the WordPress. After the activation, the left menu list will receive a new entry 'Smart Slider'. Click it will bring the Smart Slider dashboard interface, where slider can be created, modified and deleted. A new slider can be created by clicking the 'New Slider' tile on the dashboard. Here the following details have been given:

- Slide name: Info Terminal
- Width: 1920 px
- Height: 1080 px
- Preset: Default
- Import Sample Sliders: none

After the above mentioned details have been given, the creation of new slider have been proceed by clicking the 'Create' button.

¹<https://wordpress.org/plugins/smart-slider-3/>

Figure 7.1: Creating a new slider



7.2 Slider Settings

There are a few general settings that has to be configured after creating a new slider. The slider settings options can be found immediately after getting into the 'Info Terminal' slider.

subsection*General Settings Under 'General' tab, two settings has be changed, which are:

- Align: Center
- Main animation properties (Duration): 600 ms

Size Settings

Here, the following attributes has to be changed:

- Slide size (Width): 1920 px
- Slide size (Height): 968 px
- Slider height (Min): 300 px
- Slider height (Max): 968 px
- Slider width (max): 1920 px

Autoplay Settings

Here, the following attributes has to be changed:

- Autoplay (Enabled): True
- Autoplay (Interval): 5000 ms

Arrow Settings


Here, the following attributes has to be set:

- Previous (Color): 999999FF
- Style: Static

Autoplay Icon Settings

By default, the autoplay mode in the slider is turned off. This mode has to be turned on as shown in Figure 7.2 and the rest the of settings are left to default settings.

Figure 7.2: Autoplay Icon Settings

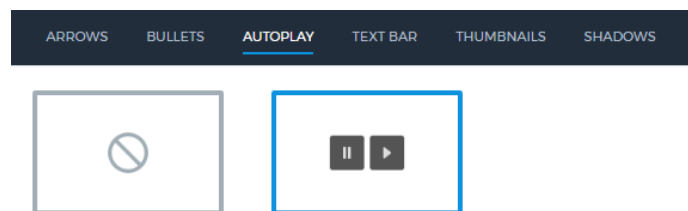

Thumbnails Setting

After enabling the Thumbnails, which by default is turned off, the following attributes have to be set.

- Thumbnail size (Width): 150 px
- Thumbnail size (Height): 100 px
- Position: Outer, bottom

Publish Setting

Under the 'Publish' tab, the shortcode of the created slider has to be taken note (refer Figure ??). In this case, the short code is

$$smartslider3slider = 1$$

. This code will be used to insert the slider into the WordPress web page as discussed in the Section 7.3.

7.3 Inserting Slider Into Web Page


A new WordPress page has to be created through the **Add New** option under the **Pages** menu.

1. The title of page has been given as 'Info Terminal' in the 'Title' field.
2. The permalink or slug has been set to `info/`.
3. The shortcode, which have been noted down from previous section has to be pasted or typed in the editor.
4. Lastly, the template of this web page has been changed from 'Default Template' to 'Blank Slate'.

7.4 Creating and Setting Slide

After setting the slider setting, slide can be created and set. The slider can be created by clicking the 'NEW SLIDE' green icon tile as shown in the Figure 7.3. After clicking it, we will be prompted to select an image. Here, any dummy image has to be chosen for time being until the slide background is set in the next step.

Figure 7.3: New slide tile icon

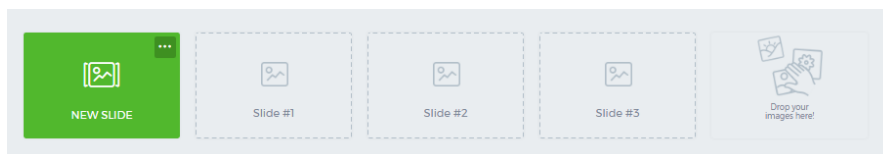

Next, after the slide has been created, the following Background and Settings has to be given as shown in the Figure 7.4. Through the 'Background' tab as shown in the Figure 7.4a, these attributes has to be set to the following:

- Background: Color
- Color: FAFABAFF

Where else, through the 'Settings' tab, the name of the current slide along with the respective thumbnail can be inserted.

Figure 7.4: Slide settings



7.5 Adding Home Button




Home button has been added to all slides manually. The following steps explain how it is done in detail. First the 'Text layer' has to be added to the slide by clicking the  icon that can be found to the right of the slide view. This will bring up a widget (refer Figure 7.5, where the following has to be set).


Figure 7.5: Text layer widget




Through the first tab with icon  in the 'Text' field, the following HTML codes has to be entered:

```
1 
```

Through the third tab with icon , following has to be set:

- Align: 
- Position X: 25 px
- Position Y: 25 px
- Width: Auto
- CSS class: home-button cursor-pointer

Next, through the  menu, 'Edit' option has to be clicked to open the 'Info Terminal' page, which has been created in the Section 7.3.

Under the 'Scripts n Styles' section, the following CSS codes has to be added under the 'Styles' tab:



```
1 .cursor-pointer {
2     cursor: pointer;
3     text-decoration: none;
4 }
```

After that, under the 'Scripts' tab, the following JS codes has been added:


```
1 window.n2ss.ready(1, function(slider){
2     jQuery( '.home-button' ).click(function(){
3         window.location.href="/";
4     });
5 });
```

These JavaScript codes give the callback functionality to the home button found on every slides. When, it is clicked, the browser takes the user to the website's home page.


7.6 Adding Header

Header elements can be added into the slide by clicking on  icon which can be found on the left side of the slide view. This will bring up a widget where the header text can be entered as shown in Figure 7.6a. By click the  on the widget, the alignment, position and size (width, height) of the header element can be set, shown in Figure 7.6b.

(a) Adding header



(b) Header element settings



7.7 Adding Images



Images can be added to slide by clicking the  icon on left of the slide viewer. Clicking this icon will bring up the media selector window where an image has to be selected. After an image had been selected, the image widget can be seen with the selected image as shown in Figure 7.7. Here also the gear icon can be selected to apply further settings to the image such as positioning, alignment and sizing.


Figure 7.7: Image widget



7.8 Creating Overview Buttons

Each spaces such as (living room, kitchen, washroom, workspace and multimedia room) will be presented with overview buttons as shown in Figure ???. This section will explain on how to create an overview button.


Figure 7.8: Overview buttons

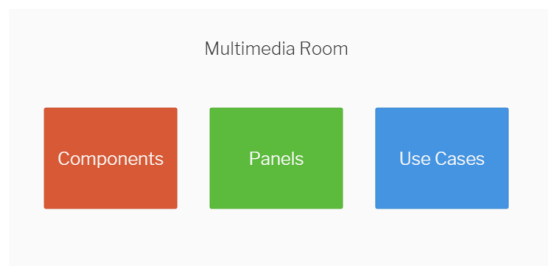

Step 1: Adding Header Element

An header element has to be added to slide as discussed in the Section 7.6. Here the text should be given either 'Components', 'Panels' or 'Use Cases'.

Step 2: Header Designing

After adding a appropriate text, the header element has to be designed clicking the . Clicking this, will show the CSS designing panel as shown in the Figure 7.9.

Here, the following design settings have to be changed:




- Color: FAFAFAFF
- Line height: 5.75
- Text align: 
- Background color: D85935FF (eg. for 'Components' button)
- Border: 1 px Solid BB4A28FF (eg. for 'Components' button)
- Border radius: 5 px


Figure 7.9: Designing header element



subsection*Step 3: Header Settings Next, the header element need to be set. The setting screen can be opened by clicking the . Here besides alignment, positioning and sizing, the CSS class has to be set, which is important. In the CSS class text field as shown in Figure 7.10, the following text has to be entered:


```
1 card-4 living-room-components
```

The **card-4** is constant for all overview button. The **living-room-** is depends on for which space the button are being added. For an example, for *kitchen*, this part has to be replaced with **kitchen-**. The last part of is **components**. This part has to be replaced accordingly. For an example, for *panels*, this part should be replaced with **panels** and for *use cases* with **use-cases**.

Next by toggling to *Hover* section by clicking  icon, the following entries have to be given:

- Background color: BB4A28FF

Figure 7.10: Adding CSS Class



- Padding: 0 0 0 0 px
- Border: 1 px Solid BB4A28FF
- Border radius: 5 px

Step 3: Adding CSS

Next, click the **Pages** icon. Then edit the 'Info-Terminal' page. Under the 'Style' tab in the 'Scripts n Styles' section, few lines of CSS codes have to be added for additional designing of the overview button as listed below:

```

1  .card-4 {
2      min-width: 19\%;
3      min-height: 30\%;
4      border-radius: 5px;
5      box-shadow: 0 14px 28px rgba(0,0,0,0.25), 0 10px 10px
6          rgba(0,0,0,0.22);
7      cursor: pointer;
8  }
9
10 .card-4 div {
11     position: absolute;
12     min-width: 100\%;
13     min-height: 100\%;
14 }
```

Step 4: Adding JavaScript Callback

Lastly, a JavaScript callback has to be added to button, so that when the button is clicked, the slider takes the user to to respective slide. This can be done by

adding the following code under the *Script* tab under the *Scripts n Styles* section.

```

1 window.n2ss.ready(1, function(slider){
2     jQuery( '.living-room-components' ).click(function() {
3         slider.slide(10);
4     });
5 });


```

Above is an example of JavaScript callback implemented by using jQuery `.click` function. Here, the `'.living-room-components'` is the text entered in the CSS Class text field as discussed in the Step 3. The line `slider.slide(10)` is the execution telling the slider to move to slide number 10. Here, the destination slide is at index 10 starting with the first slide at index 0.


7.9 Creating Component Buttons

This section will discuss how to create the component buttons as shown in the Figure ???. The component buttons shown in figure belongs to the one that can be found in the living room. In this case, there are only two components in the living room, namely *Surface Hub* and *BenQ Smart Projector*. In order to create this buttons, there are few steps to be taken which will be discussed here.

Step 1: Adding header element


Header element can be added to the slider by clicking the . Then, the corresponding text has to be added to the *Text* field which can be found on the widget first tab.

Step 2: Designing the header element

Next, the header element has to be designed. To proceed with designing, click on the . In this section of the widget as shown in the Figure 7.11, following entries have to be changed:


- Color: 414141FF
- Line height: 1.5

- Background color: CED3D5FF
- Padding: 5 0 5 0 px
- Border: 1 px solid 81898DFF
- Border radius: 5px


Next by toggling to *Hover* section by clicking  icon, the following entries have to be given:

- Background color: BDC1C3FF
- Padding: 5 0 5 0 px
- Border: 1 px Solid 81898DFF
- Border radius: 5 px

Figure 7.11: Designing component buttons




Step 3: Setting Header Element

The header element has to be set with following settings. The setting panel of the header element can be opened by clicking the . Here, the following entries has to be set:

- Align:
- Width: 1000 px
- Height: auto
- CSS claa: card-1 components-surface-hub

CSS Class with text `card-1 components-surface-hub` is very important. The `card-1` is the reference to CSS styling which will be discussed in the next section. Whereby `components-surface-hub` is the reference for the JavaScript callback function. In this case, it refers to the destination slide which contains the component Surface Hub.

Adding CSS Styling

To add the CSS styling for the component buttons, navigate to . Edit the *Info Terminal*. Under the *Styles* tab under *Scripts n Styles* section, the following CSS codes have to be added:

```
1 .card-1 {
2     border-radius: 5px;
3     box-shadow: 0 5px 10px rgba(0,0,0,0.19), 0 6px 6px
4         rgba(0,0,0,0.23);
5     cursor: pointer;
6 }
```

Adding JavaScript Callback

The JavaScript callback is a small codes that will get executed when the user click on the component buttons. This codes will be added to the *Scripts* tab under the *Scripts n Styles* section. Here, the following codes have to be added:


```
1 window.n2ss.ready(1, function(slider){
2     jQuery('.components-surface-hub').click(function(){
3         slider.slide(11);
4     });
5 });
```

The example callback function above contains the reference '`.components-surface-hub`'. When the button with this reference get clicked, the `.click()` function will be executed which will slide the slider to to slide with index 10. The slide number 10 should contain, in this case, the *Surface Hub*. The index counting starts from 0.



7.10 Creating Panel Buttons

This section will explain on how to create a panel button as shown in the Figure 7.12. Panel buttons are buttons that have been used as navigation to items that can be found on the panels in the lab. These buttons have been created with images of item itself.

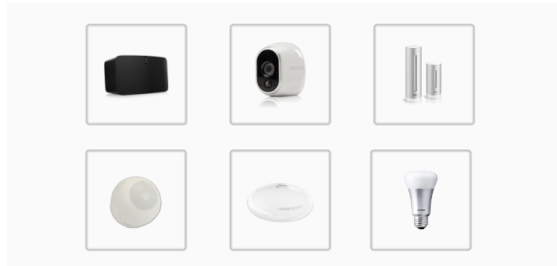Figure 7.12: Panel buttons



Step 1: Adding Text Layer


In order to add or create a panel button, a text layer has to be added by clicking  icon that can be found on left of the slide viewer. This is bring up the text layer widget as shown in the Figure ???. In the *Text* field which can be found under , the following HTML codes have to be added. This code will result in the following button containing the Sonos Play:5 speaker as the button image.

```

1 <div class="panel-nav-container panels-sonos-play5">
2   <span class="span-helper"></span>
3   
4 </div>

```


Step 2: Setting of Text Layer

Setting of the text layer can be accessed by clicking the . Here, only two settings has to be changed as listed below:

- Width: 200 px
- Height: 200 px

Apart from the width and height, the positioning of the button in X and Y direction has to be set accordingly as can be seen in Figure 7.12.

Step 3: Adding CSS Styling

To style the button, CSS styling has to applied. Edit the *Info Terminal* page which can be found under . Under the *Styles* tab under *Scripts n Styles*

section, the following CSS code has to be added:

```
1 .panel-nav-container {
2     background-color: #fff;
3     text-align: center;
4     width: 100%;
5     height: 100%;
6     border-radius: 10px;
7     border: 1px solid #aaa;
8     box-shadow: 0 0 5px 2px rgba(0, 0, 0, 0.2) inset;
9     cursor: pointer;
10    position: absolute;
11 }
12
13 .panel-nav-container:hover {
14     border: 1px solid #008855;
15     box-shadow: 0 0 5px 2px rgba(0, 136, 85, 0.2) inset;
16 }
17
18 .span-helper {
19     display: inline-block;
20     height: 100%;
21     vertical-align: middle;
22 }
23
24 .panel-nav-container img {
25     transform: scale(1);
26     transition: transform 0.5s;
27     transition-timing-function: ease;
28 }
29
30 .panel-nav-container:hover img {
31     transform: scale(1.1);
32 }
```

This CSS code will style the panel button and the image of button as well. The CSS with *:hover* tags add the hover effect to buttons.

Step 4: Adding JavaScript Callback

Lastly, the JavaScript callback function has to be added to the button when the user click on the buttons. The JavaScript callback has to be added under the *Scripts* tab under the *Scripts n Styles* section of the *Info Terminal* page.

```


1 window.n2ss.ready(1, function(slider){
2   jQuery( '.panels-sonos-play5-2' ).click( function() {
3     slider.slide(55);
4   });
5 });

```



7.11 Creating Use-Cases Buttons

Use-cases buttons are the buttons used to navigate user to the use-cases that can be found in the lab. A use-case button contains an image and a short descriptive text below the text as shown in Figure 7.13

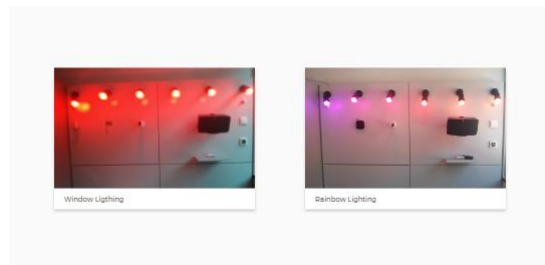Figure 7.13: Use-cases buttons



Step 1: Adding Text Layer

Begin by adding the text layer to the slide by clicking the . In the *Text* field under the  the following HTML codes have to be entered:


```

1 
2 <div class="use-cases-desc">
3   <p>Window Ligthing</p>
4 </div>

```

The above code is an example of use-cases button for *Window Lighting*.

Step 2: Adding CSS Class

After adding the HTML codes to the *Text* field, class text has to be added to the *CSS class* field which can be found under the . Here the following CSS class has to be entered:

```
1 use-cases-container use-cases-window-lighting
```

The `use-cases-container` will be used as a reference for CSS styling. And the `use-cases-window-lighting`, in this case as an example for window lighting use-cases button, will be used as CSS class reference for the JavaScript callback.

Step 3: Adding CSS Styling

The use-cases buttons have been styled by using custom CSS code. The CSS code has been entered under the *Styles* tab under the *Scripts n Styles* section of the *Info Terminal* page. The following CSS code has been added for styling:

```
1 div.use-cases-container {  
2     max-width: 20%;  
3     background-color: white;  
4     box-shadow: 0 4px 8px 0 rgba(0, 0, 0, 0.2);  
5     cursor: pointer;  
6     transition: box-shadow 0.5s;  
7     transition-timing-function: ease;  
8 }  
9  
10 div.use-cases-desc {  
11     border-top: 1px solid #aaa;  
12     text-align: center;  
13     padding: 3.5% 5.5%;  
14 }  
15  
16 div.use-cases-container:hover {  
17     box-shadow: 0 10px 20px 5px rgba(0, 0, 0, 0.2);  
18 }
```

Step 4: Adding JavaScript Callback

Lastly, JavaScript callback has to be programmed so that the slider will navigate to the destination slide when the user click on the use-cases buttons. The JavaScript callback script has to be added under the *Scripts* tab under the *Scripts n Styles*.

```

1 window.n2ss.ready(1, function(slider){
2     jQuery( '.use-cases-window-ligthing ' ).click( function() {
3         slider.slide(62);
4     });
5     jQuery( '.use-cases-rainbow-ligthing ' ).click( function() {
6         slider.slide(63);
7     });
8 });

```

7.12 Creating Breadcrumb


Breadcrumb, as shown in the Figure 7.14, is the navigation bar that can be found on the slides, where user can navigate from the current level to the upper hierarchy level.

Figure 7.14: Breadcrumb



Lab / Living Room / Components

Step 1: Adding Text Layer

Start creating a breadcrumb by adding a text layer to the slide by clicking  icon

```

1 <span class="breadcrumb_link breadcrumb-lab">Lab</span> / <span
    class="breadcrumb_link lab-multimedia-room">Multimedia
    Room</span> / Use Cases

```


Step 2: Adding CSS Styling

Next, CSS styling has to be applied. The CSS code has to be entered under the *Styles* tab under the *Scripts n Styles* section in the Info Terminal page.

```
1 .breadcrumb_link {  
2     color: #337ab7;  
3     cursor: pointer;  
4 }  
5  
6 .breadcrumb_link:hover {  
7     filter: brightness(70%);  
8     text-decoration: underline;  
9 }
```

Step 3: Adding JavaScript Callback

Lastly, JavaScript callback script has to be added so that when the user click on the breadcrumb link, the slider will take user to the destination slide.

```
1 window.n2ss.ready(1, function(slider){  
2     jQuery( '.breadcrumb-lab ' ).click( function() {  
3         slider.slide(4);  
4     });  
5 });
```

Chapter 8

CCTV Live Stream

8.1 Introduction

Another task in this thesis work is to stream live CCTV footage on the website. The CCTV used in thesis work is called PremiumBlue IP Camera [35] [36] as shown in the Figure 8.1. This camera is built with 720p resolutions, can be rotated and tilted remotely and monitored wirelessly. It is suitable to be used in homes, offices and labs. The user interface of the camera, which is used to view the footage and control the camera itself, can be accessed through the web browser. Additionally, it has a SD-card slot, which enables the storing of the footages and replay of them in the later time.

Figure 8.1: PremiumBlue IP-Camera



This chapter will discuss on how to configure the above mentioned IP-Camera; extracting the information to get the camera footage and controlling the camera; and designing the web page in the WordPress.


8.2 Pre-Configuration

Identifying IP Address

The steps discussed here is part of configuration steps from the camera vendor, which can be found in the following documentation[37].

The camera came with built-in web application and a bundle of softwares. To get started, the IP-Camera need to be connected to power supply and LAN-network. Next, we need to identify the IP of the camera by using the software came bundled with the camera called *SearchIPCam.exe* (see Figure 8.2). This application can also be downloaded from the vendor's website¹. Run the program and hit the 'Refresh' button to obtain the IP address of the camera.

Figure 8.2: SearchIPCam.exe

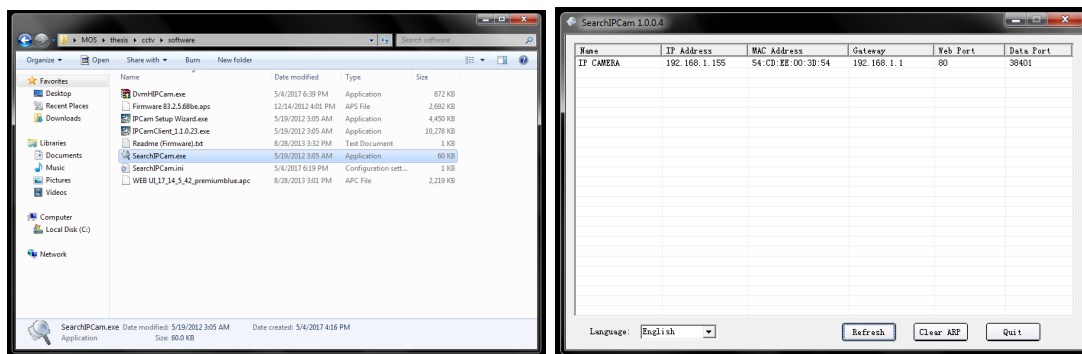

Login into Web Interface


After identifying the IP address of the camera, the web interface of the camera can be accessed by giving in the identified IP address (e.g. 192.168.0.157) from previous step in the web browser's address bar. Login by using the following credentials.

- Anwender: admin
- Passwort: admin
- Modus: Server Push

¹<https://www.pollin.de/shop/downloads/D722622S.ZIP>

(Note: 'Anwender' and 'Passwort' were not changed as at time of writing this. It may be changed in the future.)

Figure 8.3: Login in into IP-Camera web interface

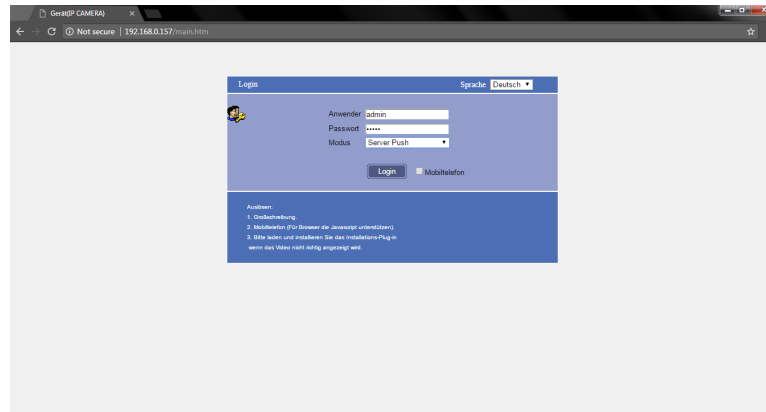

WLAN Setup

After successful login, the settings of the IP Camera can be accessed by clicking the tool button 'Einstellung' on top right of the page. In the menu list on the left panel, click on the 'Wlan'. In there search for the available WLAN network by clicking the 'Suchen' button. After the program finish the search, choose the lab network identified by SSID name 'SHLAB01' or 'SHLAB02'. Enter the following details:

- Wlan wird verwendet: tick
- SSID: 'SHLAB01' or 'SHLAB02'
- Netzwerk Type: Infra
- Sicherer Modus: AEP
- Verschlüsselung: WPA2-PSK
- Key: 91054319

Hit the 'Update' and 'Speichern' buttons and close the web browser or the tab.
(Note: The SSID and password may be changed in the future time.)

Restart

Now, the IP-Camera has to be restarted without connecting it to network via LAN cable. Since the wireless network credentials have been entered in the previous

Figure 8.4: IP-Camera WLAN settings


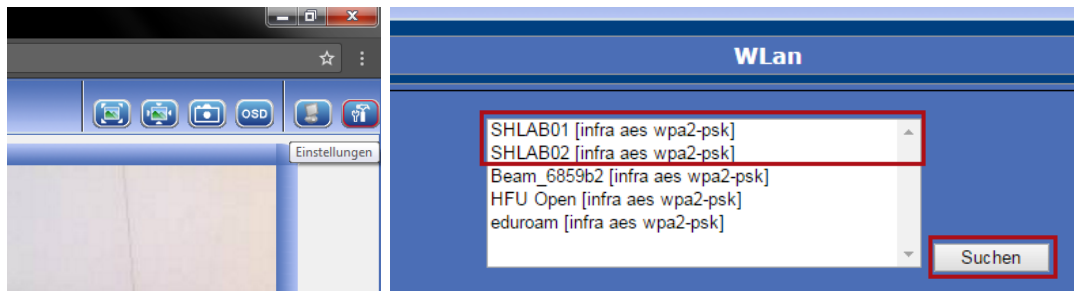


Figure 8.5: Wlan Credentials

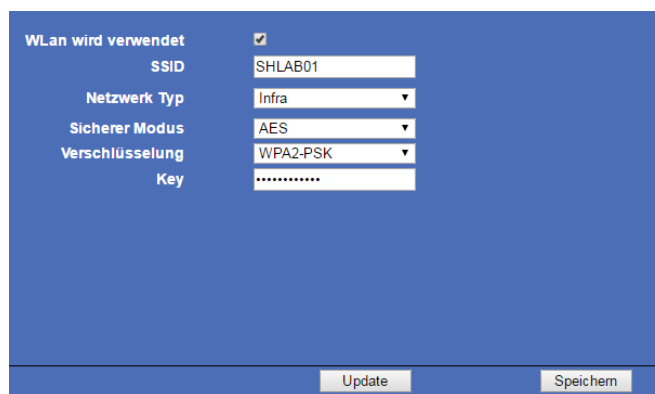

step, it will connect to lab network, 'SHLAB02' automatically upon start-up and will have a different IP address. Run the *SearchIPCam.exe* program again as discussed in the Section 8.2 and login into the web interface using the new IP address. The IP address will be renewed when the IP-Camera is connected through wireless LAN.

8.3 Identifying the cgi-bin Module

Introduction

In order to stream the live footage or recording of the IP-Camera in the Smart Home Lab website, the URI address and additional query parameters are required in order to access the IP-Camera recording. These parameters are not available openly but can be obtained by studying the HTML and JavaScript codes of the web interface of the camera. The studying of the web interface codes may take time up to 1 to 2 days depending on the level of web programming knowledge. The URI where the footage of the camera can be obtained is identified with

relative path *cgi-bin*.

Studying the Codes

The codes can be studied by using the *Developer Mode* of any web browser. In this thesis, the Chrome web browser has been used. The developer mode of Chrome web browser can be opened either through (Right click > Inspect) option or keyboard shortcut key (Ctrl-Shift-I).

The the HTML and JavaScript codes of the IP-Camera web interface, however, can't be studied easily because there are a lot of files which are embedded upon one another and referred to and from one file to another. The method used to extract the required URI and query parameters are through backtracking the video footage and the callback functions of the controller buttons.


Upon successful backtracking, the video footage can be found out to be delivered through the following URI:

`http://<base_uri>/cgi-bin/videostream.cgi?user=<username>&pwd=<password>`

Where,

- base_url: 192.168.0.157 (as per *SearchIPCam.exe* search result)
- username: admin
- password: admin

Figure 8.6: Developer Mode panel Sources

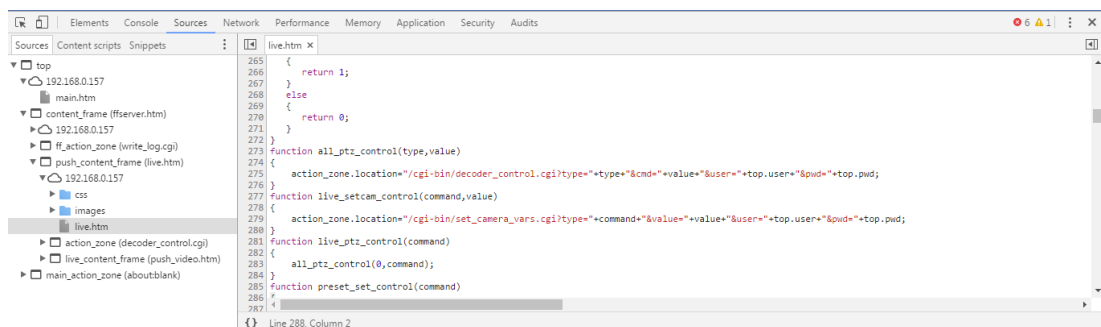

The URI required to control the camera (panning and tilting), can be backtracked through the controller buttons. The backtrack will lead to a function called `all_ptz_control(type, value)` in the `live.htm` file. This file can be

found through the developer mode panel *Sources*. Expand content_frame (ffmpeg-server.htm) >push_content_frame (live.htm) >192.168.0.157 nodes to find and open that file (see Figure 8.6).

After opening the file, the function can be found either through manual scrolling and searching or through search functionality that can be invoked through keyboard shortcut key (Ctrl-F). Through this function, the required URI to control the camera can be found out, which is:

```
http://<base_uri>/cgi-bin/decoder_control.cgi?type=<type>&cmd=
<command>user=<username>&pwd=<password>
```

Where,

- base_uri: 192.168.0.157 (*as per SearchIPCam.exe search result*)
- type: 0
- command: *see Table 8.1*
- username: admin
- password: admin

Table 8.1: Camera Control Commands

Command	Camera Movement
0	Up
1	Down
2	Right
3	Left
10	Stop
11	Centralize
13	Up-Left
14	Down-Left
15	Up-Right
16	Down-Right

8.4 Designing the Web Page

Introduction

In this section, the process of designing the web page to stream live footage of CCTV or IP-Camera will be discussed. In order to design this page, WordPress, CSS, JavaScript and jQuery knowledge will be required. In general, the development involves styling with CSS. Additionally, JavaScript will be used to render the HTML view, handle user actions and execute AJAX request.

Creating the Web Page

The web page is created by using WordPress built-in functionality. To create a new page, go to 'Page' section from the left side menu and click on 'Add New' sub-menu. Here, the page name is given as 'Live Stream' and then the page is published by clicking 'Publish' button. All the other settings are left in the default mode.

Scripts n Styles Plugin


Next, JavaScript [38] code will be added to render the HTML view. Below the WordPress text editor column, the 'Scripts n Styles' column can be found (*refer* Figure 8.7). This column will be added to every created page because of the installation of a WordPress plugin by the same name, 'Scripts n Styles'. To find out about the installed and activated plugins, explore the Plugins page. To learn more about this plugin, refer to URL linked in given footnote². Basically, this plugin enable the WordPress user to add custom CSS and JavaScript codes globally or to individual pages. Custom CSS and JavaScript is added into the page created to render the IP-Camera recording and the controller buttons.

Self-Invoked JavaScript Function

First, a self-invoked JavaScript function will be added into 'Scripts' lower column as shown in the Figure 8.7. The self-invoked JavaScript will be executed by the

²<https://de.wordpress.org/plugins/scripts-n-styles/>

Figure 8.7: Scripts n Styles Column

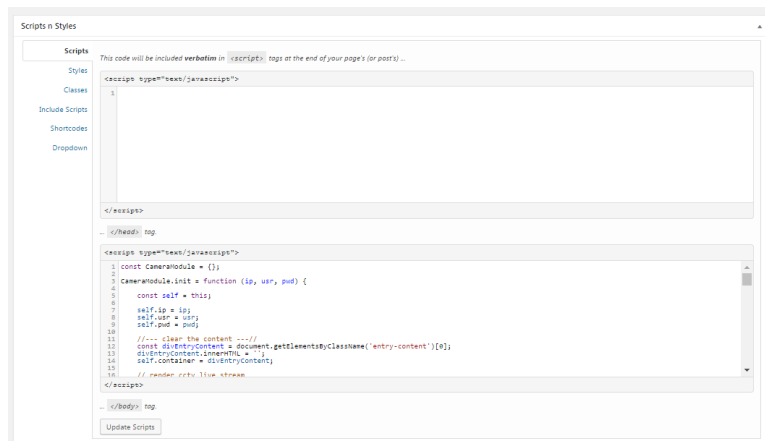

browser as soon as the script has been loaded without being called. This function contains codes to render the HTML view, which will render a HTML form with 3 input text fields:

- IP
- Username
- Password

and a submit button. The rendered view will then be inserted into HTML page under the `div` element with class name `'entry-content'`.

Figure 8.8: HTML form with 3 input text fields and a submit button

In addition to that, the function has the callback method to handle when the form is submitted by the user. The codes can be found within the function block as shown below.

```
1 // self-invoked function to run when page is loaded
2 (function () {
3     // codes to render view and form submission
4     ...
5     ...
6 })();
```

Rendering CCTV Footage and Controller

After the form as shown in Figure 8.8 is submitted by user, the JavaScript will execute the codes to render the CCTV footage view and controller buttons. The rendering of these elements is handled by a function with the name **CameraModule**. This function is divided into 3 sub-functions:

- `init()`
- `renderStream()`
- `renderController()`

```
1 const CameraModule = {};
```

```
2
```

```
3 CameraModule.init = function () {
```

```
4     // codes
```

```
5     ...
```

```
6 }
```

```
7 CameraModule.renderStream = function () {
```

```
8     // codes
```

```
9     ...
```

```
10 }
```

```
11 CameraModule.renderController = function () {
```


```
12     // codes
```

```
13     ...
```

```
14 }
```

These sub-functions contain codes to execute what their name suggest. The `init()` has codes to initialize the HTML view rendering process by clearing the current view and setting the text fields input values from the HTML form in

Figure 8.9: Camera Module HTML View

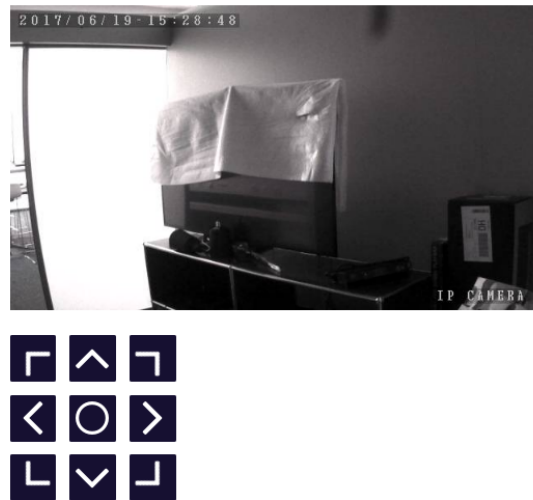

the functional scope variables. The `renderStream()` function render the camera footage stream, and the `renderController()` renders the controller buttons into the view. The rendered HTML view will appears as shown in the Figure 8.9.

Styling and Positioning the Buttons

The controller buttons that are rendered through JavaScript alone do not appear as shown in Figure 8.9. In order to make them appear good and positioned in a group as such, some CSS styling and positioning have been done. The CSS codes used for this purpose can be viewed from 'Styles' section of the 'Scripts n Styles' column.

The positioning of the buttons are done through relative and absolute positioning mechanism of the CSS³. In addition to that, the buttons has to be given the position as where it should find itself within the button container. The direction of arrow, as to which direction it should be pointing is done through CSS-Transform rotate effect.

```
1 /* relatively positioned button container */
2 .btn-container {
3     position: relative;
4     width: 200px;
```

³<https://www.mediaevent.de/tutorial/css-position-absolute-relative.html>

```
5     height: 200px;
6 }
7
8 /* absolutely positioned buttons */
9 .navi-btn {
10     line-height: 0;
11     padding: 8px;
12     position: absolute;
13 }
14
15 /* position of button in the button container */
16 .btn-top {
17     top: 0;
18     left: 72px;
19 }
20
21 ... /* positioning of other buttons */
22
23 /* arrow direction of the button */
24 .arrow-down {
25     -webkit-transform: rotate(180deg);
26     -moz-transform: rotate(180deg);
27     -ms-transform: rotate(180deg);
28     -o-transform: rotate(180deg);
29     transform: rotate(180deg);
30 }
31
32 ... /* arrow positioning of other buttons */
```

Callback Functions

The last thing that needed to be added to this web page is the callback functions. Callback functions here refers to what should be done when the controller buttons are clicked using mouse or pressed using touch display such as on smartphone. The controller buttons remotely control the movement of the camera. All the buttons are registered with 4 types of event handlers except for the middle button, which has only 2 event handlers.

The 4 event handlers registered are as follow:

- onmousedown - when user click the mouse left button
- onmouseup - when user lift the clicking of mouse left button
- ontouchstart - when user start the touch of button (touch display)
- ontouchend - when user end the touch of button (touch display)

The 2 event handlers registered for center button are as follow:

- onclick - when user click on the button
- ontouch - when user touch on the button

All these event handlers are registered on the respective buttons during the rendering process as discussed in the Section 8.4. The registering is done through the JavaScript method `setAttribute()`. This method register the event handler and the callback function to be invoked as shown in the code example below.

```
1 // .setAttribute(event_handler , callback_fn);  
2 btn.setAttribute('onmouseup', 'navi_stop(event)');
```

For these buttons, only 2 callback functions are required. First is the callback function when the events 'onmousedown', 'ontouchstart', 'onclick', and 'ontouch' are detected. Second callback function is when the event 'onmouseup' and 'ontouchend' are detected. The first callback function, `navi_start(event, command)` contain codes to make AJAX request to the IP-Camera for starting the navigation as per user command. The second callback function, `navi_stop(event)` contain codes to make AJAX request to the IP-Camera to stop the navigation.

Each of the AJAX request is done through jQuery's AJAX method and by setting 'cross-domain' flag to true. The codes for both callback functions are as follow.

```
1 //---- Button Callback Functions ----//  
2 function navi_start (event , cmd) {  
3     event.preventDefault();  
4     const ip = CameraModule.ip;  
5     const usr = CameraModule.usr;  
6     const pwd = CameraModule.pwd;  
7
```

```
8     jQuery.ajax({
9         crossDomain: true,
10        url: 'http://' + ip + '/cgi-bin/decoder_control.cgi?type=0&
11            cmd='+cmd+'&user='+usr+'&pwd='+pwd,
12    });
13 }
14
15 function navi_stop (event) {
16     event.preventDefault();
17     const ip = CameraModule.ip;
18     const usr = CameraModule.usr;
19     const pwd = CameraModule.pwd;
20
21     jQuery.ajax({
22         crossDomain: true,
23        url: 'http://' + ip + '/cgi-bin/decoder_control.cgi?type=0&
24            cmd=10&user='+usr+'&pwd='+pwd,
25    });
26 }
```

For both AJAX request, 5 parameters are required, which includes

- URL
- type
- cmd
- user
- pwd

These parameters are the same as been discussed before in the Section 8.3.

Chapter 9

Integrating Unity 3D-Model

The Smart Home Lab website has been integrated with Unity 3D-Model [39]. Unity is a game engine used to develop computer games and console games for cross-platform devices. With Unity game engine, 2D and 3D Models can be built through the provided API. The created 3D-Model can be viewed on web browsers through Unity Web Player plugins [40].

By default, WordPress doesn't have built-in Unity Web Player nor provide any support to view the Unity 3D-Models. Hence, integrating the 3D-Model has to be done manually. This chapter will outline and explain on how to integrate the 3D-Model into a WordPress powered website. Integrating Unity 3D-Model involves 2 steps. First, uploading the Unity files to resource folder. Second, developing a web page to render the 3D-Model.

9.1 Uploading Unity Files

This section will explain how to upload Unity files into WordPress resource folder. The Unity 3D-Model consists of following directories and files as shown below.

```
/
├── Build
│   ├── Prototyp_V2_Web.asm.code.unityweb
│   ├── Prototyp_V2_Web.asm.framework.unityweb
│   ├── Prototyp_V2_Web.asm.memory.unityweb
│   ├── Prototyp_V2_Web.data.unityweb
│   ├── Prototyp_V2_Web.json
│   └── UnityLoader.js
```



```
├─ TemplateData
│   ├── favicon.ico
│   ├── fullscreen.png
│   ├── progressEmpty.Dark.png
│   ├── progressEmpty.Light.png
│   ├── progressFull.Dark.png
│   ├── progressFull.Light.png
│   ├── progressLogo.Dark.png
│   ├── progressLogo.Light.png
│   ├── style.css
│   ├── UnityProgress.js
│   └── webgl-logo.png
```

These files has to be uploaded to the directory

```
/var/www/html/wp-content/uploads/
```

in the server. Uploading those 2 directories together with the files is done through `git clone` method. First, these files have been uploaded to a git repository. There is no any specific git account or git repository has been created for the Smart Home Lab website purpose. Please use your own or create one for the website if it is necessary.

After uploading 3D-Model files into a git repository, login into the backend of the server using PuTTY with hostname and port number as shown in the Figure 9.1. Don't forget to include the `private_key.ppk` for authentication under **Auth** tab in the PuTTY. Once the session is opened, enter the SSH passphrase `BSY2qjtu$#`


Navigate to the directory `/var/www/html/wp-content/uploads`. And use `git clone` method to clone i.e. download the required Unity 3D-Model files to the server. Replace the `[url]` with the URL address of the git repository.

```
1 cd /var/www/html/wp-content/uploads
2 git clone [url]
```

Since the directories and files are uploaded through the system user of Ubuntu Server, by default WordPress don't have permission to access them. File ownership and file permission for those directories and files has to set using `chown` and `chmod`.

```
1 chown -R user:www-data /var/www/html/wp-content/uploads/Build
```

Figure 9.1: Login into backend using PuTTY

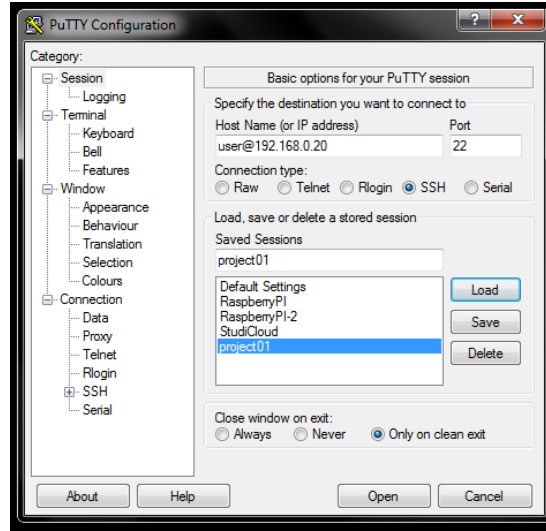

```

2 chown -R user:www-data /var/www/html/wp-content/uploads/TemplateData
3 chmod -R g+w /var/www/html/wp-content/Build
4 chmod -R g+w /var/www/html/wp-content/TemplateData

```

Uploading the required Unity 3D-Model is done with setting of file ownership and file permission. In the next section, the rendering of HTML page will be discussed and explained.

9.2 Rendering HTML for Unity Web Player

This section will discuss adding the HTML tag to render the Unity Web Player as well as linking the required Unity 3D-Model files, that have been uploaded to the web server directory as discussed in Section 9.1.

First, a new web page has to be added by using the WordPress built-in Page function. Click on 'Pages' option from the side menu and 'Add New' sub option. Here, '3D Model' has been given as the title of the page with `/unity` as the relative web page path.

In the editor column, HTML codes have been added to render the Unity Web Player. The web player will be rendered inside 2 `div` containers with class names `webgl-content` and `gameContainer` respectively. However, the web player is fixed to size of 960 pixel width and 600 pixel height as set by the author of the 3D-Model. These attributes have not been changed. Fixing the width and height

will cause the page not to act responsively across various screen sizes. Codes snippet below shows the rendering of Unity Web Player.

```

1 <div class="webgl-content" style="margin-top: 17%; margin-bottom:
  10%">
2   <div id="gameContainer" style="width: 960px; height:
    600px"></div>
3   <div class="footer">
4     <div class="webgl-logo"></div>
5     <div class="fullscreen"
      onclick="gameInstance.SetFullscreen(1)"></div>
6     <div class="title">Smart-Home-Labor</div>
7   </div>
8 </div>

```

Next, required files has to be linked to web page. These files include **style.css**, **UnityProgress.js**, and **UnityLoader.js**. These files are included onto the web page as shown in code snippet below.

```

1 // linking required files
2 <link rel="stylesheet"
  href="../wp-content/uploads/TemplateData/style.css">
3 <script
  src="../wp-content/uploads/TemplateData/UnityProgress.js"></script>
4 <script src="../wp-content/uploads/Build/UnityLoader.js"></script>

```

After that, the web player has to instantiated using the **UnityLoader.instantiate()** function.

```

1 <script>
2   const gameInstance = UnityLoader.instantiate(
3     "gameContainer",
4     "../wp-content/uploads/Build/Web_V6.json",
5     {
6       onProgress: UnityProgress
7     }
8   );
9 </script>

```

Lastly, in order to enhance the user interface level, the title of the web page


has to be removed. This ensures that the Unity Web Player uses the maximum space in the view. The default title of the web page is removed by using CSS code as shown below. This code has be inserted into 'Scripts n Styles' column under 'Styles' tab.

```
1 .entry-header {
2     display: none;
3 }
```

9.3 Alternative way to upload Unity 3D-Model Files

Another alternative way to upload the required Unity 3D-Model files is by using the 'File Manager' plugin¹. This plugin is available free of cost in the WordPress plugins directory². This plugin can be added to the website and activate through the web browser.

Figure 9.2: File Manager Plugin

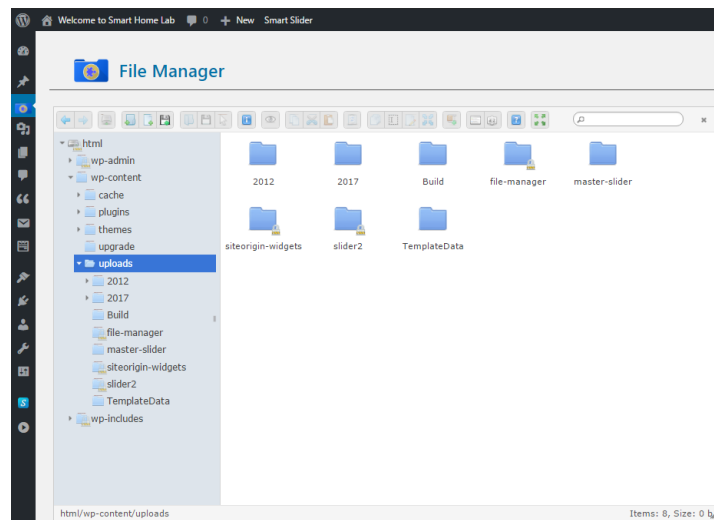

After installation and activation of this plugin, a new 'File Manager' option will appear on the left menu bar. This plugin enables the directories and files on the backend server to be viewed on the front-end web interface (see Figure 9.2).

¹<https://wordpress.org/plugins/file-manager/>

²<https://wordpress.org/plugins/>

Through this plugin, directories and files can be added, modified and deleted. Here, the root directory starts with `/html/.`, instead of `/var/www/html/..`. The `html` is the root directory of WordPress where else `/var/www` is the root directory of the Nginx web server.

Uploading file through 'File Manager' plugin can be done simply by drag-n-drop method. The files, however, have to be made sure uploaded to the correct directory, which is `/html/wp-content/uploads`. Since we used WordPress frontend to upload the files, no file ownership and file permission has to be set. Here the files and directories are added with WordPress as the owner.

Even though this method is much simpler than the method discussed in the Section 9.1, a problem has occurred. There is a file with size of almost 12 MB in the `TemplateData` directory. This file are not uploading to the server by using the 'File Manager' plugin. The WordPress deliver a `http-error`. After research and studies, no working solution has been found on how to enable large file upload of more than 10 MB.

This is taking into consideration after increasing the file upload size limit both in the Nginx web server configuration and PHP application server configuration [41]. Solving the `http-error` will enable the file to be uploaded or upgraded easily in the future by using this plugin, without having to login in to server backend and uploading file using PuTTY or SFTP.

Chapter 10

Bloggng with WordPress

WordPress has a blogging feature readily built-in. Enabling blogging on the website is very simple and require only a few steps. This chapter will explain how to create a new blog spot, publishing it, and adding a menu link to the blog post entries.

Step 1: Login into admin side

First, login into admin side of the website by accessing the following URL:

```
1 http://<base-url>/wp-admin
2
3 http://web.smarthome.hs-furtwangen.de/wp-admin
```



In case the base URL has been changed, just add the relative URL `/wp-admin` to access the admin side of the website. The admin side of any WordPress powered website is accessed through this relative path.


Step 2: Username and password

As of the point of writing, there is only username has been created. Login into admin side using the following credentials:

- Username: ashiqmoh
- Password: oSm0cCCAguIMsalrZd(#2i5(

Optional Step: Creating a new user

In the future, if required, additional users can be added to website by accessing the  **Users** menu and subsequently  **Add New** item on the left navigation. This will show a page with fields such as *Username*, *Email*, *First Name*, *Last Name*, and *Website* to be entered.

Only the *Username* and *Email* fields are mandatory. The password will be auto-generated and sent to the email address of the new user automatically. But WordPress also allow the password to be seen and be given manually by clicking the  **Show password** button while creating a new user.

Another important thing while creating a new user is to assign the appropriate *Role*. There are five types of role, which are:

- Subscriber
- Contributor
- Author
- Editor
- Administrator

For the user that requires the permission to do blogging should be assigned with the role of *Editor* or *Author*. The difference [42] between these two roles are as follow:

Editor is somebody who can publish and manage posts including the posts of other users.

Author is somebody who can publish and manage their own posts only.

Step 3: Creating a new blog entry


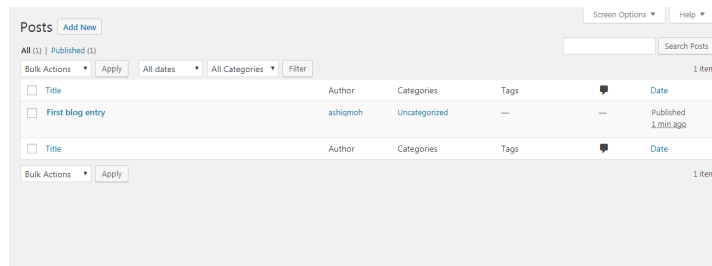
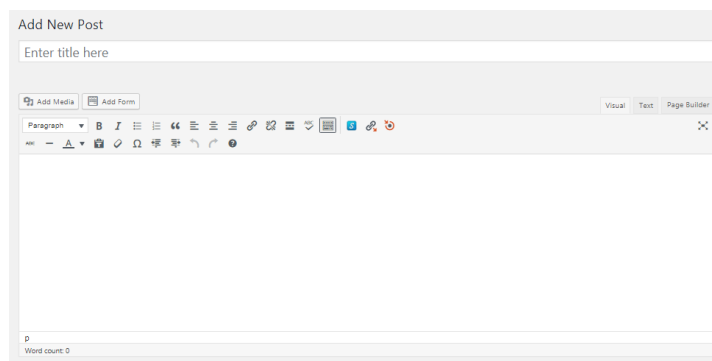
The blog section can be accessed by clicking the  **Posts** menu on the left menu navigation. When this menu has been clicked, a listing of all the blog entries (see Figure 10.1) will be shown. As at the point of writing, there is only one blog entry in the website. The title of the blog is "First blog entry" with the content "Hello, world!".

Figure 10.1: Blog entries




In order to create a new blog entry, click on the [Add New](#) button, which can be found on the top left of the blog post entries. When this button has been clicked, a new page will appear as shown in Figure 10.2.

Figure 10.2: New blog (post) entry



Here, the title of the blog post has to be given in the text field with the placeholder *Enter title here* (refer Figure 10.3). Next, make sure that the text editor is in the *Visual* mode (refer Figure 10.4). The visual mode provides a semi WYSIWYG content editor, which enable an easy way to create, edit and format the blog post contents in view similar to that of a word processor [43].


Figure 10.3: Text field for blog post title



Step 5: Publishing the blog post


After finish editing the blog post content, the post can be published by clicking the [Publish](#) button as shown in the Figure 10.5. Other than that, WordPress also

Figure 10.4: Text editor setting to 'Visual' mode

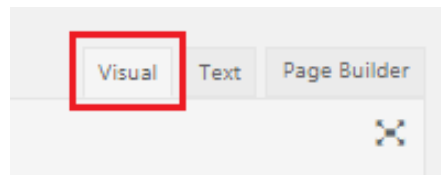

offers the options to save the blog post without publishing it into the website. This can be done clicking the 'Save Draft' button.


Figure 10.5: Publishing blog post

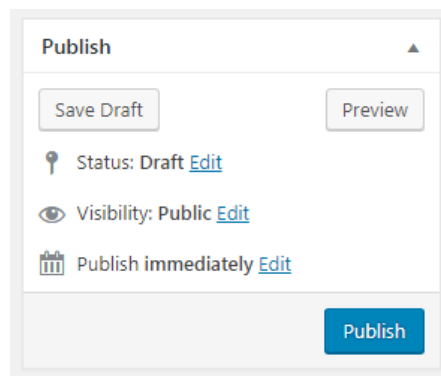

Step 6: Previewing the blog post entry

The edited blog post can be viewed or previewed by clicking the [Preview](#) button before publishing it. If the blog post has been published, the button will change into [Preview Changes](#). This button also has the same functionality as the preview button. Another way of previewing the blog entry is by clicking the permalink that appears below the 'Title' text field as shown in Figure 10.6.

Figure 10.6: Permalink below 'Title' text field



Note: The permalink only will appear when the user start editing the new post. It won't appear at the beginning.

Step 7: Adding menu for blog entry


When blogging has been started, a menu has to be added to the main navigation menu (refer Figure 10.7) that appears at the header part of the website. Currently, there is no menu link that links the website to the blog entries. This section will explain how to add one.

Figure 10.7: Main navigation menu



From the left navigation panel on the admin side, access the **Appearance** menu and followed by **Menus** submenu. A screen as shown in the Figure 10.8 will appear. First, expand the *Pages* accordion menu has been highlighted in the figure.

Figure 10.8: Menu screen

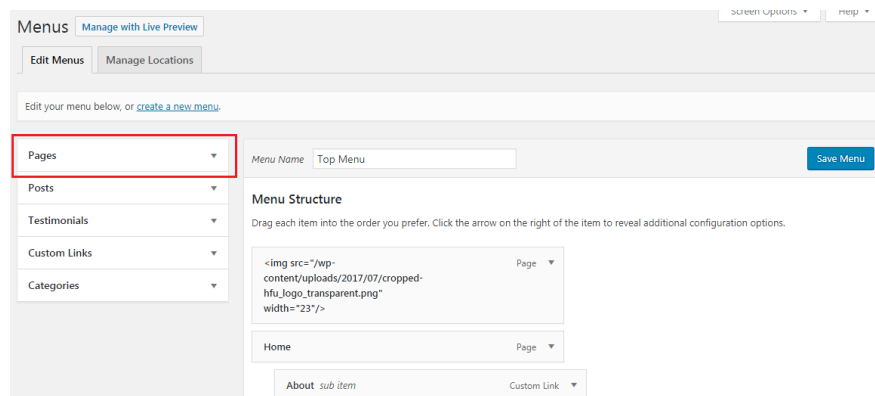

Then, check the checkbox *Blog* and click the **Add to Menu** button. This will add a link linking blog post entry to the main navigation menu as shown in the Figure 10.7.

After adding the *Blog* menu by clicking the **Add to Menu**, the *Blog* menu will appear under the *Menu Structure* column on the right (refer Figure 10.10). Here, the position of the link can re-ordered by dragging and dropping, as the new menu will be added as a last menu item by default.

After reordering the *Blog* menu to the desired position, save the added menu by clicking the **Save Menu** button on the top right of *Menu Structure* column on the web page.

Figure 10.9: Adding a menu to link blog post


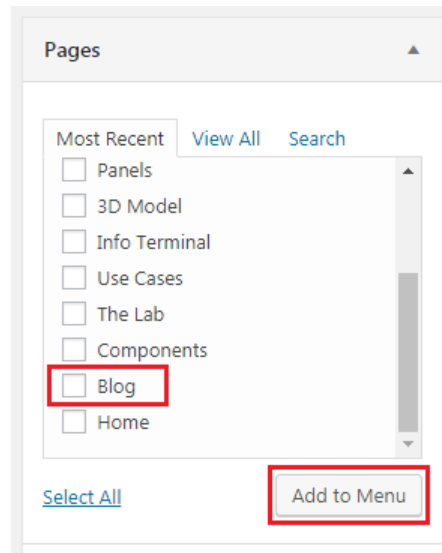


Figure 10.10: Menu structure column

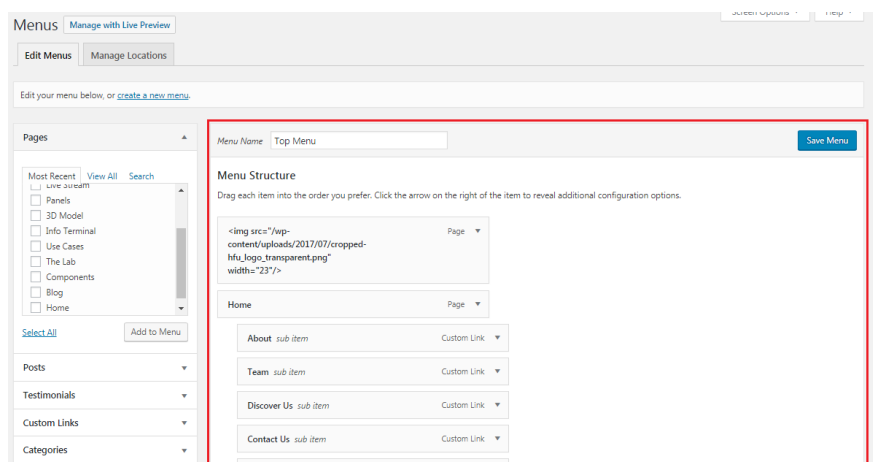

Chapter 11

Conclusion

This thesis work involves creating a website for the smart home laboratory at the Hochschule Furtwangen University. The website has been designed and developed by using content management system called WordPress. WordPress is an open source CMS which is widely used and has a lot features built-in.

In addition to that, the website has been equipped with an info-terminal. The info-terminal serves to display information regarding the laboratory and its components in an automated and interactive way. Hence, a WordPress plugin called SmartSlider 3 has been used to develop the info-terminal. This plugin is also open-source and can be downloaded from WordPress plugin marketplace.

Before choosing the plugin SmartSlider 3, the thorough research and analysis have been carried out. This research involves learning available methods and plugins which will allow the development of the info-terminal inside the WordPress. Since WordPress doesn't offer much of a flexibility like programming on native platform offers, the result that can be achieved through the chosen plugin has to be maximized. More 10 different plugins has been downloaded, installed and tested on a local server. From the analysis, SmartSlider 3 has been found to be the most appropriate plugin to be used for this purpose.

The website also has been developed to include the live stream of an IP camera footage. In order achieve this, the IP camera has been configured and the parameters required to connect and communicate with it has been studied. Then, a web page has been designed and programmed in the WordPress to embed the live footage of the IP camera in real-time. Additionally, buttons has been added

and programmed, which enables controlling the IP camera remotely.

Another task that has been accomplished through this thesis is the integration of Unity 3D-Model. This task accounts to only a small portion of the thesis work. The task involves only in uploading necessary files into the server and developing a web page to render and display the 3D-Model correctly.

The safety of the website has been ensured from the server level up to the front-end level. Then, it has been public which can be accessible every one.

11.1 Future Works

Even though the website is made public and fully functional, there are still room for improvements. For an example, more contents can be added to the website. Other than that, the blogging features has been installed in the WordPress. It only requires activation as discussed in the previous chapter, and latest news regarding the development in the smart home laboratory can be shared instantly.

For the info-terminal, the interactivity can be enhanced through the CSS3 animation. The CSS3 animation allows the HTML elements displayed on a web page to be animated through various effects. There are two ways to this. First is to program the animation manually and applying to the elements such as images and texts on the info-terminal. Secondly, the plugin SmartSlider 3 full version can be bought. By upgrading to full version, the animation can be added through the plugin user interface without any programming works.

Bibliography

- [1] FZI Research Center for Information Technology. Fzi forschungszentrum informatik: Home. <https://www.fzi.de/en/home>, 2017. [Online; accessed 9-April-2017].
- [2] Marc Mültin. Kit-forschungsprojekt izeus. <http://www.izeus.kit.edu/62.php>, 2012. [Online; accessed 11-April-2017].
- [3] Prof. Dr.-Ing. habil. Nativi. Iotlab hochschule reutlingen. <http://iotlab.reutlingen-university.de>, 2016. [Online; accessed 24-March-2017].
- [4] Jim Gaston. Duke smart home program. <https://smarthome.duke.edu>, 2007. [Online; accessed 10-April-2017].
- [5] Federico Casalegno. Re:thinking the future of smart living. <http://mobile.mit.edu/smartliving>, 2014. [Online; accessed 5-April-2017].
- [6] Syed Balkhi. Which is the best wordpress slider? performance + quality compared. <http://www.wpbeginner.com/best-wordpress-slider>, 2015. [Online; accessed 23-April-2017].
- [7] Team Updraft. Meta slider. <https://wordpress.org/plugins/ml-slider>, 2016. [Online; accessed 24-April-2017].
- [8] Team Updraft. Meta slider - responsive wordpress slider plugin. <https://www.metaslider.com>, 2016. [Online; accessed 23-April-2017].
- [9] MotoPress. Responsive wordpress slider plugin. <https://www.getmotopress.com/plugins/slider>, 2015. [Online; accessed 4-April-2017].
- [10] MotoPress. Responsive slider by motopress. <https://wordpress.org/plugins/motopress-slider-lite>, 2016. [Online; accessed 4-April-2017].

-
- [11] Greg Priday SiteOrigin, Braam Genis. Siteorigin widgets bundle. <https://de.wordpress.org/plugins/so-widgets-bundle>, 2015. [Online; accessed 29-March-2017].
 - [12] Greg Priday. Slider widget documentation. <https://siteorigin.com/widgets-bundle/slider-widget-documentation>, 2014. [Online; accessed 16-April-2017].
 - [13] Nextendweb. Smart slider 3. <https://de.wordpress.org/plugins/smart-slider-3>, 2015. [Online; accessed 24-April-2017].
 - [14] Nextendweb. Smart slider 3 - responsive wordpress slider. <https://smartslider3.com>, 2015. [Online; accessed 24-April-2017].
 - [15] Web Dorado. Wordpress slider plugin - slider wd. <https://web-dorado.com/products/wordpress-slider-plugin.html>, 2016. [Online; accessed 12-April-2017].
 - [16] StatCounter GlobalStat. Screen resolution stat worldwide. <http://gs.statcounter.com/screen-resolution-stats>, 2107. [Online; accessed 20-May-2017].
 - [17] W3techs. Usage statistics and market share of content management systems for websites, august 2017. https://w3techs.com/technologies/overview/content_management/all, 2017. [Online; accessed 9-March-2017].
 - [18] WordPress. Features of wordpress. <https://wordpress.org/about/features>, 2017. [Online; accessed 5-March-2017].
 - [19] WhichCmsToChoose. Wordpress - cms review, advantages and disadvantages. <http://whichcmstochoose.com/wordpress.html>, 2012. [Online; accessed 25-May-2017].
 - [20] WordPress. Security of wordpress. <https://wordpress.org/about/security>, 2017. [Online; accessed 5-March-2017].

- [21] PHP Group. Php: What is php? - manual. <http://php.net/manual/en/intro-whatis.php>, 2001. [Online; accessed 8-March-2017].
- [22] PHP Group. Php: What can php do? - manual. <http://php.net/manual/en/intro-whatcando.php>, 2001. [Online; accessed 8-March-2017].
- [23] Refsnes Data. Sql introduction. https://www.w3schools.com/sql/sql_intro.asp, 2017. [Online; accessed 15-March-2017].
- [24] NGINX Inc. Nginx wiki! <https://www.nginx.com/resources/wiki>, 2009. [Online; accessed 8-March-2017].
- [25] NGINX Inc. Nginx plus technical specifications. <https://www.nginx.com/products/technical-specs>, 2017. [Online; accessed 8-March-2017].
- [26] Mark Hachman. Hands-on with surface hub: Microsoft's huge tablet has some productivity holes. <http://www.pcworld.com/article/3051049/hardware/hands-on-with-surface-hub-microsofts-huge-tablet-has-some-productivity-holes.html>, 2016. [Online; accessed 12-March-2017].
- [27] Microsoft Crop. Microsoft surface hub. <https://www.microsoft.com/microsoft-surface-hub/en-us>, 2016. [Online; accessed 11-March-2017].
- [28] Microsoft. Microsoft surface hub. <https://www.microsoft.com/microsoft-surface-hub/en-us/product-specs>, 2016. [Online; accessed 11-March-2017].
- [29] Mark Hachman. Microsoft's gigantic, almost-forgotten \$22,000 surface hub touchscreen is now shipping. <http://www.pcworld.com/article/3048433/hardware/microsofts-gigantic-almost-forgotten-22000-surface-hub-touchscreen-is-now-shipping.html>, 2016. [Online; accessed 12-March-2017].
- [30] Sugar Hill. Php 7.0 - extensions. <https://www.digitalocean.com/community/questions/php-7-0-ziparchive-library-is-missing-or-disabled>, 2016. [Online; accessed 7-March-2017].

- [31] Brad Williams, David Damstra, and Hal Stern. *Professional WordPress: Design and development*. John Wiley & Sons, Indianapolis, third edition edition, 2015. [Online; accessed 8-March-2017].
- [32] Greg Priday SiteOrigin, Braam Genis. Page builder by siteorigin. <https://de.wordpress.org/plugins/siteorigin-panels>, 2016. [Online; accessed 29-March-2017].
- [33] SiteOrigin. Getting started with page builder. <https://siteorigin.com/page-builder/documentation>, 2014. [Online; accessed 21-March-2017].
- [34] Refsnes Data. How to create a slideshow. https://www.w3schools.com/howto/howto_js_slideshow.asp, 8/10/2017. [Online; accessed 7-May-2017].
- [35] PremiumBlue. Hd ip-kamera premiumblue pipc-hd720sd. <https://www.pollin.de/p/hd-ip-kamera-premiumblue-pipc-hd720sd-pan-tilt-722622>, 2013. [Online; accessed 27-April-2017].
- [36] PremiumBlue. Ip-kamera premiumblue pipc-011. <https://www.pollin.de/p/ip-kamera-premiumblue-pipc-011-pan-tilt-722285>, 2013. [Online; accessed 27-April-2017].
- [37] PremiumBlue. Hd ip-kamera pipc-hd720sd - produktbeschreibung. 2013. [Online; accessed 28-April-2017].
- [38] Axel Rauschmayer. *Speaking JavaScript: an in-depth guide for programmers*. O'Reilly Media, Sebastopol, CA, first edition edition, 2014. [Online; accessed 22-April-2017].
- [39] Dean Takahashi. Unity technologies. <https://venturebeat.com/2014/10/23/john-riccitiello-sets-out-to-identify-the-engine-of-growth-for-unity-technologies-interview>, 2014. [Online; accessed 3-June-2017].
- [40] Unity3D. Unity - webplayer. <https://unity3d.com/webplayer>, 2017. [Online; accessed 3-June-2017].

- [41] J. Grey. The uploaded file exceeds the upload_max.filesize directive in php.ini. https://www.digitalocean.com/community/questions/the-uploaded-file-exceeds-the-upload_max_filesize-directive-in-php-ini, 2014. [Online; accessed 13-May-2017].
- [42] WordPress. Codex - roles and capabilities. https://codex.wordpress.org/Roles_and_Capabilities, 2009. [Online; accessed 5-August-2017].
- [43] WordPress. Visual editor. <https://en.support.wordpress.com/visual-editor>, 2013. [Online; accessed 5-August-2017].

Statutory Declaration

I, hereby, declare and assure that I have written the above work independently and have used, to this end, no other than the specified literature sources. The words or sentences that has been taken or referred from foreign sources has been cited through out this paper.

Any identical work or any similar work resembling this work has not been done or submitted or publicized by others or any other institutions.

I am fully aware that a false declaration and breaching the declaration may have legal consequences.

Ashiq Mohamed Akbar Ali

Furtwangen, 30.08.2017

Appendices

.1 Comparisons of the evaluated websites

Website / Criteria	Information	Layout	Header	Body	Footer	Contents	Navigation Menu	Media Supports / Features	Responsiveness	Languages
KIT iZEUS	<ul style="list-style-type: none"> * Webserver: Apache 2.4.10 * Framework: Unknown * Language: PHP (version unknown) * Server: Debian 	<ul style="list-style-type: none"> * Classic web layout * Normal, not wide, not stretched 	<ul style="list-style-type: none"> * Brand logo * Sub menu 	<ul style="list-style-type: none"> * 3 Column view 	<ul style="list-style-type: none"> * Copyright statement 	<ul style="list-style-type: none"> * Overview about lab * Information material / flyer * Project team / partners * Publications * Press review * Links * Contact * Legals * Sitemap 	<ul style="list-style-type: none"> * Main menu (left column) * Sub menu (Upper part of header) 	<ul style="list-style-type: none"> * Video * Images * Banner * PDFs 	<ul style="list-style-type: none"> * No 	<ul style="list-style-type: none"> * German * English
IoTLab Reutlingen	<ul style="list-style-type: none"> * Webserver: Apache * Framework: Joomla! * Language: PHP 5.5.36 * Server: Unknown 	<ul style="list-style-type: none"> * Modern web layout * Wide and stretched 	<ul style="list-style-type: none"> * Brand logo * Main menu * Toggle button for drawer 	<ul style="list-style-type: none"> * Homepage single column * Other pages double column * Social media plugin fixed to right edge 	<ul style="list-style-type: none"> * Copyright statement * Impressum link * University homepage link * Link / info about CMS * Link / info about CMS theme 	<ul style="list-style-type: none"> * Newsfeed * Master Projects * Publications * Thesis * Blog * Contact Us 	<ul style="list-style-type: none"> * Main menu (Header) * Duplicate of main menu (Left drawer) * Duplicate of main menu (Left column, but has additional entries) 	<ul style="list-style-type: none"> * Images * Slide show * Videos * Social media plugins * Contact form * Commenting 	<ul style="list-style-type: none"> * Yes 	<ul style="list-style-type: none"> * English
Duke Smart Home Program	<ul style="list-style-type: none"> Webserver: Apache 2.4.7 Framework: Drupal 4.7 Language: PHP 5.5.9-1 Server: Ubuntu 4.20 	<ul style="list-style-type: none"> * Modern and simple web layout * Wide and stretched 	<ul style="list-style-type: none"> * Brand logo * Search bar * Main menu * External links 	<ul style="list-style-type: none"> * 2 column * Left column is main contents view * Right column has sub menu 	<ul style="list-style-type: none"> * Copyright statement * Institution logo * Link (Contact Us) 	<ul style="list-style-type: none"> * Picture gallery * Quicklinks * About * Research * Our Smart Dorm * Industry * Students * Contact Us 	<ul style="list-style-type: none"> * Main menu (Header) * Sub Menu (Right column, individual to every page) 	<ul style="list-style-type: none"> * Images * Video * Map * Banner 	<ul style="list-style-type: none"> * Yes 	<ul style="list-style-type: none"> * English
MIT Mobile	<ul style="list-style-type: none"> * Webserver: Apache 2.2.22 * Framework: * WordPress 4.3.1 * Language: PHP 5.4.45 * Server: Debian 7u8 	<ul style="list-style-type: none"> * Modern web layout * Wide not stretched * Tile-based content arrangement 	<ul style="list-style-type: none"> * Brand logo * Main menu 	<ul style="list-style-type: none"> * Single column * Had breadcrumb * Projects and Events pages have filtering option 	<ul style="list-style-type: none"> * Main menu (duplicate) * Copyright statement * Institution logo * Department logo 	<ul style="list-style-type: none"> * Featured News * Upcoming events * Contact Us * Projects * Team Members * Sponsors 	<ul style="list-style-type: none"> * Main Menu (Header) * Duplicate of main menu (Footer) 	<ul style="list-style-type: none"> * Images * Video * Slide show * Breadcrumb * Image zoom-in features 	<ul style="list-style-type: none"> * No 	<ul style="list-style-type: none"> * English
MIT Smart Living	<ul style="list-style-type: none"> * Webserver: Apache 2.2.22 * Framework: WordPress 4.3.1 * Language: PHP 5.4.45 * Server: Debian 7u8 	<ul style="list-style-type: none"> * Wide not stretched * Modern web layout 	<ul style="list-style-type: none"> * Brand logo * Main menu 	<ul style="list-style-type: none"> * Single column * Simple web layout 	<ul style="list-style-type: none"> * Copyright statement 	<ul style="list-style-type: none"> * Slide show * Project Brief * Methodology * Projects * Team 	<ul style="list-style-type: none"> * Main Menu (Header) 	<ul style="list-style-type: none"> * Images * Slide show * Videos 	<ul style="list-style-type: none"> * Yes 	<ul style="list-style-type: none"> * English
FZI Forschungszentrum	<ul style="list-style-type: none"> * Webserver: Apache * Framework: Typo3 CMS * Language: PHP 5.4.45 * Server: Unknown 	<ul style="list-style-type: none"> * Normal layout * Modern yet typical 	<ul style="list-style-type: none"> * Brand logo * Main menu * Sub menu 	<ul style="list-style-type: none"> * 2 column Homepage has big left column with slideshow, latest new. Small right column with upcoming events and quicklink. * Other pages has big right column for main contents and small left column for sub menu 	<ul style="list-style-type: none"> * Sub menu * Social media button 	<ul style="list-style-type: none"> * Newsfeed * Events * Research * Offers * Work For Us * About Us * Privacy Policy * Legal Notice * Sitemap * Contact Us * Location 	<ul style="list-style-type: none"> * Main menu (Header) * Sub Menu (Right column, individual to every page) * Footer menu (footer) 	<ul style="list-style-type: none"> * Images * Slide Show * Videos * Contact form * Search bar * Social media button 	<ul style="list-style-type: none"> * Yes 	<ul style="list-style-type: none"> * German * English

.2 CD-ROM

```
/
├─ Thesis.pdf
├─ Thesis-Latex/
├─ Presentation.pdf
└─ bibliography.bib
```