

Crime Analytics Across Indian Cities

Overview

This project analyzes crime data from 29 Indian cities, focusing on the spread of crimes by gender, age, and city. The analysis also examines crime trends over time and evaluates the efficiency of law enforcement in closing cases. Special focus is given to Nagpur and Pune, comparing crime rates and the time taken to resolve cases.

Note: The data does not represent all crimes in India but provides a snapshot based on 29 major cities. The dataset was sourced from Kaggle, and the analysis is limited to the available data.

Importing libraries & CSV file

```
In [1]: #Importing important libraries
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
import warnings
```

```
In [2]: #We import here CSV file from device
data = pd.read_csv(r"C:\\Users\\OM\\Desktop\\Excel data\\crime_dataset_india\\crime_data.csv")
data.head(3)
```

```
Out[2]:
```

	Report Number	Date Reported	Date of Occurrence	Time of Occurrence	City	Crime Code	Crime Description
0	1	02-01-2020 00:00	01-01-2020 00:00	01-01-2020 01:11	Ahmedabad	576	IDENTITY THEFT
1	2	01-01-2020 19:00	01-01-2020 01:00	01-01-2020 06:26	Chennai	128	HOMICIDE
2	3	02-01-2020 05:00	01-01-2020 02:00	01-01-2020 14:30	Ludhiana	271	KIDNAPPING

```
In [3]: # We checking Blank value in all columns
(data.isnull().sum()*len(data))/100
```

```
Out[3]: Report Number          0
Date Reported                0
Date of Occurrence           0
Time of Occurrence           0
City                         0
Crime Code                   0
Crime Description             0
Victim Age                   0
Victim Gender                 0
Weapon Used                   0
Crime Domain                  0
Police Deployed              0
Case Closed                   0
Date Case Closed             8071356
dtype: int64
```

```
In [4]: #For blanks in "Date Case Closed" we will replace them with "NA"
data["Date Case Closed"] = data["Date Case Closed"].fillna("NA")
```

```
In [5]: # We checking the data types of all columns
data.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 40160 entries, 0 to 40159
Data columns (total 14 columns):
#   Column                Non-Null Count  Dtype
---  -
0   Report Number          40160 non-null  int64
1   Date Reported           40160 non-null  object
2   Date of Occurrence      40160 non-null  object
3   Time of Occurrence      40160 non-null  object
4   City                   40160 non-null  object
5   Crime Code              40160 non-null  int64
6   Crime Description       40160 non-null  object
7   Victim Age              40160 non-null  int64
8   Victim Gender           40160 non-null  object
9   Weapon Used             40160 non-null  object
10  Crime Domain            40160 non-null  object
11  Police Deployed         40160 non-null  int64
12  Case Closed             40160 non-null  object
13  Date Case Closed        40160 non-null  object
dtypes: int64(4), object(10)
memory usage: 4.3+ MB
```

```
In [6]: # Here we Counting unique values in each column
data.nunique()
```

```
Out[6]: Report Number      40160
        Date Reported      25546
        Date of Occurrence  40160
        Time of Occurrence  39886
        City                29
        Crime Code          500
        Crime Description    21
        Victim Age          70
        Victim Gender       3
        Weapon Used         7
        Crime Domain        4
        Police Deployed     19
        Case Closed         2
        Date Case Closed    16012
        dtype: int64
```

```
In [7]: # Here we Converting "Date Reported" and "Date of Occurrence" columns to date
data["Date Reported"] = pd.to_datetime(data["Date Reported"], format="%d-%m-%Y")
data["Date of Occurrence"] = pd.to_datetime(data["Date of Occurrence"], format="%d-%m-%Y")
```

```
In [8]: # Here we Separating date and time from "Date Reported" and "Date of Occurrence"
data["Reported date"] = data["Date Reported"].dt.strftime("%d-%m-%Y")
data["Reported Time"] = data["Date Reported"].dt.strftime("%H:%M:%S")
data["Occurrence date"] = data["Date of Occurrence"].dt.strftime("%d-%m-%Y")
data["Occurrence Time"] = data["Date of Occurrence"].dt.strftime("%H:%M:%S")
```

```
In [9]: order = ["Reported date", "Reported Time", "Occurrence date", "Occurrence Time"]
data = data[order]
data.head(3)
```


```
Out[9]:
```

	Reported date	Reported Time	Occurrence date	Occurrence Time	City	Crime Code	Crime Description
0	02-01-2020	00:00:00	01-01-2020	00:00:00	Ahmedabad	576	IDENTIFY THE
1	01-01-2020	19:00:00	01-01-2020	01:00:00	Chennai	128	HOMICIDE
2	02-01-2020	05:00:00	01-01-2020	02:00:00	Ludhiana	271	KIDNAPPING

```
In [10]: plt.rcParams['axes.labelsize'] = 20
plt.rcParams['xtick.labelsize'] = 15
plt.rcParams['ytick.labelsize'] = 15
```

Number of Crimes per City


```
In [11]: plt.figure(figsize=(15,5))
sns.countplot(data=data, x="City", order=data["City"].value_counts().index)
plt.xticks(rotation=90)
plt.title('Number of Crimes per City')
plt.xlabel('City')
plt.ylabel('Crimes Number')
plt.show()
```

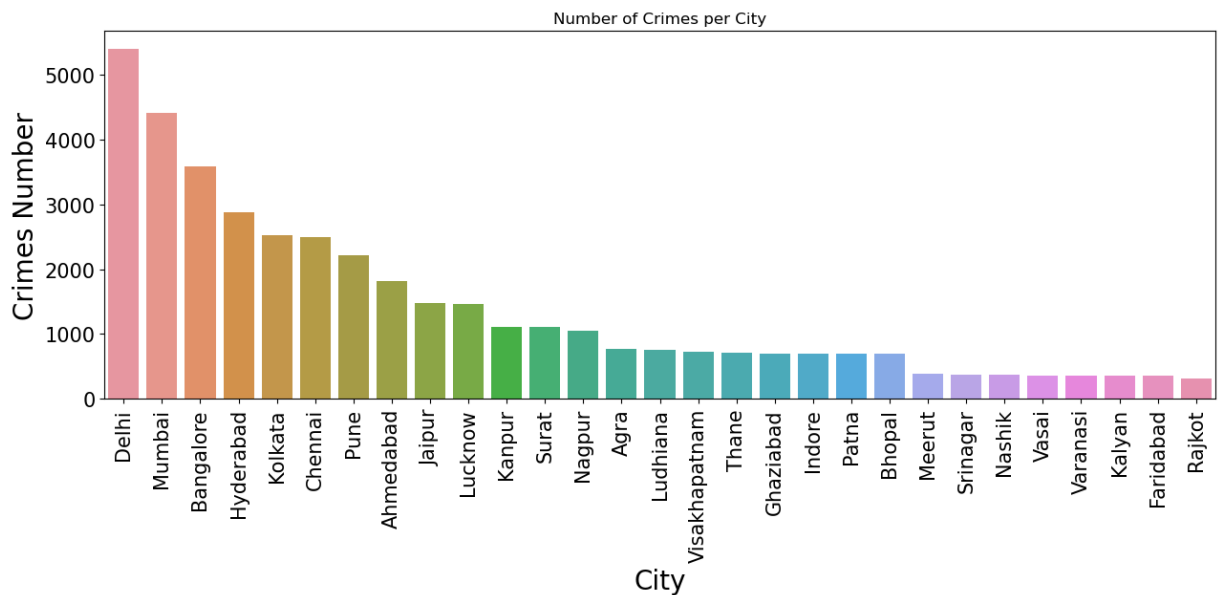

According to the data, the cities with the highest crime rates are major metropolitan areas like Delhi, Mumbai, Bangalore, Hyderabad, and Kolkata.

Crimes by Gender

```
In [12]: plt.figure(figsize=(15,5))
sns.countplot(data=data, x="Victim Gender", order=data["Victim Gender"].value_counts())
plt.xticks(rotation=45)
plt.title('Crimes per Gender')
plt.xlabel('Victim Gender')
plt.ylabel('Number of Crimes')
plt.show()
```

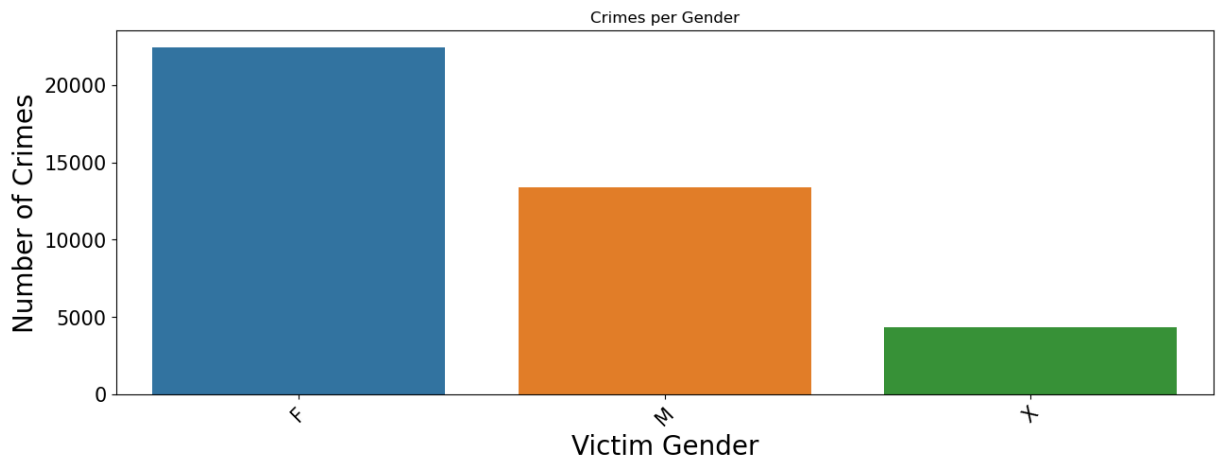


The data shows that the majority of crime victims are female across all reported cases. This highlights the need for gender-specific policies and protection measures, especially for women in crime-prone areas.

Sexual Assault Cases by City

```
In [13]: sexual_assault_data = data[data['Crime Description'] == 'SEXUAL ASSAULT']

sexual_assault_count = sexual_assault_data['City'].value_counts().reset_index
sexual_assault_count.columns = ['City', 'Sexual Assault Count']

plt.figure(figsize=(15,5))
sns.barplot(x='City', y='Sexual Assault Count', data=sexual_assault_count, p
plt.title('Number of Sexual Assault Cases by City')
plt.xlabel('City')
plt.ylabel('Sexual Assault Cases')
plt.xticks(rotation=70)
plt.show()
```


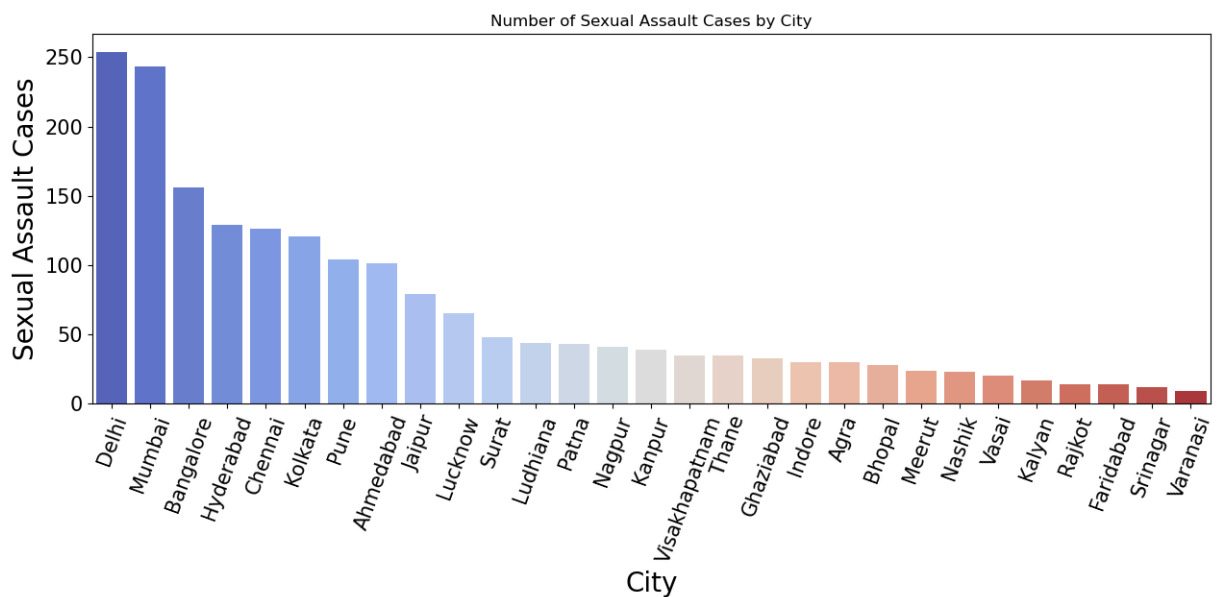


The data indicates that sexual assault cases are concentrated in metro cities. The most cases are reported in Delhi, Mumbai, and Bangalore, suggesting that bigger cities have more challenges with these crimes.

Comparison of Crime Distribution by Age Group and Gender

```
In [14]: # Categorizing victim age groups and counting crimes by age group and gender
def age_category(age):
    if age <= 12:
        return "Child"
    elif 13 <= age <= 19:
        return "Teenager"
    elif 20 <= age <= 35:
        return "Young Adult"
    elif 36 <= age <= 55:
        return "Middle-Aged"
    elif 56 <= age <= 70:
        return "Middle-Aged"
    elif age >= 71:
        return "Senior Citizen"
    else:
        return "Unknown"

data["Age_group"] = data["Victim Age"].apply(age_category)
age_gender_data = data.groupby(['Age_group', 'Victim Gender']).size().reset_index()
age_group_data = data.groupby('Age_group').size().reset_index(name='Crime Count')
fig, ax = plt.subplots(1, 2, figsize=(15, 5))
sns.barplot(x='Age_group', y='Crime Count', hue='Victim Gender', data=age_gender_data)
ax[0].set_title('Crimes by Age Group and Gender')
ax[0].set_xlabel('Age Group')
ax[0].set_ylabel('Crime Count')
ax[0].legend(title='Victim Gender')
ax[0].set_xticklabels(ax[0].get_xticklabels(), rotation=30)
ax[1].pie(age_group_data['Crime Count'], labels=age_group_data['Age_group'],
ax[1].set_title('Crime Distribution by Age Group')
plt.tight_layout()
plt.show()
```

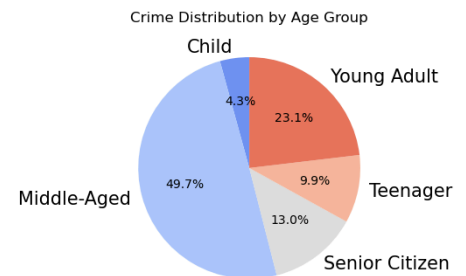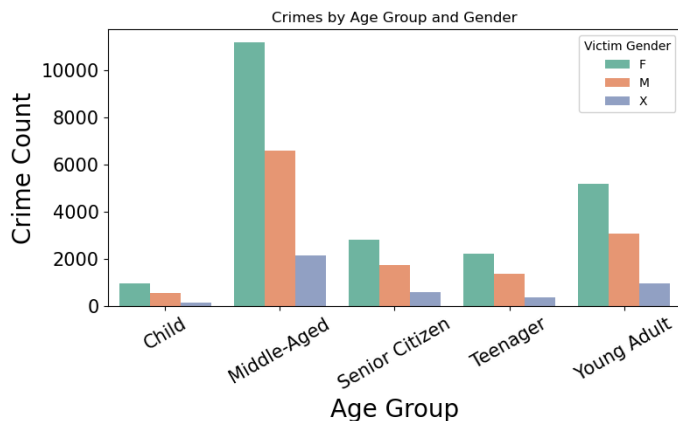

According to the data, females are the most affected across all age groups, highlighting the need for better crime prevention for women. In the second chart shows that the middle-aged group (36-55 years) has the highest number of victims overall.

Average Days to Close a Case by Crime Description (All 29 Cities)


```
In [15]: warnings.filterwarnings("ignore")

closed_cases = data[data['Case Closed'] == 'Yes']
closed_cases['Reported date'] = pd.to_datetime(closed_cases['Reported date'])
closed_cases['Date Case Closed'] = pd.to_datetime(closed_cases['Date Case Closed'])

closed_cases['Days to Close'] = (closed_cases['Date Case Closed'] - closed_cases['Reported date']).dt.days

average_days_per_crime = closed_cases.groupby('Crime Description')['Days to Close'].mean()

plt.figure(figsize=(15,5))
sns.barplot(x='Crime Description', y='Days to Close', data=average_days_per_crime)
plt.title('Average Days to Close a Case by Crime Description (All Cities)')
plt.xlabel('Crime Description')
plt.ylabel('Average Days to Close')
plt.xticks(rotation=75)
plt.show()
```

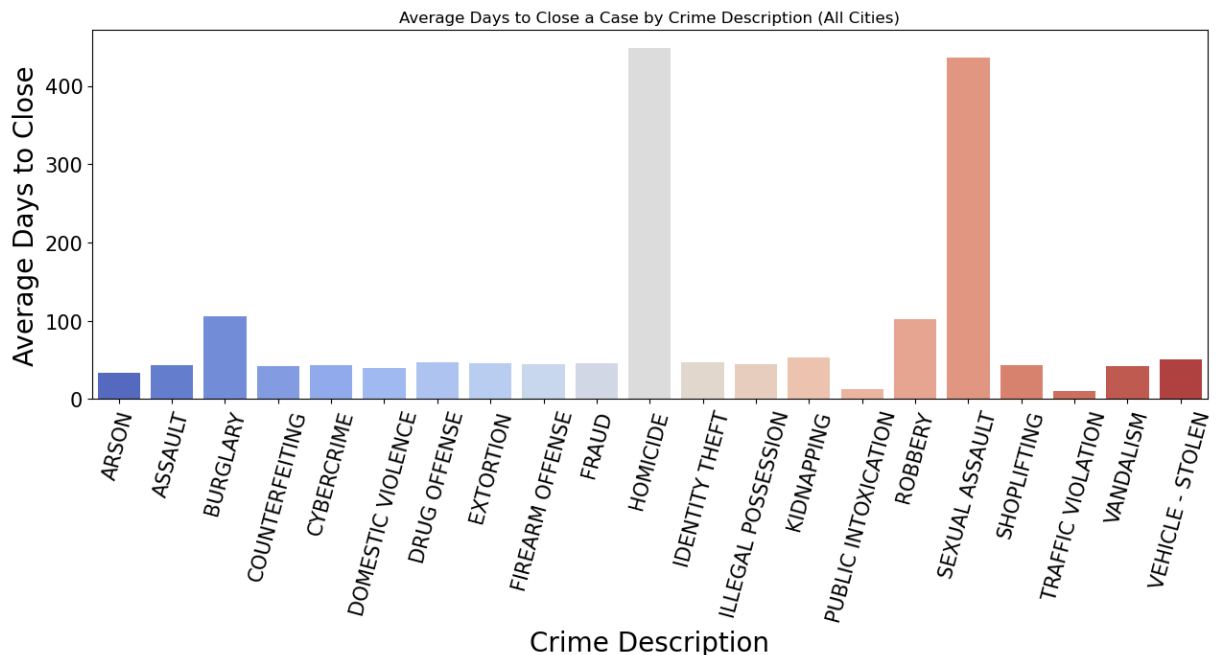

The chart indicates that Homicide and Sexual Assault crimes take significantly more time to close, highlighting inefficiencies in the investigation and legal processes for serious crimes.

Homicide - Homicide is a general term and may refer to a noncriminal act as well as the criminal act of murder.


Comparing Two Cities Nagpur & Pune

Total Crimes in Nagpur vs Pune

```
In [16]: # Here we Filter data for Nagpur and Pune
nagpur_pune_data = data[data['City'].isin(['Nagpur', 'Pune'])]

crime_count = nagpur_pune_data.groupby('City').size().reset_index(name='Crime Count')


plt.figure(figsize=(15,5))
sns.barplot(x='City', y='Crime Count', data=crime_count, palette='muted')
plt.title('Total Crimes in Nagpur vs Pune')
plt.xlabel('City')
plt.ylabel('Crimes Number')
plt.show()
```

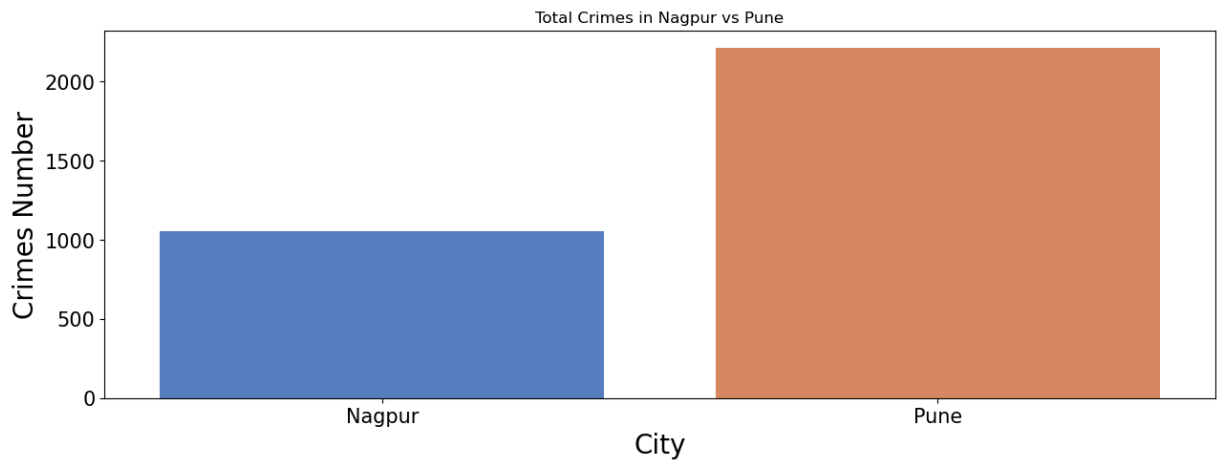

The data shows that cities with the highest crime rates is Pune as compared to Nagpur most reported crime occurrences, likely due to their larger populations and urban environments.

Crime Trends in Pune vs Nagpur (2020-2023)

```
In [17]: data["year"] = pd.to_datetime(data["Reported date"]).dt.year
filtered_data = data[(data['City'].isin(['Nagpur', 'Pune'])) & (data['year']
crime_trend = filtered_data.groupby(['year', 'City']).size().reset_index(name=
plt.figure(figsize=(15,5))
sns.lineplot(x='year', y='Crime Count', hue='City', data=crime_trend, marker=
plt.title('Crime Rate Comparison: Nagpur vs Pune (2020-2023)')
plt.xlabel('Year')
plt.ylabel('Crimes')
plt.grid(True)
plt.show()
```

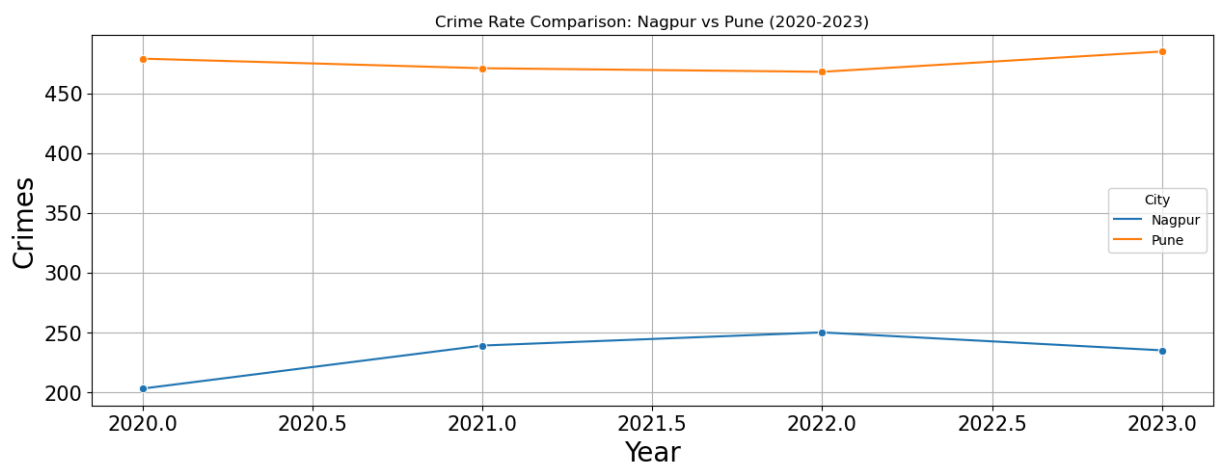


The data shows that in Pune, crime rates decreased in 2021 and 2022, but are rising again in 2023. Conversely, Nagpur saw increasing crime rates in 2021 and 2022, but a decline in 2023.

Victim Demographics by Age Group in Nagpur vs Pune

```
In [18]: victim_demo = nagpur_pune_data.groupby(['City', 'Age_group', 'Victim Gender'])
fig, ax = plt.subplots(1, 2, figsize=(20, 8))

sns.barplot(x='Age_group', y='Crime Count', hue='City', data=victim_demo, pa
ax[0].set_title('Victim Demographics by Age Group in Nagpur vs Pune')
ax[0].set_xlabel('Age Group')
ax[0].set_ylabel('Crimes Number')
ax[0].legend(title='City')
ax[0].set_xticklabels(ax[0].get_xticklabels(), rotation=45)


sns.barplot(x='Victim Gender', y='Crime Count', hue='City', data=victim_demo
ax[1].set_title('Victim Gender Comparison in Nagpur vs Pune')
ax[1].set_xlabel('Gender')
ax[1].set_ylabel('Crimes Number')
ax[1].legend(title='City')
plt.tight_layout()
plt.show()
```

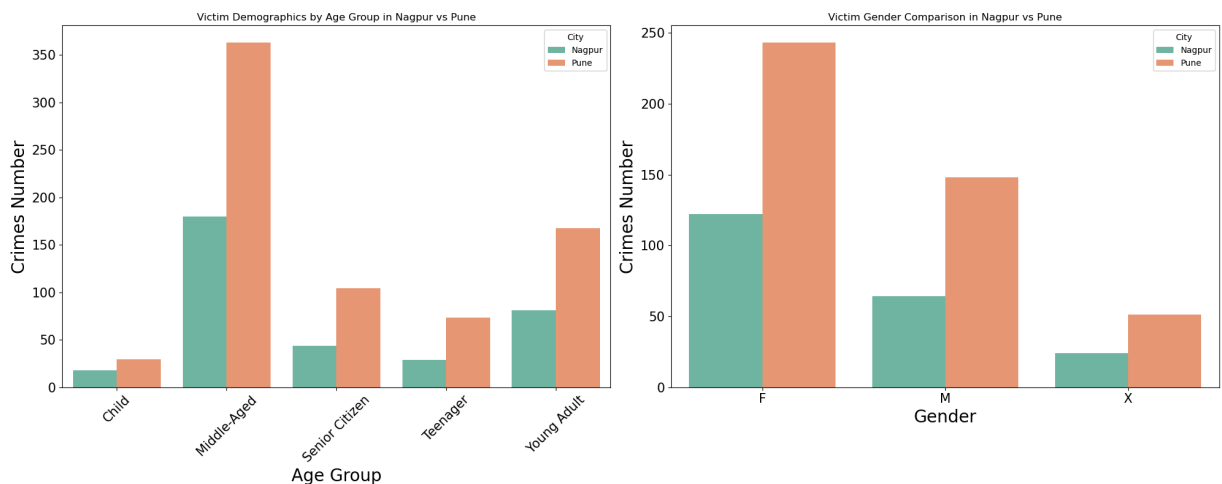

The data shows that Middle-aged victims (aged 36-55) are the most common in both Nagpur and Pune, with females making up the majority of victims in both cities. The chart emphasizes the importance of targeted safety measures for this age group and gender.

Comparison of Sexual Assault Cases in Nagpur vs Pune

```
In [19]: nagpur_pune_sexual_assault = sexual_assault_data[sexual_assault_data['City']  
  
nagpur_pune_count = nagpur_pune_sexual_assault['City'].value_counts().reset_  
nagpur_pune_count.columns = ['City', 'Sexual Assault Count']  
  
plt.figure(figsize=(15,5))  
sns.barplot(x='City', y='Sexual Assault Count', data=nagpur_pune_count, pale  
plt.title('Comparison of Sexual Assault Cases: Nagpur vs Pune')  
plt.xlabel('City')  
plt.ylabel('Sexual Assault Cases')  
plt.xticks(rotation=45)  
plt.show()
```

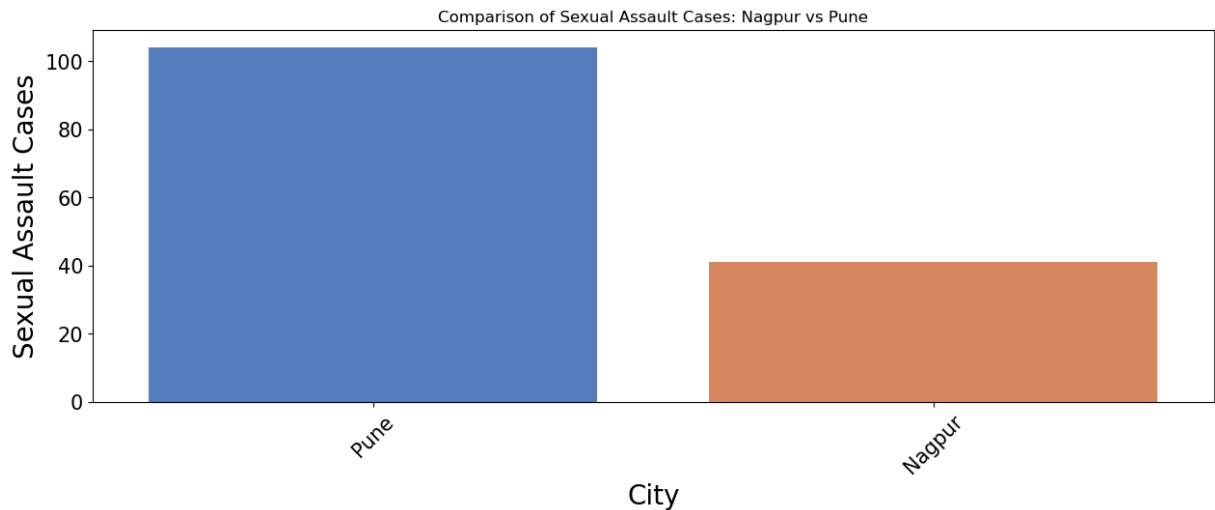

The data shows that Pune has a higher number of sexual assault cases compared to Nagpur. The chart highlights that this type of crime is more prevalent in Pune, which calls for stronger awareness and prevention measures.

Comparison of Average Days to Close a Case by Crime Description: Nagpur vs Pune


```
In [20]: nagpur_pune_cases = closed_cases[closed_cases['City'].isin(['Nagpur', 'Pune'])]

average_days_nagpur_pune = nagpur_pune_cases.groupby(['City', 'Crime Description'])

average_days_nagpur = average_days_nagpur_pune[average_days_nagpur_pune['City'] == 'Nagpur']
average_days_pune = average_days_nagpur_pune[average_days_nagpur_pune['City'] == 'Pune']

max_days_nagpur = average_days_nagpur.loc[average_days_nagpur['Days to Close'] == max_days_nagpur['Days to Close'].idxmax()]
max_days_pune = average_days_pune.loc[average_days_pune['Days to Close'] == max_days_pune['Days to Close'].idxmax()]

plt.figure(figsize=(15,5))
sns.barplot(x='Crime Description', y='Days to Close', hue='City', data=average_days_nagpur_pune)
plt.title('Average Days to Close a Case: Nagpur vs Pune')
plt.xlabel('Crime Description')
plt.ylabel('Average Days to Close')
plt.xticks(rotation=75)
plt.show()
```

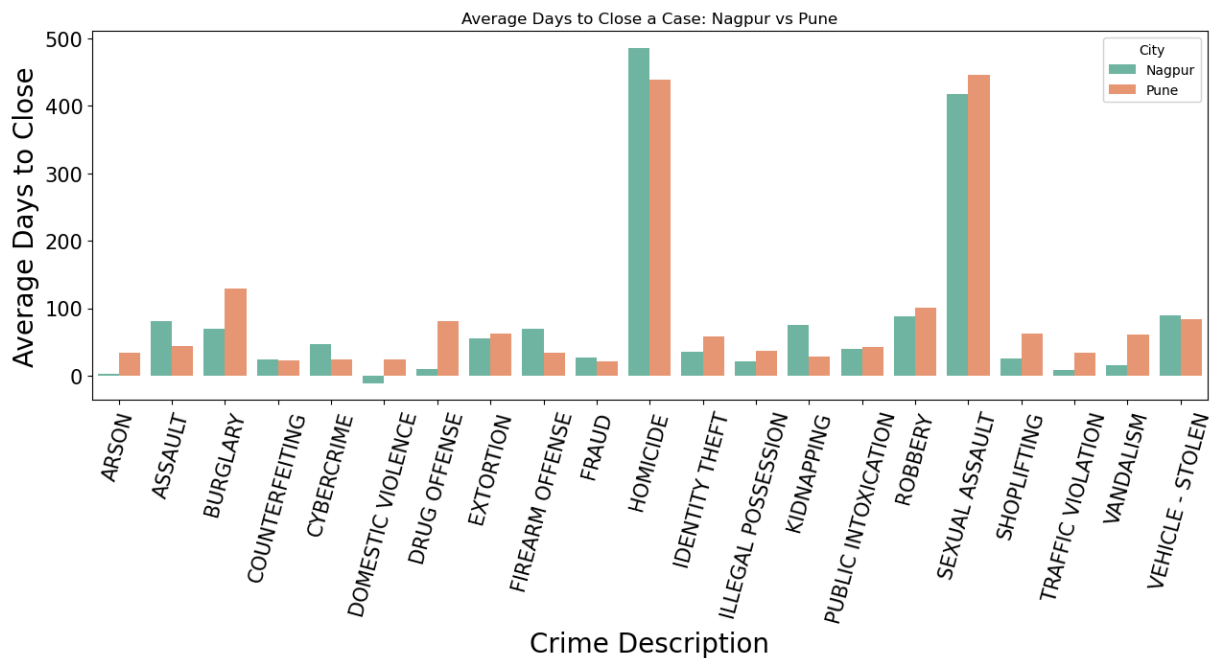

The chart shows that in Nagpur, Homicide cases take longer to close, while in Pune, Sexual Assault cases take longer. This suggests that the investigation processes in Nagpur require more time, which could indicate inefficiencies in solving cases.

Homicide - Homicide is a general term and may refer to a noncriminal act as well as the criminal act of murder.

Conclusion:

The analysis reveals that larger cities, such as Delhi, Mumbai, and Bangalore, experience higher crime rates due to their dense populations and urban environments. The majority of crime victims are female, and middle-aged individuals (36-55 years) are the most commonly affected group. Crimes like Homicide and Sexual Assault take longer to solve, pointing to inefficiencies in investigations. The comparison between Nagpur and Pune shows distinct crime trends, with Pune experiencing a higher overall crime rate and longer resolution times for sexual assault cases, while Nagpur faces challenges in resolving homicide cases.