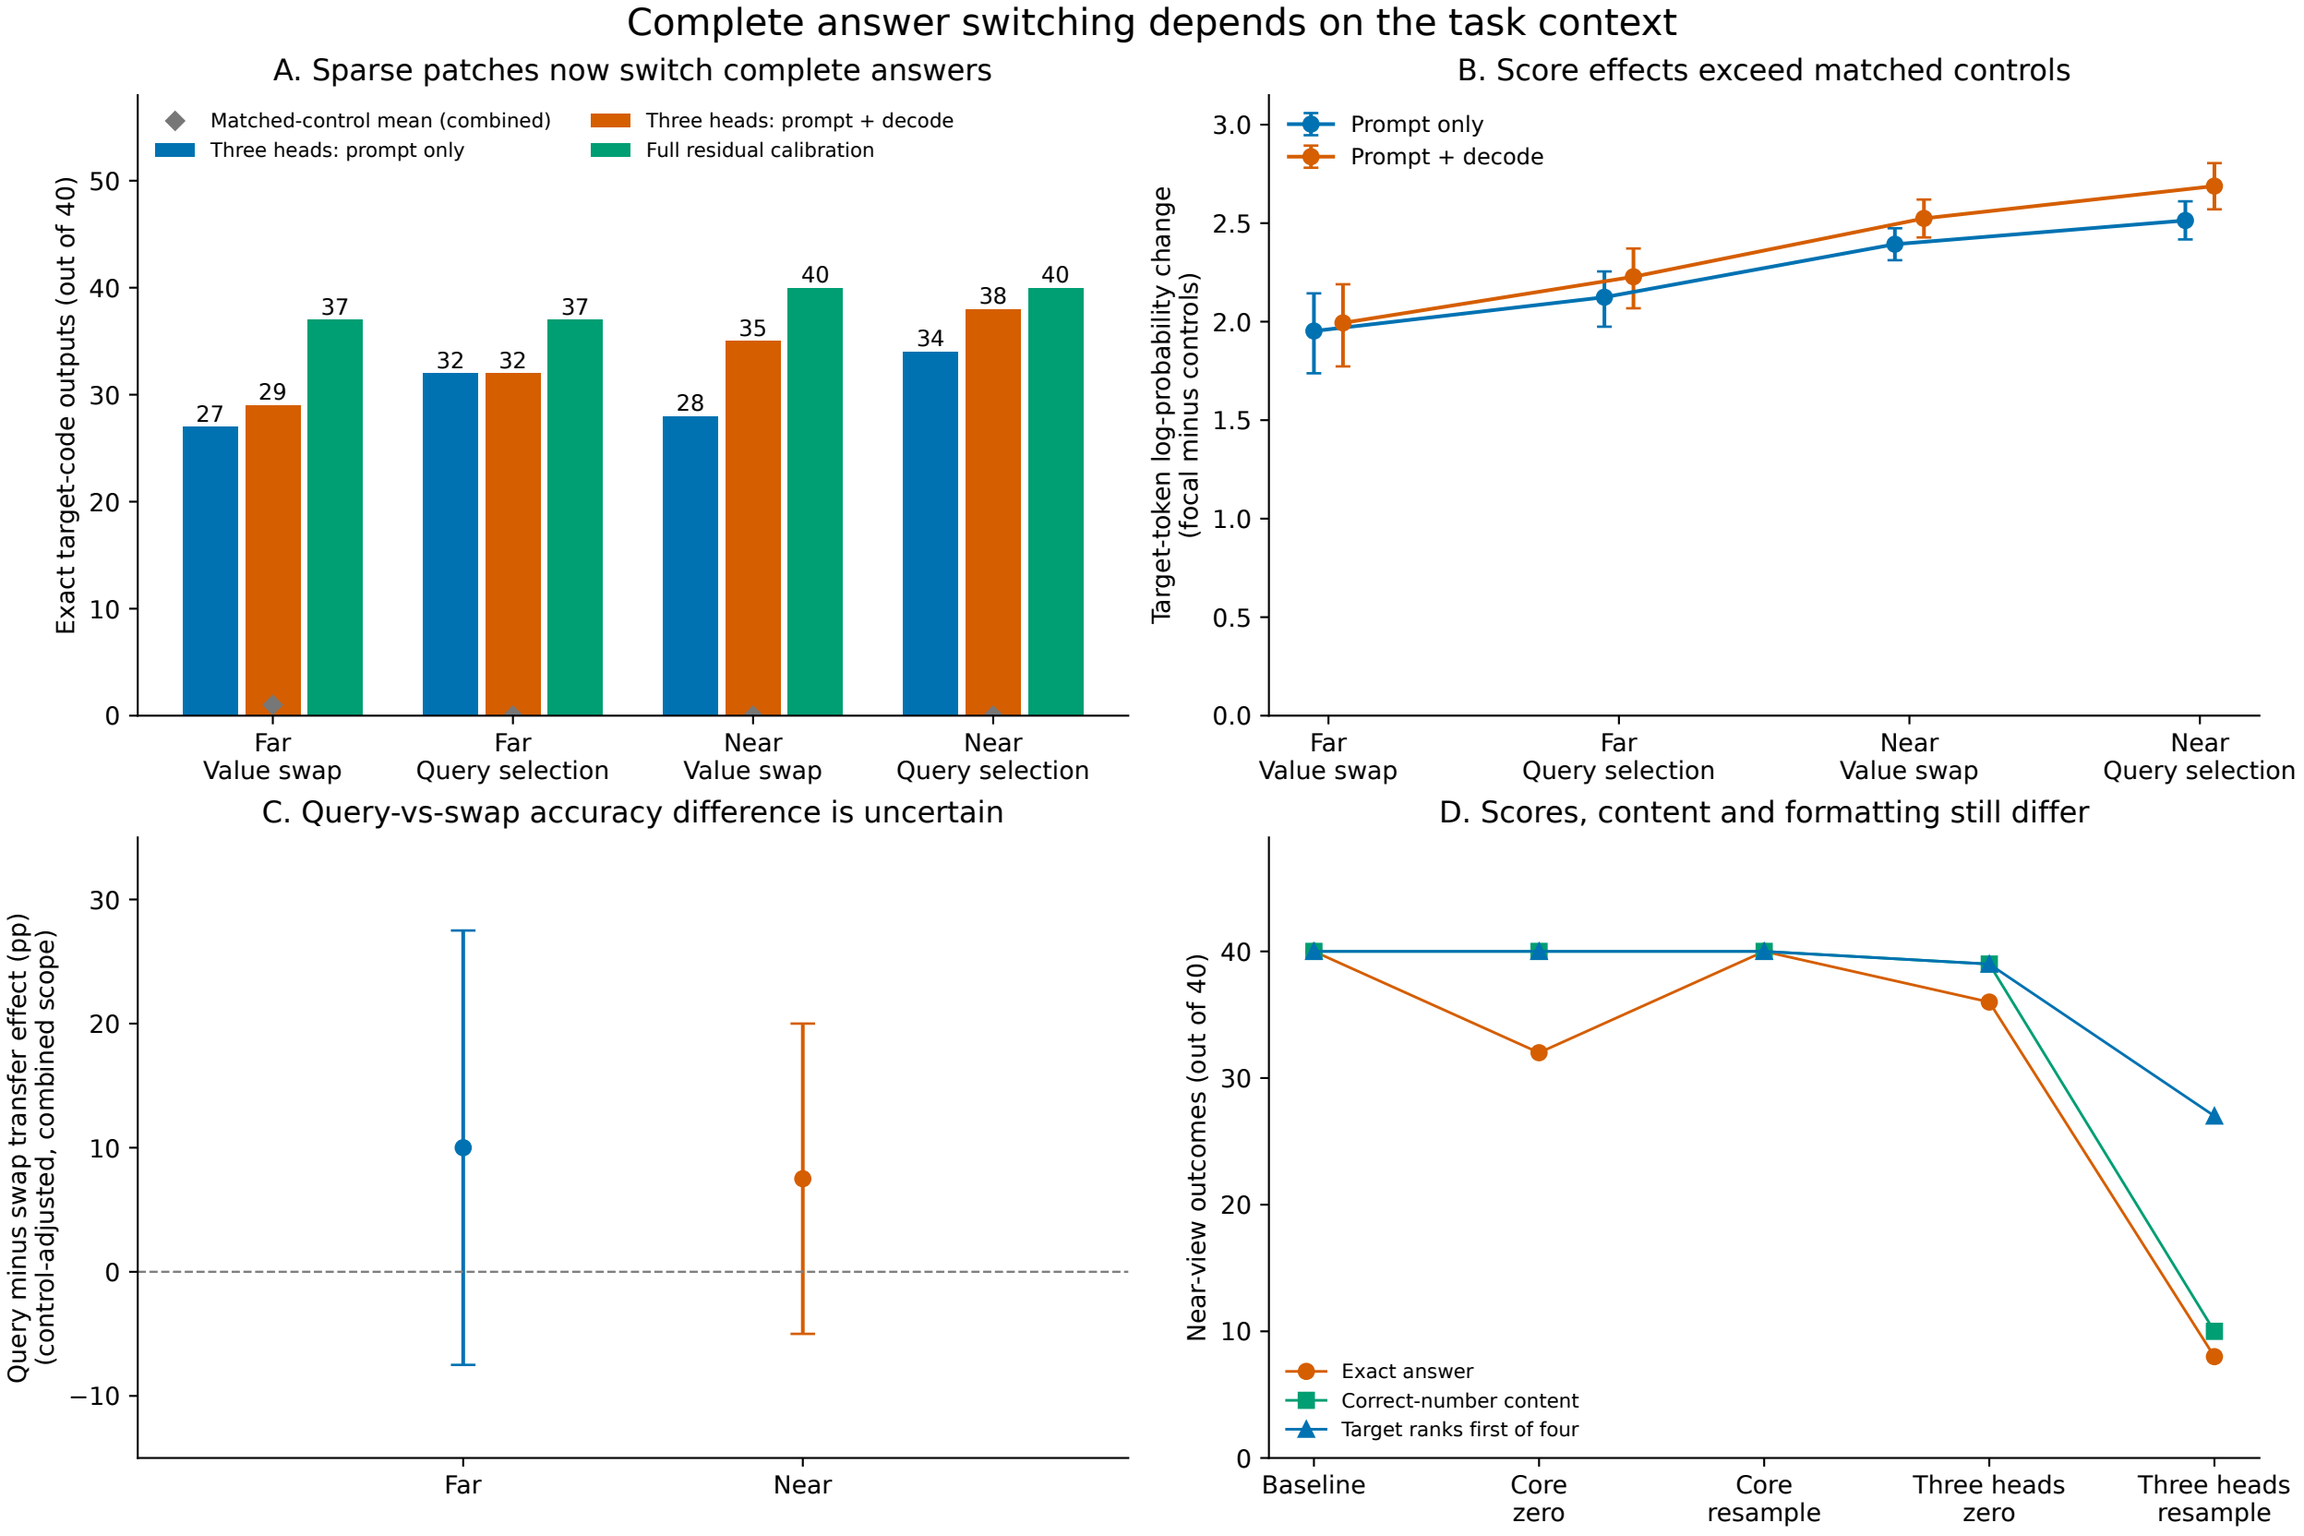

40 paired identities; B/C: 95% pointwise identity-bootstrap intervals. A/D: descriptive counts, not independent trials across conditions.
Far value-swap baseline already emits the target once. Calibration copies actual donors, including errors; A plots known target codes.