Edge detection

- **Goal:** Identify sudden changes (discontinuities) in an image
  - Intuitively, most semantic and shape information from the image can be encoded in the edges
  - More compact than pixels
- **Ideal:** artist's line drawing (but artist is also using object-level knowledge)

Source: D. Lowe

Origin of Edges

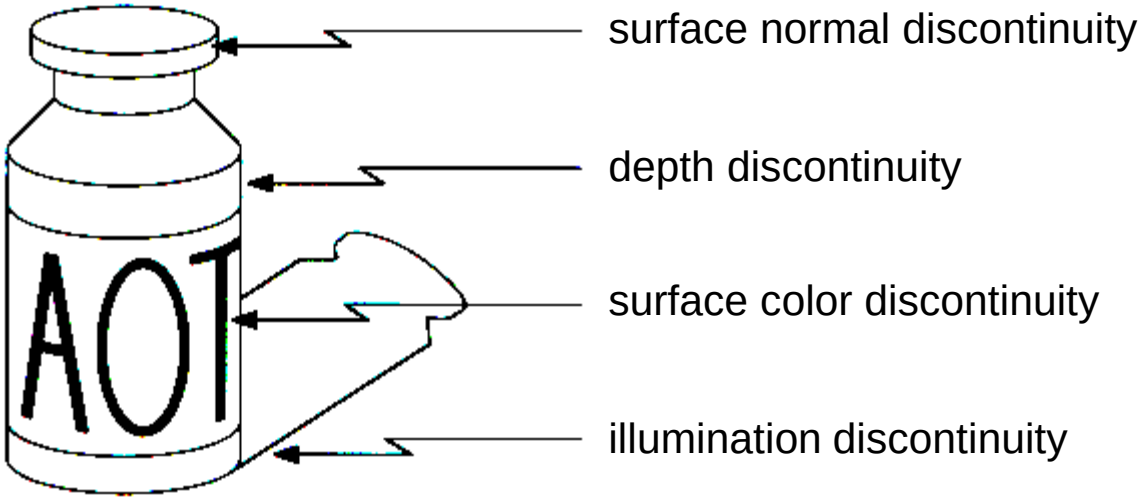

Edges are caused by a variety of factors

Source: Steve Seitz

Characterizing edges

- An edge is a place of rapid change in the image intensity function

image

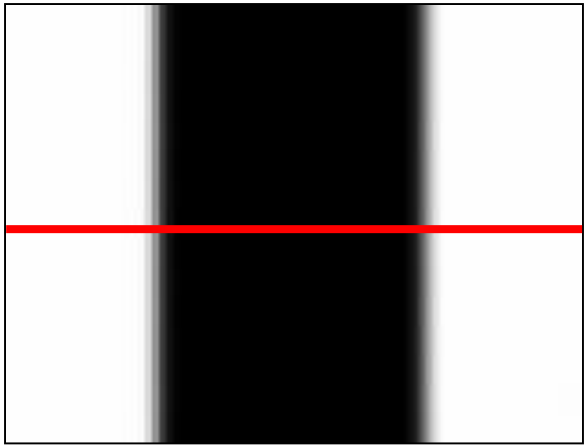

intensity function
(along horizontal scanline)

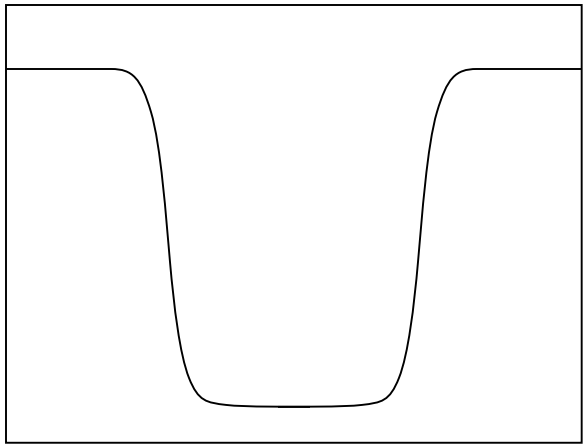

first derivative

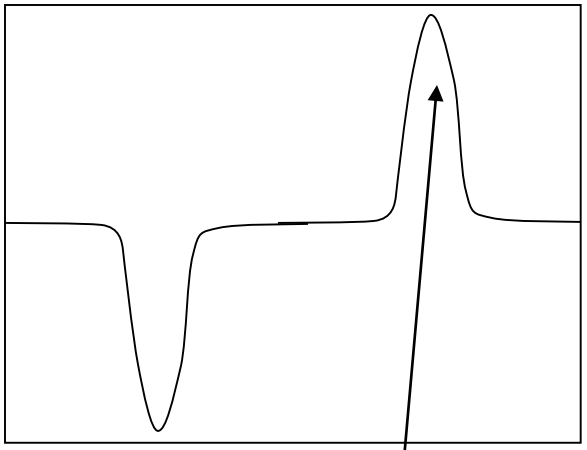

edges correspond to
extrema of derivative

Image gradient

The gradient of an image: $\nabla f = \left[\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}\right]$

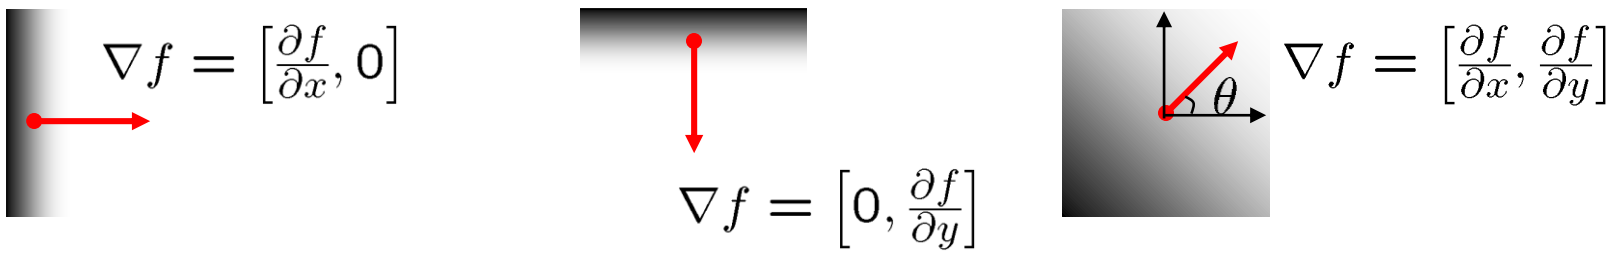

The gradient points in the direction of most rapid increase in intensity

The gradient direction is given by $\theta = \tan^{-1}\left(\frac{\partial f}{\partial y} / \frac{\partial f}{\partial x}\right)$

- how does this relate to the direction of the edge?

The *edge strength* is given by the gradient magnitude

$$\|\nabla f\| = \sqrt{\left(\frac{\partial f}{\partial x}\right)^2 + \left(\frac{\partial f}{\partial y}\right)^2}$$

Source: Steve Seitz

Differentiation and convolution

Recall, for 2D function, f(x,y):

$$\frac{\partial f}{\partial x} = \lim_{\varepsilon \to 0}\left(\frac{f(x+\varepsilon, y)}{\varepsilon} - \frac{f(x,y)}{\varepsilon}\right)$$

This is linear and shift invariant, so must be the result of a convolution.

We could approximate this as

$$\frac{\partial f}{\partial x} \approx \frac{f(x_{n+1}, y) - f(x_n, y)}{\Delta x}$$

(which is obviously a convolution)

-1	**1**

Source: D. Forsyth, D. Lowe

Finite difference filters

Other approximations of derivative filters exist:

Prewitt: $M_x = \begin{bmatrix} -1 & 0 & 1 \\ -1 & 0 & 1 \\ -1 & 0 & 1 \end{bmatrix}$; $M_y = \begin{bmatrix} 1 & 1 & 1 \\ 0 & 0 & 0 \\ -1 & -1 & -1 \end{bmatrix}$

Sobel: $M_x = \begin{bmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{bmatrix}$; $M_y = \begin{bmatrix} 1 & 2 & 1 \\ 0 & 0 & 0 \\ -1 & -2 & -1 \end{bmatrix}$

Roberts: $M_x = \begin{bmatrix} 0 & 1 \\ -1 & 0 \end{bmatrix}$; $M_y = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix}$

Source: K. Grauman

Finite differences: example

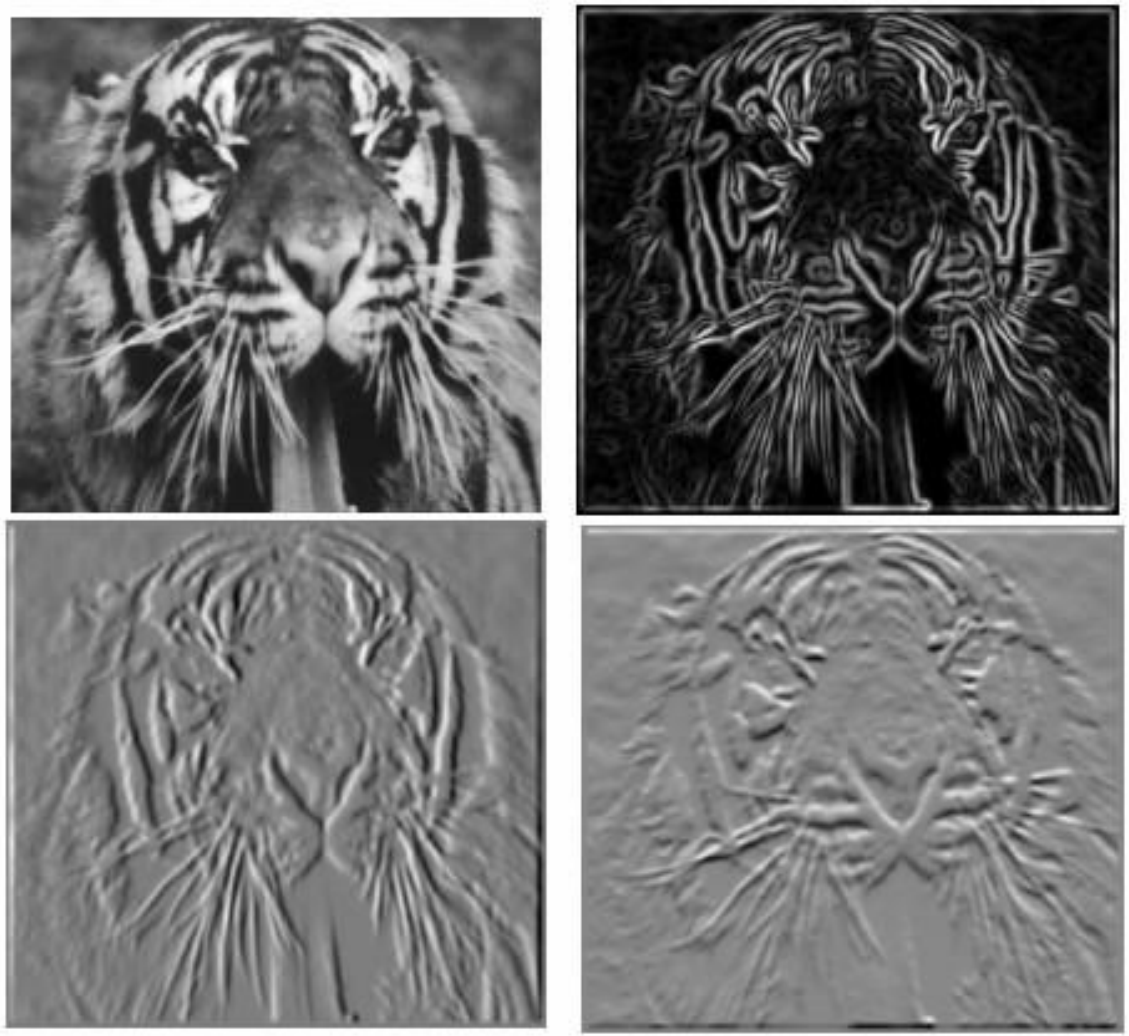

Which one is the gradient in the x-direction (resp. y-direction)?

Effects of noise

Consider a single row or column of the image

- Plotting intensity as a function of position gives a signal

$f(x)$

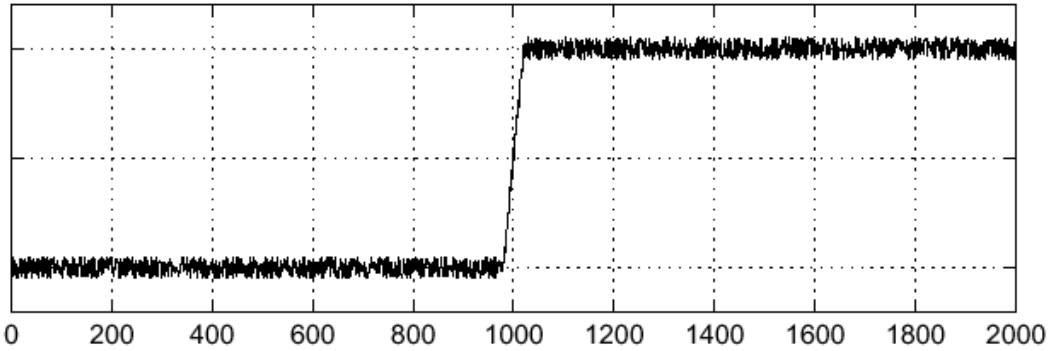

$\frac{d}{dx}f(x)$

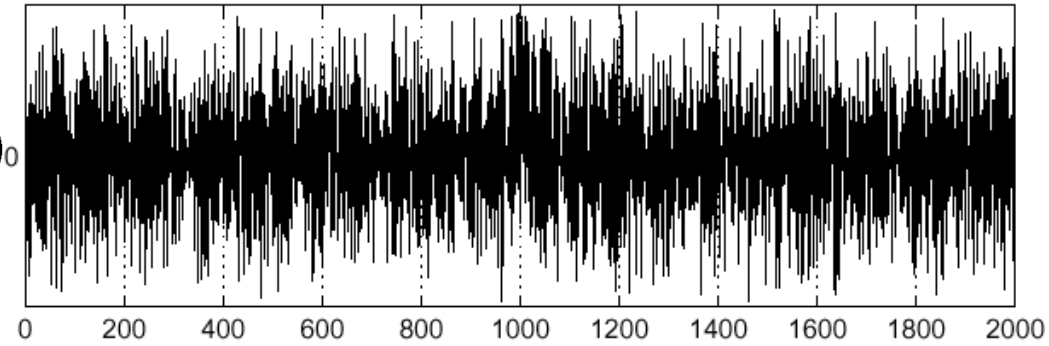

Where is the edge?

Source: S. Seitz

Effects of noise

- Finite difference filters respond strongly to noise
  - Image noise results in pixels that look very different from their neighbors
  - Generally, the larger the noise the stronger the response
- What is to be done?

Source: D. Forsyth

Effects of noise

- Finite difference filters respond strongly to noise
  - Image noise results in pixels that look very different from their neighbors
  - Generally, the larger the noise the stronger the response
- What is to be done?
  - Smoothing the image should help, by forcing pixels different to their neighbors (=noise pixels?) to look more like neighbors

Source: D. Forsyth

Solution: smooth first

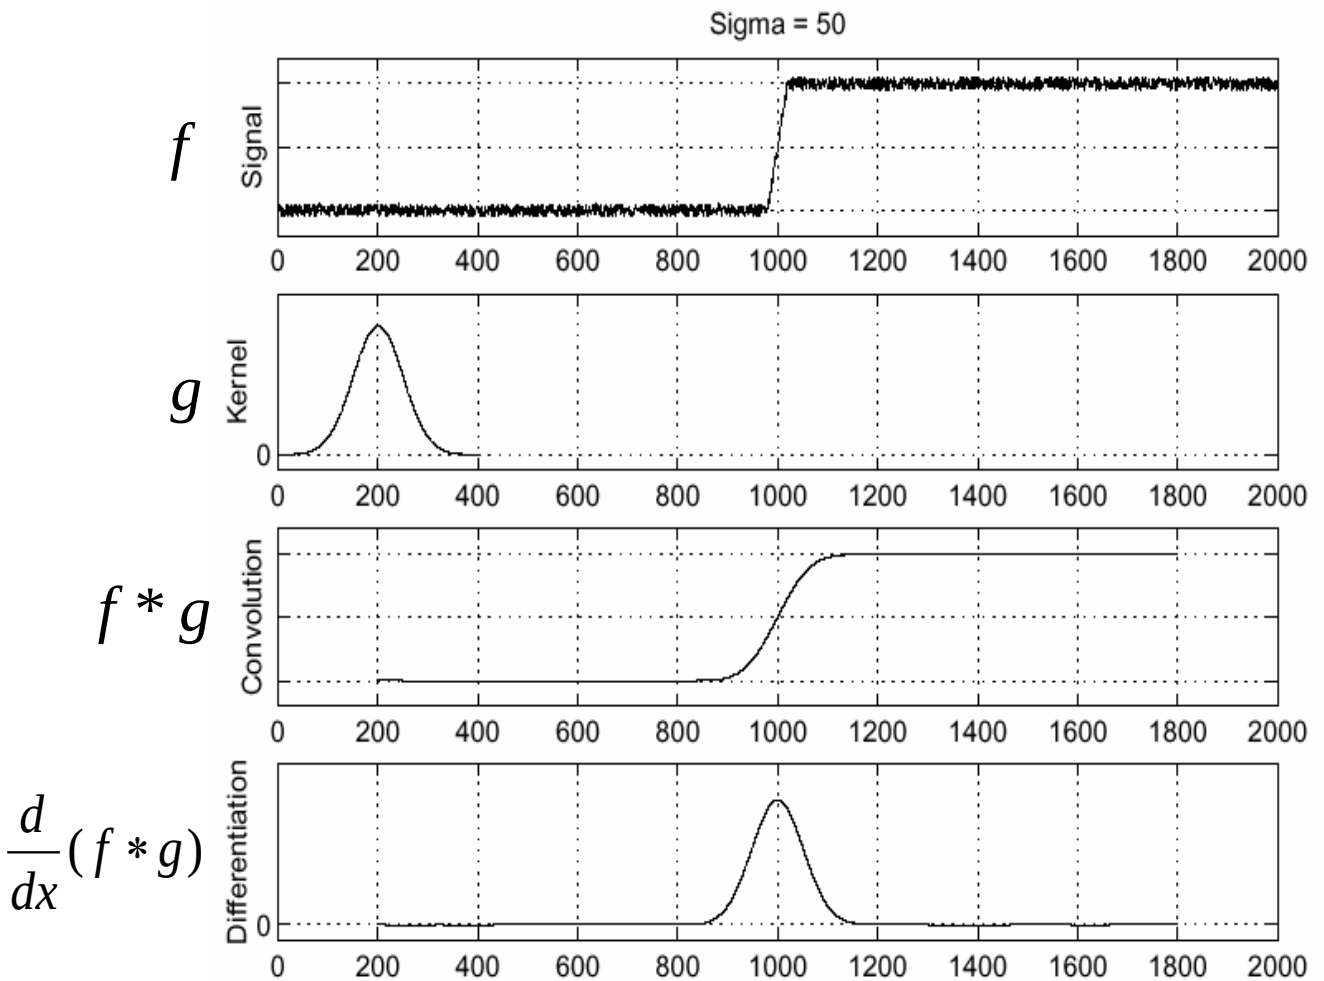

- To find edges, look for peaks in $\frac{d}{dx}(f * g)$

Source: S. Seitz

Derivative theorem of convolution

- Differentiation is convolution, and convolution is associative: $$\frac{d}{dx}(f * g) = f * \frac{d}{dx} g$$

- This saves us one operation:

f

$\frac{d}{dx} g$

$f * \frac{d}{dx} g$

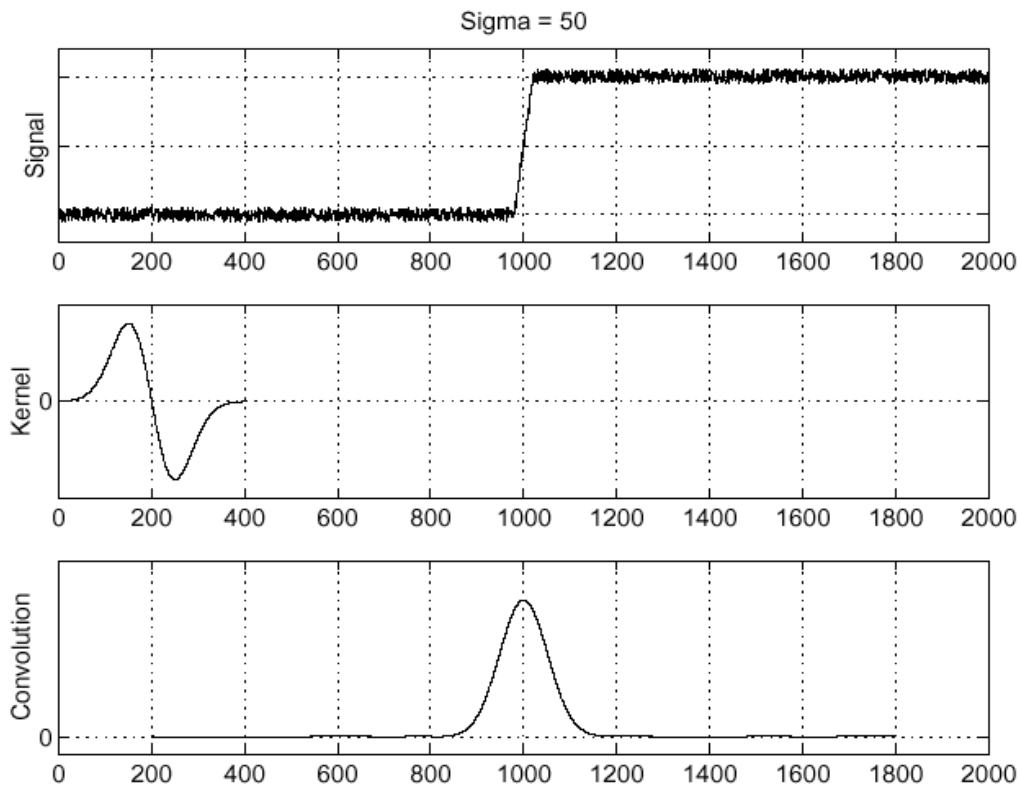

Source: S. Seitz

Derivative of Gaussian filter

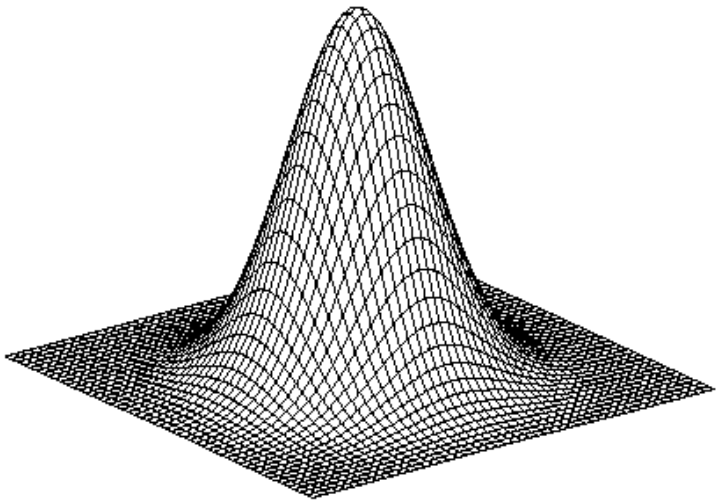

* [1 -1] =

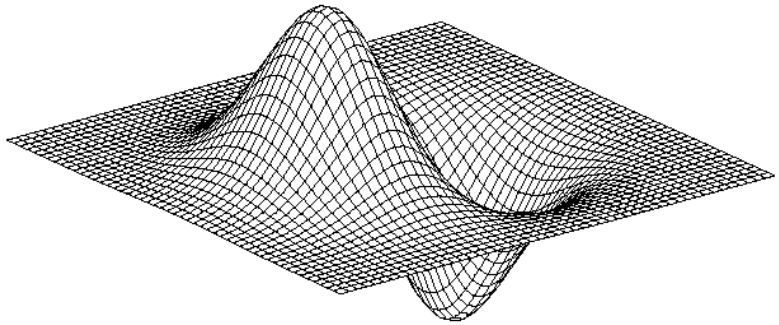

Is this filter separable?

Derivative of Gaussian filter

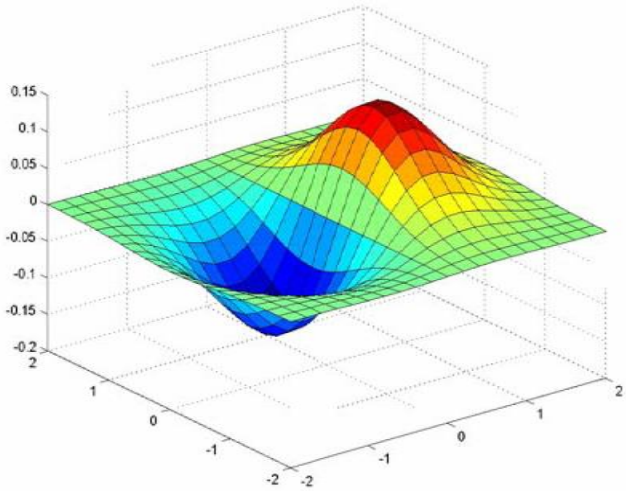

x-direction

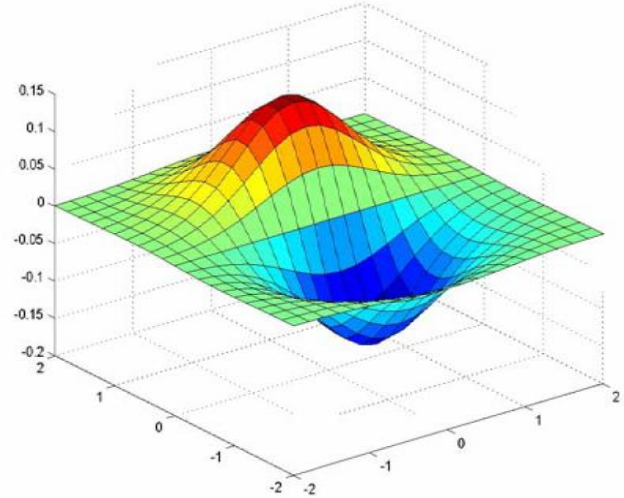

y-direction

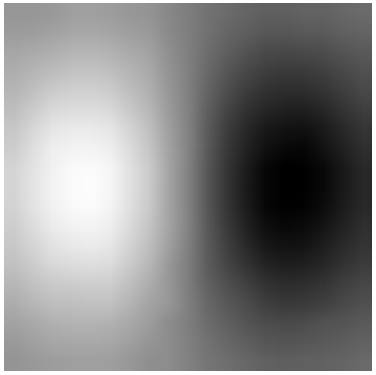

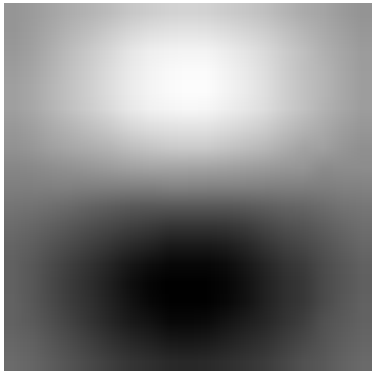

Which one finds horizontal/vertical edges?

Summary: Filter mask properties

- Filters act as templates
  - Highest response for regions that “look the most like the filter”
  - Dot product as correlation
- Smoothing masks
  - Values positive
  - Sum to 1 → constant regions are unchanged
  - Amount of smoothing proportional to mask size
- Derivative masks
  - Opposite signs used to get high response in regions of high contrast
  - Sum to 0 → no response in constant regions
  - High absolute value at points of high contrast

Source: K. Grauman

Tradeoff between smoothing and localization

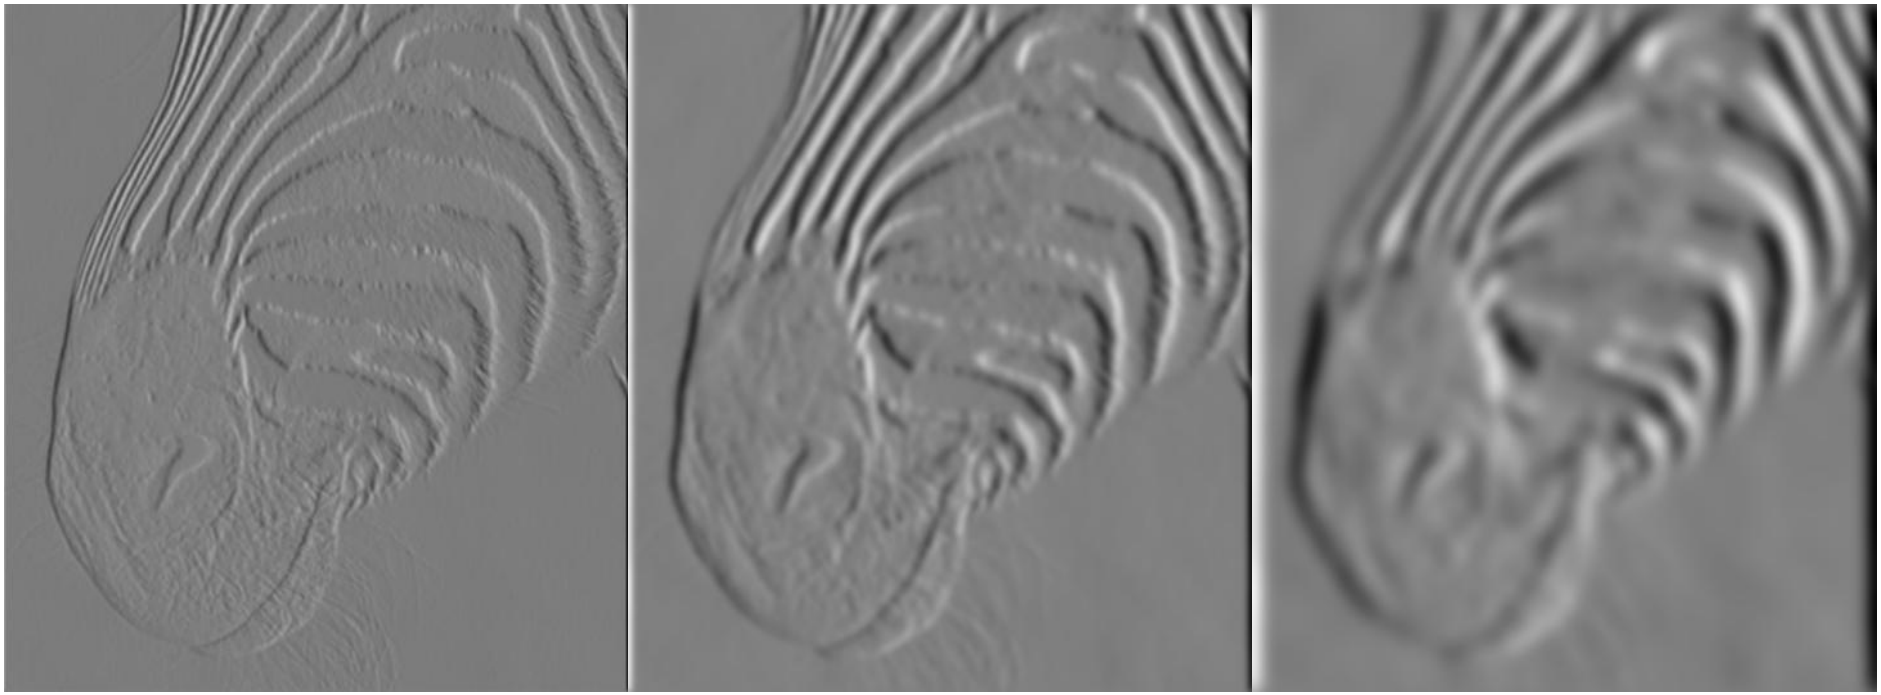

1 pixel 3 pixels 7 pixels

Smoothed derivative removes noise, but blurs edge. Also finds edges at different “scales”.

Source: D. Forsyth

Implementation issues

- The gradient magnitude is large along a thick “trail” or “ridge,” so how do we identify the actual edge points?
- How do we link the edge points to form curves?

Source: D. Forsyth

Edge finding

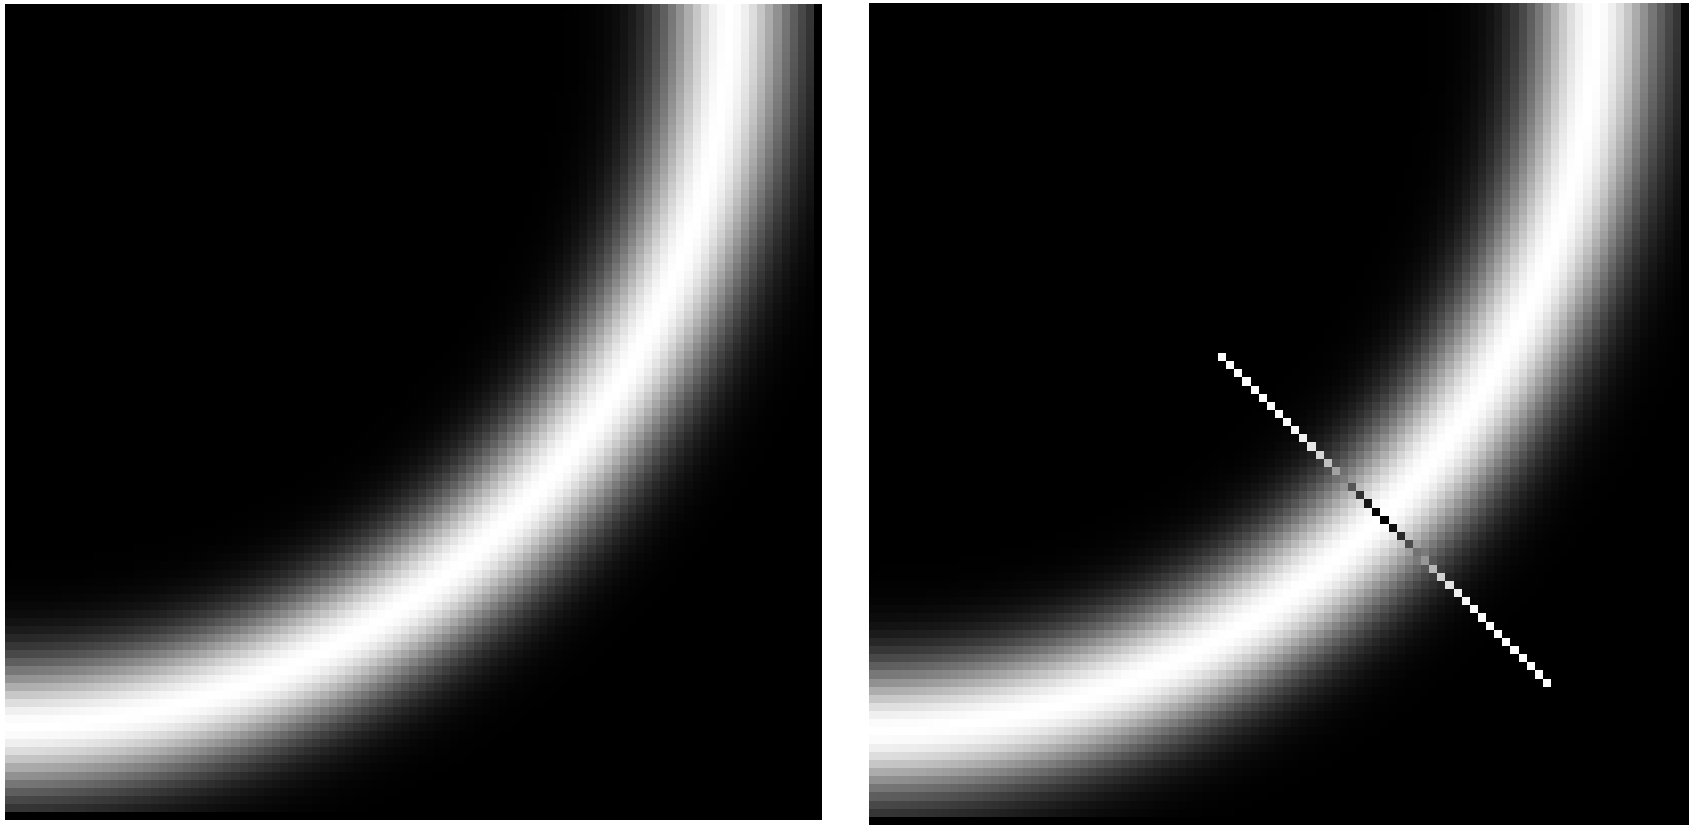

We wish to mark points along the curve where the magnitude is biggest. We can do this by looking for a maximum along a slice normal to the curve (non-maximum suppression). These points should form a curve. There are then two algorithmic issues: at which point is the maximum, and where is the next one?

Source: D. Forsyth

Non-maximum suppression

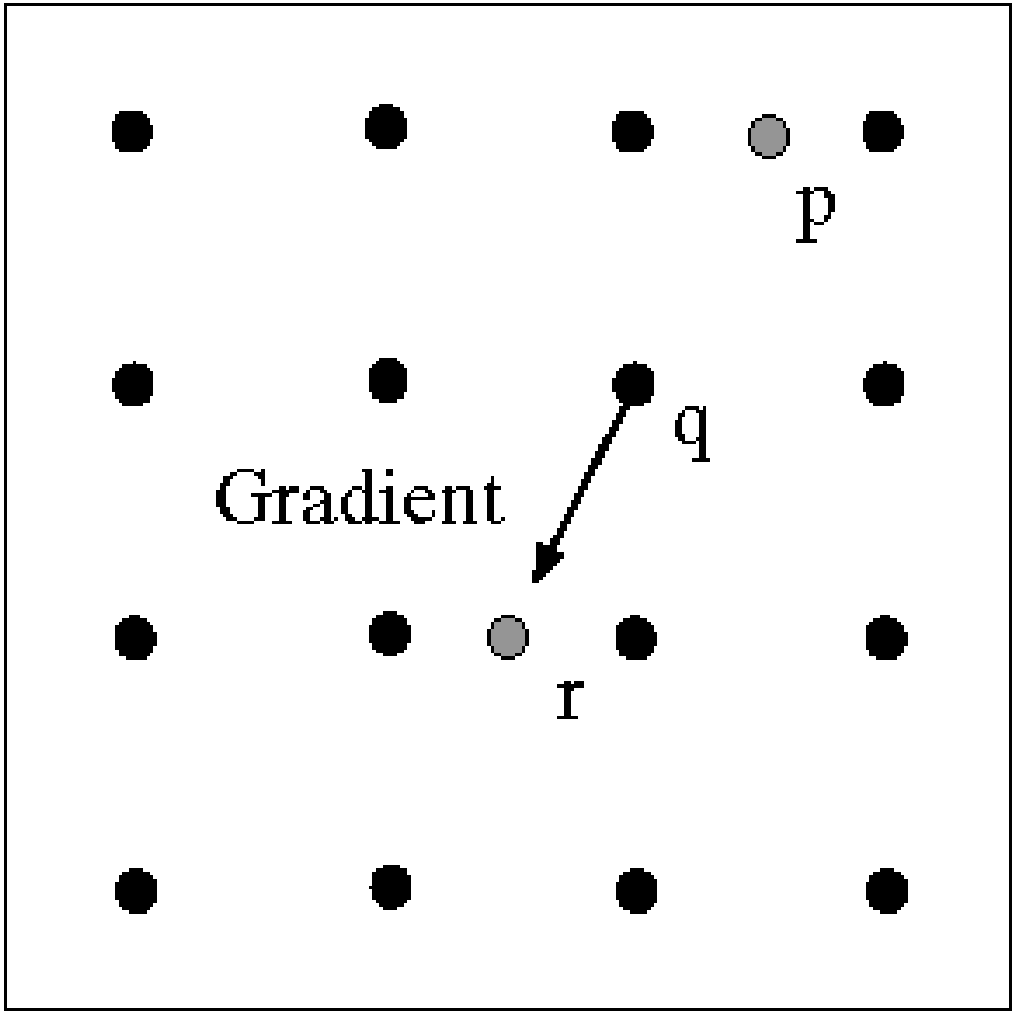

At q, we have a maximum if the value is larger than those at both p and at r. Interpolate to get these values.

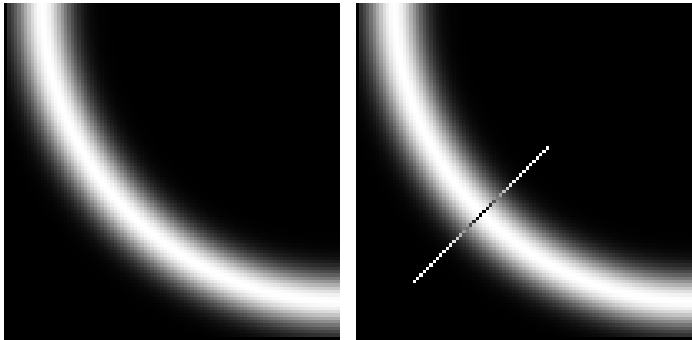

Source: D. Forsyth

Predicting the next edge point

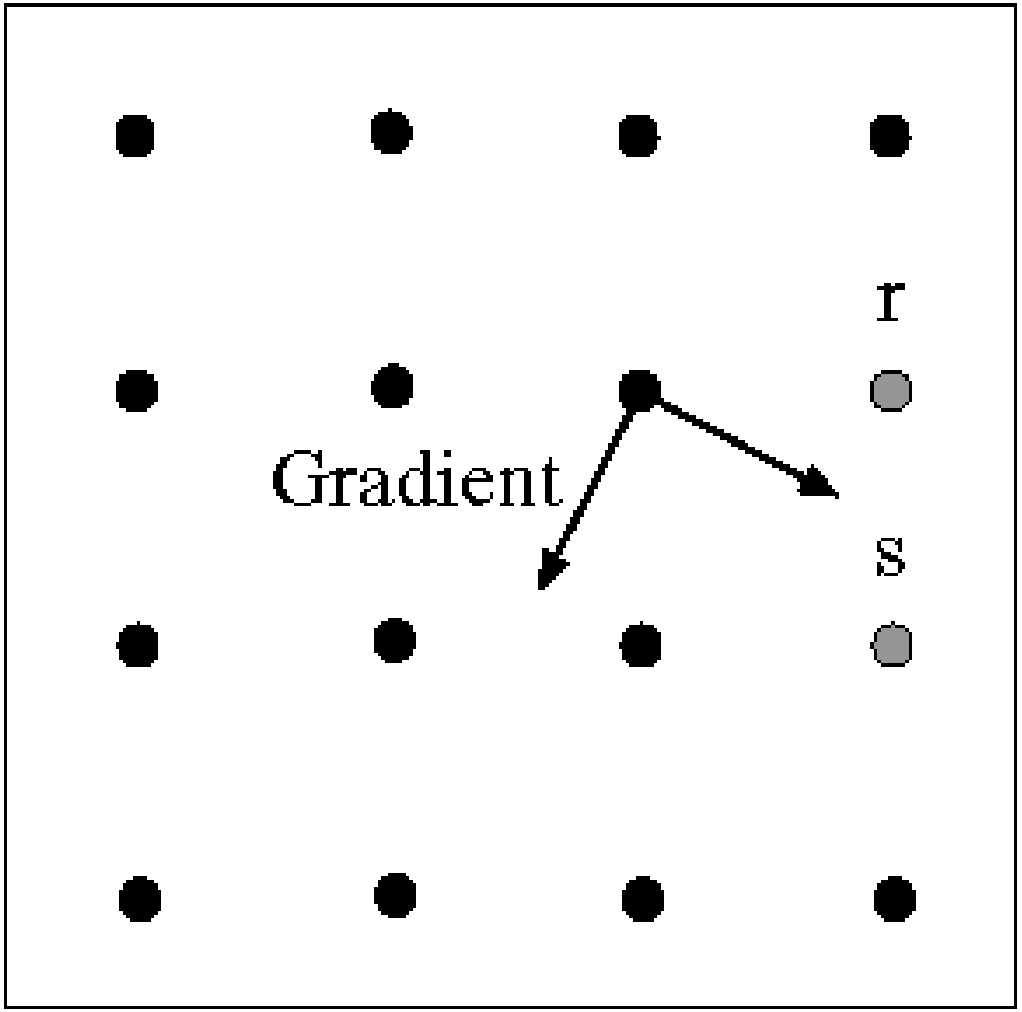

Assume the marked point is an edge point. Then we construct the tangent to the edge curve (which is normal to the gradient at that point) and use this to predict the next points (here either r or s).

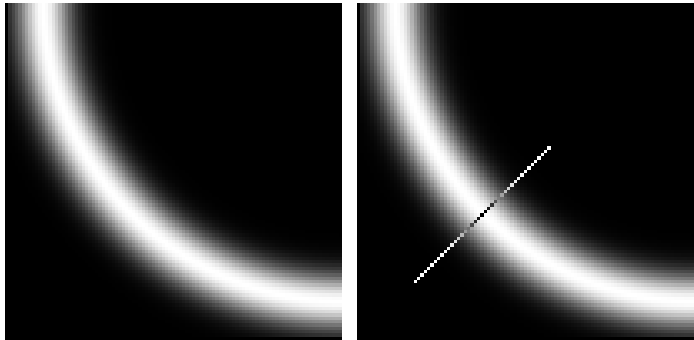

Source: D. Forsyth

Designing an edge detector

- Criteria for an “optimal” edge detector:
  - **Good detection:** the optimal detector must minimize the probability of false positives (detecting spurious edges caused by noise), as well as that of false negatives (missing real edges)
  - **Good localization:** the edges detected must be as close as possible to the true edges
  - **Single response:** the detector must return one point only for each true edge point; that is, minimize the number of local maxima around the true edge

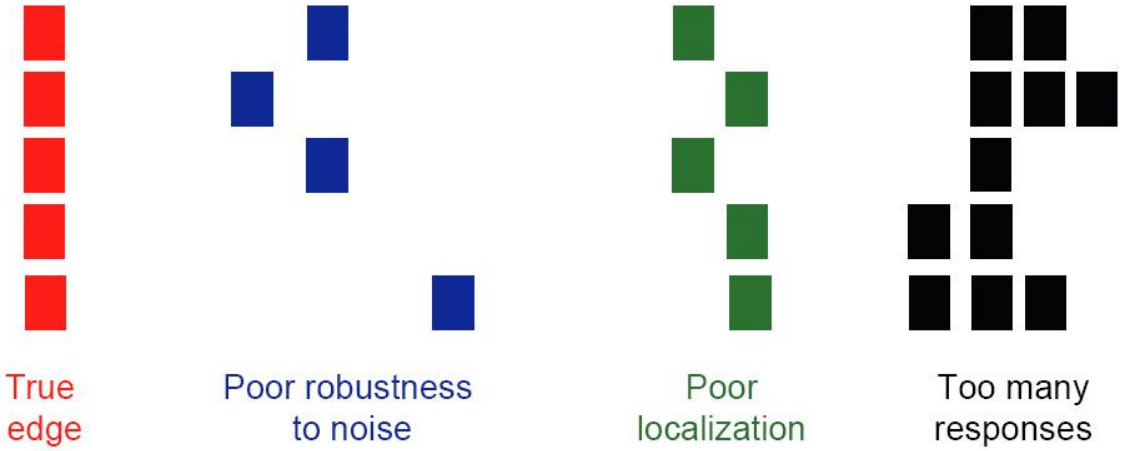

Source: L. Fei-Fei

Canny edge detector

- This is probably the most widely used edge detector in computer vision
- Theoretical model: step-edges corrupted by additive Gaussian noise
- Canny has shown that the first derivative of the Gaussian closely approximates the operator that optimizes the product of *signal-to-noise ratio* and localization

J. Canny, ***A Computational Approach To Edge Detection***, IEEE Trans. Pattern Analysis and Machine Intelligence, 8:679-714, 1986.

Source: L. Fei-Fei

Canny edge detector

1. Filter image with derivative of Gaussian
2. Find magnitude and orientation of gradient
3. Non-maximum suppression:
   - Thin multi-pixel wide “ridges” down to single pixel width
4. Linking and thresholding (hysteresis):
   - Define two thresholds: low and high
   - Use the high threshold to start edge curves and the low threshold to continue them

MATLAB: edge(image, ‘canny’)

Source: D. Lowe, L. Fei-Fei

The Canny edge detector

original image (Lena)

The Canny edge detector

norm of the gradient

The Canny edge detector

thresholding

The Canny edge detector

thinning

(non-maximum suppression)

Hysteresis thresholding

original image

high threshold
(strong edges)

low threshold
(weak edges)

hysteresis threshold

Source: L. Fei-Fei

Effect of σ (Gaussian kernel spread/size)

original

Canny with $\sigma = 1$

Canny with $\sigma = 2$

The choice of σ depends on desired behavior

- large σ detects large scale edges
- small σ detects fine features

Source: S. Seitz

Edge detection is just the beginning…

image | human segmentation | gradient magnitude

Berkeley segmentation database:

http://www.eecs.berkeley.edu/Research/Projects/CS/vision/grouping/segbench/
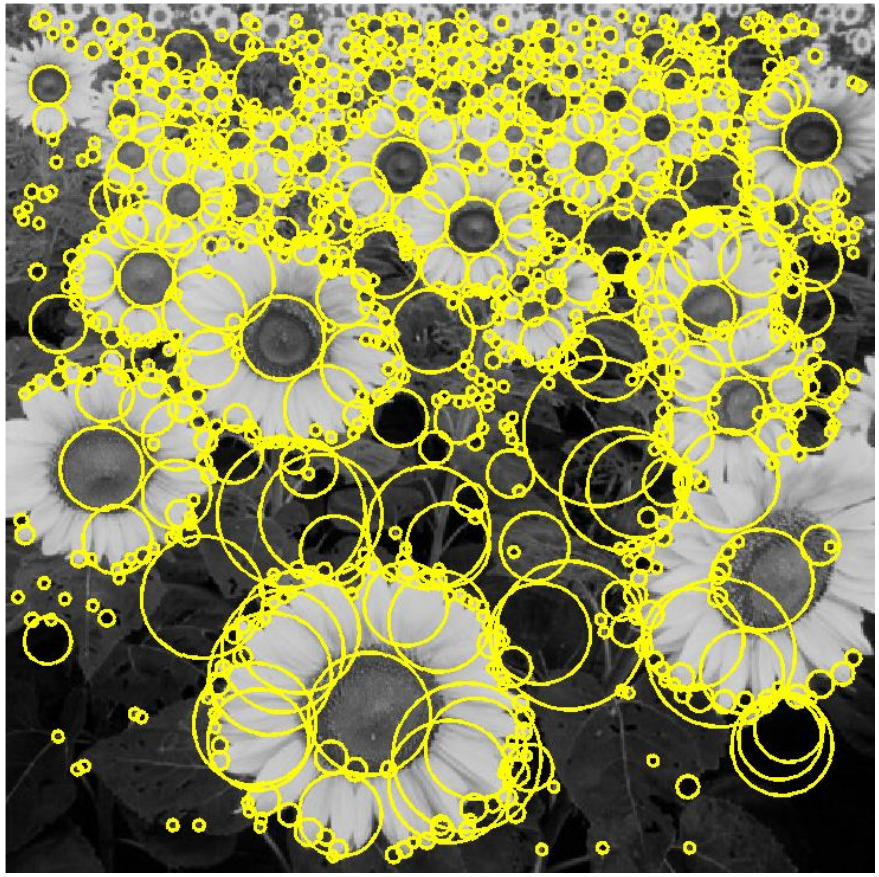
Next time: Corner and blob detection