

welcome

HTML



BY:-

Ashish



Lists ⇒

Lists are used to display content which represents a list.

Unordered List ⇒ used to list unordered items

 Home

 About

ordered list ⇒ used to list ordered items

 Phone

 PC

 Laptop

Tables ⇒

The <table> tag is used to define tables in HTML.

It is used to format & display tabular data.

tr tag ⇒ used to display table rows

td tag ⇒ used to display table data.

th tag ⇒ used in place of table data for displaying table headers.

We can first define as many table rows as we want.

To add a caption to the table, we use <caption> tag inside table.

thead tag ⇒ used to wrap table head (caption & th with th).

tbody tag ⇒ used to wrap the table body.

/HTML/
Hyper Text Markup Language

LIST, TABLE, FORM CREATING

```
<tr class="row-1 row-first row-last">
  <td class="col-1 col-first">
    <div class="views-field views-field-title"><span class="field-content"><a href="/yellowleather/products/shoes">
      <div class="views-field views-field-uc-product-image">
        <div class="field-content">
          <a href="/yellowleather/products/shoes/comfortable-leather-shoes"><img alt="Yellow leather shoes" type="image" data-bbox="680 460 780 480"/>
        </div>
      </div>
    </div>
    <div class="views-field views-field-display-price"><span class="view-label view-label-display-price">
      </div>
  </td>
  <td class="col-2">
    <div class="views-field views-field-title"><span class="field-content"><a href="/yellowleather/products/belts">
      <div class="views-field views-field-uc-product-image">
        <div class="field-content">
          <a href="/yellowleather/products/belts/embossed-spread-wing-egle-belt"><img alt="Yellow leather belt" type="image" data-bbox="780 580 880 600"/>
        </div>
      </div>
    </div>
    <div class="views-field views-field-display-price"><span class="view-label view-label-display-price">
      </div>
  </td>
  <td class="col-3 col-last">
    <div class="views-field views-field-title"><span class="field-content"><a href="/yellowleather/products/hats">
      <div class="views-field views-field-uc-product-image">
        <div class="field-content">
          <a href="/yellowleather/products/hats/leather-hat"><img alt="Yellow leather hat" type="image" data-bbox="880 720 980 740"/>
        </div>
      </div>
    </div>
    <div class="views-field views-field-display-price"><span class="view-label view-label-display-price">
      </div>
  </td>
</tr>
```

BY:-

ASHISH



/HTML/
Hyper-Text Markup Language

Colspan attribute \Rightarrow
This attribute is used to create cells spanning multiple columns.
`<th colspan="3"> Ashish </th>`
 \rightarrow spans 3 columns

HTML forms \Rightarrow
An HTML form is used to collect input from the user.
form tag is used for the same.
`<form>`
-- Element of the form --
`</form>`
There are different form elements for different kinds of user input.
 \rightarrow **input element** \Rightarrow can be of type text, checkbox, radio, button and submit. We also have a 'file' type.
 \rightarrow **textarea element** \Rightarrow Defines a multi line text input column and some attributes can be used to size the textarea.
 \rightarrow **select element** \Rightarrow Define a drop down list.
Note: You don't have to remember all the tags, you will automatically memorize them with practice.

Embedding Videos \Rightarrow
Video tag is used to play videos in HTML.
`<video src="sam.mp4">Error </video>`

Attributes of video \Rightarrow
We can use:
 \rightarrow **width:** To adjust width of a video (Height automatically adjusts)
 \rightarrow We can use `autoplay/loop` to autoplay or loop the video.



BY:-
ASHISH

Multimedia =>

Audio = `<audio>` `</audio>`

Video = `<video>` `</video>`

Image = ``

Plug-ins = `<embed>`, `<object>` (pass)

<u>Audio</u>	Value
Attribute	"filename.mp3"
src	controls
controls	autoplay
autoplay	mute
mute	

<u>Video</u>	Value
Attribute	"filename.mp4"
src	controls
controls	autoplay
autoplay	mute
mute	
width	"720"
height	"480"

<u>Image</u>	Value
Attribute	"filename.jpg"
src	"720"
width	"480"
height	"image name"
alt	
border	1, 2, 3, 4



/HTML/
Hyper Text Markup Language

MULTIMEDIA

BY:-

ASHISH



/HTML/
Hyper Text Markup Language

ATTRIBUTES



<embed>
Attribute
src
width
height

Name
"filename.ext"
"720"
"480"

<object>
Attribute
src
width
height

Name
"filename.ext"
"720"
"480"

list

Bullets : • ◻ ○

Numbering : i, ii, iii, abc

Unordered tag ⇒

Attribute
type
value
"circle", "square", "disc"

Ordered list tag ⇒

Attribute
type
start
value
"a", "A", "i"
8

Table Tag
To create table
To row
To columns
headings for columns
define table name

<table> </table>
<tr> </tr>
<td> </td>
<th> </th>
<caption> </caption>

BY:-
ASHISH

tag	value
Attribute	500
width	600
height	1
border	"red"
border color	"left", "center", "right"
align	"style"
bg color	30
cell spacing	

Form

To create form

To create box in the form

Value

"Text", "number", "date", "email"

"The name", "name"

For address

name

value

textarea </textarea>

name

placeholder

size

max, min, step

required

text for watermark

30

12

required



/HTML/

Hyper Text Markup Language



INPUT TYPES IN HTML

<input type="text">	xyz
<input type="password">	*****
<input type="radio">	No <input type="radio"/> Yes
<input type="checkbox">	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>
<input type="button">	Button
<input type="color">	<input type="color"/>
<input type="email">	xyz@gmail.com
<input type="file">	Choose File image.jpg
<input type="hidden">	
<input type="image">	<input type="image"/> Submit Image
<input type="number">	898

BY:-

ASHISH

font tag

use to style the letters

Attribute

color

Value

"blue"

face

Arial

size

"5"

Image

Attribute

Value

"location/name of pic"

src

"300" or "400"

width

"300"

height

"image name"

alt

"2"

border

<a> tag

To open a file in click on specific key.

Value download

or download

"blank" "self" "top"

target

/HTML/

HyperText Markup Language



ATTRIBUTES




BY:-

ASHISH



Thanks

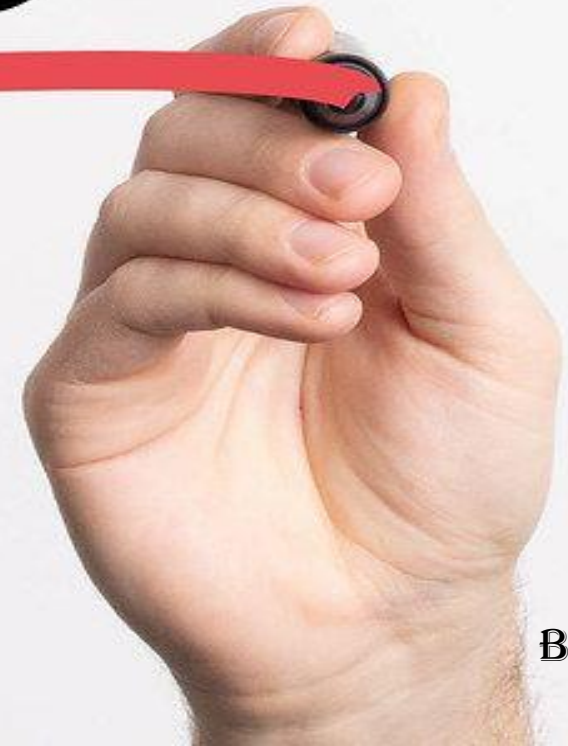

BY:-
ASHISH