Thank you fo contents.	r printing our co	ntent at www.domain-name.com. Please check back soon for new			
FLASH SALE	OFF all PRO courses! Claim Your	(https://programiz.pro/offer/pro-sales?utm_source=top-banner-programiz-web&utm_medium=banner&utm_campaign=3-day-sale_top-banner-programiz-web_may_50)			
(/)	Discount Search tutorio	als & examples			
www.domain-name.com					

Huffman Coding

In this tutorial, you will learn how Huffman Coding works. Also, you will find working examples of Huffman Coding in C, C++, Java and Python.

Huffman Coding is a technique of compressing data to reduce its size without losing any of the details. It was first developed by David Huffman.

Huffman Coding is generally useful to compress the data in which there are frequently occurring characters.


How Huffman Coding works?

Suppose the string below is to be sent over a network.



Each character occupies 8 bits. There are a total of 15 characters in the above string. Thus, a total of $\begin{bmatrix} 8 & * & 15 & = & 120 \end{bmatrix}$ bits are required to send this string.

Using the Huffman Coding technique, we can compress the string to a smaller size.

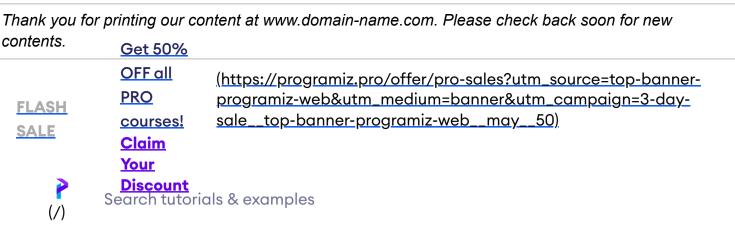


www.domain-name.com


the property.

Huffman coding is done with the help of the following steps.


1. Calculate the frequency of each character in the string.

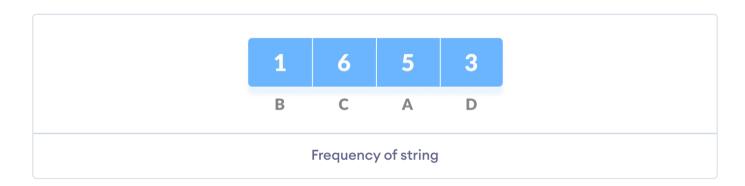

2. Sort the characters in increasing order of the frequency. These are stored in a priority queue Q.

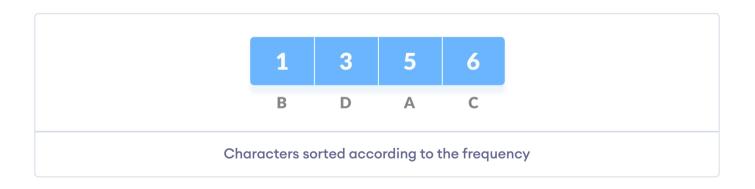

- 3. Make each unique character as a leaf node.
- 4. Create an empty node z. Assign the minimum frequency to the left child of z and assign the second minimum frequency to the right child of z. Set the value of the z as the sum of the above two minimum frequencies.

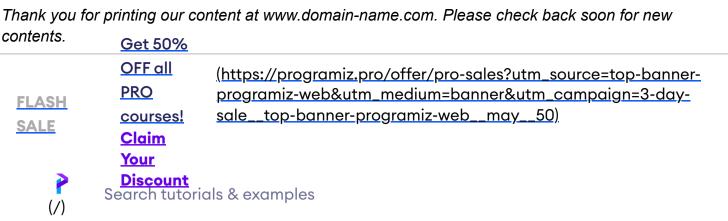



www.domain-name.com


B

Getting the sum of the least numbers


- 5. Remove these two minimum frequencies from Q and add the sum into the list of frequencies (* denote the internal nodes in the figure above).
- 6. Insert node z into the tree.
- 7. Repeat steps 3 to 5 for all the characters.

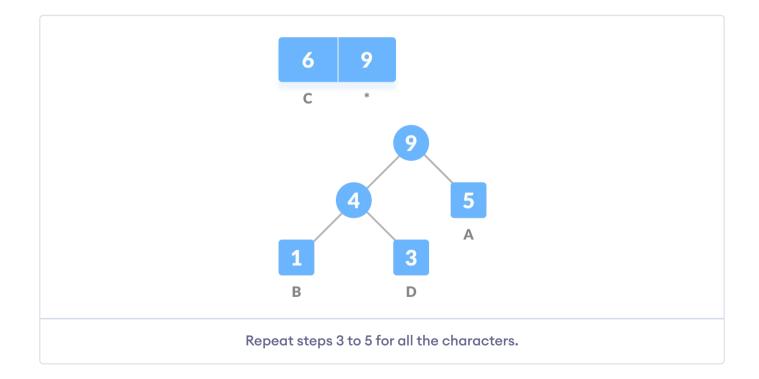

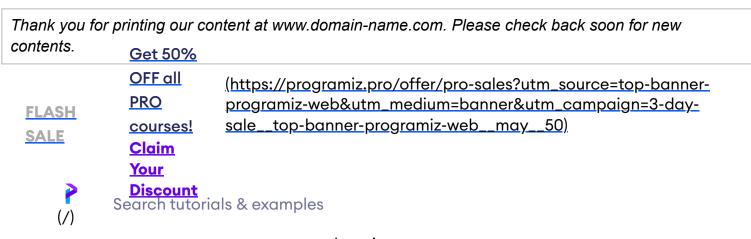

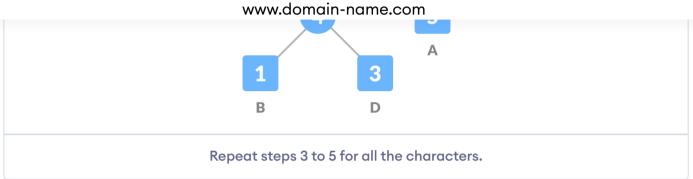

8. For each non-leaf node, assign 0 to the left edge and 1 to the right edge.

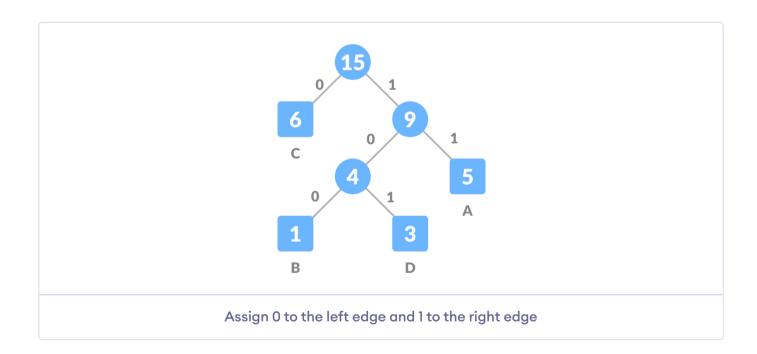

Thank you for printing our content at www.domain-name.com. Please check back soon for new contents. Get 50%					
FLASH SALE	OFF all PRO courses! Claim Your	(https://programiz.pro/offer/pro-sales?utm_source=top-banner-programiz-web&utm_medium=banner&utm_campaign=3-day-sale_top-banner-programiz-web_may_50)			
(/)	<u>Discount</u> Search tutorion	als & examples			

14/14/14/	amain nama	\sim
VV VV VV .C	lomain-name.	COIII


С	6	0	6*1 = 6
D	3	101	3*3 = 9
4 * 8 = 32 bits	15 bits		28 bits


Without encoding, the total size of the string was 120 bits. After encoding the size is reduced to $\begin{bmatrix} 32 + 15 + 28 = 75 \end{bmatrix}$.

Decoding the code

For decoding the code, we can take the code and traverse through the tree to find the character.

Let 101 is to be decoded, we can traverse from the root as in the figure below.

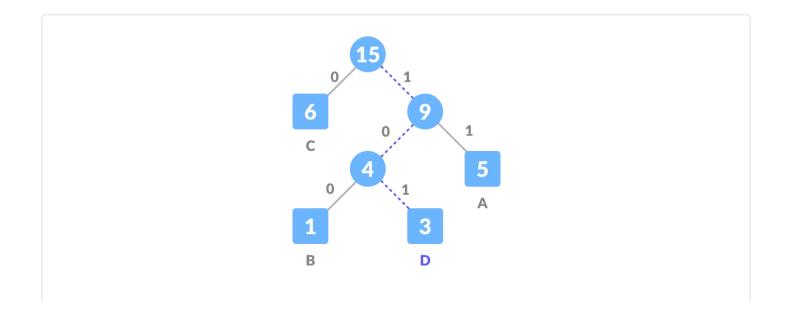

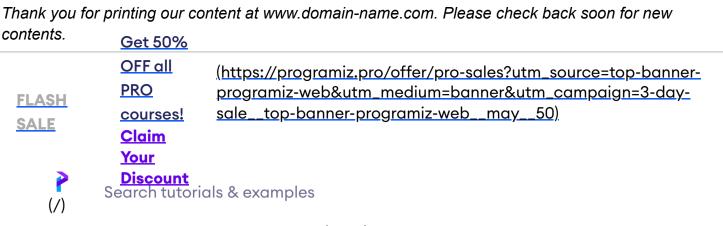

www.domain-name.com

create a newNode
extract minimum value from Q and assign it to leftChild of newNode
extract minimum value from Q and assign it to rightChild of newNode
calculate the sum of these two minimum values and assign it to the value of new
insert this newNode into the tree
return rootNode

Python, Java and C/C++ Examples

Python Java C C++

```
Thank you for printing our content at www.domain-name.com. Please check back soon for new
contents.
              Get 50%
              OFF all
                          (https://programiz.pro/offer/pro-sales?utm_source=top-banner-
              PRO
                          programiz-web&utm_medium=banner&utm_campaign=3-day-
 FLASH
                          sale_top-banner-programiz-web_may_50)
              courses!
 SALE
              Claim
              Your
              Discount
            Search tutorials & examples
                                 www.domain-name.com
```

```
def children(self):
    return (self.left, self.right)

def nodes(self):
    return (self.left, self.right)

def __str__(self):
    return '%s_%s' % (self.left, self.right)

# Main function implementing huffman coding
def huffman_code_tree(node, left=True, binString=''):
    if type(node) is str:
        return {node: binString}
    (1, r) = node.children()
    d = dict()
```


Huffman Coding Complexity

The time complexity for encoding each unique character based on its frequency is $O(n\log n)$.

Extracting minimum frequency from the priority queue takes place 2*(n-1) times and its complexity is $0(\log n)$. Thus the overall complexity is $0(n\log n)$.

Huffman Coding Applications

Huffman coding is used in conventional compression formats like GZIP, BZIP2,
 PKZIP, etc.

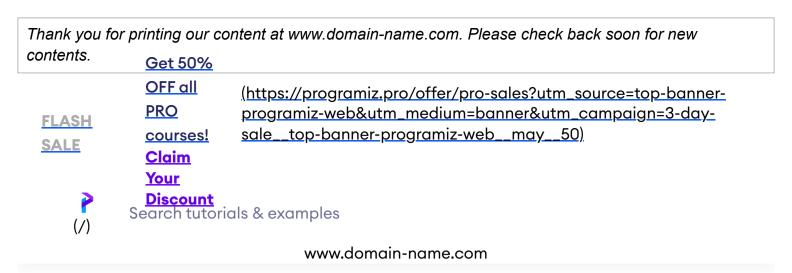



Related Tutorials

DS & Algorithms

Full Binary Tree

Thank you for printing our content at www.domain-name.com. Please check back soon for new contents. **Get 50%** OFF all (https://programiz.pro/offer/pro-sales?utm_source=top-bannerprogramiz-web&utm_medium=banner&utm_campaign=3-day-**PRO FLASH** sale_top-banner-programiz-web_may_50) courses! SALE Claim **Your <u>Discount</u>** Search tutorials & examples (/) www.domain-name.com DS & Algorithms <u>Tree Traversal - inorder, preorder and postorder</u> (/dsa/tree-traversal)

Binary Tree

DS & Algorithms

(/dsa/binary-tree)