


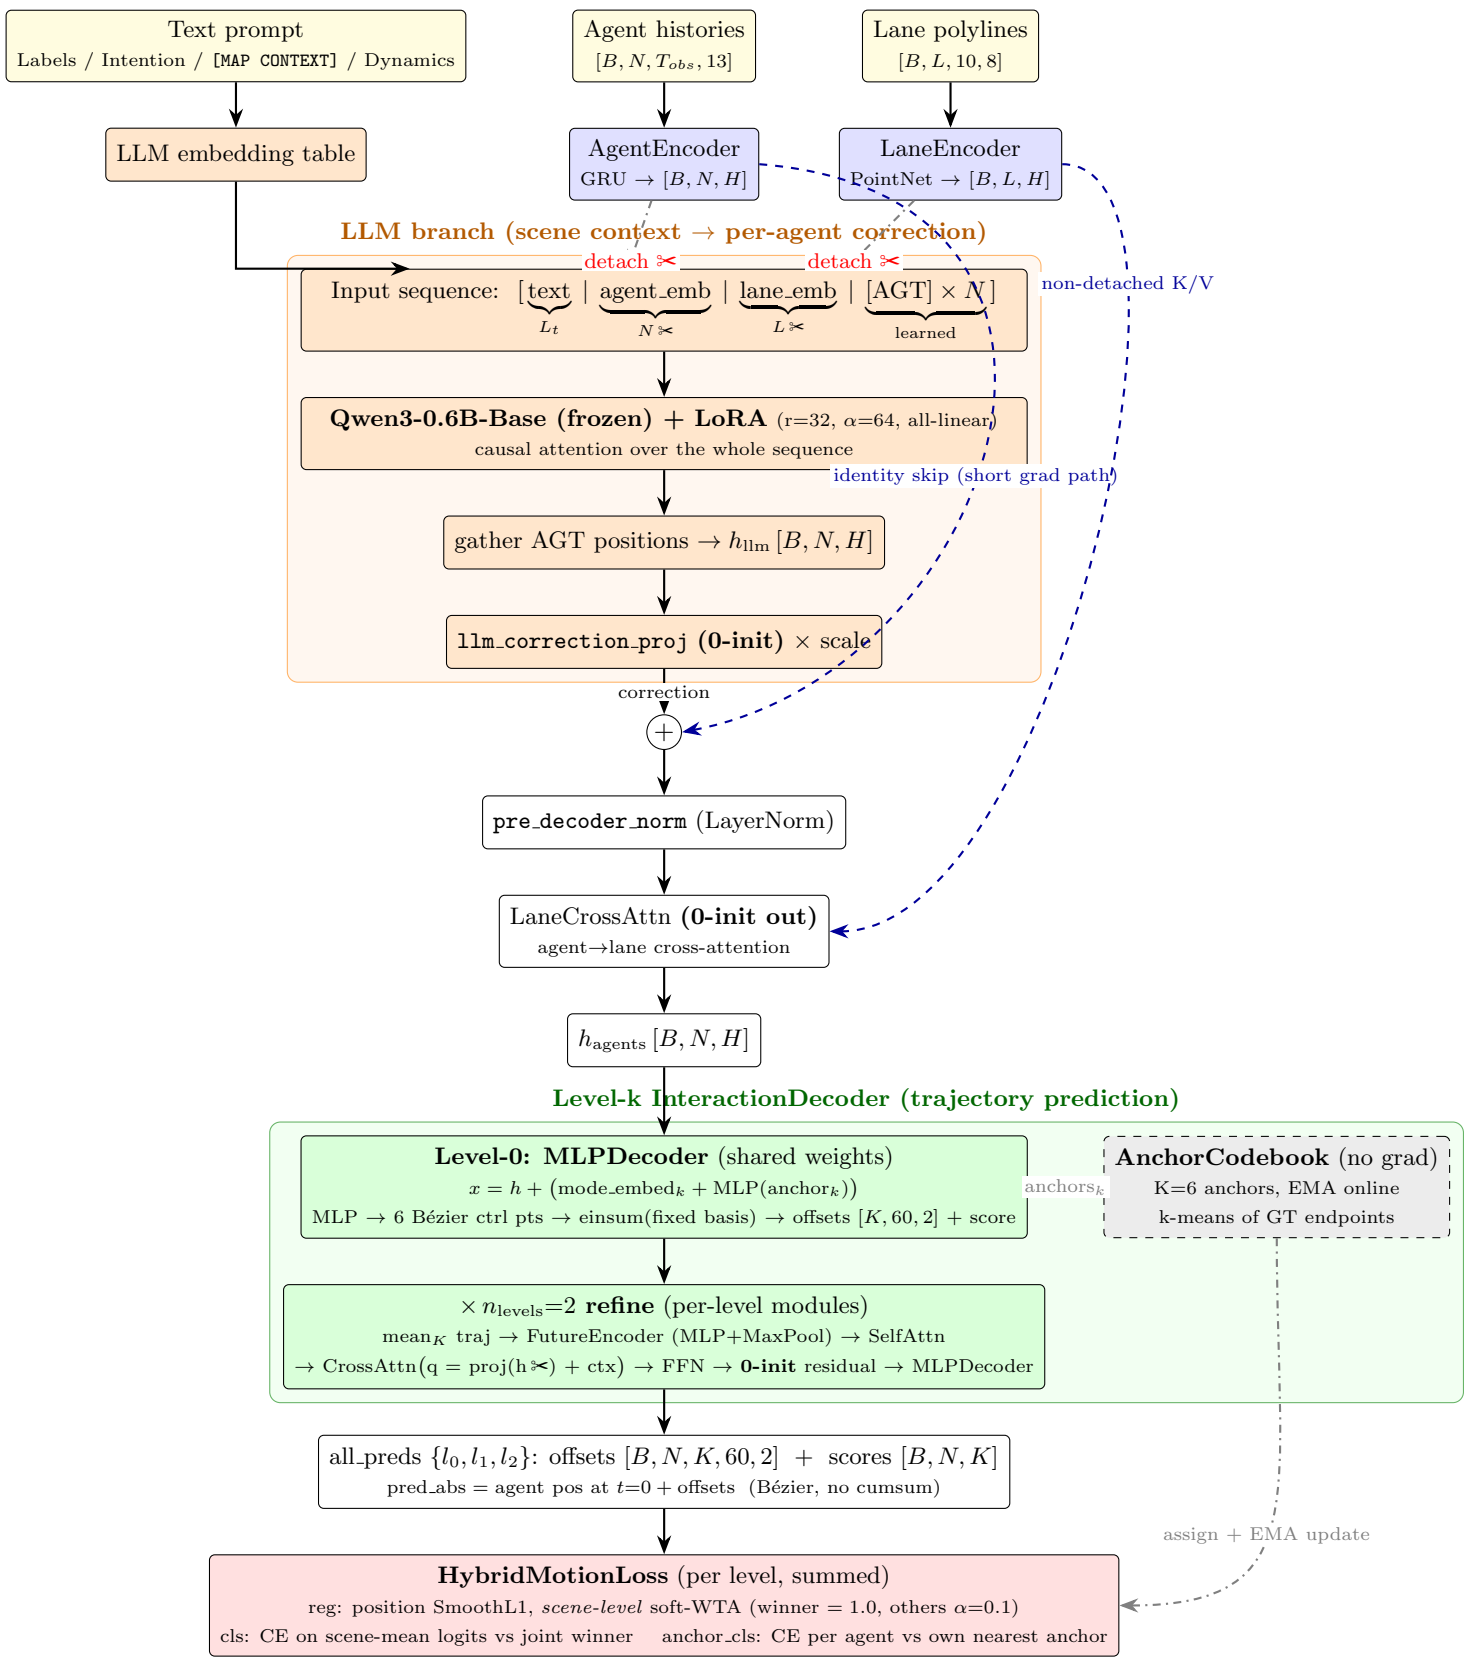

Legend
 $\longrightarrow$ forward + gradient $\dashrightarrow$ residual / skip (with gradient) $\cdashrightarrow$ no-gradient path $\times$ = detach 0-init = zero-initialised
Note: the LLM never outputs trajectories — it produces h_{ilm} , projected (0-init) into a per-agent *residual correction* on the encoder embedding. All trajectory decoding happens in the Bézier MLPDecoder.