


UiPath Community

Fast Track Agentic Automation - API Workflow

High-Velocity Workflows for a Cloud-First World

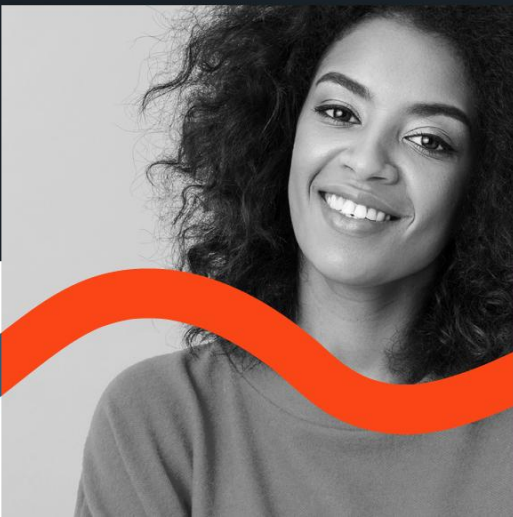

Fast Track Agentic Automation

3/6 – API Workflow


High-Velocity Workflows for a Cloud-First World



About Me



- 🤖 RPA Solution Architect & Tech Lead
- 🏆 7X UiPath Professional Certified
- 🤖 RPA Enthusiast
- 🏆 2x UiPath MVP 2026,2025
- 🚩 Consistent contributor on UiPath Forum

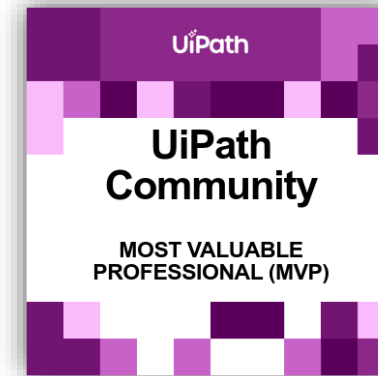

Let's connect!

<https://www.linkedin.com/in/ashokkarale/>



Challenges for automation teams

Automation teams need to move faster, integrate more systems, build smarter logic, and support agentic use cases - all while staying aligned with IT.

Explosion of endpoints

Real-time is the expected response time

API-first is the new standard

The integration layer is a security boundary

Orchestration needs speed & scale

Agents need APIs

How can API automation solve these challenges?

Relying on user interfaces is not the right approach for system-to-system integration. That's where API automation comes in.

Explosion of endpoints

Reusable, modular logic that makes orchestration across systems simpler

Real-time is the expected response time

Millisecond-response time, no idle bots or scheduling overhead

API-first is the new standard

Designed for API-first development

The integration layer is a security boundary

Balance security and governance with an easy-to-use experience

Orchestration needs speed & scale


Fast, scalable, efficient

Agents need APIs


Business logic layer that can be called by agentic solutions

RPA workflows vs. API workflows


	RPA workflows	API workflows
Target	Human-centric automations involving user interfaces (UI) and APIs.	System-to-system integrations through APIs.
Speed	Operates at human-like speed.	Executes in real time.
Runtime	Managed robots on virtual or hybrid infrastructure.	Serverless robots.
Usage	Suitable for attended, unattended, and long-running processes.	Suitable for real-time triggers, interactions with external systems, or responding to platform events.
Best for	Automating user interfaces, handling semi-structured tasks, and managing user flows.	API-centric automation scenarios allowing you to integrate structured data and scale logical processes.

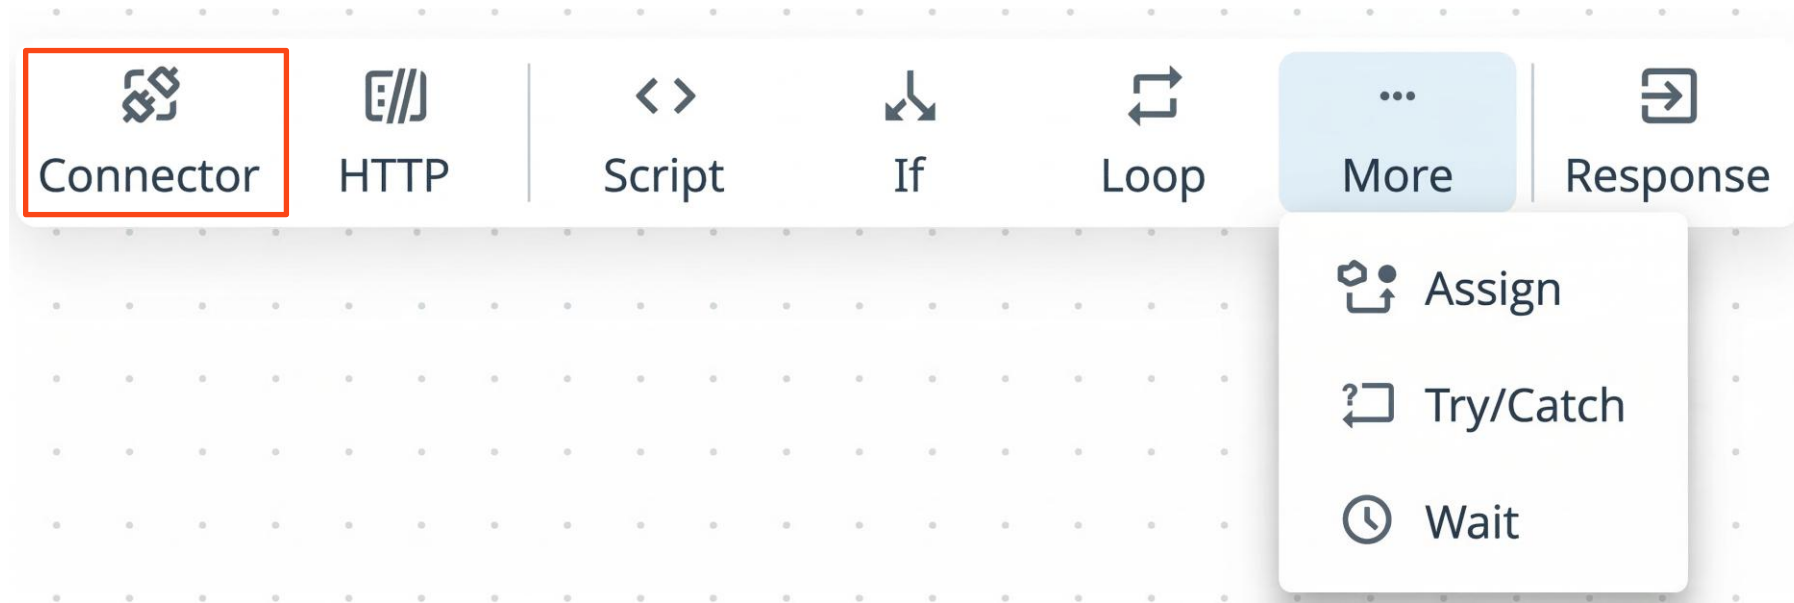


The Connector activity provides access to Integration Service connectors and custom-built connectors. It helps your workflow interact with third-party APIs without a manual HTTP request configuration.

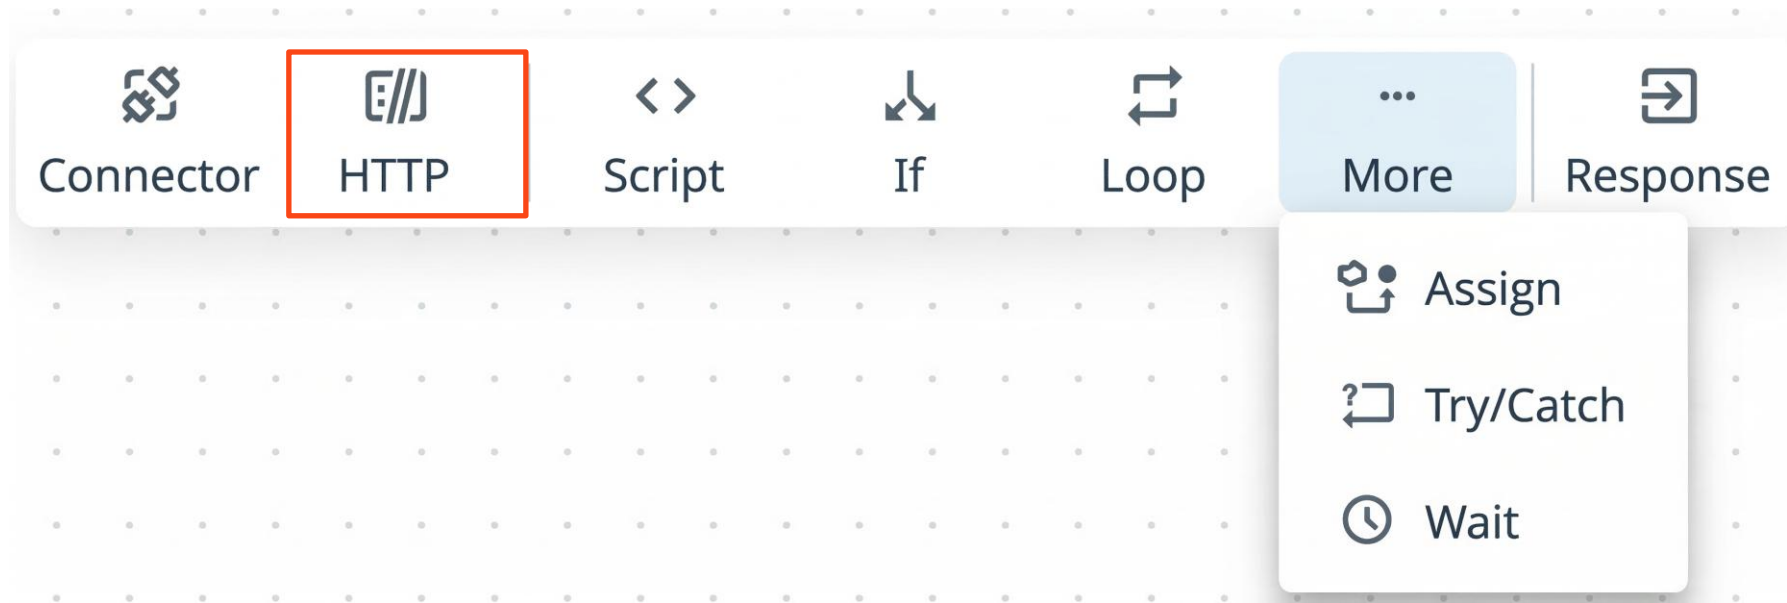


The HTTP request activity enables you to perform JSON-based API requests within your workflow. You can use the generic HTTP connector or any of the supported Integration Service connectors for authentication, but you also have the option to use the activity without a connection and provide authentication details directly in the request.

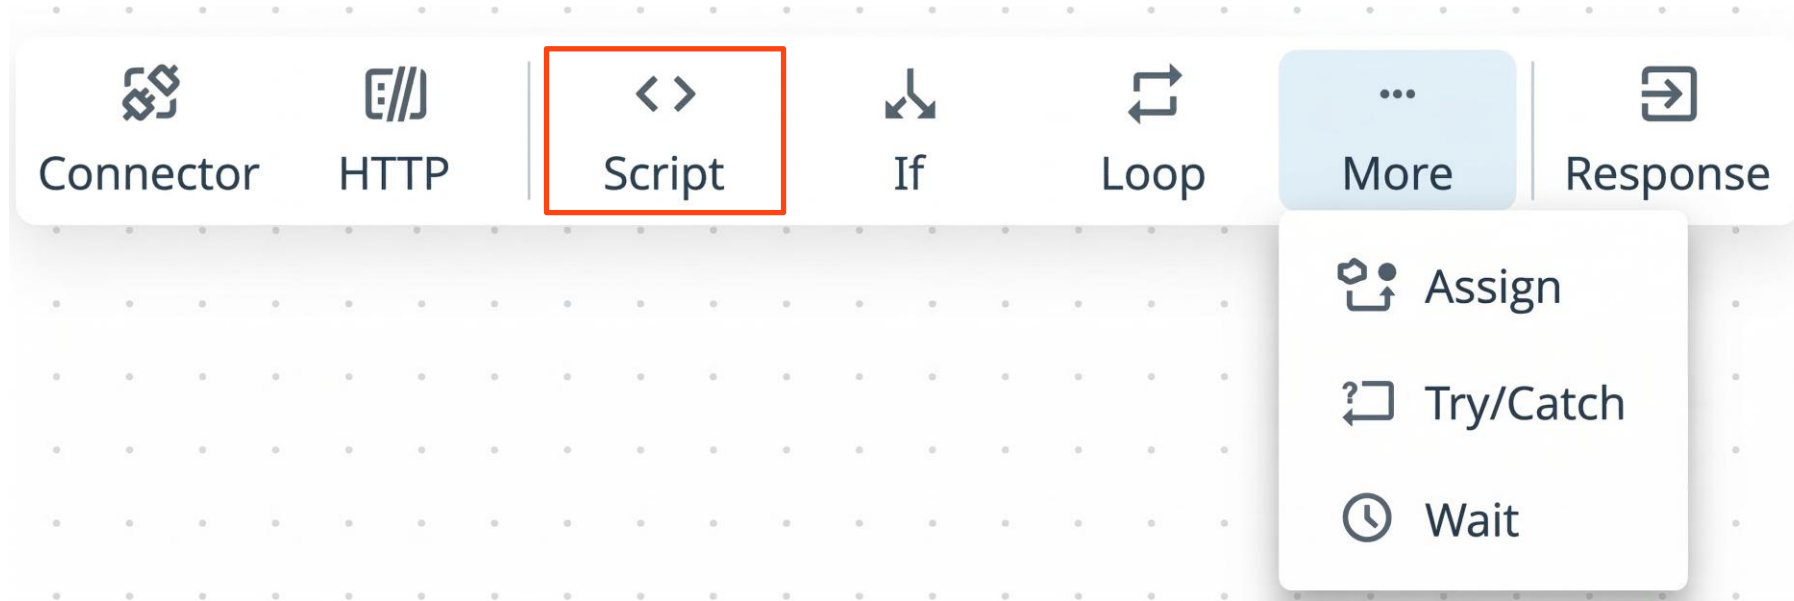


The **Script** activity uses JavaScript to enable custom data manipulation within your workflow.

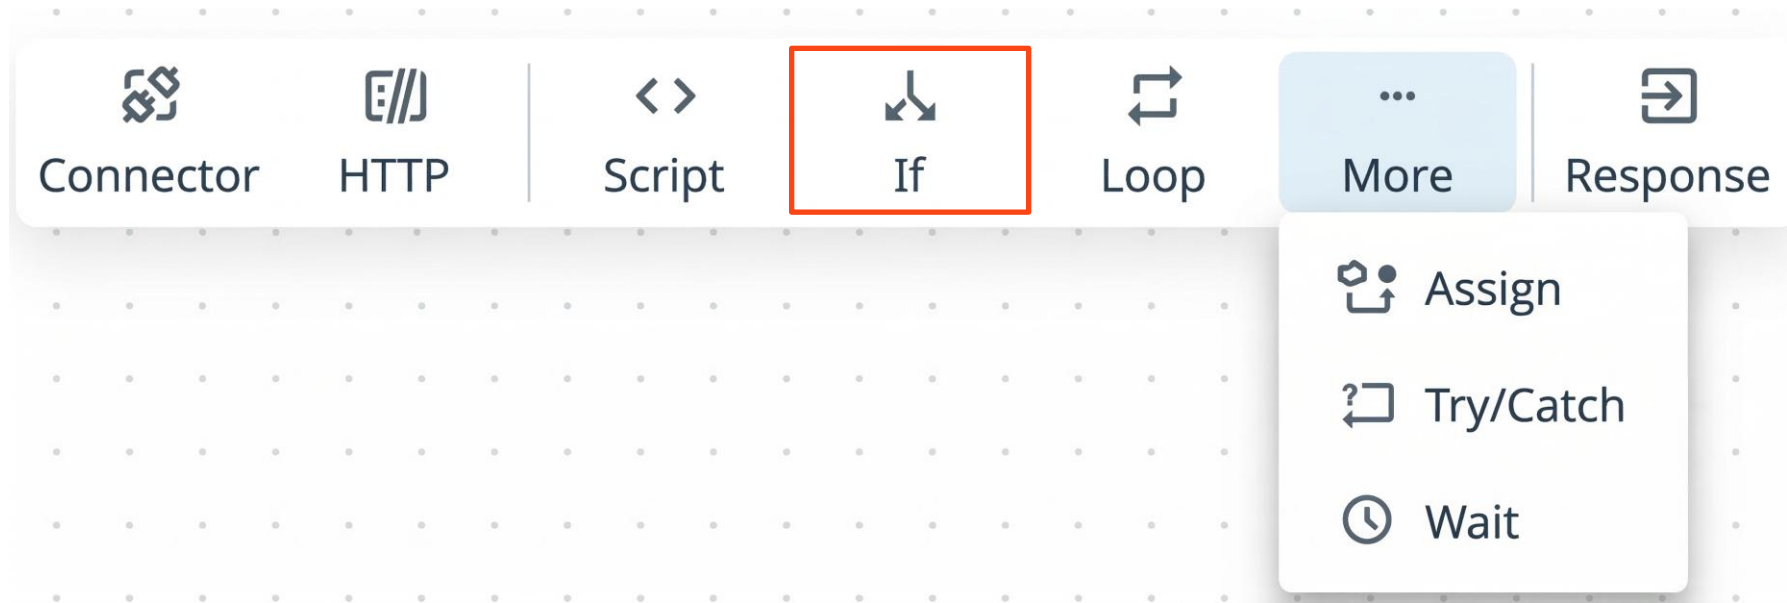


The **If** activity enables conditional branches within API workflows to create dynamic execution paths based on data-driven conditions. Use the **If** activity for workflows that require different actions depending on real-time API responses, user inputs, or system states.

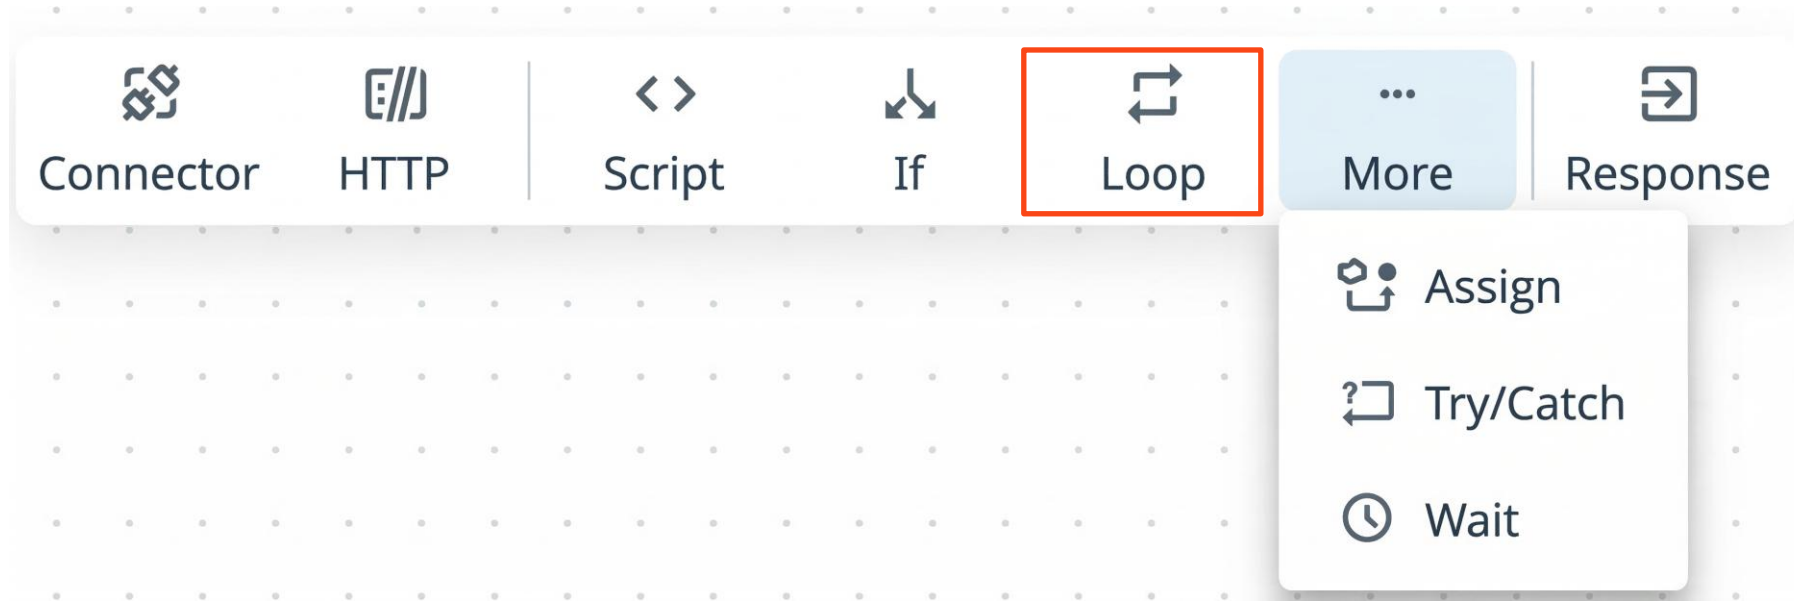


The **For Each** activity iterates over arrays and executes a defined set of steps for each array element. Use the **For each** activity to handle API responses containing object arrays, such as lists of users, orders, or records that require individual processing.

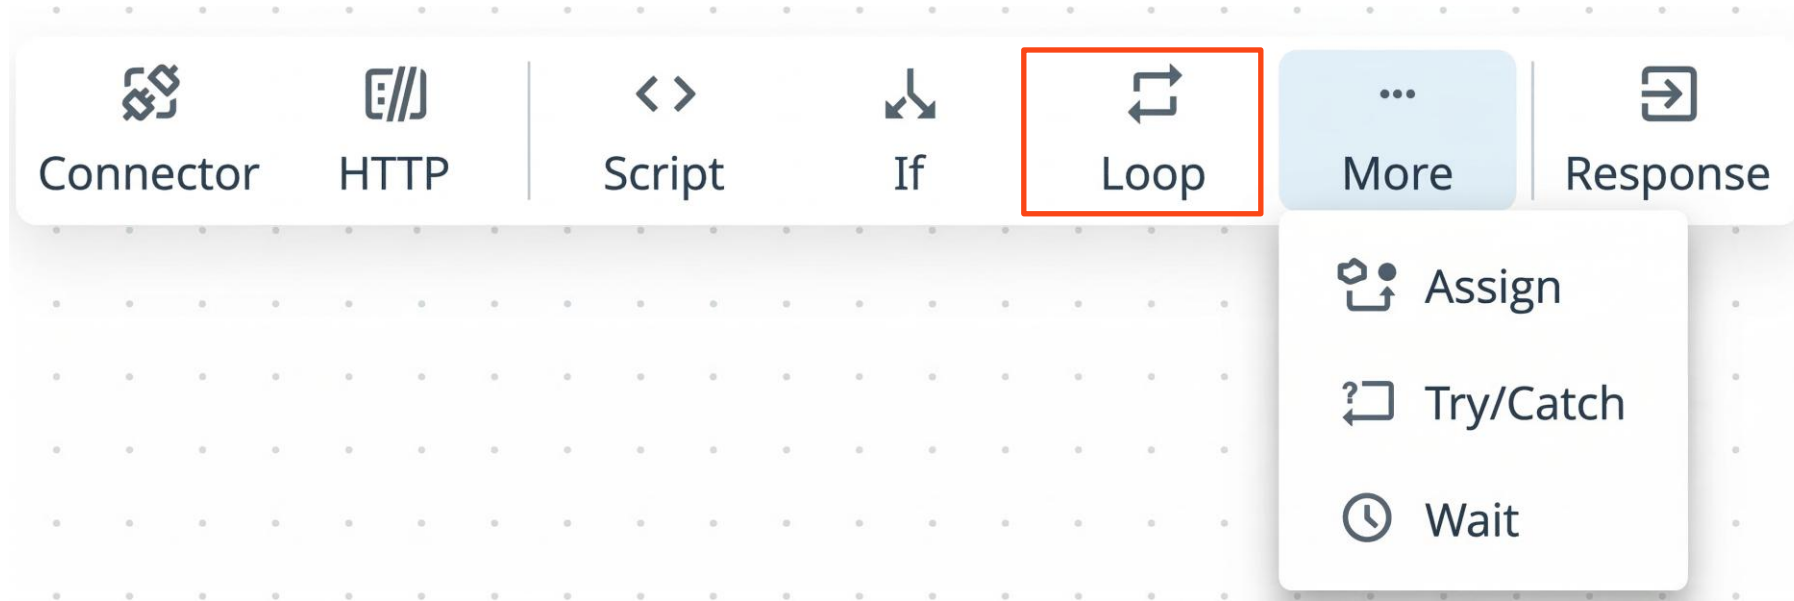


The **Do While** activity enables workflows to repeatedly execute one or more activities. Use it for paging through API datasets or repeating actions until a specific property in the response changes.

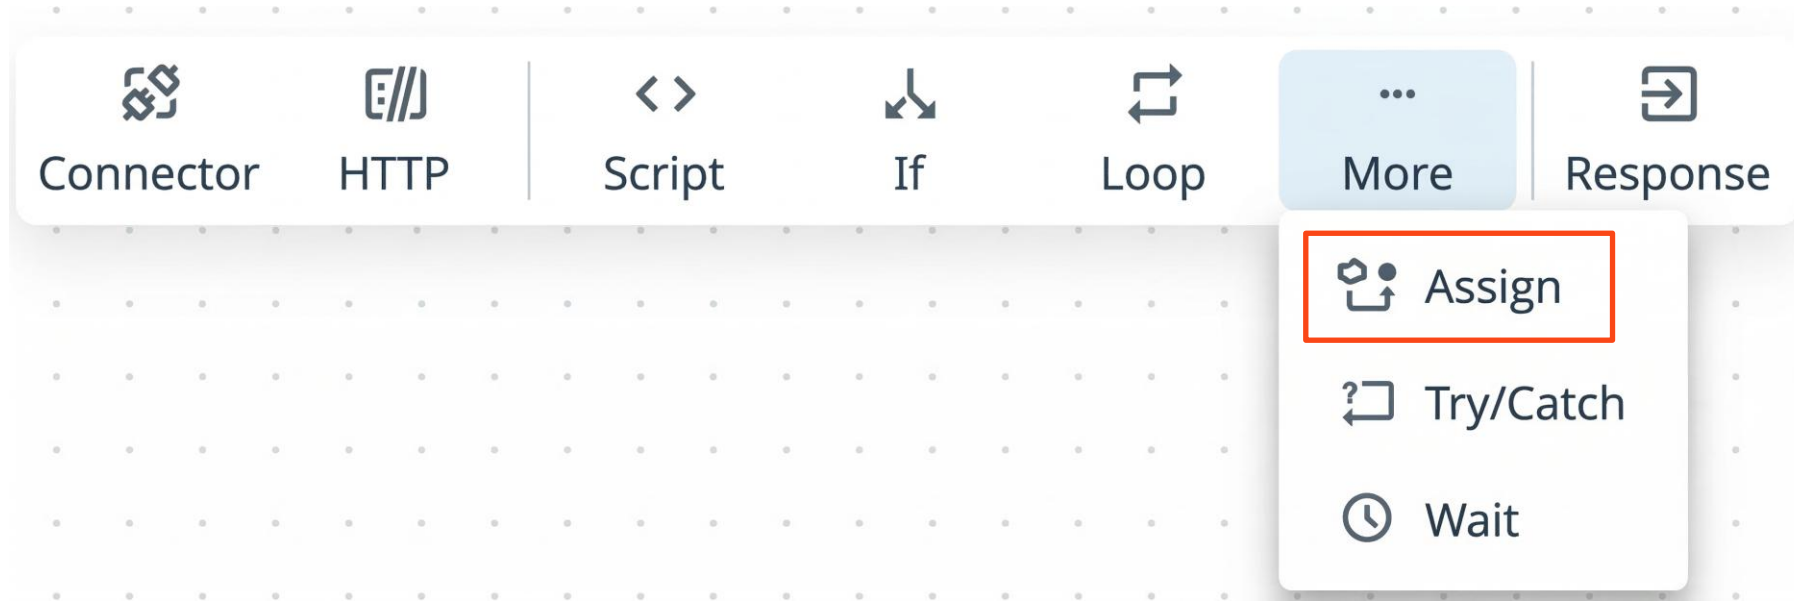


The **Assign** activity helps you manage data within your API workflows. Use it to set to update the values of variables, ensuring you workflows always has the correct information at hand.

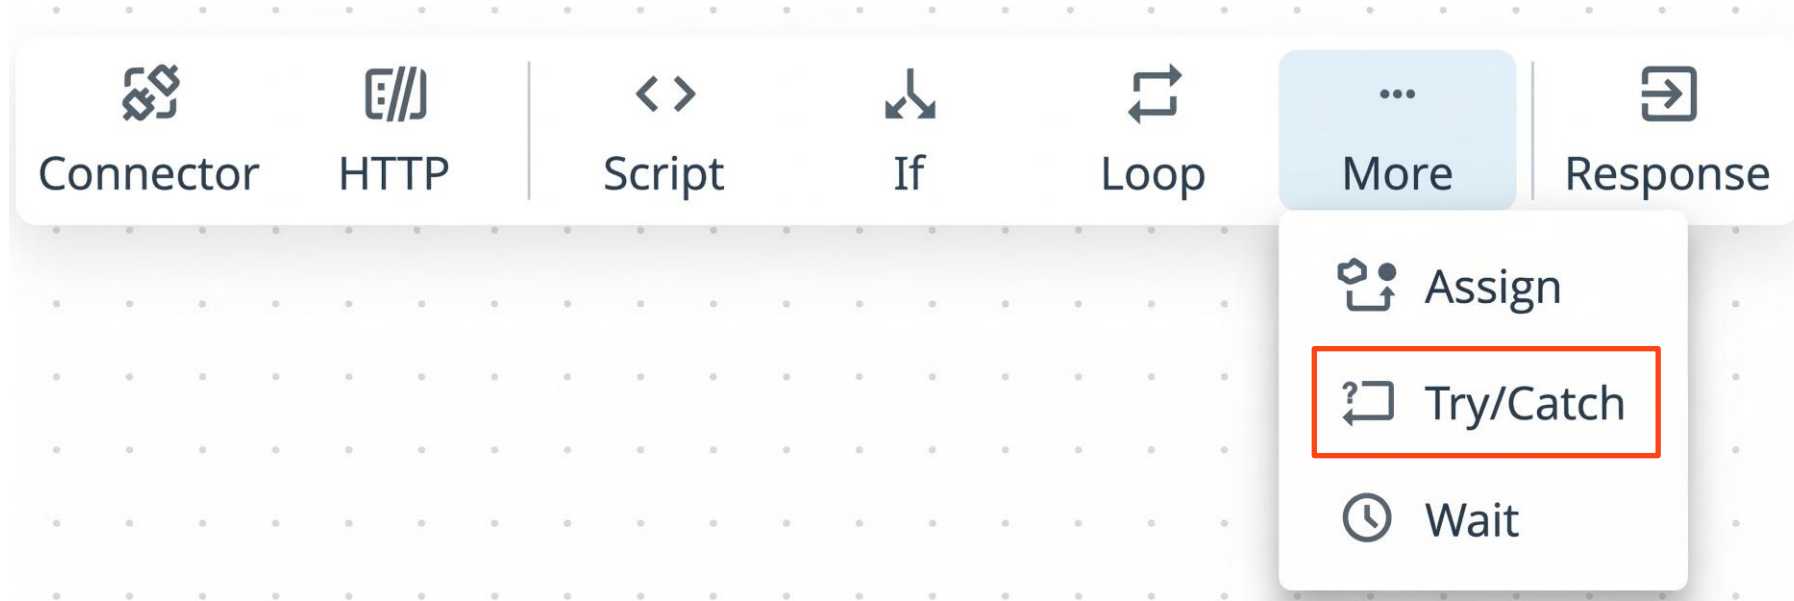

The **Try Catch** activity provides structured exception handling within workflows. Use it to define fallback actions for API failures, invalid data, or unexpected errors.

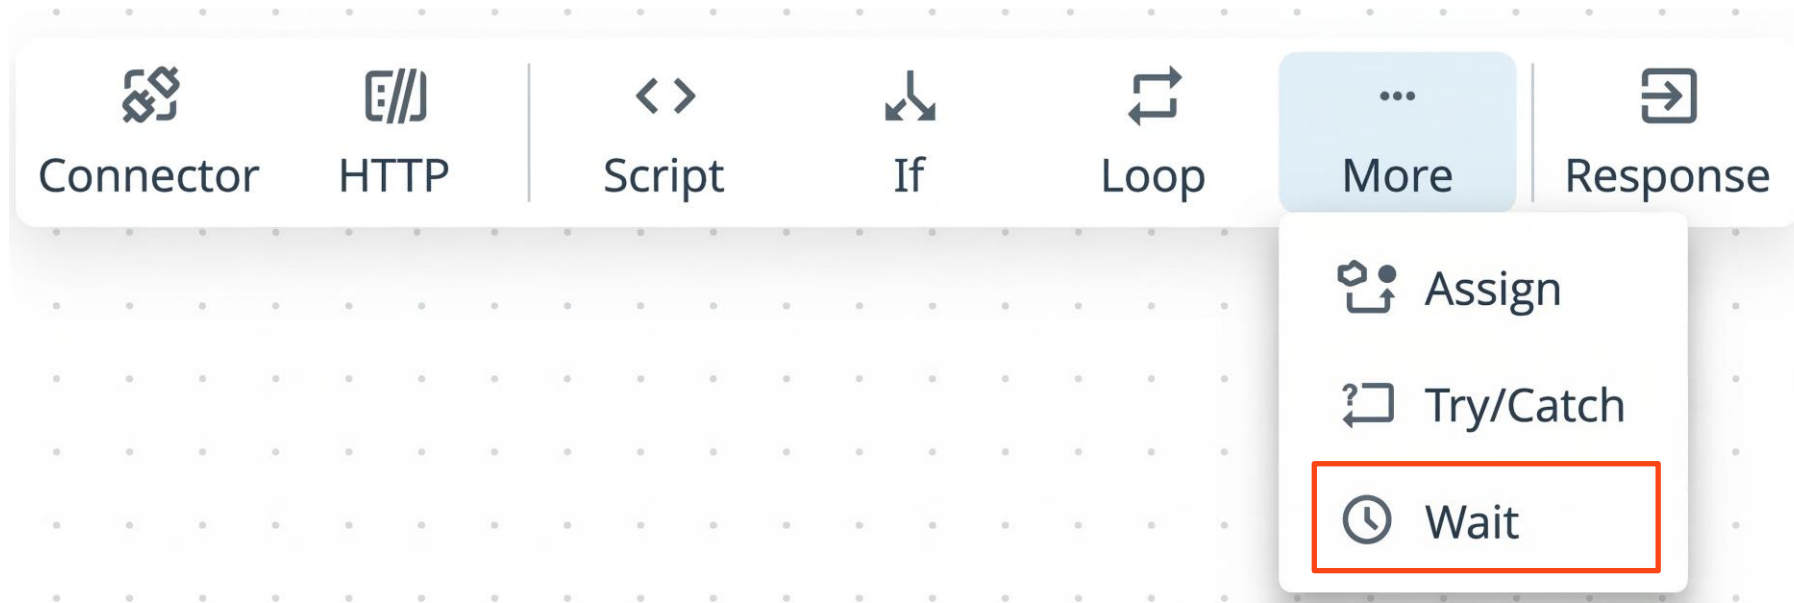

The **Wait** activity introduces controlled pauses within your API workflow. Use it to add delays between actions, ensuring systems have time to process requests, update statuses, or become available before your workflow proceeds to the next step.

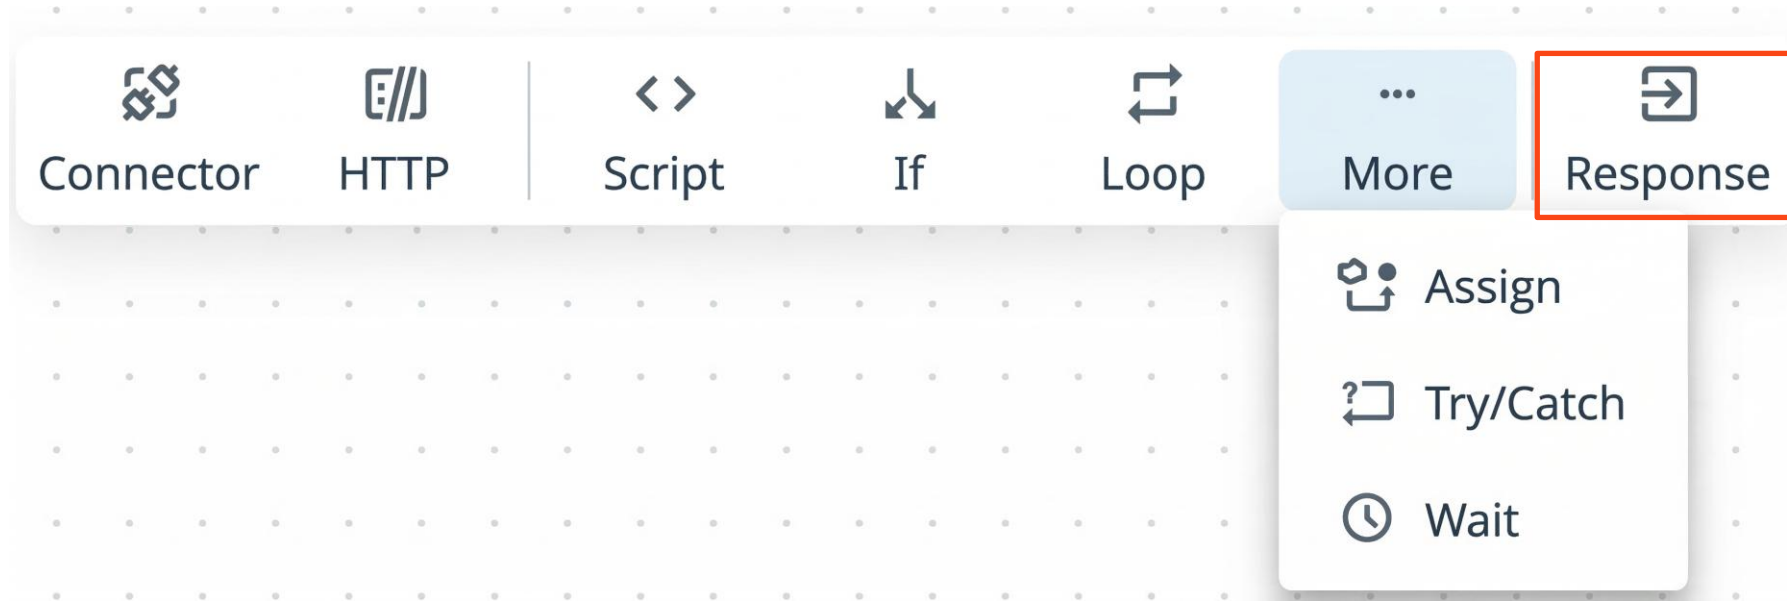

The **Response** activity terminates an API workflow and sends a structured response to the requester. The response typically includes a status and additional data.



Demo

Getting started and exploring API Workflows

Live




UiPath Community Events Page

Don't waste time. Scan and join the family.



Pune
Chapter

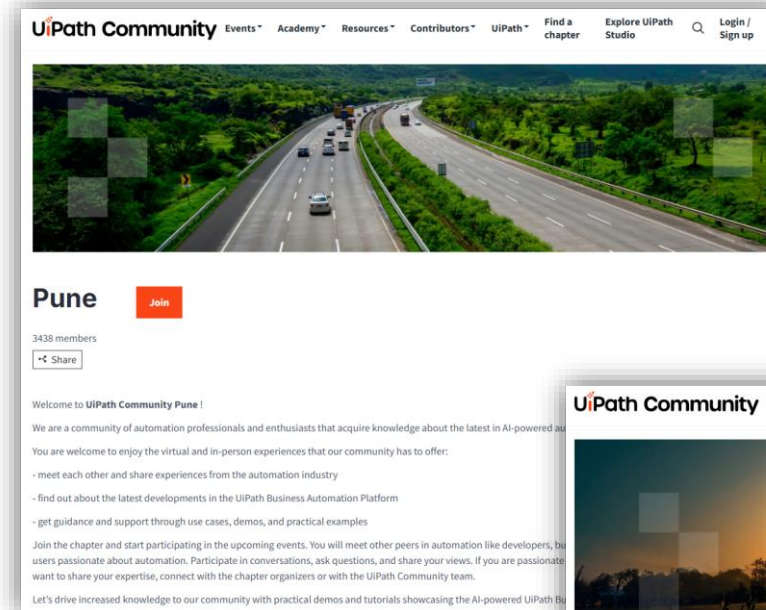

Delhi-NCR
Chapter



UiPath Official WhatsApp Group

Don't waste time. Scan and join the community.





Pune
Chapter



Delhi-NCR
Chapter



UiPath Community

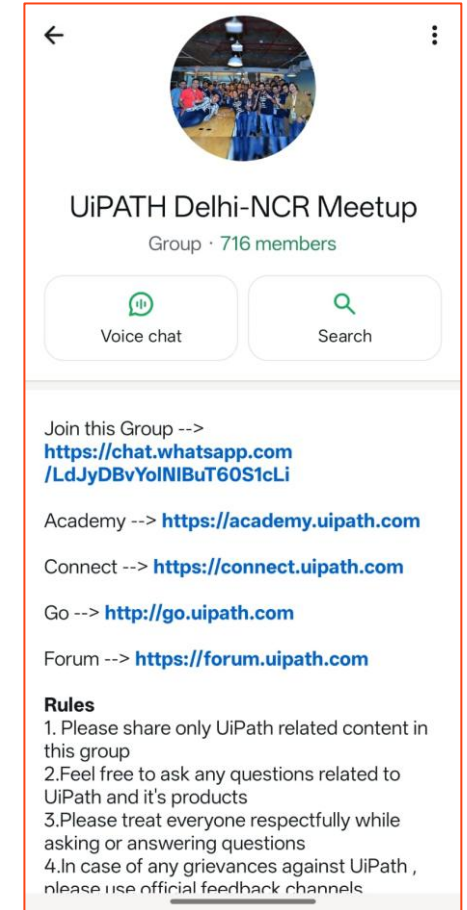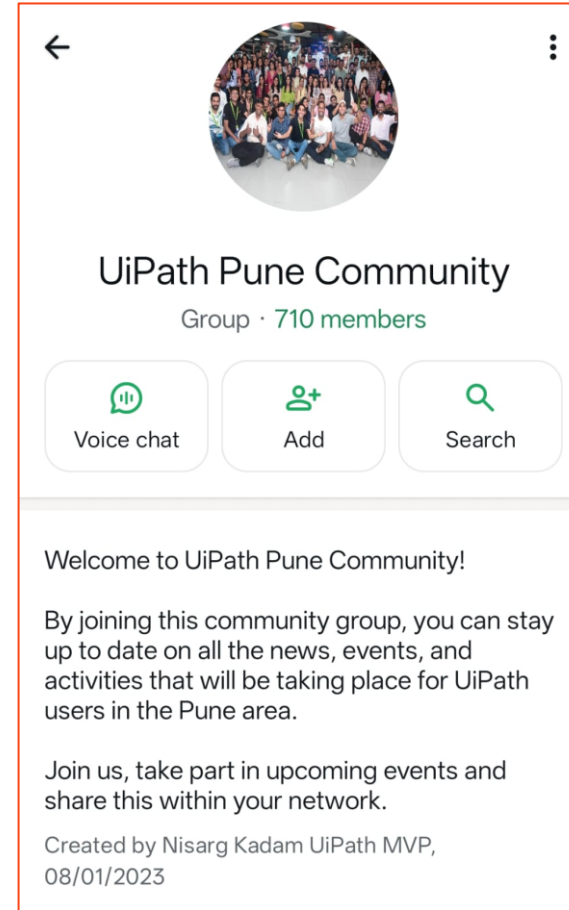



Questions?

Let's discuss your move to Cloud-First Automation.