# iLearn Practice Exam

12BR · Chapter / Topic 20

## Cambridge A Level Computer Science 9618

Paper 3  Advanced Theory

# Topic 20: Further Programming

**Name:** _____

**Class:** _____

**Date:** _____

**Time allowed:** 45 minutes

**TOTAL MARKS: 37**

Marks obtained: ..... / 37

**INSTRUCTIONS**

· Answer all questions.
· Write your answers in the spaces provided on this paper, using a black or dark blue pen.
· Do not use an erasable pen or correction fluid.
· No calculators are allowed.
· Do not write anything in the margins.

**INFORMATION**

· The total mark for this paper is 37.
· The number of marks for each question or part question is shown in brackets [ ].
· This paper contains 5 questions, all drawn from Cambridge past papers on this chapter.
· After you finish, mark your work against the official Cambridge mark scheme (see the source list on the last page).
· Only 37 marks of past-paper questions are available for this chapter, so the recommended time is 45 minutes (1 min 1

Questions reproduced from Cambridge International past papers © Cambridge University Press & Assessment, for classroom practice.

1 **(a)** A medical centre uses objects of the class `Appointment` to record treatments given and medication prescribed during each doctor's appointment. Some of the attributes required in the class are listed in the table.

| Attribute | Data type | Description |
|---|---|---|
| `DateSeen` | `DATE` | date of treatment |
| `Treatments` | `STRING` | treatments given |
| `Medications` | `STRING` | medications prescribed |

Patients are identified by a unique 8-digit number, beginning with the patient's year of birth, for example, 20108989.
Doctors are identified by their name, for example, A N Other.

Complete the class diagram for `Appointment`, to include:

- attribute and data type for the identification of the patient
- attribute and data type for the identification of the doctor
- methods to assign date seen, treatments given and medications prescribed
- method to return the date seen and the attributes for the patient and the doctor.

| **Appointment** |
|---|
| DateSeen : DATE<br>..... : .....<br>..... : .....<br>Treatments : STRING<br>Medications : STRING |
| .....<br>SetPatientID(PatientNumber : INTEGER)<br>SetDoctor(DoctorID : STRING)<br>.....<br>.....<br>.....<br>.....<br>.....<br>GetTreatments()<br>GetMedications() |

[5]

**(b) (i)** Identify the object-oriented programming (OOP) feature whose function includes restricting external access to the data.

..... [1]

**(ii)** Describe what is meant by the OOP feature **inheritance**.

.....

.....

.....

..... [2]

2 **(a)** Object-Oriented Programming (OOP) is used to design a class called `Node`.

A partial design of the `Node` class includes the `STRING` attribute `Content` and the `INTEGER` attribute `Pointer`, together with their getters and setters.

The class also includes a constructor, with two parameters, to set the values of these attributes.

Write pseudocode statements to declare the `Node` class, its attributes and the constructor.

.....

.....

.....

.....

.....

.....

.....

.....

.....

..... [5]

**(b)** Complete the table by filling in the missing OOP terms and descriptions.

| OOP term | description |
|---|---|
| ..... | A method used to change values in private attributes in a class. |
| ..... | An occurrence of a class during the execution of a program. |
| aggregation | ..... ..... ..... |
| inheritance | ..... ..... ..... |

[4]

**BLANK PAGE**


3 **(a)** A medical clinic uses objects of the class `Patient` to assign a priority and a doctor to a patient. Some of the attributes required in the class are listed in the table.

| Attribute | Data type | Description |
|---|---|---|
| `PatientID` | `STRING` | Unique identifier of the patient |
| `Name` | `STRING` | Patient's full name, surname first |
| `DoctorID` | `STRING` | ID of doctor administering treatment |

Treatment is prioritised with a numeric scale of 1 to 5.

Complete the class diagram for `Patient`, to include:

- attribute and data type for the date of birth
- attribute and data type for the priority
- methods to assign the patient ID, priority and doctor ID
- methods to return the patient ID, patient date of birth and the priority.

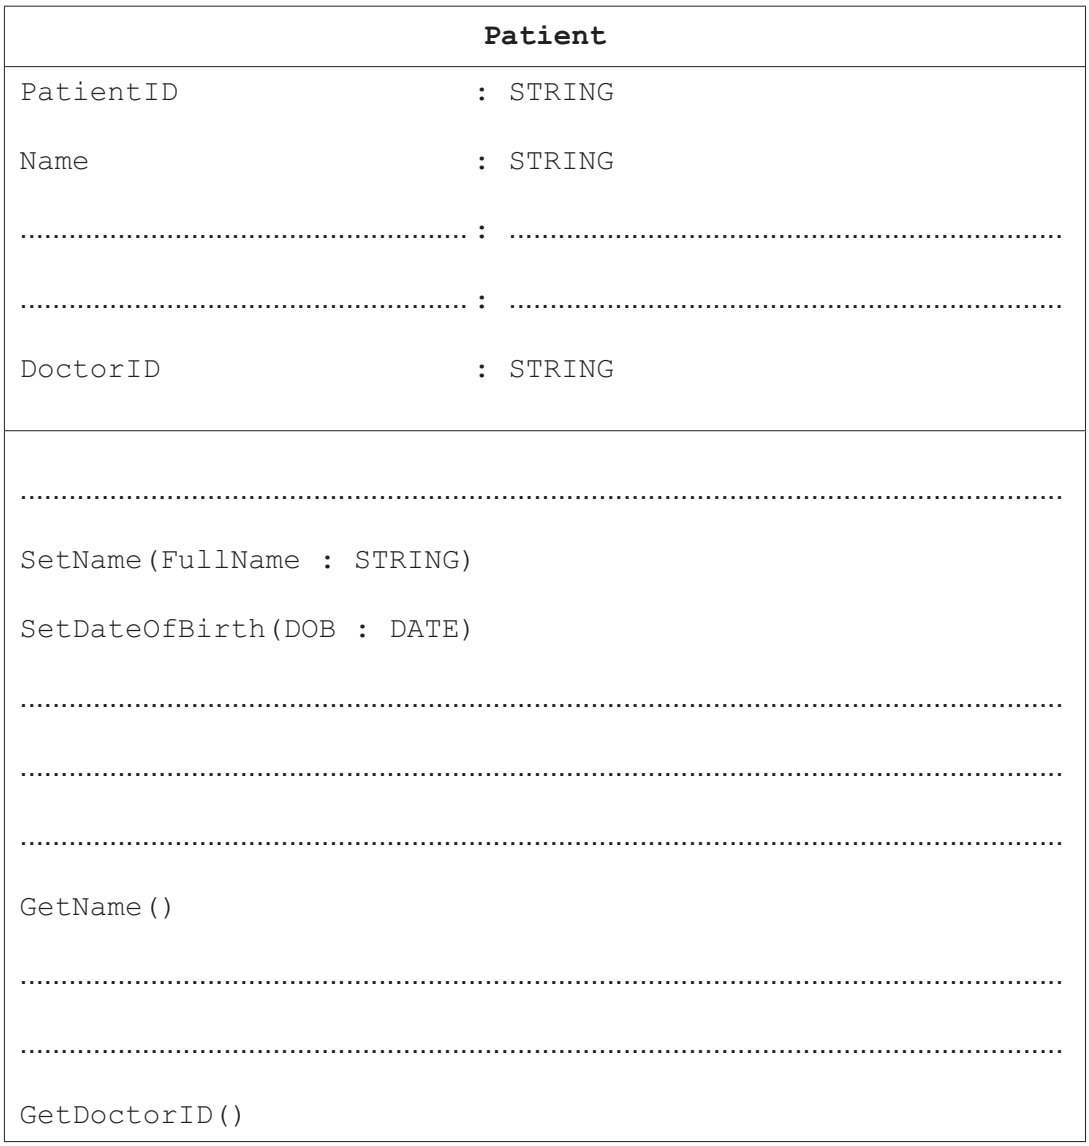


[5]

**(b) (i)** Identify the object-oriented programming (OOP) term described as ‘an occurrence of an object’.

..... [1]

**(ii)** Describe what is meant by the OOP term **polymorphism**.

.....

.....

.....

..... [2]

4 A declarative programming language is used to show which home cinema devices customers already have and which devices they want.

```
01 device(projector).
02 device(large_tv).
03 device(medium_tv).
04 device(bluray_player).
05 device(amplifier).
06 device(media_player).
07 device(main_speakers).
08 device(centre_speaker).
09 device(surround_speakers).
10 customer(petrov).
11 customer(margaret).
12 customer(steffan).
13 customer(susan).
14 customer(allan).
15 customer(sammy).
16 owns(projector, petrov).
17 owns(media_player, petrov).
18 owns(projector, susan).
19 owns(projector, sammy).
20 owns(media_player, allan).
21 owns(bluray_player, steffan).
22 wants(main_speakers, margaret).
23 wants(surround_speakers, susan).
24 wants(medium_tv, steffan).
```

These facts (clauses) have the meanings:

| fact | meaning |
|---|---|
| 01 | A projector is a device. |
| 10 | Petrov is a customer. |
| 16 | Petrov owns a projector. |
| 22 | Margaret wants main speakers. |

**(a)** Betty is a customer who owns a large TV and wants a Blu-ray player.

Write additional facts to represent this information.

25 .....

26 .....

27 .....

[3]

**(b)** Using the variable `Owner`, the goal:

```
owns(media_player, Owner)
```

returns

```
Owner = petrov, allan
```

Write the result of using the goal:

```
owns(projector, Owner)
```

`Owner =` ..... [1]

**(c)** `D` may be available for `A` to buy if `D` is a device and `A` is a customer and `A` does **not** own that device.

Write this as a rule:

```
may_buy_device(D, A)
```

`IF` .....

.....

.....

..... [4]

**BLANK PAGE**

5 Complete the table by filling in the missing object-oriented programming (OOP) terms and descriptions.

| OOP term | Description |
|---|---|
| ..... | A method that accesses the value of a property. |
| ..... | A method that changes the value of a property. |
| Object | .....<br>.....<br>..... |
| Method | .....<br>.....<br>..... |

[4]

**END OF QUESTION PAPER**

## Source of each question (for marking)

Find the matching official Cambridge mark scheme for the series/paper shown, to mark your answers.

| Q | Past paper | Original question | Marks |
|---|---|---|---|
| 1 | Oct/Nov 2025 Paper 31 | Q11 (a),(b) | 8 |
| 2 | May/June 2026 Paper 32 | Q11 (a),(b) | 9 |
| 3 | Oct/Nov 2025 Paper 32 | Q12 (a),(b) | 8 |
| 4 | May/June 2026 Paper 31 | Q11 (a),(b),(c) | 8 |
| 5 | Oct/Nov 2025 Paper 33 | Q5 | 4 |

**Total: 37 marks**