




Design Patterns Tutorial
Design Patterns - Home
Design Patterns - Overview
Design Patterns - Factory Pattern
Abstract Factory Pattern
Design Patterns - Singleton Pattern
Design Patterns - Builder Pattern
Design Patterns - Prototype Pattern
Design Patterns - Adapter Pattern
Design Patterns - Bridge Pattern
Design Patterns - Filter Pattern
Design Patterns - Composite Pattern
Design Patterns - Decorator Pattern
Design Patterns - Facade Pattern
Design Patterns - Flyweight Pattern
Design Patterns - Proxy Pattern
Chain of Responsibility Pattern
Design Patterns - Command Pattern
Design Patterns - Interpreter Pattern
Design Patterns - Iterator Pattern
Design Patterns - Mediator Pattern
Design Patterns - Memento Pattern
Design Patterns - Observer Pattern
Design Patterns - State Pattern
Design Patterns - Null Object Pattern
Design Patterns - Strategy Pattern
Design Patterns - Template Pattern

Leave a Message



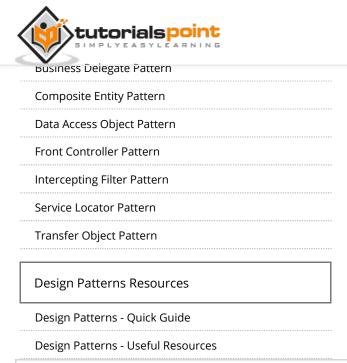

Design Pattern - Abstract Factory Pattern

Advertisements

• Previous Page

Next Page **⊙**



Abstract Factory patterns work around a super-factory which creates other factories. This factory is also called as factory of factories. This type of design pattern comes under creational pattern as this pattern provides one of the best ways to create an object.

In Abstract Factory pattern an interface is responsible for creating a factory of related objects without explicitly specifying their classes. Each generated factory can give the objects as per the Factory pattern.

Implementation


We are going to create a Shape and Color interfaces and concrete classes implementing these interfaces. We create an abstract factory class AbstractFactory as next step. Factory classes ShapeFactory and ColorFactory are defined where each factory extends AbstractFactory. A factory creator/generator class FactoryProducer is created.

AbstractFactoryPatternDemo, our demo class uses FactoryProducer to get a AbstractFactory object. It will pass information (CIRCLE / RECTANGLE / SQUARE for Shape) to AbstractFactory to get the type of object it needs. It also passes information (RED / GREEN / BLUE for Color) to AbstractFactory to get the type of object it needs.

AbstractFactory

FactoryProducer

AbstractFactory

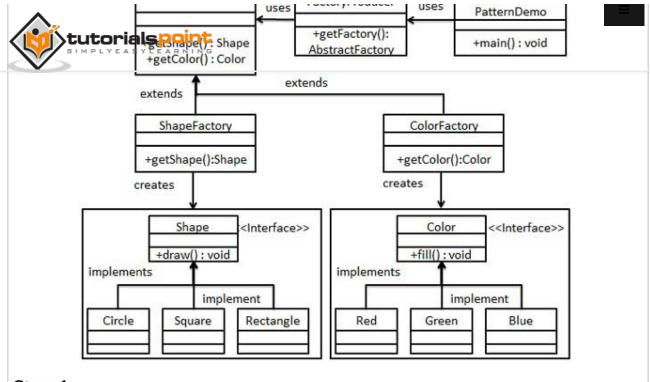

Create an interface for Shapes.

Shape.java

```
public interface Shape {
  void draw();
}
```

Step 2

Create concrete classes implementing the same interface.

Rectangle.java

```
public class Rectangle implements Shape {
    @Override
    public void draw() {
        System.out.println("Inside Rectangle::draw() method.");
    }
}
```

Square.java

```
public class Square implements Shape {
   @Override
   public void draw() {
```





```
public class Circle implements Shape {
   @Override
   public void draw() {
      System.out.println("Inside Circle::draw() method.");
}
```

Create an interface for Colors.

Color.java

```
public interface Color {
   void fill();
```

Step4

Create concrete classes implementing the same interface.

Red.java

```
public class Red implements Color {
   @Override
   public void fill() {
      System.out.println("Inside Red::fill() method.");
}
```

Green.java

```
public class Green implements Color {
   @Override
   public void fill() {
      System.out.println("Inside Green::fill() method.");
}
```

Blue.java

```
public class Blue implements Color {
   @Override
   public void fill() {
```





Create an Abstract class to get factories for Color and Shape Objects.

AbstractFactory.java

```
public abstract class AbstractFactory {
   abstract Color getColor(String color);
   abstract Shape getShape(String shape) ;
}
```

Step 6

Create Factory classes extending AbstractFactory to generate object of concrete class based on given information.

ShapeFactory.java

```
public class ShapeFactory extends AbstractFactory {
   @Override
   public Shape getShape(String shapeType){
      if(shapeType == null){
         return null;
      }
      if(shapeType.equalsIgnoreCase("CIRCLE")){
         return new Circle();
      }else if(shapeType.equalsIgnoreCase("RECTANGLE")){
         return new Rectangle();
      }else if(shapeType.equalsIgnoreCase("SQUARE")){
         return new Square();
      return null;
   }
   @Override
   Color getColor(String color) {
      return null;
   }
}
```

ColorFactory.java

```
public class ColorFactory extends AbstractFactory {

@Override
```



}

Create a Factory generator/producer class to get factories by passing an information such as Shape or Color

FactoryProducer.java

return null;

```
public class FactoryProducer {
   public static AbstractFactory getFactory(String choice){

   if(choice.equalsIgnoreCase("SHAPE")){
      return new ShapeFactory();

   }else if(choice.equalsIgnoreCase("COLOR")){
      return new ColorFactory();
   }

   return null;
}
```

Step 8

Use the FactoryProducer to get AbstractFactory in order to get factories of concrete classes by passing an information such as type.

AbstractFactoryPatternDemo.java

```
public class AbstractFactoryPatternDemo {
   public static void main(String[] args) {
```



```
//call draw method of Shape Circle
      shape1.draw();
      //get an object of Shape Rectangle
      Shape shape2 = shapeFactory.getShape("RECTANGLE");
      //call draw method of Shape Rectangle
      shape2.draw();
      //get an object of Shape Square
      Shape shape3 = shapeFactory.getShape("SQUARE");
      //call draw method of Shape Square
      shape3.draw();
      //get color factory
      AbstractFactory colorFactory = FactoryProducer.getFactory("COLOR");
      //get an object of Color Red
      Color color1 = colorFactory.getColor("RED");
      //call fill method of Red
      color1.fill();
      //get an object of Color Green
      Color color2 = colorFactory.getColor("Green");
      //call fill method of Green
      color2.fill();
      //get an object of Color Blue
      Color color3 = colorFactory.getColor("BLUE");
      //call fill method of Color Blue
      color3.fill();
   }
}
```

Verify the output.

```
Inside Circle::draw() method.
Inside Rectangle::draw() method.
Inside Square::draw() method.
Inside Red::fill() method.
Inside Green::fill() method.
Inside Blue::fill() method.
```

• Previous Page

Next Page **⊙**



Mobile First

Available on the App Store





About us

- **▶** Company
- ▶ Team
- ▶ Careers
- ▶ Privacy
- Copyright
- **▶** Disclaimer

Extra Links

- ▶ Forums
- ▶ Articles
- ▶ Shared
- ▶ FAQ's

Contact Us

- Address: 388-A , Road no 22, Jubilee Hills, Hyderabad Telangana, INDIA-500033
- **Email:** contact@tutorialspoint.com
- ★ Website: www.tutorialspoint.com







© Copyright 2015. All Rights Reserved. Write for us FAQ's Helping Contact