

# Length of Longest Substring without any Repeating Character

**Problem Statement:** Given a String, find the length of longest substring without any repeating character.

**Examples:**

**Example 1:**

**Input:** s = "abcabcbb"

**Output:** 3

**Explanation:** The answer is abc with length of 3.

**Example 2:**

**Input:** s = "bbbbbb"

**Output:** 1

**Explanation:** The answer is b with length of 1 units.


**Solution**

**Disclaimer:** Don't jump directly to the solution, try it out yourself first.

## Solution 1: Brute force Approach


**Approach:** This approach consists of taking the two loops one for traversing the string and another loop – nested loop for finding different substrings and after that, we will check for all substrings one by one and check for each and every element if the element is not found then we will store that element in HashSet otherwise we will break from the loop and count it.

At this position , when hashset is checked and we can find a is already present . So, 3 will be the maximum length of string yet

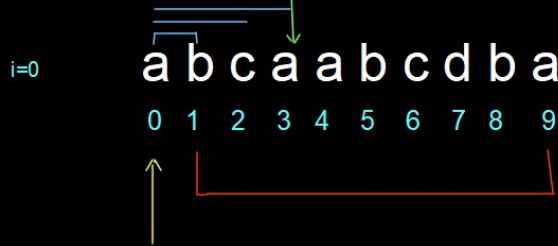

We will iterate for all elements and generate all substrings possible by beginning with that element

Same case here

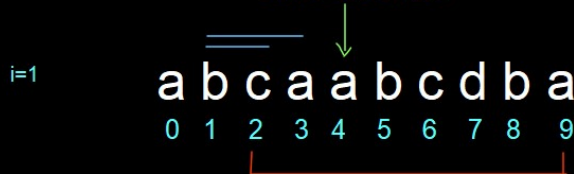

Similarly , we will run more number of iterations to get the desired answer

### Code:

- C++ Code
- Java Code
- Python Code

```
#include<bits/stdc++.h>

using namespace std;

int solve(string str) {

    if(str.size()==0)

        return 0;
```

```

int maxans = INT_MIN;
for (int i = 0; i < str.length(); i++) // outer loop for traversing the string
{
    unordered_set < int > set;
    for (int j = i; j < str.length(); j++) // nested loop for getting different
string starting with str[i]
    {
        if (set.find(str[j]) != set.end()) // if element is found so mark it as ans
and break from the loop
        {
            maxans = max(maxans, j - i);
            break;
        }
        set.insert(str[j]);
    }
}
return maxans;
}

int main() {
    string str = "takeUforward";
    cout << "The length of the longest substring without repeating characters is "
    <<
    solve(str);
    return 0;
}

```


**Output:** The length of the longest substring without repeating characters is 9

**Time Complexity:**  $O(N^2)$

**Space Complexity:**  $O(N)$  where N is the size of HashSet taken for storing the elements

### **Solution 2: Optimised Approach 1**

**Approach:** We will have two pointers left and right. Pointer 'left' is used for maintaining the starting point of the substring while 'right' will maintain the endpoint of the substring. 'right' pointer will move forward and check for the duplicate occurrence of the current element if found then the 'left' pointer will be shifted ahead so as to delete the duplicate elements.

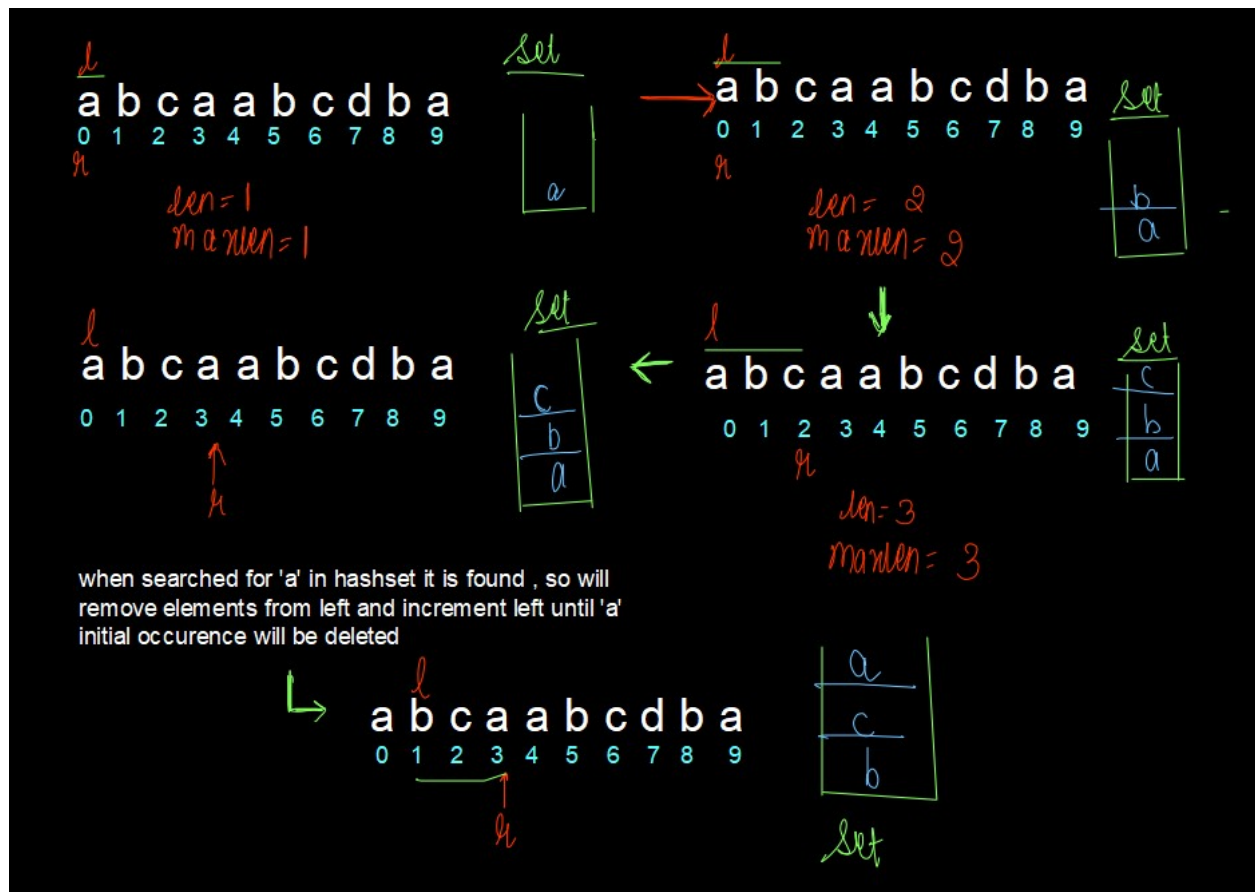

### Code:

- C++ Code
- Java Code
- Python Code

```
#include <bits/stdc++.h>

#include<unordered_set>

using namespace std;

int solve(string str) {
```

```

if(str.size()==0)

    return 0;

int maxans = INT_MIN;

unordered_set < int > set;

int l = 0;
for (int r = 0; r < str.length(); r++) // outer loop for traversing the string
{
    if (set.find(str[r]) != set.end()) //if duplicate element is found
    {
        while (l < r && set.find(str[r]) != set.end()) {
            set.erase(str[l]);
            l++;
        }
    }
    set.insert(str[r]);
    maxans = max(maxans, r - l + 1);
}
return maxans;
}

int main() {
    string str = "takeUforward";
    cout << "The length of the longest substring without repeating characters is "
    <<
    solve(str);
    return 0;
}

```


**Output:** The length of the longest substring without repeating characters is 9

**Time Complexity:**  $O(2 \cdot N)$  (sometimes left and right both have to travel a complete array)

**Space Complexity:**  $O(N)$  where  $N$  is the size of HashSet taken for storing the elements

### **Solution 3: Optimised Approach 2**

**Approach:** In this approach, we will make a map that will take care of counting the elements and maintaining the frequency of each and every element as a unity by taking the latest index of every element.

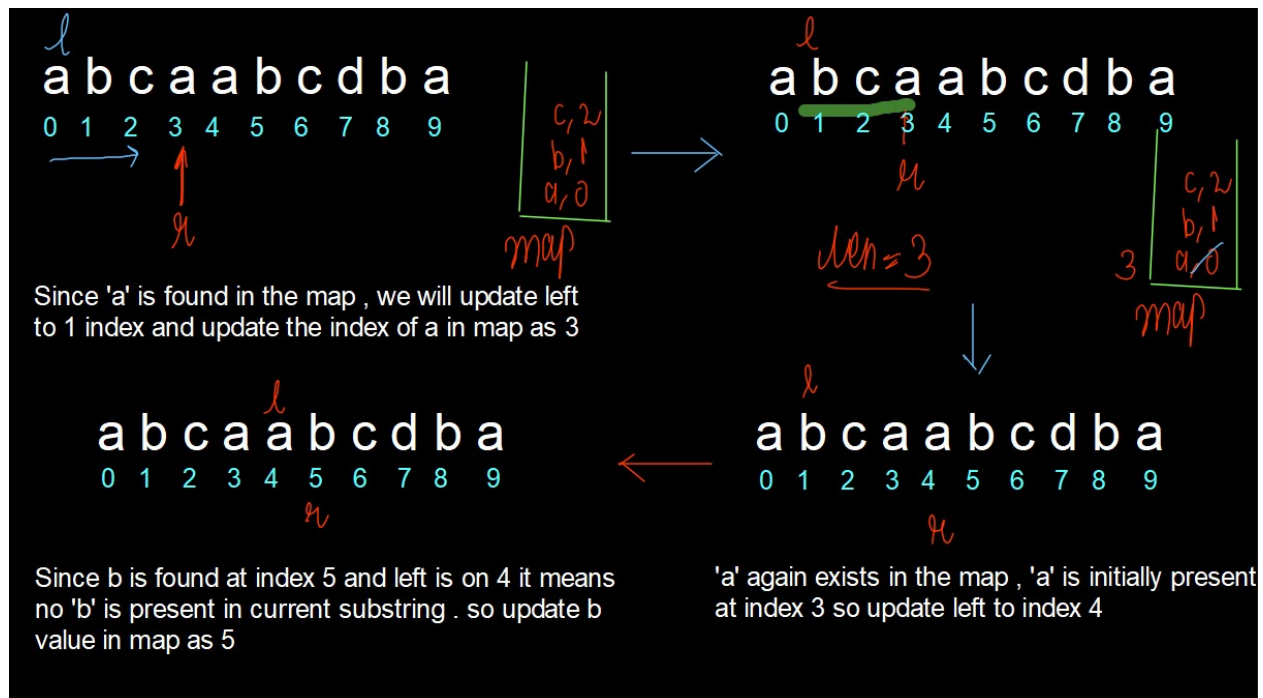

#### Code:

- C++ Code
- Java Code
- Python Code

```
#include <bits/stdc++.h>

using namespace std;

class Solution {
public:
    int lengthofLongestSubstring(string s) {
        vector < int > mpp(256, -1);

        int left = 0, right = 0;

        int n = s.size();

        int len = 0;
```

```

        while (right < n) {
            if (mpp[s[right]] != -1)
                left = max(mpp[s[right]] + 1, left);

            mpp[s[right]] = right;

            len = max(len, right - left + 1);
            right++;
        }
        return len;
    }
};

int main() {
    string str = "takeUforward";
    Solution obj;

    cout << "The length of the longest substring without repeating characters is "
    << obj.lengthofLongestSubstring(str);

    return 0;
}

```

**Output:** The length of the longest substring without repeating characters is 9

**Time Complexity:**  $O(N)$

**Space Complexity:**  $O(N)$  where  $N$  represents the size of HashSet where we are storing our elements