


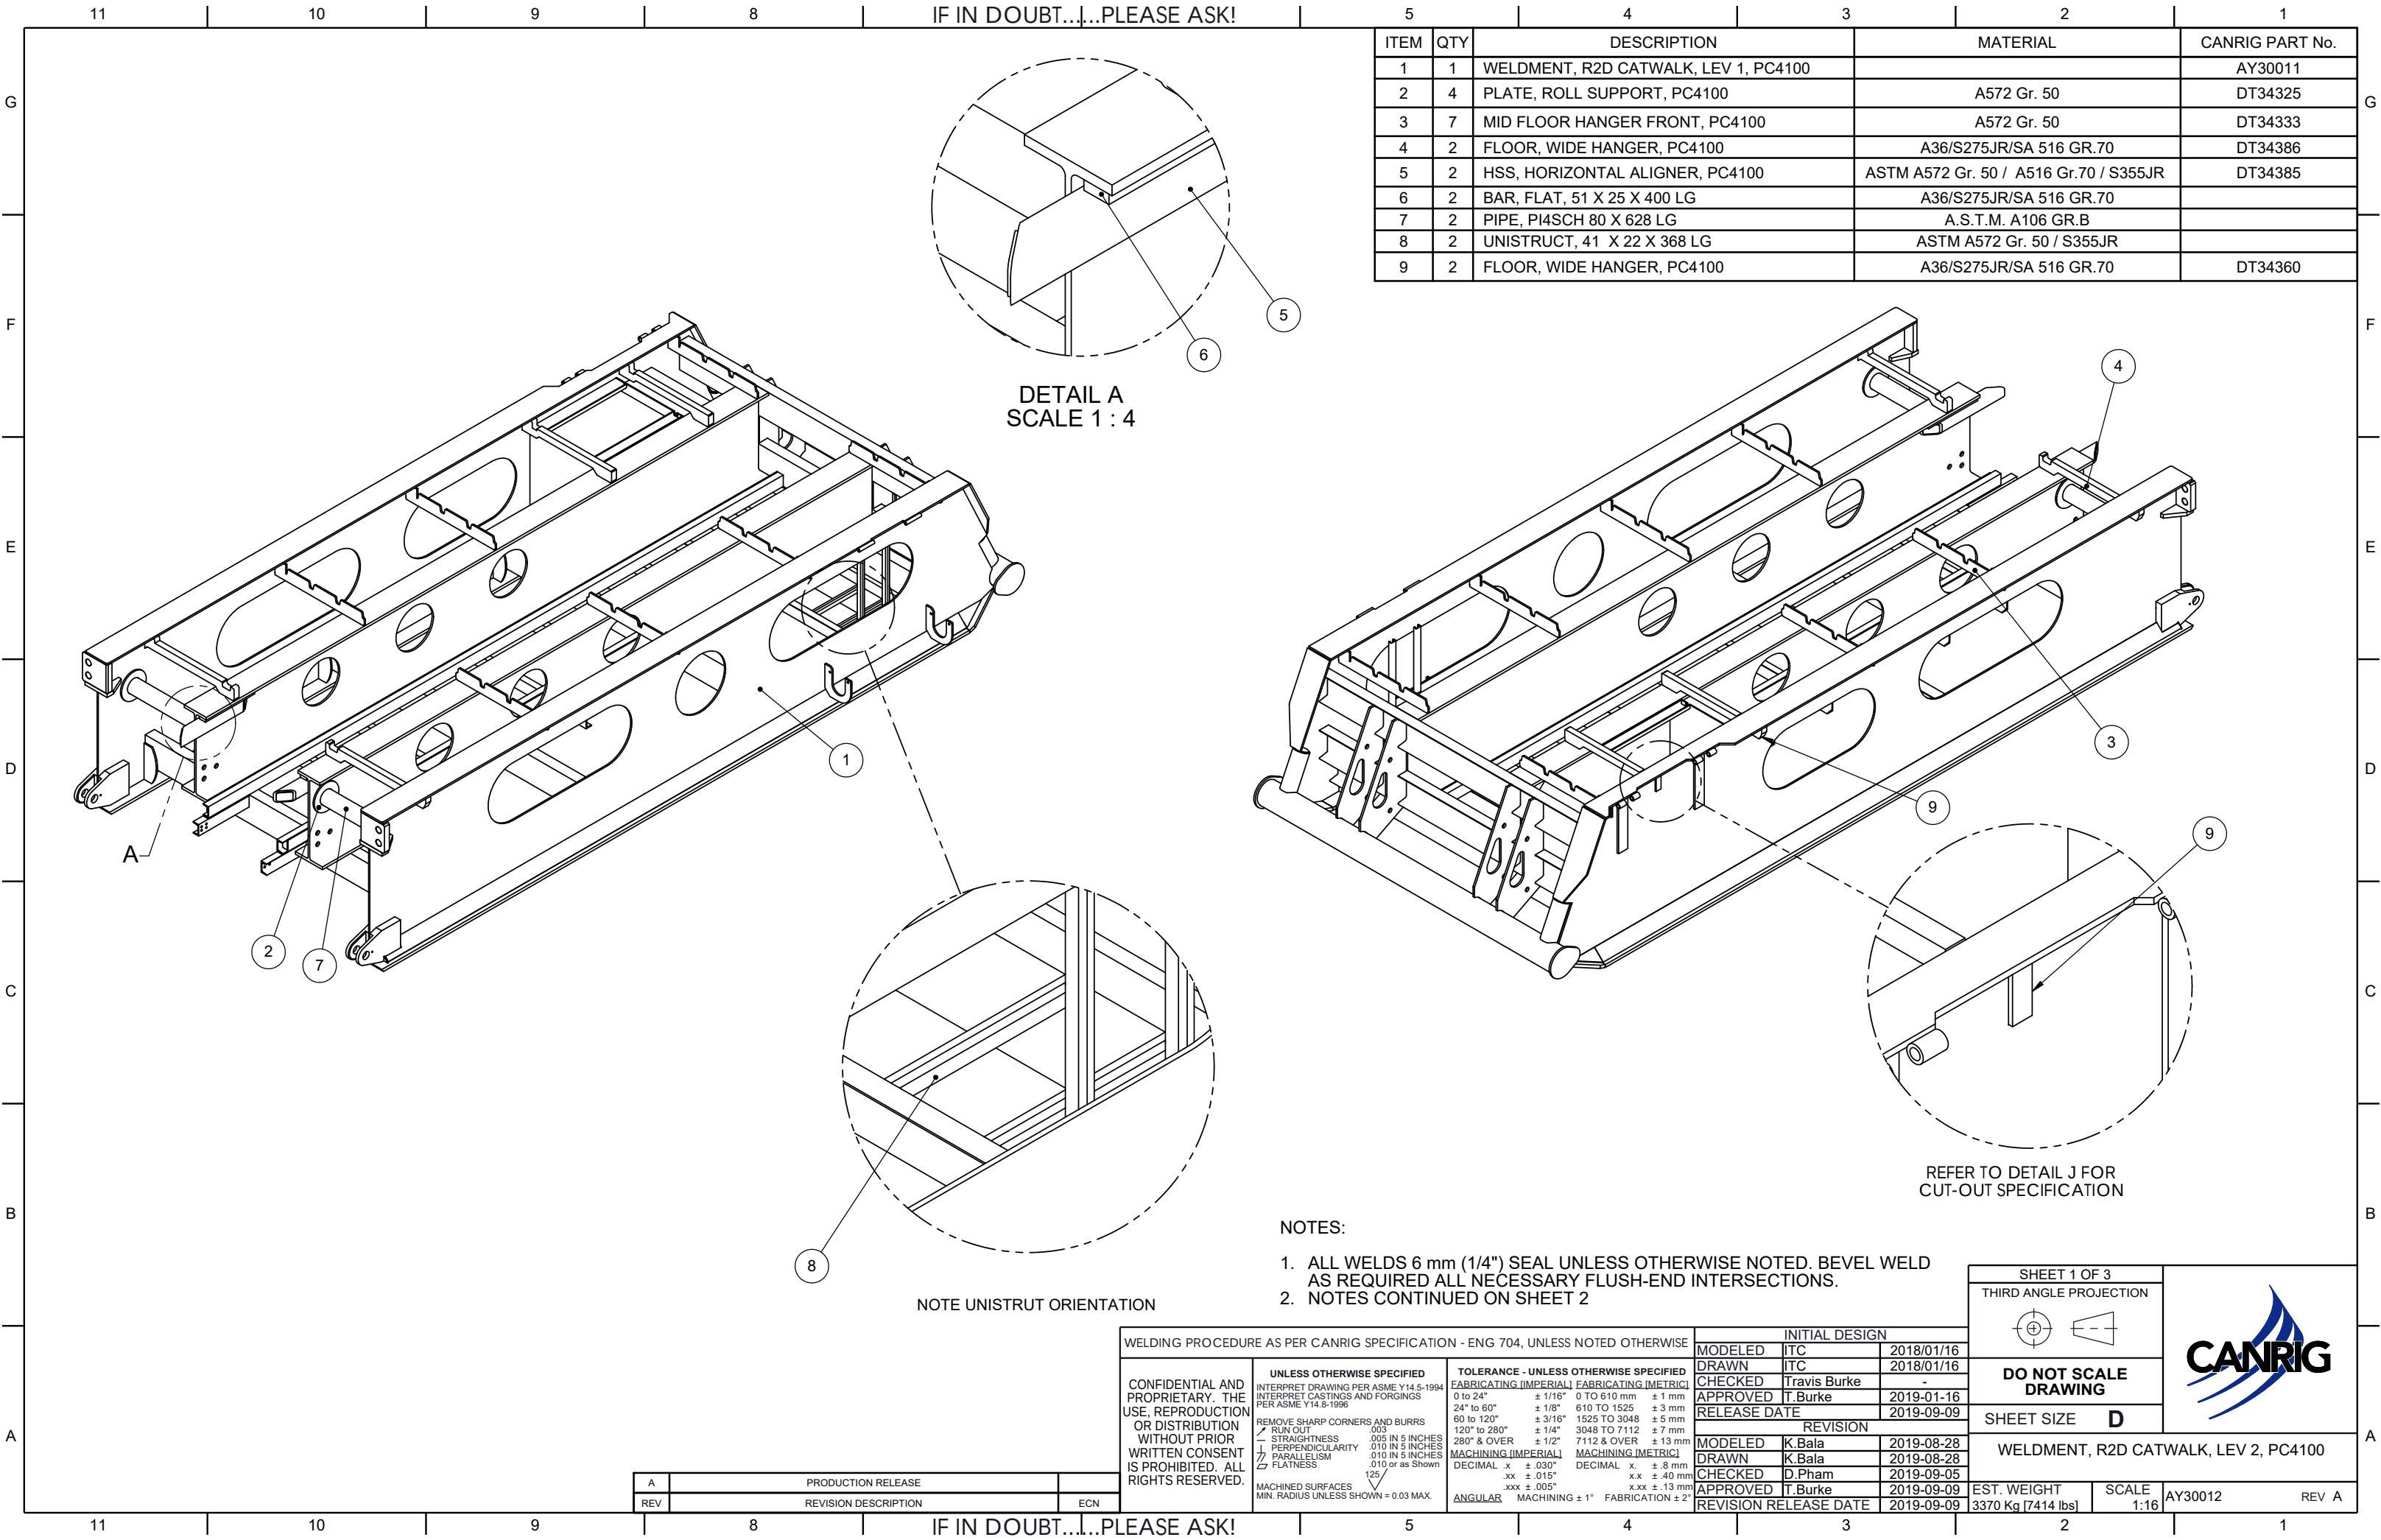

5		4		3	2	1
ITEM	QTY	DESCRIPTION		MATERIAL		CANRIG PART No.
1	1	WELDMENT, R2D CATWALK, LEV 1, PC4100				AY30011
2	4	PLATE, ROLL SUPPORT, PC4100		A572 Gr. 50		DT34325
3	7	MID FLOOR HANGER FRONT, PC4100		A572 Gr. 50		DT34333
4	2	FLOOR, WIDE HANGER, PC4100		A36/S275JR/SA 516 GR.70		DT34386
5	2	HSS, HORIZONTAL ALIGNER, PC4100		ASTM A572 Gr. 50 / A516 Gr.70 / S355JR		DT34385
6	2	BAR, FLAT, 51 X 25 X 400 LG		A36/S275JR/SA 516 GR.70		
7	2	PIPE, PI4SCH 80 X 628 LG		A.S.T.M. A106 GR.B		
8	2	UNISTRUCT, 41 X 22 X 368 LG		ASTM A572 Gr. 50 / S355JR		
9	2	FLOOR, WIDE HANGER, PC4100		A36/S275JR/SA 516 GR.70		DT34360

NOTES:

1. ALL WELDS 6 mm (1/4") SEAL UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS.
2. NOTES CONTINUED ON SHEET 2

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE

CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.

UNLESS OTHERWISE SPECIFIED
INTERPRET DRAWING PER ASME Y14.5-1994
INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996
REMOVE SHARP CORNERS AND BURRS
Z RUN OUT .003
Z STRAIGHTNESS .005 IN 5 INCHES
Z PERPENDICULARITY .010 IN 5 INCHES
Z PARALLELISM .010 IN 5 INCHES
Z FLATNESS .010 or as Shown
MACHINED SURFACES MIN. RADIUS UNLESS SHOWN = 0.03 MAX.

TOLERANCE - UNLESS OTHERWISE SPECIFIED
FABRICATING [IMPERIAL] FABRICATING [METRIC]
0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm
24" to 60" ± 1/8" 610 TO 1525 ± 3 mm
60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm
120" to 280" ± 1/4" 3048 TO 7112 ± 7 mm
280" & OVER ± 1/2" 7112 & OVER ± 13 mm
MACHINING [IMPERIAL] MACHINING [METRIC]
DECIMAL .x ± .030" DECIMAL .x ± .8 mm
DECIMAL .xx ± .015" DECIMAL .xx ± .40 mm
DECIMAL .xxx ± .005" DECIMAL .xxx ± .13 mm
ANGULAR MACHINING ± 1° FABRICATION ± 2°

INITIAL DESIGN		
MODELED	ITC	2018/01/16
DRAWN	ITC	2018/01/16
CHECKED	Travis Burke	-
APPROVED	T.Burke	2019-01-16
RELEASE DATE		2019-09-09
REVISION		
MODELED	K.Bala	2019-08-28
DRAWN	K.Bala	2019-08-28
CHECKED	D.Pham	2019-09-05
APPROVED	T.Burke	2019-09-09
REVISION RELEASE DATE		2019-09-09

SHEET 1 OF 3			
THIRD ANGLE PROJECTION			
			
DO NOT SCALE DRAWING			
SHEET SIZE		D	
WELDMENT, R2D CATWALK, LEV 2, PC4100			
EST. WEIGHT		AY30012	
3370 Kg [7414 lbs]		REV A	
SCALE			
1:16			

G

F

E

D

C

B

A

G

F





E

D

C

B

A

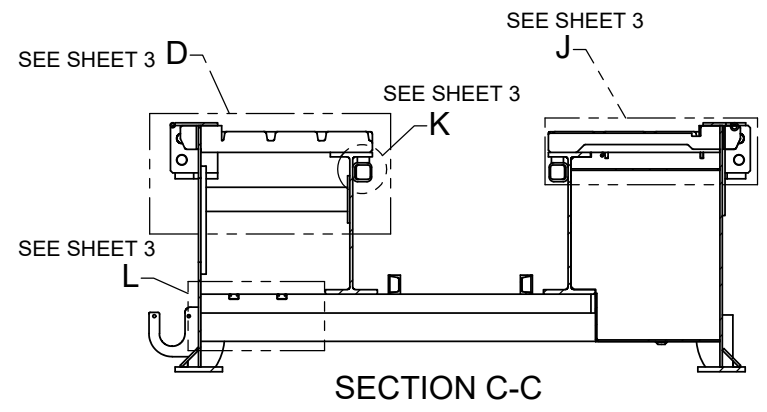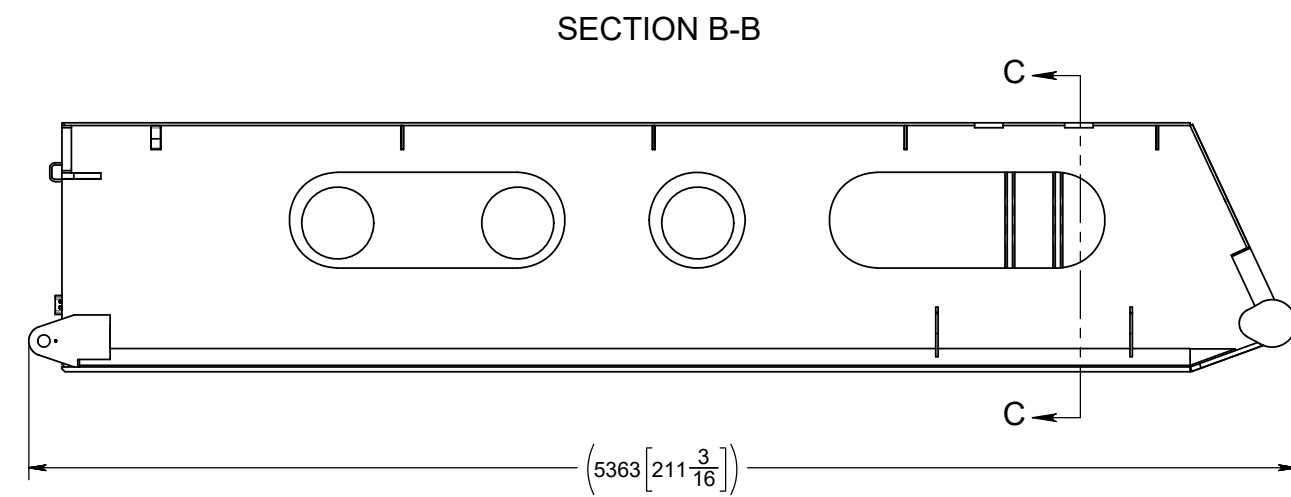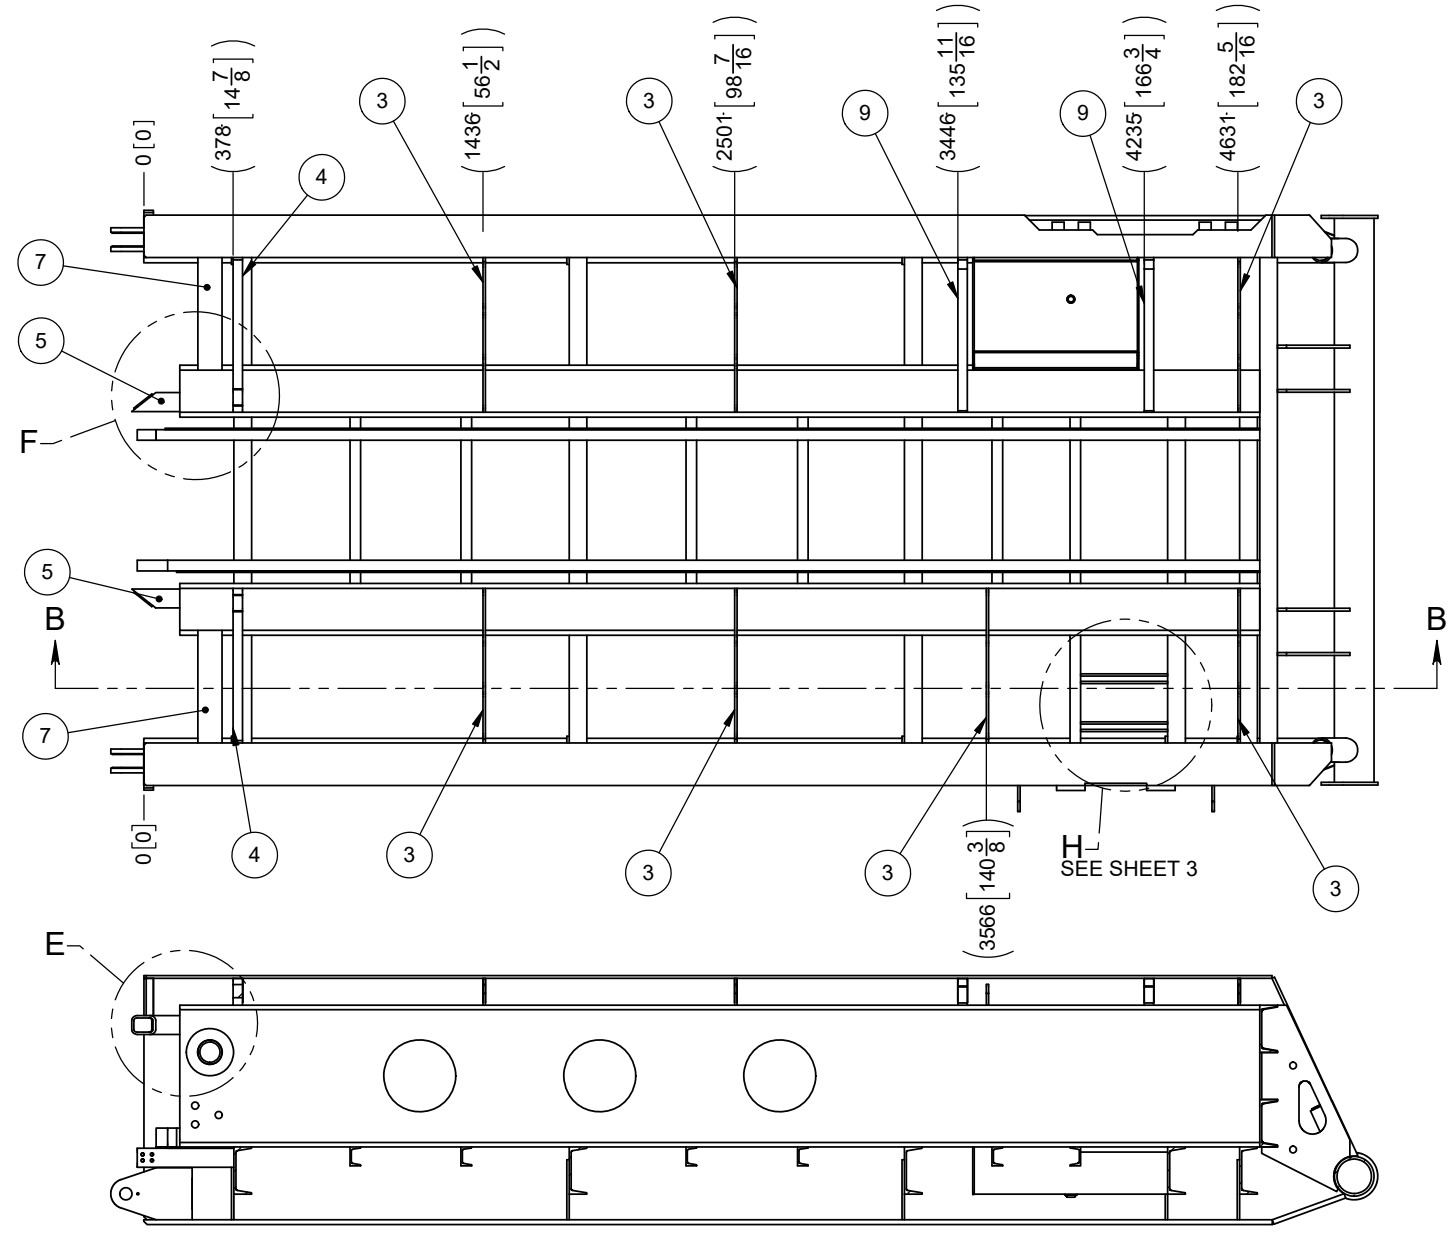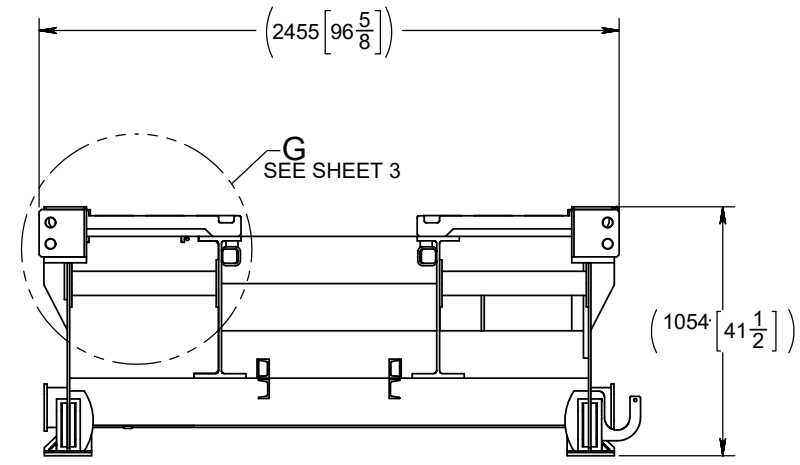

- NOTES:
- 3. ALL WELDS 6 mm (1/4") SEAL UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS
 - 4. NOTES CONTINUED ON SHEET 3

UNLESS OTHERWISE SPECIFIED SEE SHEET 1 FOR DEFAULT TOLERANCES AND SPECIFICATIONS	THIRD ANGLE PROJECTION	
	DO NOT SCALE DRAWING	
	WELDMENT, R2D CATWALK, LEV 2, PC4100	
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.	SHEET 2 OF 3	AY30012
SCALE 1:16 SHEET SIZE D		REV A

G

F


E

D


C

B


A

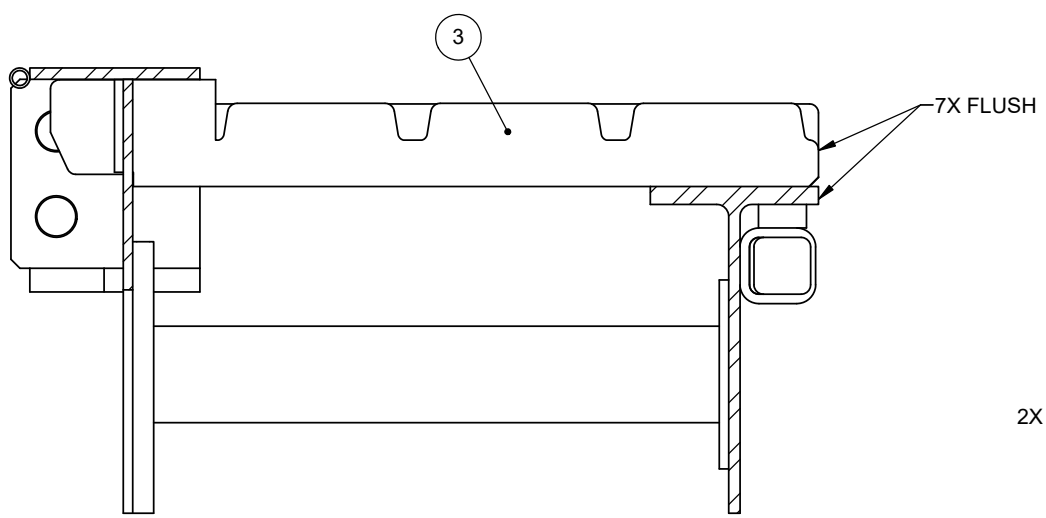


DETAIL D

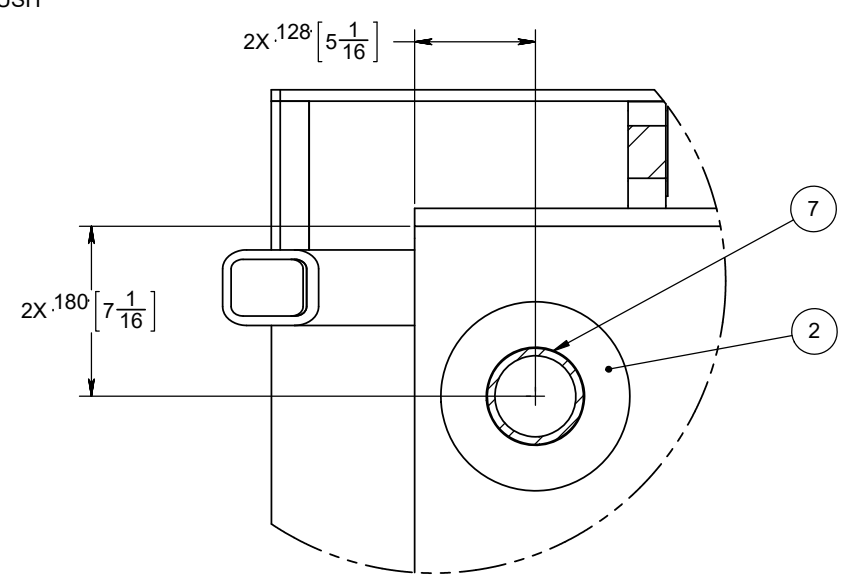


DETAIL E

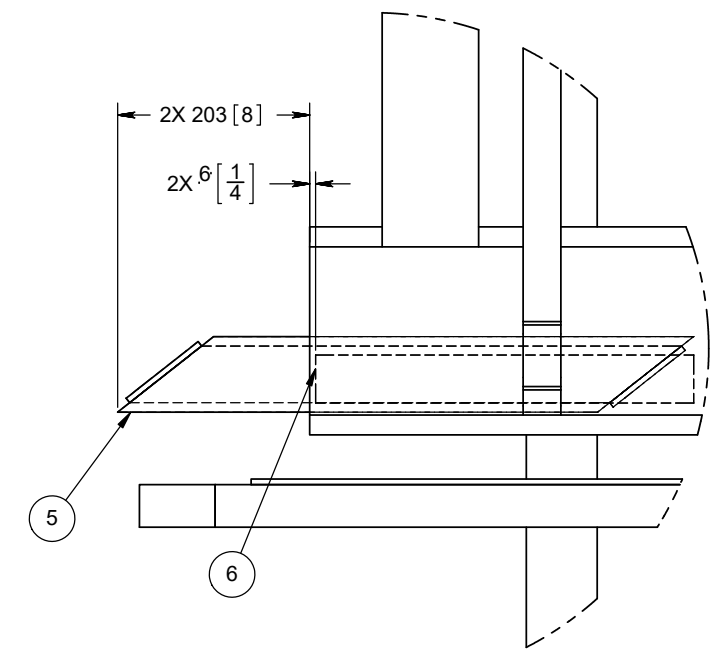


DETAIL F

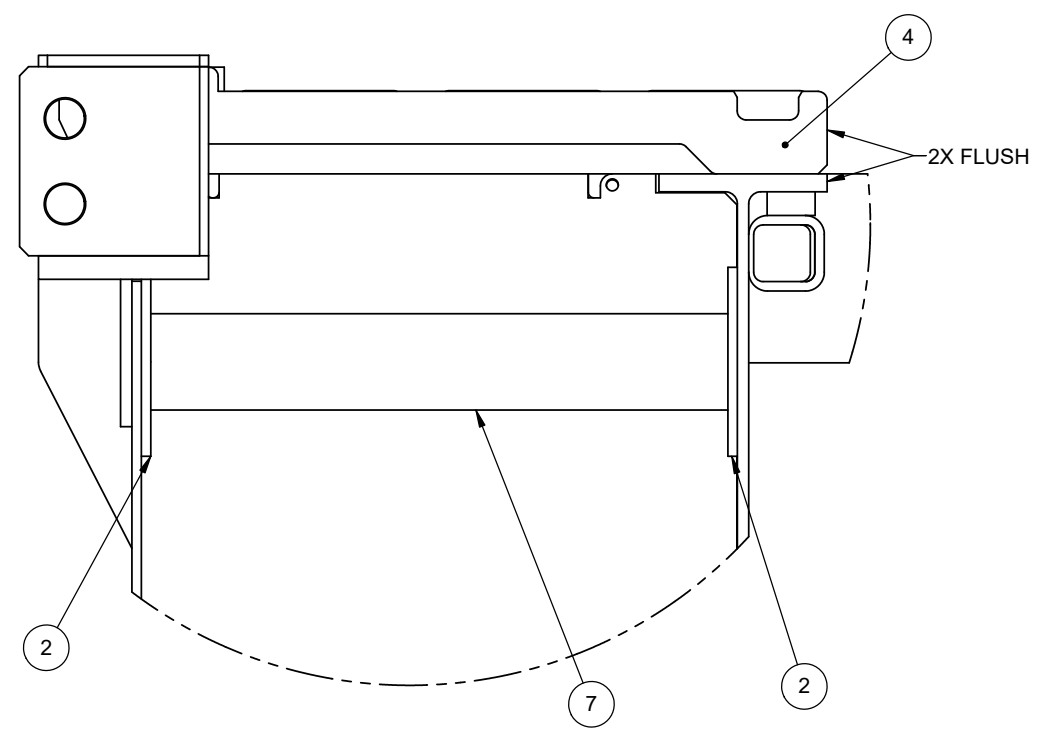


DETAIL G

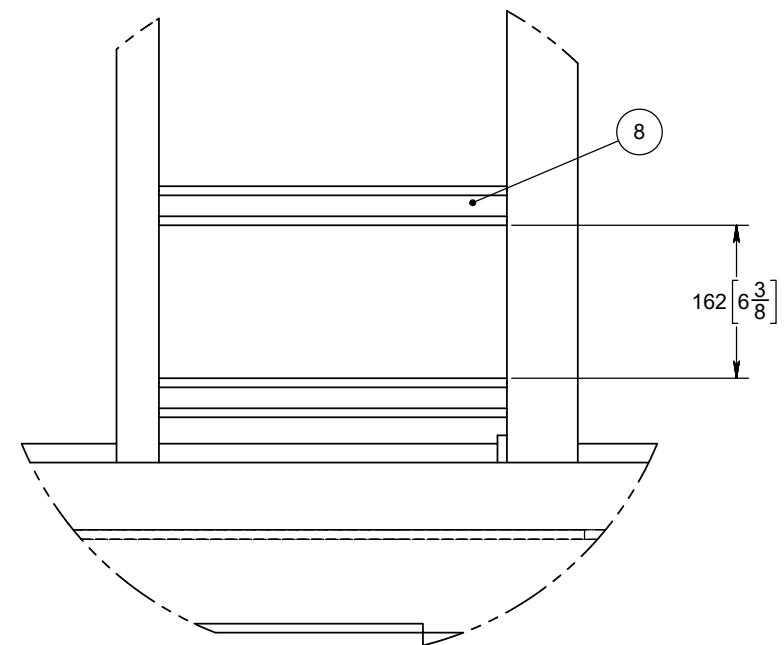


DETAIL H

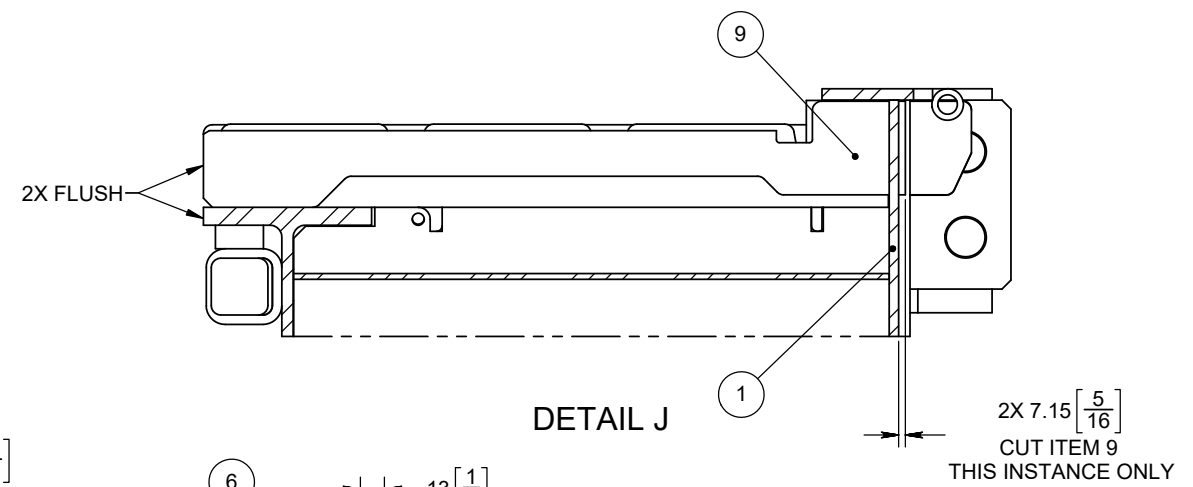

DETAIL J

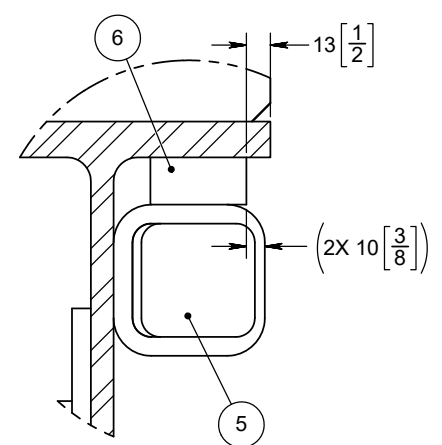

DETAIL K
SCALE 1 : 2

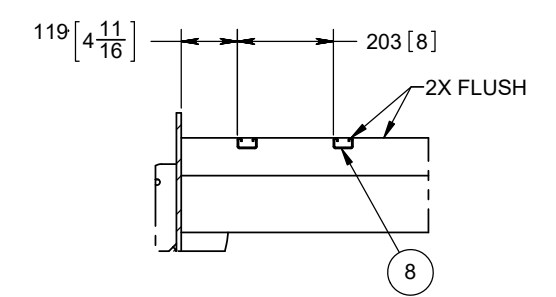

DETAIL L
SCALE 1 : 8

NOTES:
5. ALL WELDS 6 mm (1/4") SEAL UNLESS OTHERWISE NOTED.
BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS

UNLESS OTHERWISE SPECIFIED SEE SHEET 1 FOR DEFAULT TOLERANCES AND SPECIFICATIONS	THIRD ANGLE PROJECTION 	
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.	DO NOT SCALE DRAWING	
WELDMENT, R2D CATWALK, LEV 2, PC4100		
SCALE 1:4 SHEET SIZE D	SHEET 3 OF 3	AY30012 REV A