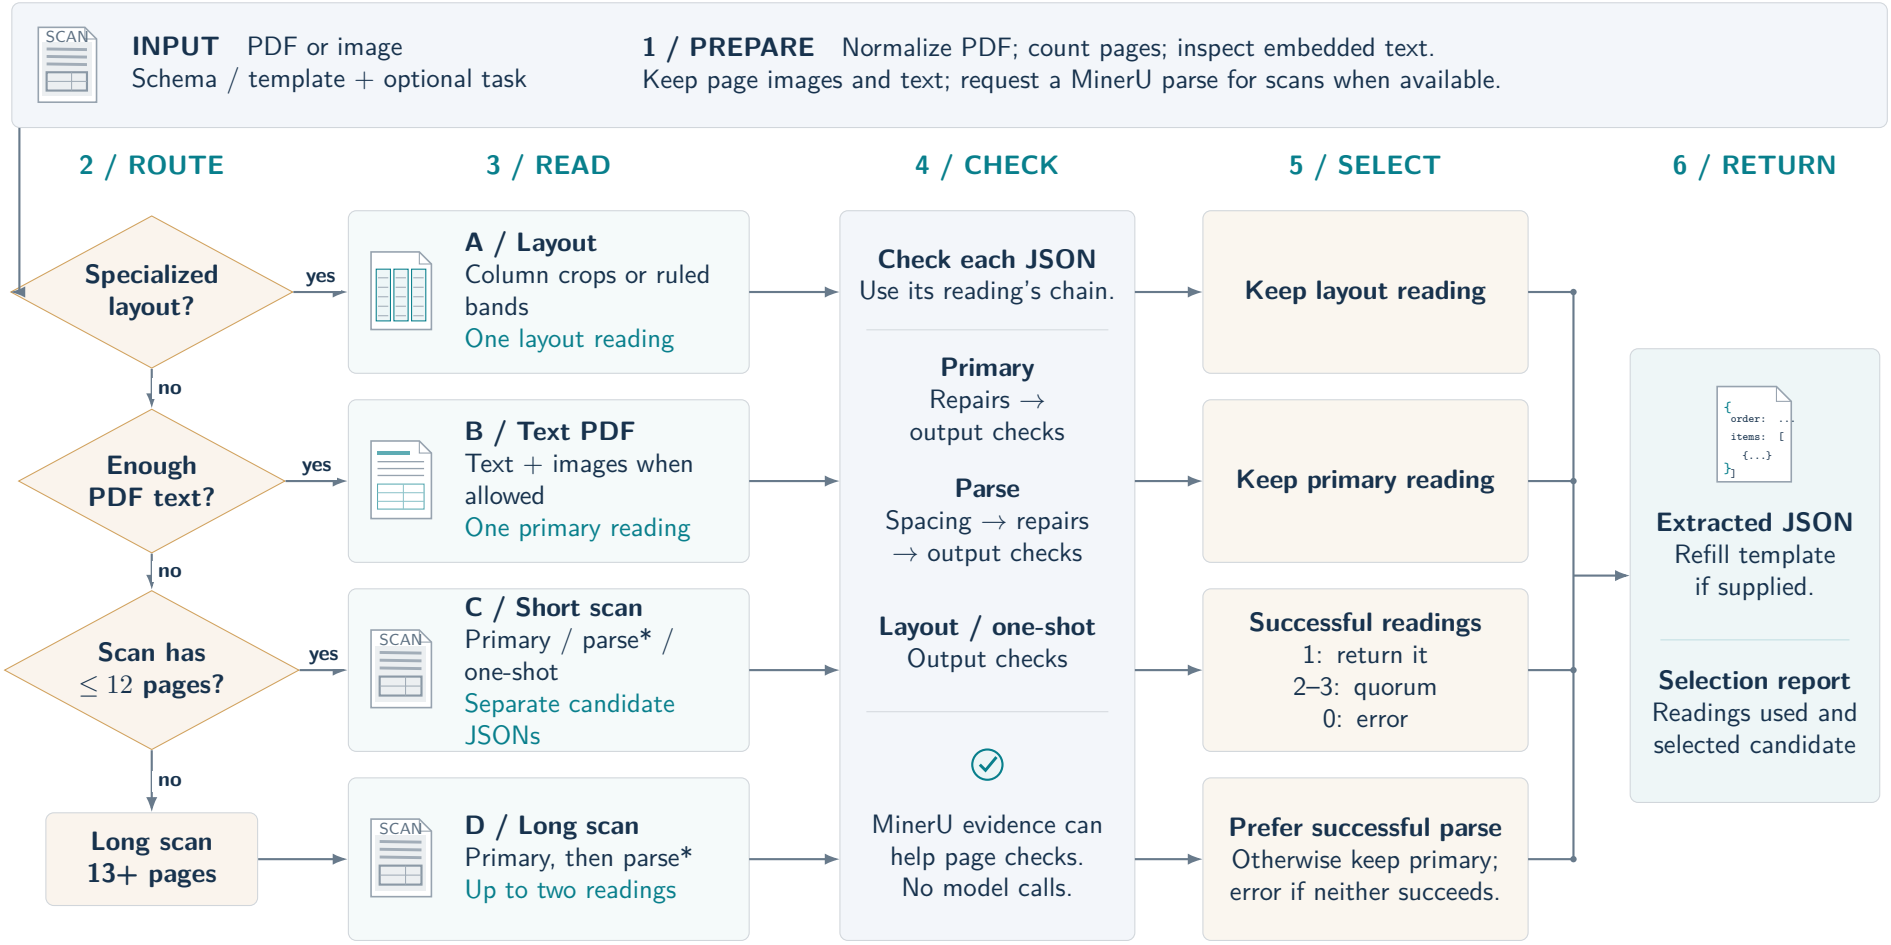


One route per document. The short-scan route can run three readings. Readers share source evidence, never candidate JSONs.

MinerU can help routing, parse-based reading and candidate checks. Quorum compares checked JSONs and keeps one whole candidate.

* Parse reading requires cached pages. Cached text is used only at $\geq 90\%$ page-count coverage; otherwise the reader uses PDF text.