

PRACTICAL-3

Name: Ashwini Ravindra Kadam

PRN: 202501050017

Division: Chemical(CH-1)

3.1.1. Numpy Array Operations

Write a Python program to create a NumPy array based on user input and display the following:

- The created NumPy array.
- The number of dimensions of the array using `ndim`
- The shape of the array using `shape`
- The total number of elements in the array using `size` Assume all input elements are valid integers.

Input Format:

- The first line contains two space-separated integers, `rows` and `cols`, representing the number of rows and the number of columns.
- The next `rows` lines contain `cols` space-separated integers representing the elements of the array, entered row by row.

Output Format:

- The created NumPy array (printed as a 2D array).

- An integer representing the number of dimensions of the array.
- A tuple representing the shape of the array.
- An integer representing the total number of elements in the array.

CODE:

```
import numpy as np
rows, cols = map(int,
input().split())
elements = []
for _ in range(rows):
    elements.extend(map(int, input().split()))
array = np.array(elements).reshape(rows, cols)
print(array)
print(array.ndim)
print(array.shape)
print(array.size)
```

The screenshot displays the CODETANTRA online code editor interface. At the top, the header includes the logo, navigation links (Home, Learn Anywhere), a user profile (202501050017@mitaoe.ac.in), and a Logout button. The main workspace is divided into several sections:

- Performance Metrics:** Shows Average time (0.006 s, 6.50 ms) and Maximum time (0.013 s, 13.00 ms).
- Test Results:** Indicates that 2 out of 2 shown test case(s) passed and 10 out of 10 hidden test case(s) passed.
- Test Case 1:** Shows a successful result (13 ms). The Expected output and Actual output are compared, showing a 3x4 matrix of integers, its dimensions (3, 4), and the total number of elements (12).
- Test Case 2:** Shows a successful result (2 ms). The Expected output and Actual output are compared, showing a 1x1 matrix of integers, its dimensions (1, 1), and the total number of elements (1).

At the bottom, there are navigation buttons: < Prev, Reset, Submit, and Next >.

3.2.1. Numpy: Matrix Operations

The given code takes two matrices, , and , as input from the user and converts them into NumPy arrays.

Task:

You are required to compute and display the results of the following matrix operations:

1. **Addition ()**
2. **Subtraction ()**
3. **Element-wise Multiplication ()**
4. **Matrix Multiplication ()**
5. **Transpose of Matrix A Input Format:**

- The user will input 3 rows for , each containing 3 integers separated by spaces.
- Similarly, the user will input 3 rows for , each containing 3 integers separated by spaces.

Output Format:

The program should display the results of the operations in the following order:

1. The result of Addition.
2. The result of Subtraction.
3. The result of Element-wise Multiplication.
4. The result of Matrix Multiplication.
5. The Transpose of Matrix A.

CODE

```
import numpy as np # Input matrices
print("Enter Matrix A:")
matrix_a = np.array([list(map(int, input().split())) for i in range(3)])
print("Enter Matrix B:")
matrix_b = np.array([list(map(int, input().split())) for i in range(3)])
```



```

# Addition
addition_result = matrix_a + matrix_b
print("Addition (A + B):")
print(addition_result)
# Subtraction
subtraction_result = matrix_a - matrix_b
print("Subtraction (A - B):")
print(subtraction_result)
# Multiplication (element-wise)
elementwise_multiplication_result = matrix_a * matrix_b
print("Element-wise Multiplication (A * B):")
print(elementwise_multiplication_result)
# Matrix multiplication (dot product)
matrix_multiplication_result = np.dot(matrix_a, matrix_b)
print("A dot B:")
print(matrix_multiplication_result)

# Transpose
transpose_a = matrix_a.T
print("Transpose of A:")
print(transpose_a)

```

[Home](#)
[Learn Anywhere](#)

202501050017@mitaoe.ac.in
Support
Logout

Average time

0.011 s

11.25 ms

Maximum time

0.015 s

15.00 ms

2 out of 2 shown test case(s) passed

2 out of 2 hidden test case(s) passed

Test case 1

15 ms

Debug

Expected output

Actual output

Enter Matrix A:

1 2 3

4 5 6

7 8 9

Enter Matrix B:

1 1 1

1 1 1

1 1 1

Addition (A + B):

[[2 3 4]

[5 6 7]

[8 9 10]]

Subtraction (A - B):

[[0 1 2]

[3 4 5]

[6 7 8]]

Element-wise Multiplication (A * B):

[[1 2 3]

[4 5 6]]

Enter Matrix A:

1 2 3

4 5 6

7 8 9

Enter Matrix B:

1 1 1

1 1 1

1 1 1

Addition (A + B):

[[2 3 4]

[5 6 7]

[8 9 10]]

Subtraction (A - B):

[[0 1 2]

[3 4 5]

[6 7 8]]

Element-wise Multiplication (A * B):

[[1 2 3]

[4 5 6]]

< Prev

Reset

Submit

Next >

CODETANTRA

HomeLearn Anywhere

202501050017@mitaoe.ac.inSupportLogout

Explorer

Average time
0.011 s
11.25 ms

Maximum time
0.015 s
15.00 ms

2 out of 2 shown test case(s) passed
2 out of 2 hidden test case(s) passed

· [7 · 8 · 9]]

A · dot · B:

[[· 6 · · 6 · · 6]]

· [15 · 15 · 15]]

· [24 · 24 · 24]]

Transpose · of · A:

[[1 · 4 · 7]]

· [2 · 5 · 8]]

· [3 · 6 · 9]]

Test case 29 msDebug

Expected output

Enter · Matrix · A:

2 4 8

9 6 5

7 8 9

Enter · Matrix · B:

10 12 13

14 15 16

17 18 19

Addition · (A + B):

· [7 · 8 · 9]]

A · dot · B:

[[· 6 · · 6 · · 6]]

· [15 · 15 · 15]]

· [24 · 24 · 24]]

Transpose · of · A:

[[1 · 4 · 7]]

· [2 · 5 · 8]]

· [3 · 6 · 9]]

Actual output

Enter · Matrix · A:

2 4 8

9 6 5

7 8 9

Enter · Matrix · B:

10 12 13

14 15 16

17 18 19

Addition · (A + B):

CODETANTRA

HomeLearn Anywhere

202501050017@mitaoe.ac.inSupportLogout

Explorer

Average time
0.011 s
11.25 ms

Maximum time
0.015 s
15.00 ms

2 out of 2 shown test case(s) passed
2 out of 2 hidden test case(s) passed

17 18 19

Addition · (A + B):

[[12 · 16 · 21]]

· [23 · 21 · 21]]

· [24 · 26 · 28]]

Subtraction · (A - B):

[[· - 8 · · - 8 · · - 5]]

· [· - 5 · · - 9 · · - 11]]

· [· - 10 · - 10 · - 10]]

Element · wise · Multiplication · (A * B):

[[· 20 · · 48 · 104]]

· [126 · · 90 · · 80]]

· [119 · 144 · 171]]

A · dot · B:

[[212 · 228 · 242]]

· [259 · 288 · 308]]

· [335 · 366 · 390]]

Transpose · of · A:

[[2 · 9 · 7]]

· [4 · 6 · 8]]

· [8 · 5 · 9]]

17 18 19

Addition · (A + B):

[[12 · 16 · 21]]

· [23 · 21 · 21]]

· [24 · 26 · 28]]

Subtraction · (A - B):

[[· - 8 · · - 8 · · - 5]]

· [· - 5 · · - 9 · · - 11]]

· [· - 10 · - 10 · - 10]]

Element · wise · Multiplication · (A * B):

[[· 20 · · 48 · 104]]

· [126 · · 90 · · 80]]

· [119 · 144 · 171]]

A · dot · B:

[[212 · 228 · 242]]

· [259 · 288 · 308]]

· [335 · 366 · 390]]

Transpose · of · A:

[[2 · 9 · 7]]

· [4 · 6 · 8]]

· [8 · 5 · 9]]

< PrevResetSubmitNext >

3.2.2. Numpy: Horizontal and Vertical Stacking of Arrays

You are given two arrays arr1 and arr2. You need to perform horizontal and vertical stacking operations on them using NumPy.

- Horizontal Stacking:** Stack the two matrices horizontally (side by side).

- **Vertical Stacking:** Stack the two matrices vertically (one below the other).

Input Format:

- The program should first prompt the user to input two 3x3 arrays.
- Each array consists of 3 rows, and each row contains 3 space-separated integers.
- The user will input the two arrays row by row.

Output Format:

- The program should display the result of the Horizontal Stack (side-by-side stacking) of the two arrays.
- The program should then display the result of the Vertical Stack (one below the other) of the two arrays.

CODE:

```
import numpy as np # Input matrices
print("Enter Array1:")
arr1 = np.array([list(map(int, input().split())) for i in range(3)])
print("Enter Array2:")
arr2 = np.array([list(map(int, input().split())) for i in range(3)])

# Perform horizontal stacking (hstack)
a=np.hstack((arr1,arr2))
print("Horizontal Stack:")
print(a)

# Perform vertical stacking (vstack)
b=np.vstack((arr1,arr2))
print("Vertical Stack:")
```


[Home](#)
[Learn Anywhere](#)

202501050017@mitaoe.ac.in
Support
Logout

Average time

0.016 s

16.25 ms

Maximum time

0.032 s

32.00 ms

2 out of 2 shown test case(s) passed

2 out of 2 hidden test case(s) passed

Test case 1

32 ms

Debug

Expected output

Enter Array1:

1 2 3

4 5 6

7 8 9

Enter Array2:

4 5 6

7 8 9

10 11 12

Horizontal Stack:

[[1 2 3 4 5 6]]

[-4 -5 -6 -7 -8 -9]

[-7 -8 -9 10 11 12]

Vertical Stack:

[[1 2 3]]

[-4 -5 -6]

[-7 -8 -9]

[-4 -5 -6]

[-7 -8 -9]

[-10 11 12]

Actual output

Enter Array1:

1 2 3

4 5 6

7 8 9

Enter Array2:

4 5 6

7 8 9

10 11 12

Horizontal Stack:

[[1 2 3 4 5 6]]

[-4 -5 -6 -7 -8 -9]

[-7 -8 -9 10 11 12]

Vertical Stack:

[[1 2 3]]

[-4 -5 -6]

[-7 -8 -9]

[-4 -5 -6]

[-7 -8 -9]

[-10 11 12]

< Prev

Reset

Submit

Next >

[Home](#)
[Learn Anywhere](#)

202501050017@mitaoe.ac.in
Support
Logout

Average time

0.016 s

16.25 ms

Maximum time

0.032 s

32.00 ms

2 out of 2 shown test case(s) passed

2 out of 2 hidden test case(s) passed

Test case 2

11 ms

Debug

Expected output

Enter Array1:

-1 -2 -3

-4 -5 -6

-7 -8 -9

Enter Array2:

10 11 12

13 14 15

16 17 18

Horizontal Stack:

[[1 2 3 10 11 12]]

[-4 -5 -6 13 14 15]

[-7 -8 -9 16 17 18]]

Vertical Stack:

[[1 2 3]]

[-4 -5 -6]

[-7 -8 -9]

[10 11 12]

[13 14 15]

[16 17 18]]

Actual output

Enter Array1:

-1 -2 -3

-4 -5 -6

-7 -8 -9

Enter Array2:

10 11 12

13 14 15

16 17 18

Horizontal Stack:

[[1 2 3 10 11 12]]

[-4 -5 -6 13 14 15]

[-7 -8 -9 16 17 18]]

Vertical Stack:

[[1 2 3]]

[-4 -5 -6]

[-7 -8 -9]

[10 11 12]

[13 14 15]

[16 17 18]]

< Prev

Reset

Submit

Next >

3.2.3. Numpy: Custom Sequence Generation

Write a Python program that takes the following inputs from the user:

- Start value: The starting point of the sequence.
- Stop value: The sequence should end before this value.
- Step value: The increment between each number in the sequence.

The program should then generate a sequence using numpy based on these inputs and print the generated sequence. Input Format:

- The user will input three integer values: start, stop, and step, each on a new line.

Output Format:

- The program should print the generated sequence based on the input values.

CODE:

```
import numpy as np

# Take user input for the start, stop, and step of the sequence start =
int(input()) stop = int(input()) step = int(input())

# Generate the sequence using np.arange() a=
np.arange(start,stop, step) print(a)

# Print the generated sequence
```

The screenshot displays the CODETANTRA web-based IDE interface. At the top, the header includes the logo, navigation links (Home, Learn Anywhere), a user profile (202501050017@mitaoe.ac.in), and a Logout button. The main workspace is divided into several sections. On the left, an 'Explorer' sidebar shows file icons. The central area displays test results for two cases. Test case 1, with a duration of 12 ms, is marked as passed and shows an expected output of 3, 10, 2 and an actual output of 3, 10, 2, both resulting in the array [3 5 7 9]. Test case 2, with a duration of 6 ms, is also marked as passed and shows an expected output of 10, 20, 30 and an actual output of 10, 20, 30, both resulting in the array [10]. On the right, a 'Debugger' sidebar is visible. At the bottom, a navigation bar contains buttons for '< Prev', 'Reset', 'Submit', and 'Next >'.

3.2.4. Numpy: Arithmetic and Statistical Operations, Mathematical Operations, Bitwise Operators

You are given two arrays A and B. Your task is to complete the function `array_operations`, which will convert these lists into NumPy arrays and perform the following operations:

1. Arithmetic Operations:

- Compute the element-wise sum, difference, and product of the two arrays.

2. Statistical Operations:

- Calculate the mean, median, and standard deviation of array A.

3. Bitwise Operations:

- Perform bitwise AND, bitwise OR, and bitwise XOR on the arrays (ex: A_i OR B_i).

Input Format:

- The first line contains space-separated integers representing the elements of array A.
- The second line contains space-separated integers representing the elements of array B.

Output Format:

- For each operation (arithmetic, statistical, and bitwise), print the results in the specified format as shown in sample test cases.

CODE:

```
import numpy as np

def array_operations(A, B):

    # Convert A and B to NumPy arrays
```

```

A = np.array(A)

B = np.array(B)          # Arithmetic Operations

sum_result = A + B  diff_result = A - B

prod_result = A * B

# Statistical Operations

mean_A = np.mean(A)    median_A =
np.median(A)    std_dev_A = np.std(A)

# Bitwise Operations

and_result = A & B

or_result = A | B

xor_result

# Output results with one space between each element

print("Element-wise Sum:", ' '.join(map(str, sum_result)))  print("Element-wise
Difference:", ' '.join(map(str, diff_result)))    print("Element-wise Product:", '
'.join(map(str, prod_result)))    print(f"Mean of A: {mean_A}")

    print(f"Median of A: {median_A}")    print(f"Standard
Deviation of A: {std_dev_A}")

    print("Bitwise AND:", ' '.join(map(str, and_result)))

print("Bitwise OR:", ' '.join(map(str, or_result)))    print("Bitwise
XOR:", ' '.join(map(str, xor_result))) A = list(map(int, input().split()))

# Elements of array A B = list(map(int, input().split())) # Elements
of array B

array_operations(A, B)

```

CODETANTRA

Home Learn Anywhere

202501050017@mitaoe.ac.in

Support

Logout

Explorer

Average time

0.010 s

9.67 ms

Maximum time

0.019 s

19.00 ms

1 out of 1 shown test case(s) passed

2 out of 2 hidden test case(s) passed

Test case 1

19 ms

Debug

Expected output

1 2 3 4

5 6 7 8

Element-wise Sum: -6 -8 -10 -12

Element-wise Difference: -4 -4 -4 -4

Element-wise Product: -5 -12 -21 -32

Mean of A: -2.5

Median of A: -2.5

Standard Deviation of A: -1.118033988749895

Bitwise AND: -1 -2 -3 -0

Bitwise OR: -5 -6 -7 -12

Bitwise XOR: -4 -4 -4 -12

Actual output

1 2 3 4

5 6 7 8

Element-wise Sum: -6 -8 -10 -12

Element-wise Difference: -4 -4 -4 -4

Element-wise Product: -5 -12 -21 -32

Mean of A: -2.5

Median of A: -2.5

Standard Deviation of A: -1.118033988749895

Bitwise AND: -1 -2 -3 -0

Bitwise OR: -5 -6 -7 -12

Bitwise XOR: -4 -4 -4 -12

< Prev

Reset

Submit

Next >

3.2.5. Numpy: Copying and Viewing Arrays

The given code takes a list of integers as input and converts it into a NumPy array. Your task is to complete the code by:

- Creating a view of the original_array and assigning it to view_array.
- Creating a copy of the originalArray and assigning it to copy_array.

After completing these steps, observe how modifying the view affects the original_array, while modifying the copy does not.

Input Format:

- A single line of space-separated integers.

Output Format:

- After modifying the view:

Original array after modifying view:<originalLarray>

View array:<view_array>

- After modifying the copy:

Original array after modifying copy:<original_array>

Copy array:<copy_array> CODE:

```
import numpy as np
```

```
inputlist = list(map(int,input().split(" "))
```

```
)# Original array originalArray =
```

```
np.array(inputlist) # Create a view
```

```
view_array =originalArray.view()
```

```
# Create a copy copy_array
```

```
=original_array.copy()
```

```
# Modify the view view_array[0] = 99 print("Original array after  
modifying view:", original_array) print("View array:", view_array)
```

```
# Modify the copy copy_array[1] = 88 print("Original array after  
modifying copy:", original_array) print("Copy array:", copy_array)
```

CODETANTRA

HomeLearn Anywhere

202501050017@mitaoe.ac.inSupportLogout

Explorer

Average time
0.004 s
3.75 ms

Maximum time
0.006 s
6.00 ms

2 out of 2 shown test case(s) passed
2 out of 2 hidden test case(s) passed

Test case 16 msDebug

Expected output
10 20 30 40 50 60 70 80
Original array after modifying view: [99 20 30 40 50 60 70 80]
View array: [99 20 30 40 50 60 70 80]
Original array after modifying copy: [99 20 30 40 50 60 70 80]
Copy array: [10 88 30 40 50 60 70 80]

Actual output
10 20 30 40 50 60 70 80
Original array after modifying view: [99 20 30 40 50 60 70 80]
View array: [99 20 30 40 50 60 70 80]
Original array after modifying copy: [99 20 30 40 50 60 70 80]
Copy array: [10 88 30 40 50 60 70 80]

Test case 23 msDebug

Expected output
99 2 3 4 5
Original array after modifying view: [99 2 3 4 5]
View array: [99 2 3 4 5]
Original array after modifying copy: [99 2 3 4 5]
Copy array: [99 88 3 4 5]

Actual output
99 2 3 4 5
Original array after modifying view: [99 2 3 4 5]
View array: [99 2 3 4 5]
Original array after modifying copy: [99 2 3 4 5]
Copy array: [99 88 3 4 5]

Debugger

< Prev

Reset

Submit

Next >

3.2.6. Numpy: Searching, Sorting, Counting, Broadcasting

The given code in the editor takes a single array, array1, as space-separated integers as input from the user.

Additionally, it takes the following inputs:

- search_value: The value to search for in the array.
- count_value: The value to count its occurrences in the array.
- broadcast_value: The value to add for broadcasting across the array. You need to complete the code to perform the following operations:

1. **Searching:** Find the indices where search_value appears in array1 and print these indices.
2. **Counting:** Count how many times count_value appears in array1 and print the count.
3. **Broadcasting:** Add broadcast_value to each element of array1 using broadcasting, and print the resulting array.
4. **Sorting:** Sort array1 in ascending order and print the sorted array.

Input Format:

1. A single line containing space-separated integers representing array1.
2. An integer search_value represents the value to search for in the array.
3. An integer count_value represents the value to count in the array.
4. An integer broadcast_value represents the value to add to each element of the array.

Output Format:

1. The indices where search_value occurs in array1.
2. The count of occurrences of count_value in array1.


3. The array after adding the broadcast_value to each element.
4. The sorted array.

CODE:

```
import numpy as np # Input array from the user array1 =  
np.array(list(map(int, input().split())))  
  
# Searching search_value = int(input("Value to search:  
")) count_value = int(input("Value to count: "))  
  
broadcast_value = int(input("Value to add: ")) # Find  
indices where value matches in array1  
  
a=np.where(array1==search_value)[0] print(a)  
  
# Count occurrences in array1  
  
b=np.count_nonzero(array1==count_value) print(b)  
  
# Broadcasting addition c=array1 +  
broadcast_value print(c)
```


Sort the first array

d=np.sort(array1) print(d)

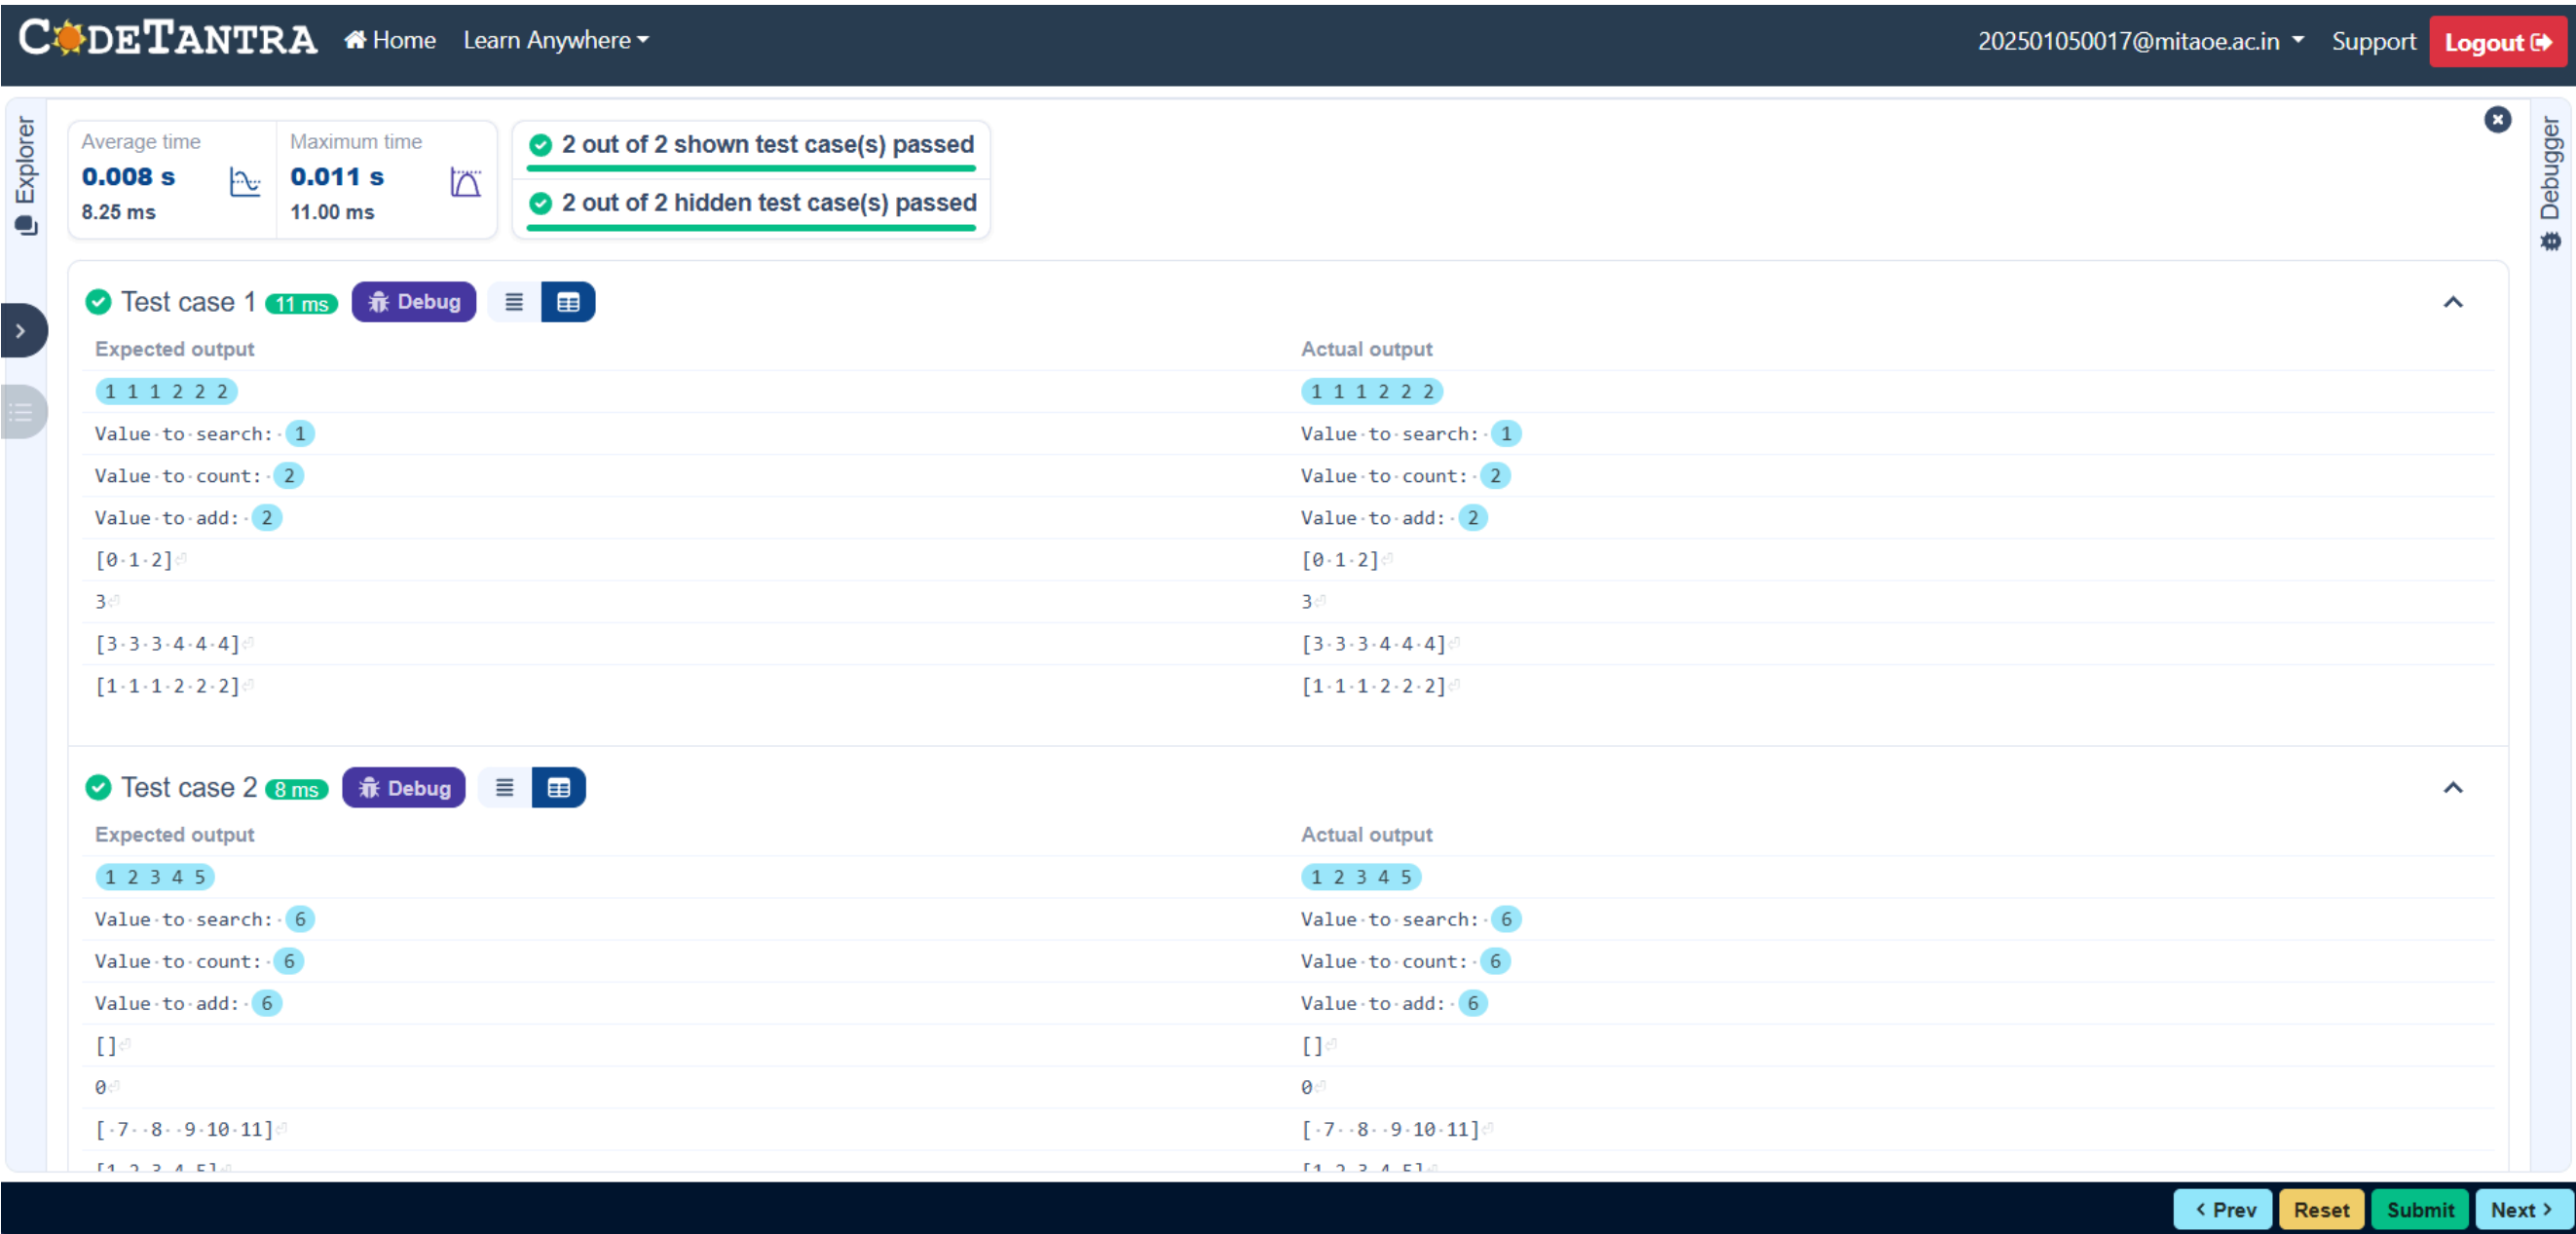

3.2.7. Student Data Analysis and Operations

Write a Python program that takes the file name of a CSV file containing student details, including roll numbers and their marks in three subjects as input, reads the data, and performs the following operations:

- **Print all student details:** Display the complete details of all students, including roll numbers and marks for all subjects.
- **Find total students:** Determine the total number of students in the dataset.
- **Print all student roll numbers:** Extract and print the roll numbers of all students.

- **Print Subject 1 marks:** Extract and print the marks of all students in Subject 1.
- **Find minimum marks in Subject 2:** Identify the lowest marks in Subject 2.
- **Find maximum marks in Subject 3:** Identify the highest marks in Subject 3.
- **Print all subject marks:** Display the marks of all students for each subject.
- **Find total marks of students:** Compute the total marks for each student across all subjects.
- **Find the average marks of each student:** Compute the average marks for each student.
- **Find average marks of each subject:** Compute the average marks for all students in each subject.
- **Find average marks of Subject 1 and Subject 2:** Compute the average marks for Subject 1 and Subject 2.
- **Find average marks of Subject 1 and Subject 3:** Compute the average marks for Subject 1 and Subject 3.
- **Find the roll number of the student with maximum marks in Subject 3:** Identify the student with the highest marks in Subject 3 and print their roll number.
- **Find the roll number of the student with minimum marks in Subject 2:** Identify the student with the lowest marks in Subject 2 and print their roll number.
- **Find the roll number of students who scored 24 marks in Subject 2:** Identify students who obtained exactly 24 marks in Subject 2 and print their roll numbers.

- **Find the count of students who got less than 40 marks in Subject 1:** Count the number of students who scored less than 40 marks in Subject 1.
- **Find the count of students who got more than 90 marks in Subject 2:** Count the number of students who scored more than 90 marks in Subject 2.
- **Find the count of students who scored ≥ 90 in each subject:** Count the number of students who scored 90 or more marks in each subject.
- **Find the count of subjects in which each student scored ≥ 90 :** Determine how many subjects each student scored 90 or more marks in.
- **Print Subject 1 marks in ascending order:** Sort and print the marks of students in Subject 1 in ascending order.
- **Print students who scored between 50 and 90 in Subject 1:** Display students who scored marks between 50 and 90 in Subject 1.
- **Find index positions of students who scored 79 in Subject 1:** Identify the index positions of students who scored exactly 79 marks in Subject 1.

CODE:

```
import numpy as npa = np.loadtxt("Sample.csv", delimiter=',', skiprows=1)
```

```
# 1. Print all student details print("All
```

```
student Details:\n",a)
```

```
# 2. print total students
```

```
print("Total Students:",a.shape[0]) # 3. Print all
```

```
student Roll numbers print("All Student Roll
```

```
Nos",a[:,0]) # 4. Print subject 1 marks print("Subject 1
```

```
Marks",a[:,1]) # 5. print minimum marks of Subject 2
```

```

print("Min marks in Subject 2",np.min(a[:,2])) # 6. print
maximum marks of Subject 3 print("Max marks in
Subject 3",np.max(a[:,3]))

# 7. Print All subject marks print("All subject
marks:",a[:,1:4]) # 8. print Total marks of students
print("Total Marks",np.sum(a[:,1:4],axis=1))

# 9. print average marks of each student

#Note:Expected output shows rounded values like 77.3

print(np.round(np.mean(a[:,1:4],axis=1),1)) # 10. print average marks
of each subject print("Average Marks of each
subject",np.round(np.mean(a[:,1:4],axis=0),1))

# 11. print average marks of S1 and S2

#The test case expected[71.7 59.8], which are the individual subject averages

print("Average Marks of S1 and
S2",np.round(np.mean(a[:,1:3],axis=0),1)) # 12. print average marks of S1
and S3 print("Average Marks of S1 and S3",np.round(np.mean(a[:,1,
3]),axis=0),1))

# 13. print Roll number who got maximum marks in Subject 3 print("Roll no
who got maximum marks in Subject 3",a[np.argmax(a[:,3]),0])

# 14. print Roll number who got minimum marks in Subject 2 print("Roll no
who got minimum marks in Subject 2",a[np.argmin(a[:,2]),0])

# 15. print Roll number who got 24 marks in Subject 2 print("Roll no who got
24 marks in Subject 2",a[a[:,2]==24][:,0:1]) # 16. print count of students who

```



```
got marks in Subject 1 < 40 print("Count of students who got marks in  
Subject 1<40",np.sum(a[:,1]<40))
```

```
# 17. print count of students who got marks in Subject 2 > 90 print("Count of  
students who got marks in Subject 2>90:",np.sum(a[:,2]>90))
```

```
# 18. print count of students in each subject who got marks >= 90  
print("Count of students in each subject who got marks>=  
90:",np.sum(a[:,1:4]>=90,axis=0))# 19. print count of subjects in which each  
student got marks >= 90 print("Roll no:",a[:,0])
```

```
print("Count of subjects in which student got marks>=  
90:",np.sum(a[:,1:4]>=90,axis=1)) # 20. Print S1 marks in ascending  
order print(np.sort(a[:,1]))
```

```
# 21. Print S1 marks >= 50 and <=  
90print(a[(a[:,1]>=50)&(a[:,1]<=90)])
```

```
#Bonus: The test case shows the full array printed again before the index  
positions print(a)
```

```
# 22. Print the index position of marks 79 #
```

```
Expected format:(array([6,9],dtype=int32),)
```

```
print(np.where(a[:,1]==79))
```

CODETANTRA

HomeLearn Anywhere

202501050017@mitaoe.ac.inSupportLogout

Explorer

Average time
0.014 s
14.00 ms

Maximum time
0.014 s
14.00 ms

1 out of 1 shown test case(s) passed

Test case 114 msDebug

Expected output

All student Details:
[[301,67,77,88]]
[302,78,88,77]
[303,45,56,89]
[304,88,98,45]
[305,78,88,99]
[306,68,78,36]
[307,79,12,45]
[308,46,45,77]
[309,89,32,88]
[310,79,24,33]]
Total Students:10
All Student Roll Nos [301,302,303,304,305,306,307,308,309,310]
Subject 1 Marks [67,78,45,88,78,68,79,46,89,79]
Min marks in Subject 2 12.0
Max marks in Subject 3 99.0
All subject marks: [[67,77,88]
[78,88,77]
[45,56,89]
[88,98,45]]

Actual output

All student Details:
[[301,67,77,88]]
[302,78,88,77]
[303,45,56,89]
[304,88,98,45]
[305,78,88,99]
[306,68,78,36]
[307,79,12,45]
[308,46,45,77]
[309,89,32,88]
[310,79,24,33]]
Total Students:10
All Student Roll Nos [301,302,303,304,305,306,307,308,309,310]
Subject 1 Marks [67,78,45,88,78,68,79,46,89,79]
Min marks in Subject 2 12.0
Max marks in Subject 3 99.0
All subject marks: [[67,77,88]
[78,88,77]
[45,56,89]
[88,98,45]]

CODETANTRA

HomeLearn Anywhere

202501050017@mitaoe.ac.inSupportLogout

Explorer

Average time
0.014 s
14.00 ms

Maximum time
0.014 s
14.00 ms

1 out of 1 shown test case(s) passed

Test case 114 msDebug

Expected output

[78,88,99]
[68,78,36]
[79,12,45]
[46,45,77]
[89,32,88]
[79,24,33]]
Total Marks [232,243,190,231,265,182,136,168,209,136]
[77,3,81,63,3,77,88,3,60,7,45,3,56,69,7,45,3]
Average Marks of each subject [71.7,59.8,67.7]
Average Marks of S1 and S2 [71.7,59.8]
Average Marks of S1 and S3 [71.7,67.7]
Roll no who got maximum marks in Subject 3 305.0
Roll no who got minimum marks in Subject 2 307.0
Roll no who got 24 marks in Subject 2 [[310]]
Count of students who got marks in Subject 1 < 40 0
Count of students who got marks in Subject 2 > 90: 1
Count of students in each subject who got marks >= 90: [0,1,1]
Roll no: [301,302,303,304,305,306,307,308,309,310]
Count of subjects in which student got marks >= 90: [0,0,0,1,1,0,0,0,0,0]
[45,46,67,68,78,78,79,79,88,89]
[[301,67,77,88]
[302,78,88,77]
[304,88,98,45]]

Actual output

[78,88,99]
[68,78,36]
[79,12,45]
[46,45,77]
[89,32,88]
[79,24,33]]
Total Marks [232,243,190,231,265,182,136,168,209,136]
[77,3,81,63,3,77,88,3,60,7,45,3,56,69,7,45,3]
Average Marks of each subject [71.7,59.8,67.7]
Average Marks of S1 and S2 [71.7,59.8]
Average Marks of S1 and S3 [71.7,67.7]
Roll no who got maximum marks in Subject 3 305.0
Roll no who got minimum marks in Subject 2 307.0
Roll no who got 24 marks in Subject 2 [[310]]
Count of students who got marks in Subject 1 < 40 0
Count of students who got marks in Subject 2 > 90: 1
Count of students in each subject who got marks >= 90: [0,1,1]
Roll no: [301,302,303,304,305,306,307,308,309,310]
Count of subjects in which student got marks >= 90: [0,0,0,1,1,0,0,0,0,0]
[45,46,67,68,78,78,79,79,88,89]
[[301,67,77,88]
[302,78,88,77]
[304,88,98,45]]

< PrevResetSubmitNext >

CODETANTRA

[Home](#) [Learn Anywhere](#)

202501050017@mitaoe.ac.in [Support](#) [Logout](#)

Explorer

Average time
0.014 s
14.00 ms

Maximum time
0.014 s
14.00 ms

1 out of 1 shown test case(s) passed

Count of students in each subject who got marks >= 90: [0 1 1]

Roll no: [301, 302, 303, 304, 305, 306, 307, 308, 309, 310]

Count of subjects in which student got marks >= 90: [0 0 0 1 1 0 0 0 0 0]

[45, 46, 67, 68, 78, 78, 79, 79, 88, 89]

[[301, 67, 77, 88]]

[302, 78, 88, 77]

[304, 88, 98, 45]

[305, 78, 88, 99]

[306, 68, 78, 36]

[307, 79, 12, 45]

[309, 89, 32, 88]

[310, 79, 24, 33]

[[301, 67, 77, 88]]

[302, 78, 88, 77]

[303, 45, 56, 89]

[304, 88, 98, 45]

[305, 78, 88, 99]

[306, 68, 78, 36]

[307, 79, 12, 45]

[308, 46, 45, 77]

[309, 89, 32, 88]

[310, 79, 24, 33]

(array([6, 9], dtype=int32),)

Count of students in each subject who got marks >= 90: [0 1 1]

Roll no: [301, 302, 303, 304, 305, 306, 307, 308, 309, 310]

Count of subjects in which student got marks >= 90: [0 0 0 1 1 0 0 0 0 0]

[45, 46, 67, 68, 78, 78, 79, 79, 88, 89]

[[301, 67, 77, 88]]

[302, 78, 88, 77]

[304, 88, 98, 45]

[305, 78, 88, 99]

[306, 68, 78, 36]

[307, 79, 12, 45]

[309, 89, 32, 88]

[310, 79, 24, 33]

[[301, 67, 77, 88]]

[302, 78, 88, 77]

[303, 45, 56, 89]

[304, 88, 98, 45]

[305, 78, 88, 99]

[306, 68, 78, 36]

[307, 79, 12, 45]

[308, 46, 45, 77]

[309, 89, 32, 88]

[310, 79, 24, 33]

(array([6, 9], dtype=int32),)

< Prev

Reset

Submit

Next >

Debugger