
Web Technology Lab — Exp 1 + HTML/CSS/JS Cheat Sheet

Ultra-compact rough-note version: Experiment 1 is Study of HTML Tags. These snippets cover the core tags plus common extras needed to build forms, lists, tables, input/output, and simple interactive pages.

1. Basic HTML structure

```
<!DOCTYPE html>
<html>
<head>
<title>My Page</title>
</head>
<body>
<h1>Heading</h1>
<p>Paragraph</p>
</body>
</html>
```

OUTPUT

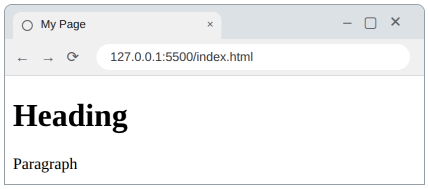


Output — basic page

2. Text and formatting tags

```
<h1>Heading 1</h1>
<h2>Heading 2</h2>
<p>Paragraph</p>
<br>
<hr>
<b>Bold</b>
<strong>Important</strong>
<i>Italic</i>
<em>Emphasis</em>
<u>Underline</u>
<mark>Highlighted</mark>
<small>Small text</small>
<del>Deleted</del>
<ins>Inserted</ins>
H<sub>2</sub>O
x<sup>2</sup>
<pre>Preserves spaces
and line breaks</pre>
```

OUTPUT

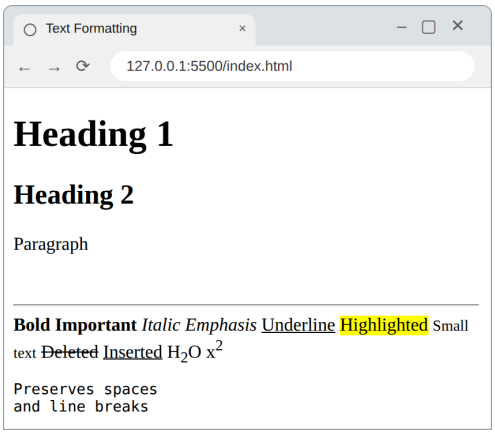

Output — text and formatting tags

3. Links, images and lists

```
<a href="https://google.com">Open Google</a>
<a href="page.html">Next Page</a>
<a href="#top">Go to Top</a>

<img src="photo.jpg" alt="Photo" width="150">


<ul>
<li>Apple</li>
<li>Mango</li>
</ul>

<ol>
<li>First</li>
<li>Second</li>
</ol>

<ol type="A">
<li>One</li>
</ol>

<dl>
<dt>HTML</dt>
<dd>Markup language</dd>
</dl>
```

OUTPUT

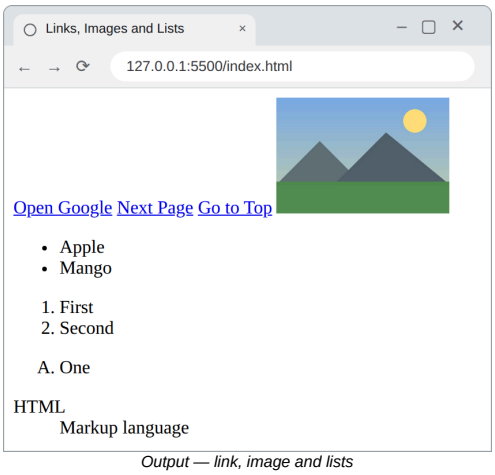


Output — link, image and lists

4. Tables

```
<table border="1">
<tr><th>Name</th><th>Mark</th></tr>
<tr><td>Arun</td><td>90</td></tr>
<tr><td>Bala</td><td>85</td></tr>
</table>
```


OUTPUT

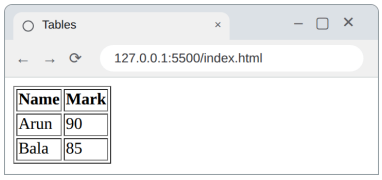

Output — table

```
<td colspan="2">Merged columns</td>
<td rowspan="2">Merged rows</td>
```

OUTPUT

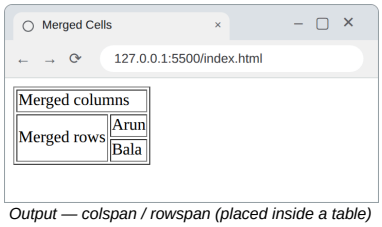


Output — colspan / rowspan (placed inside a table)

5. Forms and input types

```
<form>
Name: <input type="text" name="name"><br>
Password: <input type="password"><br>
Email: <input type="email"><br>
Age: <input type="number"><br>
Date: <input type="date"><br>
<input type="radio" name="g" value="M">Male
<input type="radio" name="g" value="F">Female<br>
<input type="checkbox">Accept<br>
<input type="file"><br>
<input type="color"><br>
<input type="range"><br>
<input type="hidden" value="1">
<textarea rows="3" cols="20"></textarea><br>
```

```
<select><option>India</option><option>USA</option></select><br>
<input type="submit" value="Submit">
<input type="reset" value="Clear">
<button type="button">Click</button>
</form>
```

OUTPUT

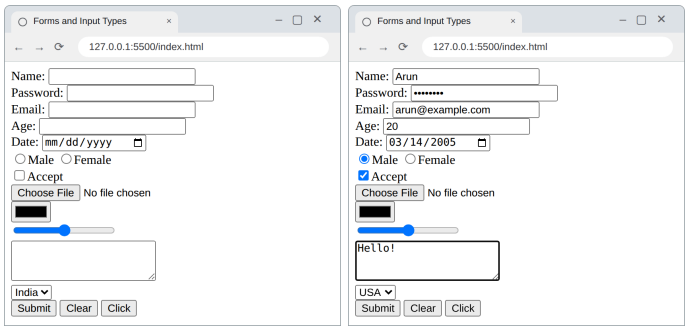


Output 1 — empty form *Output 2 — form filled in*

Useful attributes: `id`, `class`, `name`, `value`, `placeholder`, `required`, `min`, `max`, `maxlength`, `checked`, `selected`, `disabled`.

6. HTML layout elements

```
<header>Header</header>
<nav>Navigation</nav>
<main>
<section>Section</section>
<article>Article</article>
<aside>Sidebar</aside>
<div>Block container</div>
<p>Text with <span>inline text</span></p>
</main>
<footer>Footer</footer>
```

OUTPUT

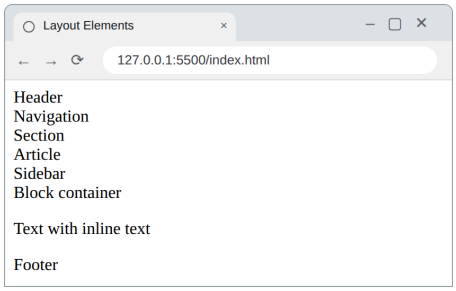


Output — layout elements (no CSS: plain text)

7. CSS basics

Add inside `<head>`:

```
<style>
body { font-family: Arial; margin: 20px; }
h1 { color: black; text-align: center; }
p { font-size: 16px; }
.box { border: 1px solid black; padding: 10px; }
#title { background: lightgray; }
</style>
```

OUTPUT

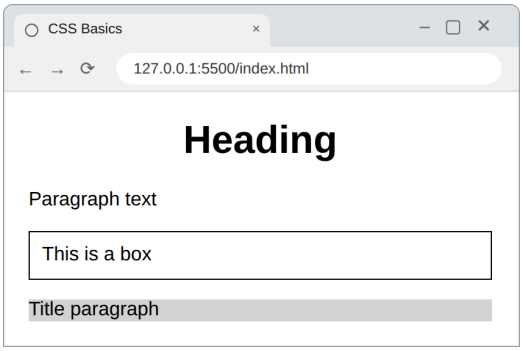


Output — page using the CSS above

Selector	Example
Tag	`p { color: red; }`
Class	`.box { padding: 10px; }`
ID	`#title { font-size: 20px; }`
All	`* { margin: 0; }`

Common CSS properties:

```
color: red;
background-color: white;
font-size: 18px;
font-weight: bold;
text-align: center;
text-decoration: none;
margin: 10px;
padding: 10px;
border: 1px solid black;
width: 200px;
height: 100px;
border-radius: 5px;
display: flex;
gap: 10px;
```

OUTPUT

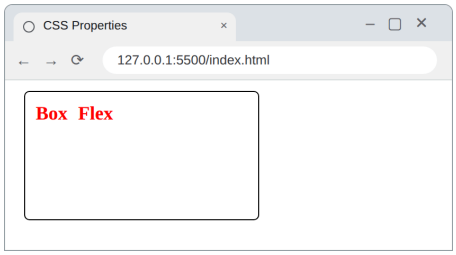

Output — a box using the properties above


8. JavaScript input, output and events

Put this before `</body>`:

```
<input id="n" placeholder="Enter name">
<button onclick="show()">Show</button>
<p id="out"></p>

<script>
function show() {
  let n = document.getElementById("n").value;
  document.getElementById("out").textContent = n;
}
</script>
```

OUTPUT

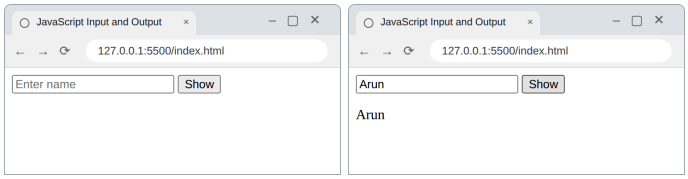


Output 1 — before click *Output 2 — type a name, click Show*


Input and output methods

```
let x = prompt("Enter a number");
alert(x);
console.log(x);
document.write(x);
document.getElementById("out").textContent = x;
document.getElementById("n").value;
```

OUTPUT

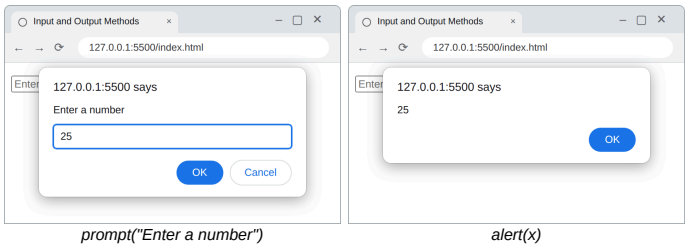

prompt("Enter a number") *alert(x)*

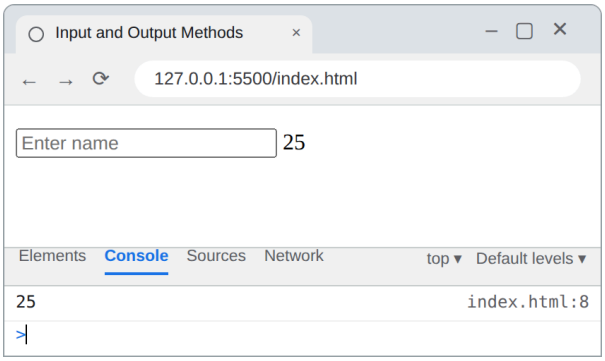

document.write(x) and console.log(x)

Variables, conditions and loops

```
let a = 10, b = 20;
const pi = 3.14;
let sum = a + b;


if (a > b) alert("A");
else if (a == b) alert("Equal");
else alert("B");

for (let i = 1; i <= 5; i++) console.log(i);


let i = 1;
while (i <= 5) { console.log(i); i++; }

let arr = [10, 20, 30];
arr.push(40);
console.log(arr[0], arr.length);
```

OUTPUT



alert("B") from the if / else chain

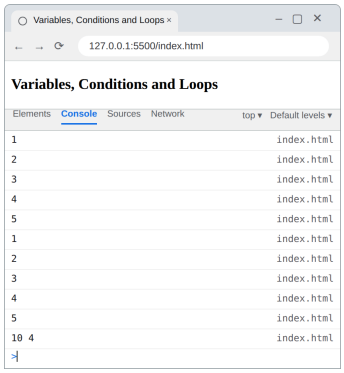


Console — loops and array output


Functions and events

```
function add(a, b) { return a + b; }
<button onclick="alert('Hello')">Click</button>
<input oninput="show()" onchange="show()">
```

OUTPUT



Click → alert("Hello")



oninput updates the text


Common events: `onclick`, `ondblclick`, `onmouseover`, `onmouseout`, `oninput`, `onchange`, `onsubmit`, `onload`, `onkeydown`.

9. Handy extra snippets

External CSS

```
<link rel="stylesheet" href="style.css">
```

OUTPUT

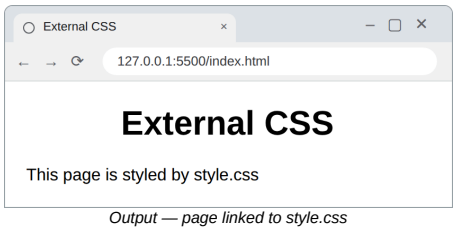


Output — page linked to style.css

External JavaScript

```
<script src="script.js"></script>
```

OUTPUT

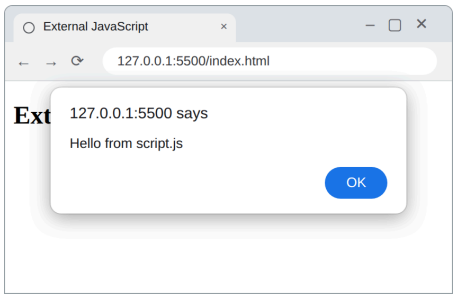


Output — script.js runs alert()

Open link in new tab

```
<a href="https://google.com" target="_blank">Google</a>
```

OUTPUT

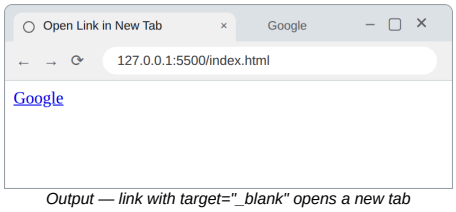


Output — link with target="_blank" opens a new tab

Required input with placeholder

```
<input type="text" placeholder="Enter name" required>
```

OUTPUT

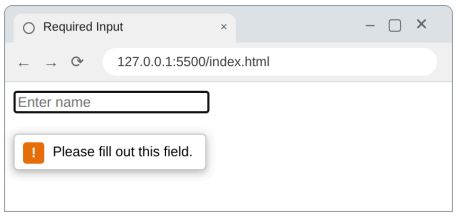


Output — submitting empty required field

Simple two-column layout

```
<div style="display:flex;gap:10px">
<div>Left</div>
<div>Right</div>
</div>
```

OUTPUT

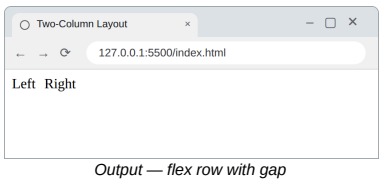

Output — flex row with gap

Important: HTML defines the structure, CSS styles it, and JavaScript adds behaviour. For the exam, prioritize the basic structure, text tags, lists, tables, hyperlinks, images, forms, CSS selectors, and JavaScript DOM input/output.