




# Blue Prism Automated Testing User Guide

Document Revision 1.0

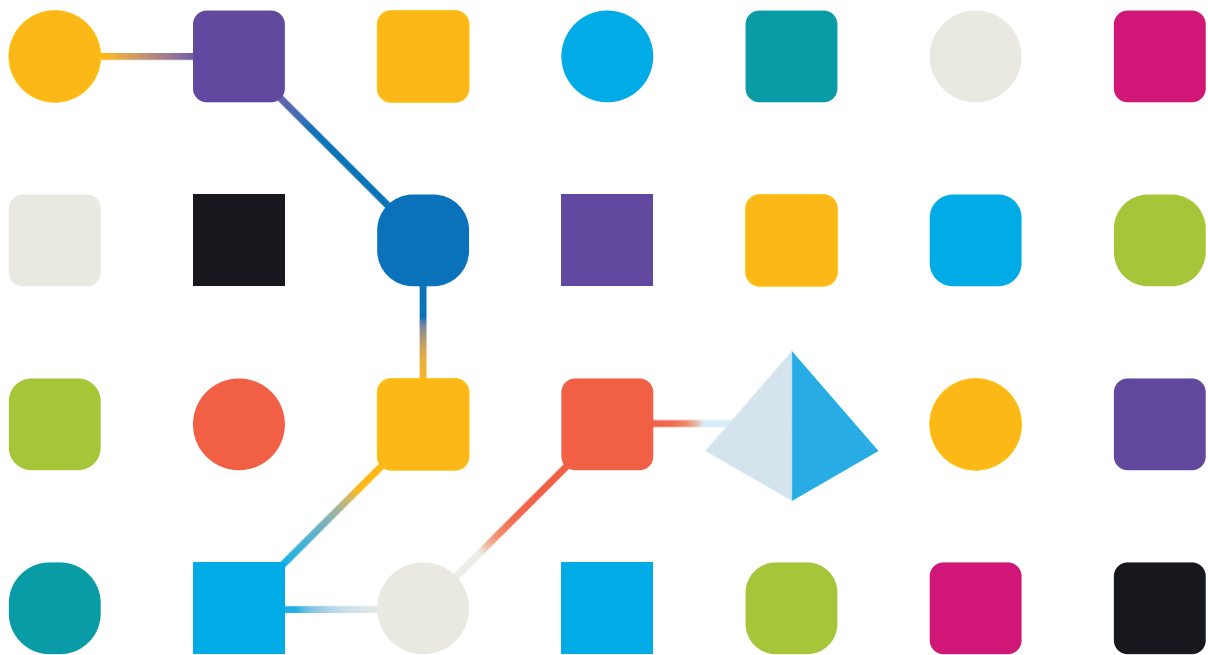

# Trademarks and copyright

The descriptions and screenshots contained in this document are licensed under the Creative Commons Attribution-ShareAlike (CC-BY-SA) 3.0 license <https://creativecommons.org/licenses/by-sa/3.0/>.

© **Blue Prism Limited, 2001 – 2021**

®“Blue Prism”, the “Blue Prism” logo and Prism device are either trademarks or registered trademarks of Blue Prism Limited and its affiliates. All Rights Reserved

All trademarks are hereby acknowledged and are used to the benefit of their respective owners.  
Blue Prism is not responsible for the content of external websites referenced by this document.

Blue Prism Limited, 2 Cinnamon Park, Crab Lane, Warrington, WA2 0XP, United Kingdom  
Registered in England: Reg. No. 4260035. Tel: +44 870 879 3000. Web: [www.blueprism.com](http://www.blueprism.com)

# Contents

Introduction .....	2
Prerequisites .....	3
Configuration .....	5
Using the Asset .....	9
Known Limitations .....	10
Python Source Code Snk Vulnerability Scan Results (25-March-2021).....	11
Support.....	12

# Introduction

The purpose of this document is to provide a guide to set up components for Blue Prism Automated Testing. The guide gives a simplistic set up which can be run and testing in lower environments.

Users can choose to use the asset as is or modify it to make it more scalable. There are two components which need to be set up.

- i. Blue Prism component
- ii. Python Web service component

## Prerequisites

Software	Link																																
Blue Prism	Robotic Process Automation tool - <a href="https://portal.blueprism.com/products/current">https://portal.blueprism.com/products/current</a> (asset supports v6.6 - v6.10.1)																																
GIT	Source code repository. You need to have GIT installed in your system. For this guide a public repo was created at: <a href="https://github.com/ashz30/BluePrism-Automated-Testing.git">https://github.com/ashz30/BluePrism-Automated-Testing.git</a>																																
Python	Python Version 3.6.8 is used, Download link <a href="#">here</a> . Python IDE used is PyCharm. Download link <a href="#">here</a> . (Apache 2 license at the time of publishing)  (users can also run the code without the IDE as a command line too or their own IDE)																																
Third Party Python Libraries  (please refer to links in name for any additional license information)	<table><tr><th>Name</th><th>Version</th><th>Licenses</th><th>Copyright</th></tr><tr><td><a href="#">click</a></td><td>7.1.2</td><td><a href="#">BSD-3-Clause</a></td><td>["Copyright 2014 Pallets","copyright 2014 Pallets","Copyright 2001-2006 Gregory P. Ward","Copyright 2002-2006 Python Software Foundation"]</td></tr><tr><td><a href="#">flask</a></td><td>1.1.2</td><td><a href="#">BSD-3-Clause</a></td><td>["Copyright 2010 Pallets","copyright 2010 Pallets","(c) Copyright 2010 by http://domain.invalid/&gt;","Copyright (c) 2010 by the Pallets team"]</td></tr><tr><td><a href="#">itsdangerous</a></td><td>1.1.0</td><td><a href="#">BSD-2-Clause</a></td><td>["Copyright (c) 2011 by the Pallets team","Copyright (c) Django Software Foundation and individual contributors","copyright 2011 Pallets Team"]</td></tr><tr><td><a href="#">Jinja2</a></td><td>2.11.3</td><td><a href="#">BSD-3-Clause</a></td><td>["Copyright 2007 Pallets","copyright 2007 Pallets","(c) Copyright 2008 by http://domain.invalid/&gt;"]</td></tr><tr><td><a href="#">MarkupSafe</a></td><td>1.1.1</td><td><a href="#">BSD-3-Clause</a></td><td>["Copyright 2010 Pallets","copyright 2010 Pallets Team","copyright 2010 Pallets"]</td></tr><tr><td><a href="#">pyodbc</a></td><td>4.0.30</td><td><a href="#">MIT</a></td><td></td></tr><tr><td><a href="#">Werkzeug</a></td><td>1.0.1</td><td><a href="#">BSD-3-Clause</a></td><td>["Copyright 2007 Pallets","copyright 2007 Pallets","(c) JS Foundation and</td></tr></table>	Name	Version	Licenses	Copyright	<a href="#">click</a>	7.1.2	<a href="#">BSD-3-Clause</a>	["Copyright 2014 Pallets","copyright 2014 Pallets","Copyright 2001-2006 Gregory P. Ward","Copyright 2002-2006 Python Software Foundation"]	<a href="#">flask</a>	1.1.2	<a href="#">BSD-3-Clause</a>	["Copyright 2010 Pallets","copyright 2010 Pallets","(c) Copyright 2010 by http://domain.invalid/>","Copyright (c) 2010 by the Pallets team"]	<a href="#">itsdangerous</a>	1.1.0	<a href="#">BSD-2-Clause</a>	["Copyright (c) 2011 by the Pallets team","Copyright (c) Django Software Foundation and individual contributors","copyright 2011 Pallets Team"]	<a href="#">Jinja2</a>	2.11.3	<a href="#">BSD-3-Clause</a>	["Copyright 2007 Pallets","copyright 2007 Pallets","(c) Copyright 2008 by http://domain.invalid/>"]	<a href="#">MarkupSafe</a>	1.1.1	<a href="#">BSD-3-Clause</a>	["Copyright 2010 Pallets","copyright 2010 Pallets Team","copyright 2010 Pallets"]	<a href="#">pyodbc</a>	4.0.30	<a href="#">MIT</a>		<a href="#">Werkzeug</a>	1.0.1	<a href="#">BSD-3-Clause</a>	["Copyright 2007 Pallets","copyright 2007 Pallets","(c) JS Foundation and
	Name	Version	Licenses	Copyright																													
	<a href="#">click</a>	7.1.2	<a href="#">BSD-3-Clause</a>	["Copyright 2014 Pallets","copyright 2014 Pallets","Copyright 2001-2006 Gregory P. Ward","Copyright 2002-2006 Python Software Foundation"]																													
	<a href="#">flask</a>	1.1.2	<a href="#">BSD-3-Clause</a>	["Copyright 2010 Pallets","copyright 2010 Pallets","(c) Copyright 2010 by http://domain.invalid/>","Copyright (c) 2010 by the Pallets team"]																													
	<a href="#">itsdangerous</a>	1.1.0	<a href="#">BSD-2-Clause</a>	["Copyright (c) 2011 by the Pallets team","Copyright (c) Django Software Foundation and individual contributors","copyright 2011 Pallets Team"]																													
	<a href="#">Jinja2</a>	2.11.3	<a href="#">BSD-3-Clause</a>	["Copyright 2007 Pallets","copyright 2007 Pallets","(c) Copyright 2008 by http://domain.invalid/>"]																													
	<a href="#">MarkupSafe</a>	1.1.1	<a href="#">BSD-3-Clause</a>	["Copyright 2010 Pallets","copyright 2010 Pallets Team","copyright 2010 Pallets"]																													
<a href="#">pyodbc</a>	4.0.30	<a href="#">MIT</a>																															
<a href="#">Werkzeug</a>	1.0.1	<a href="#">BSD-3-Clause</a>	["Copyright 2007 Pallets","copyright 2007 Pallets","(c) JS Foundation and																														

	other contributors","Copyright 2010 Canonical Ltd."]
<b>Blue Prism VBO List (needs to be imported)</b>	MS Excel VBO Utility – Collection Manipulation VBO Utility – General VBO Utility – JSON VBO Utility – Environment VBO Utility – Strings VBO

# Configuration

Prior to starting this process, the below steps need to be configured:

- Clone git repository - open cmd in a blank folder (mine is C:\GIT) and type  
“git clone <https://github.com/ashz30/BluePrism-Automated-Testing.git>”
- Install Python, open any cmd window and run the below commands:
  - (a) Check python version – “python --version”  
(if this does not show the correct python version, you will need to edit windows path to point to python folder and open a new cmd window to try again)  
Copy all contents in python web service folder to a new project folder (name as per project). Open terminal in this folder and run.  
“pip3 install -r requirements.txt”  
(to download and install all python libraries)
- User will need to install Blue Prism in any machine.
- The machine which runs the python web service needs to directly connect to Blue prism database with the windows AD credentials and run SQL's explained in Python web service set up steps section.

## Python Web service set up steps.

- Once cloned this is the structure of the GIT folder –

Name	Date modified	Type	Size
.git	22-03-2021 15:01	File folder	
Blue Prism release	19-03-2021 17:27	File folder	
Demo	19-03-2021 18:50	File folder	
Guide	22-03-2021 17:35	File folder	
Process-RR-Mapping	19-03-2021 18:20	File folder	
Python Web Service	22-03-2021 14:51	File folder	
Sample Test Results	19-03-2021 17:24	File folder	
Test Results	19-03-2021 18:24	File folder	
LICENSE	15-03-2021 14:25	File	2 KB
README.md	15-03-2021 14:25	MD File	1 KB

- Goto folder - GIT\BluePrism-Automated-Testing\Python Web Service (or your corresponding project folder path set up in the earliest step).

You should be able to view below files:


	ConfigFile.properties	17-03-2021 12:48	PROPERTIES File	3 KB
	GenerateTestCoverageRelease.py	17-03-2021 14:09	PY File	5 KB
	GetDatabaseSessionData.py	11-03-2021 11:21	PY File	5 KB
	requirements.txt	22-03-2021 14:57	Text Document	1 KB
	webservicewrapper.py	17-03-2021 13:15	PY File	2 KB

- Goto file **ConfigFile.properties**, and update these properties:
  - server=<Blue Prism Database server details> (for SQL statement runs present in last 4 SQL statement properties)
  - database=<Name of Blue Prism database>


Other properties can be left as is unless required. The machine which runs the python web service needs to directly connect to Blue prism database with the windows AD credentials.

***Windows user needs to have access to run the select sql's present in the properties – testcoveragesql, processsessiondatasql objectsessiondatasql and sessiondatasql.***

- Open file 'webservicewrapper.py', and replace host and port values as required for the machine which runs the python web service.

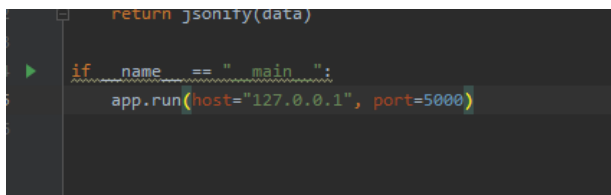

- Open command line in folder '**Python Web Service**' (or your corresponding project folder) and run command  
`'python webservicewrapper.py'`  
alternately run webservicewrapper.py through the IDE (pycharm).
- Provided everything is set up correctly, it should start a web server in your local system.

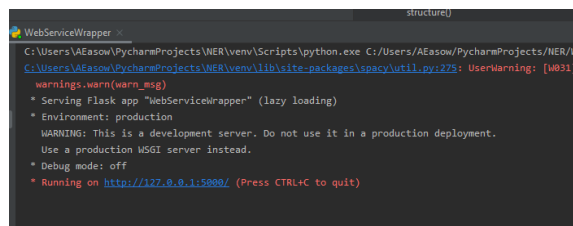

- Open your browser to goto link  
(replace below with host and port which you changed in file 'webservicewrapper.py')  
"127.0.0.1:5000"  
Hit enter
- You should see the result "Hello World"



## Blue Prism set up steps.

- Open Blue Prism.
- Import release file in the folders –
  - a) IT\BluePrism-Automated-Testing\Blue Prism release - C:\GIT\BluePrism-Automated-Testing\Python Web Service\release\Registration Process.bprelease *(for Demo only)*
  - b) GIT\BluePrism-Automated-Testing\Blue Prism release\Test Suite Master v6.bprelease
- Update Excel - GIT\BluePrism-Automated-Testing\Process-RR-Mapping\Process-RR-Mapping.xlsx.
  - a) Blue Prism Process name - Process to be tested
  - b) Runtime Resource host – Hostname/IP of runtime resource
  - c) Runtime Resource Port – Port of Runtime Resource
  - d) SSO Flag – True, if AD is used for Blue Prism
  - e) RR Credential Name – Credential name to be used if AD is not configured.
  - f) DBConName – Connection name present in Runtime Resource Automate.config file.
  - g) Start Up Param – Start up parameter for Blue Prism process in xml parameter format. Sample link here.  
 Run a **process** on a remote PC with startup parameters:  

```
AutomateC /run "Excel Test" /resource YourPCHostName /user admin mypwd /startp "<inputs> <input name='comment' type='text' value='Hello World' /></inputs>"
```
  - h) Test Results Data File location – Excel with the process name to be stored here  
 GIT\BluePrism-Automated-Testing\Test Results. Sample file present here : GIT\BluePrism-Automated-Testing\Sample Test Results.
  - i) Import Test coverage release Flag – true, if test coverage needs to be run and imported.
  - j) Release file location – Original release of the process being tested.
  - k) New release file name – new release file name of the process being tested after test coverage font change.
- Update Excel(s) - GIT\BluePrism-Automated-Testing\Test Results\<processname.xlsx>.
  - a) Master Sheet –
    - (1) Queues to be processed, Worksheet name for Queue item status : Any queue names from which data needs to be extracted and worksheet names for respective queue names. Worksheets need to be blank if created. If not created automation will create a new worksheet.
    - (2) Session data extraction worksheets – One Worksheet for each stage from which session data needs to be extracted. Worksheets created needs to have first two rows filled as shown in template

Stage Name	Process Name	Page Name	Object Name	Action Name
Work Queues::Get Next Item	Submit Registration process	process queue data	Blueprism.Automate.clsWorkQueuesActions	Get Next Item

This data for each stage which needs to be set up is available in the BPASessionLog\_NonUnicode or equivalent table.

Script for SelectTopNRows command from SSMS \*\*\*\*\*

```
SELECT *
FROM [jenkins].[dbo].[BPASessionLog_NonUnicode]
```

100 %

Results Messages

		stagename	stagetype	processname	pagename	objectname	actionname	result
1	30-0000-0000-0000-000000000000	NULL	1	NULL	NULL	NULL	NULL	Created session log
2	30-0000-0000-0000-000000000000	NULL	1	NULL	NULL	NULL	NULL	Created session log
3	>01-5227-4AF6-B05F-C4D34E0E7029	Start	1024	NULL	NULL	Submit registration	Initialise	NULL
4	4D-703B-417E-979F-E2C808BC08F2	End	2048	NULL	NULL	Submit registration	Initialise	NULL
5	;7B-8DAC-4E71-8E4D-FFAC34CF672	Start	1024	NULL	NULL	Submit registration	submit	NULL
6	AA-B8EA-461C-BA53-329C85F48255	attach	128	NULL	NULL	Submit registration	submit	NULL
7	9B-AFD2-4201-B4CE-89EDF7407489	Start	1024	NULL	NULL	Submit registration	attach	NULL

- b) Input Sheet – populated for ease of formulae. Tester should know the input required for the test.
- c) Expected Output Sheet - populated for ease of formulae. Tester should know the Expected Output required for the test.
- d) Validation Sheet – Formulae for Validating output. This can be written either as simple excel formulae, or macros can be written when output validation requires complex logic. Sheet is locked with password admin to avoid formulae getting corrupted when sheets are deleted or overwritten.
- Update Credentials -Test Suite credentials: User needs to have access to run Blue Prism processes, Check status of processes and import releases. If SSO is used, the commands runs with the user context of the SSO user currently logged in the Runtime Resource (which runs Test Suite Master process), in that case the logged in SSO user needs to have the rights to run and import Blue Prism processes.
- Update Web API endpoint – In Blue Prism, goto System – Objects -Web API Services – Automated Testing. Update base url, replace host and port as updated in file 'webservicewrapper.py'
- Update logging levels - The stages of the Blue Prism Process/Object being tested, for which data needs to be extracted (configured in Session data extraction worksheets), needs to be at full logging level, so that data for those stages can be logged in the Blue Prism database and can be extracted by this framework.

## Using the Asset

- If everything is set up correctly, run the BP process – Automated Testing Master Process. It will sequentially execute each process in the specified runtime resource and output will be obtained in Test results folder. Validation sheet of each process will show the status of the Test cases.

	A	B	C	D	E	F	G	H	I	J	K
	Test Case No	ITEM STATUS: RegistrationQStatus - Expected Output	NAME: RegistrationQStatus - Input	NAME: RegistrationQStatus - Expected Output	PHONE: RegQGetItemData - Expected Output	WriterOutput address Test Result					
1											
2	1	pass	pass	pass	pass	pass					
3	2	pass	pass	pass	pass	pass					
4	3	fail	pass	pass	pass	pass					
5		#N/A	#N/A	#N/A	#N/A	#N/A					
6		#N/A	#N/A	#N/A	#N/A	#N/A					
7		#N/A	#N/A	#N/A	#N/A	#N/A					
8		#N/A	#N/A	#N/A	#N/A	#N/A					
9		#N/A	#N/A	#N/A	#N/A	#N/A					
10		#N/A	#N/A	#N/A	#N/A	#N/A					

- After every run a new Test results sheet needs to be placed in folder.
- For the sample Registration Process, GIT\BluePrism-Automated-Testing\Python Web Service\release\Registration Form.html is the end application. Open it in IE for the first 2 test cases to pass ITEMSTATUS test cases. If its not opened in IE, only the 3<sup>rd</sup> case will pass for ITEMSTATUS.

## Known Limitations

- Performance has not been evaluated, this asset is to be used in a lower environment only, if it is to be made scalable, performance, risk and best practice recommendations need to be implemented.
- Asset queries BPASessionLog\_NonUnicode tables to get information. Queries present in config.properties have not been evaluated during high load and need to be analysed for running at scale in a large Blue Prism environment.
- Python code is for POC purposes and should be reviewed and modified as needed, if required to be used at scale.
- Asset gets the output from internal Blue Prism tables and not the end application, this results in certain exception conditions which can cause a few scenarios output evaluation to be uncertain,

Few examples.

- If Global Send keys are used, data would be sent to the end application, but without correctly clicking on the correct field, data will not be input correctly. Assumption is that the main Automation will throw exception in such cases.
- Object uses Index as the only unique criteria for identifying a field, but due to any reason
  - (a) Index gives a valid identification for an incorrect field and
  - (b) Data written by the object for the incorrect field, identified by the index, does not throw an exception


This results in a data extracted from Blue Prism database to be correct, but the data can be incorrect in the end application.

Note: This is not an exhaustive list.

In such cases users need to write an output extraction process customised to the end application which populate Test results excel sheets. This output extraction process will get the correct output extracted from the end application (rather than BP database). Test Suite Master process needs to be modified to accommodate adding Output extraction process.

- Test coverage feature imports the release file as a last step, this can be customised if not needed, but every import will add to the Audit table in Blue Prism.

# Python Source Code Snyk Vulnerability Scan Results (25-March-2021)

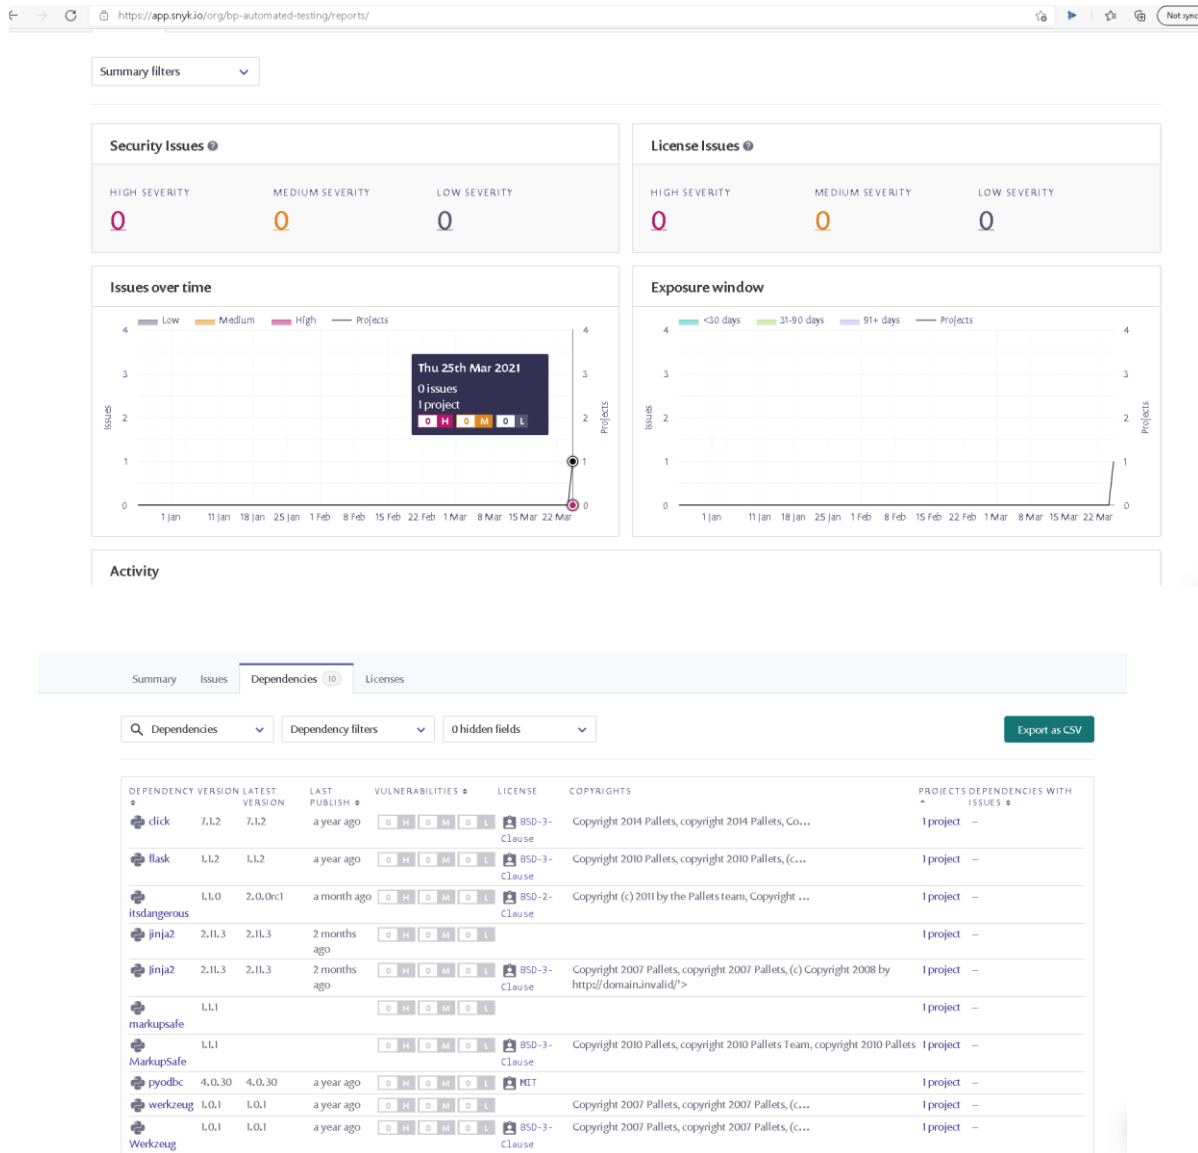

## Support

This asset is provided free-of-charge by Blue Prism. Blue Prism does not provide formal support of this asset. Please direct any questions you have, related to this asset, to the Digital Exchange Community page:

<https://community.blueprism.com/communities/community-home?CommunityKey=1e516cfe-4d1f-4de9-a9eb-58d15bf38c81>