

# Cloud Computing Architecture

Semester project

March 15, 2023

## Overview

The semester project consists of four parts, two of which are described in detail in this handout. In this project, you will explore how to schedule latency-sensitive and batch applications in a cloud cluster. You will deploy applications inside containers and gain experience using a popular container orchestration platform, [Kubernetes](#). Containers are a convenient and lightweight mechanism for packaging code and all its dependencies so that applications can run quickly and reliably from one computing environment to another.

You will work in groups of three students and submit a single report per group. **Please submit your report in the format of the [project report template](#).** We will be assigning groups for the project, however you will have a chance to optionally let us know your preferences for teammates. If you know one or two other students in the class that you would like to work with on the project, please submit your group preference by March 9th, 2023. To do so, each student in your preferred group should sign up for the same group number in the Project Group Selection page on Moodle. We will notify you about final group assignments on March 13th and then you may redeem your cloud credits and begin working on the project.

## Important Dates

**March 9th, 2023:** Deadline to submit group preferences. **Remember that you must either subscribe to a group or join the general group (Group 1) to be assigned randomly by us.**

**March 13th, 2023:** Groups are assigned and announced. Start working on project.

**April 6th, 2023 at 13:00:** Deadline to submit Part 1 and 2 of the project.

**May 25th, 2023 at 13:00:** Deadline to submit Part 3 and 4 of the project.

We will release Part 3 and 4 of the project mid-April. Parts 3 and 4 are more open-ended and will require more time to complete than Part 1 and 2. Please plan your time accordingly.

## Cloud Environment and Credits

To run experiments for the project, you will use Google Cloud. We will provide you with Google Cloud credits for your project. To redeem your cloud credits, please follow the steps in Part 1 (Section [1.1](#)), when your project group assignment is confirmed. Each group member should create

a Google Cloud account at <https://accounts.google.com>. Please use your ETH email address to create the account.

# 1 Part 1

In Part 1 of this project, you will run a latency-critical application, memcached, inside a container. Memcached is a distributed memory caching system that serves requests from clients over the network. A common performance metric for memcached is the tail latency (e.g., 95th percentile latency) under a desired query rate. You will measure tail latency as a function of queries per second and explore the impact of hardware resource interference. To add different types of hardware resource contention, you will use the iBench microbenchmark suite to apply different sources of interference (e.g., CPU, caches, memory bandwidth).

Follow the setup instructions below to deploy a Google Cloud cluster using the **kops** tool. Your cluster will consist of four virtual machines (VMs). One VM will serve as the Kubernetes cluster master, one VM will be used to run the memcached server application and iBench workloads, and two VMs will be used to run a client program that generates load for the memcached server.

This document contains setup instructions. Answer and submit the questions for Part 1 of the project in the report [template](#).

## 1.1 Setup Instructions

### Installing necessary tools

For the setup of the project, you will need to install [kubernetes](#), [google-tools](#) and **kops**. Instructions based on the operating system on your local machine are provided in the links above. Having installed all the tools successfully, the following three commands should return output in your terminal (for the rest of the document the \$ symbol is there to declare a bash command and you shouldn't type it explicitly):

1. `$ kubectl --help`
2. `$ kops --help`
3. `$ ./google-cloud-sdk/bin/gcloud --help`

Note that the final command is relative to where you have downloaded the google cloud tools. If you have installed via a package manager or have added the gcloud tools to your `$PATH` you don't need the prefix and you can just type **gcloud**. Note that you have to open a new terminal or refresh your shell using **source** for your `$PATH` to be updated.

All the scripts that you will need for both parts of the project are available [here](#):

```
git clone https://github.com/eth-easl/cloud-comp-arch-project.git
```

### Redeeming cloud credits and creating Google Cloud project

Each group member should create a Google Cloud account at <https://accounts.google.com>. Use your ETH email address to create the account. Each group will receive a \$50 Google Cloud coupon code. Select **one** group member to enter their name and ETH email address at the link you will receive when the groups have been assigned. Only redeem one coupon per group. If you need more credits you can get in touch with the TA team.


After installing kubernetes tools, connect your local client to your google cloud account using:

**gcloud init**

A browser window will open and you will have to login in with your ETH address. Afterwards, you will give **google-cloud-sdk** permissions to your account and then in the command line you will pick a name for the project. When creating the project name use **cca-eth-2023-group-XXX** (where XXX is your group number). **Only one group member (who also redeemed the cloud credit coupon) should create the Google Cloud project.** This person will add other group members as Project Owners (see instructions below). After the other group members are added as Project Owners, they will simply select the existing project name when they run the **gcloud init** command. All group members will have access to the project and share the cloud credits.

Do not configure any default computer region and zone. For deploying a cluster on Google Cloud we will modify some of the instructions listed [here](#), which will be given below.

After creating the project you can log into the [google cloud console](#) and will be prompted to select a billing account for the project. In the pop up choose **Billing account for education** as below and click **Set account**:

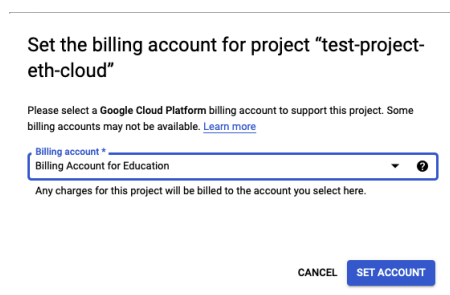

Afterwards, you can try the command **gcloud compute zones list**. The first time you should get a prompt to enable the compute engine API that looks like this:

```
API [compute.googleapis.com] not enabled on project [project number].
Would you like to enable and retry (this will take a few minutes)? (y/N)?
```

After the API is enabled you can repeat the command which should now yield the following output:

```
$ gcloud compute zones list
```

NAME	REGION	STATUS
us-east1-b	us-east1	UP
us-east1-c	us-east1	UP
us-east1-d	us-east1	UP
us-east4-c	us-east4	UP
us-east4-b	us-east4	UP
us-east4-a	us-east4	UP
us-central1-c	us-central1	UP
us-central1-a	us-central1	UP

us-central1-f	us-central1	UP
us-central1-b	us-central1	UP
us-west1-b	us-west1	UP
us-west1-c	us-west1	UP
us-west1-a	us-west1	UP
europa-west4-a	europa-west4	UP
europa-west4-b	europa-west4	UP
europa-west4-c	europa-west4	UP
europa-west1-b	europa-west1	UP
europa-west1-d	europa-west1	UP
europa-west1-c	europa-west1	UP
europa-west3-c	europa-west3	UP
europa-west3-a	europa-west3	UP
europa-west3-b	europa-west3	UP
europa-west2-c	europa-west2	UP
europa-west2-b	europa-west2	UP
europa-west2-a	europa-west2	UP


Then you will need to configure your default credentials using:

```
$ gcloud auth application-default login
```


This will redirect you to a browser window where you will login with the same account you used when you setup the `gcloud init` command.

## Giving your teammates owner permission to the project

After creating the `cca-eth-2023-group-XXX` project on Google Cloud, give your group members access to the project and cloud credits by navigating to the [Google Cloud console menu](#). Make sure your project is properly displayed on the top left as below:

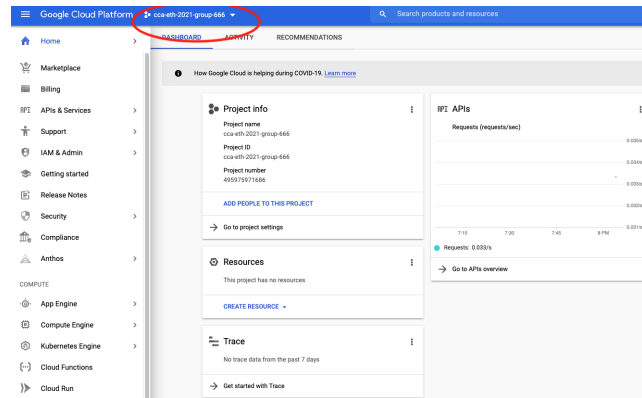

In the project info click **Add people to this project**.

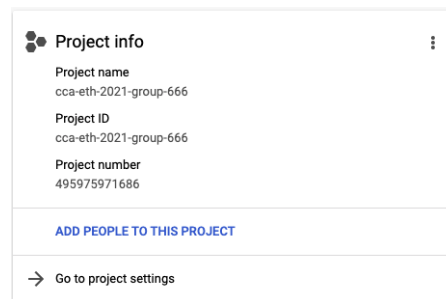

Type the email addresses of your teammates, select **Owner** as a role and click **Save**. Note that your teammates should have created a google cloud account with their ETH address in advance to put them as project owners.

### Add principals and roles for "cca-eth-2022-lcvetkovic" resource

Enter one or more principals below. Then select a role for these principals to grant them access to your resources. Multiple roles allowed. [Learn more](#)

New principals

fstrati@ethz.ch

Role

Owner

Condition

[Add condition](#)

Full access to most Google Cloud resources. See the list of included permissions.

[+ ADD ANOTHER ROLE](#)

SAVE

CANCEL

## Deploying a cluster using **kops**

At this point you will deploy a cluster using **kops**. First of all you will need to create an empty bucket to store the configuration for your clusters. Do this by running:

```
$ gsutil mb gs://cca-eth-2023-group-XXX-ethzid/
```

... where **XXX** is your group number and **ethzid** is your ETH username. Then run the following command to have the **KOPS\_STATE\_STORE** command to your environment for the subsequent steps:

```
$ export KOPS_STATE_STORE=gs://cca-eth-2023-group-XXX-ethzid/
```

**If you open another terminal this and other environmental variables will not be preserved. You can preserve it by adding it with an `export` command to your `.bashrc`. You should substitute the number of your group and your ETH username as before.**

Small Hint: Since Windows users cannot use the "export" command, you can manually add this environment variable. This tip also applies to the following "export" commands and "PROJECT='gcloud config get-value project'" commands.

For the first part of the exercise you will need a 3 node cluster. Two VMs will have 2 cores. One of these VMs will be the node where **memcached** and **iBench** will be deployed and another will be used for for the **mcperf** memcached client which will measure the round-trip latency of memcached requests. The third VM will have 8 cores and hosts the **mcperf** client which generates the request load for the experiments.

Before you deploy the cluster with **kops** you will need an ssh key to login to your nodes once they are created. Execute the following commands to go to your `.ssh` folder and create a key:

```
$ cd ~/.ssh
$ ssh-keygen -t rsa -b 4096 -f cloud-computing
```

Once you have created the key, go to lines 16 and 43 of the **part1.yaml** file (provided in the github link above) and **substitute the placeholder values with your group number and ethzid**. Then run the following commands to create a kubernetes cluster with 1 master and 2 nodes.

```
$ PROJECT=`gcloud config get-value project`
$ kops create -f part1.yaml
```

We will now add the key as a login key for our nodes. Type the following command:

```
$ kops create secret --name part1.k8s.local sshpublickey admin -i ~/.ssh/cloud-computing.pub
```

We are ready now to deploy the cluster by typing:

```
$ kops update cluster --name part1.k8s.local --yes --admin
```

Your cluster should need around 5-10 minutes to be deployed. You can validate this by typing:

```
$ kops validate cluster --wait 10m
```

The command will terminate when your cluster is ready to use. If you get a **connection refused** or **cluster not yet healthy** messages, wait while the previous command automatically retries. When the command completes, you can type:

```
$ kubectl get nodes -o wide
```

... to get the status and details of your nodes as follows:

NAME	STATUS	ROLES	AGE	VERSION	INTERNAL-IP	EXTERNAL-IP
master-europe-west3-a-2s21	Ready	master	3m2s	v1.19.7	10.156.0.63	34.107.107.152
memcache-server-jrk4	Ready	node	102s	v1.19.7	10.156.0.61	34.107.94.26
client-agent-vg5v	Ready	node	98s	v1.19.7	10.156.0.62	34.89.236.52
client-measure-ngwk	Ready	node	102s	v1.19.7	10.156.0.60	35.246.185.27

You can connect to any of the nodes by using your generated ssh key and the node name. For example to connect to the client-agent node, you can type:

```
$ gcloud compute ssh --ssh-key-file ~/.ssh/cloud-computing ubuntu@client-agent-vg5v \
    --zone europe-west3-a
```



## Running memcached and the mcperf load generator

To launch memcached using Kubernetes, run the following:

```
$ kubectl create -f memcache-t1-cpuset.yaml
$ kubectl expose pod some-memcached --name some-memcached-11211 \
    --type LoadBalancer --port 11211 \
    --protocol TCP

$ sleep 60
$ kubectl get service some-memcached-11211
```

Then run the following:

```
$ kubectl get pods -o wide
```

The output should look like:

NAME	READY	STATUS	RESTARTS	AGE	IP	NODE
some-memcached	1/1	Running	0	42m	100.96.3.3	memcache-server-zns8

Use the IP address above (100.96.3.3 in this example) as the **MEMCACHED\_IP** in the remaining instructions. Now ssh into both the **client-agent** and **client-measure** VMs and run the following commands to compile the **mcperf** memcached load generator:

```
$ sudo apt-get update
$ sudo apt-get install libevent-dev libzmq3-dev git make g++ --yes
$ sudo cp /etc/apt/sources.list /etc/apt/sources.list~
$ sudo sed -Ei 's/^# deb-src /deb-src /' /etc/apt/sources.list
$ sudo apt-get update
$ sudo apt-get build-dep memcached --yes
$ cd && git clone https://github.com/shaygalon/memcache-perf.git
$ cd memcache-perf
$ git checkout 0afbe9b
$ make
```

On the **client-agent** VM, you should now run the following command to launch the **mcperf** memcached client load agent with 16 threads:

```
$ ./mcperf -T 16 -A
```

On the **client-measure** VM, run the following command to first load the memcached database with key-value pairs and then query memcached with throughput increasing from 30000 queries per second (QPS) to 110000 QPS in increments of 5000:

```
$ ./mcperf -s MEMCACHED_IP --loadonly
$ ./mcperf -s MEMCACHED_IP -a INTERNAL_AGENT_IP \
    --noload -T 16 -C 4 -D 4 -Q 1000 -c 4 -w 2 -t 5 \
    --scan 30000:110000:5000
```

... where **MEMCACHED\_IP** is from the output of **kubectl get pods -o wide** above and **INTERNAL\_AGENT\_IP** is from the Internal IP of the client-agent node from the output of **kubectl get nodes -o wide**. You should look at the output of **./mcperf -h** to understand the different flags in the above commands.

## Introducing Resource Interference

Now we are going to introduce different types of resource interference with [iBench](#) microbenchmarks. Run the following commands:

```
$ kubectl create -f interference/ibench-cpu.yaml
```

This will launch a CPU interference microbenchmark. You can check it is running correctly with:

```
$ kubectl get pods -o wide
```

(wait until READY 1/1 and STATUS Running shows before starting a run).

When you have finished collecting memcached performance measurements with CPU interference, you should kill the job by running:

```
$ kubectl delete pods ibench-cpu
```

You can apply the above three steps for any of the six **ibench-cpu**, **ibench-l1d**, **ibench-l1i**, **ibench-l2**, **ibench-l1c**, and **ibench-membw** interference microbenchmarks. For Part 1 you will perform experiments to investigate the effect of the different types of interference. After now having followed this tutorial, you are able to run those experiments. First, start with reading the information of what to run for Part 1 in the project report template.

## Deleting your cluster

**IMPORTANT:** you must delete your cluster when you are not using it! Otherwise, you will easily use up all of your cloud credits! When you are ready to work on the project, you can easily re-launch the cluster with the instructions above.

To delete your cluster, run on your local machine the command:

```
$ kops delete cluster part1.k8s.local --yes
```

## 1.2 Notes

- Writing a script to automatize the data collection for Parts 1 and 2 is not mandatory and will not affect the grading. However, using automation scripts will be required for Parts 3 and 4, thus we encourage you to practice this approach in order to save time in the future.
- Parts 3 and 4 of the project are more resource-demanding and more costly in comparison to Parts 1 and 2 so make sure to plan your budget (usage of redeemed cloud credits) accordingly.

## 2 Part 2

In Part 2 of this project, you will run eight different throughput-oriented (“batch”) workloads from the **PARSEC** (and **SPLASH2x**) benchmark suite: **blackscholes**, **canneal**, **dedup**, **ferret**, **freqmine**, **radix** and **vips**. You will first explore each workload’s sensitivity to resource interference using iBench on a small 2 core VM (**e2-standard-2**). This is somewhat similar to what you did in Part 1 for **memcache**. Next, you will investigate how each workload benefits from parallelism by measuring the performance of each job with 1, 2, 4, 8 threads on a large 8 core VM (**e2-standard-8**). In the latter scenario, no interference is used.

Follow the setup instructions below to deploy a Google Cloud cluster and run the batch applications. Answer and submit the questions for Part 2 of the project in the report [template](#).

### 2.1 Setup

In order to complete this Part of the project, we will have to study the behavior of **PARSEC** in two different contexts. For both, we will require that **kubectl**, **kops** and **gcloud sdk** are set up. This should already be the case if you have completed Part 1.

We have provided you with a set of **yaml** files which are useful towards spawning **kubectl** jobs for workloads and interference. The interference files are the same as in Part 1, **but you must change the nodetype from memcached to parsec**. The workloads are in the **parsec-benchmarks** folder in the github repo. All these files cover the workloads in the **PARSEC** suite, as well as the **iBench** interference sources relevant for this part: **cpu**, **l1d**, **l1i**, **l2**, **l1c**, **memBW**.

#### 2.1.1 PARSEC Behavior with Interference

For the first half of Part 2, you will have to set up a single node cluster consisting of a VM with 2 CPUs. For this, we will employ **kops** and make use of the **part2a.yaml** file (make sure to update the file with values for your GCP project and configBase):

```
$ export KOPS_STATE_STORE=<your-gcp-state-store>
$ PROJECT=`gcloud config get-value project`
$ kops create -f part2a.yaml
$ kops update cluster part2a.k8s.local --yes --admin
$ kops validate cluster --wait 10m
$ kubectl get nodes -o wide
```

If successful, you should see something like this:

NAME	STATUS	ROLES	AGE	VERSION	INTERNAL-IP	EXTERNAL-IP
master-europe-west3-a-9nx1	Ready	master	3m2s	v1.19.7	10.156.0.46	34.107.0.118
parsec-server-s28x	Ready	node	104s	v1.19.7	10.156.0.47	35.234.110.58

Now you should be able to connect to the **parsec-server** VM using either **ssh**:

```
$ ssh -i ~/.ssh/cloud-computing ubuntu@35.234.110.58
```

Or by using **gcloud**:

```
$ gcloud compute ssh --ssh-key-file ~/.ssh/cloud-computing ubuntu@parsec-server-s28x \
--zone europe-west3-a
```

To make sure that the jobs can be scheduled successfully, run the following command in order to assign the appropriate label to the **parsec** node (replace the **<parsec-server-name>** with the name of the parsec server observed in the output of the **kubectl get nodes** command):


```
$ kubectl label nodes <parsec-server-name> cca-project-nodetype=parsec
```

For this part of the study we will sometimes require to set up some form of interference, and also deploy a job. For this example, we will use the **PARSEC dedup** job together with **iBench** CPU interference. Here is where we will use **kubectl** together with some of the **yaml** files we provide. The following code snippet spins up the interference, and runs the **PARSEC dedup** job:

```
$ kubectl create -f interference/ibench-cpu.yaml # Wait for interference to start
$ kubectl create -f parsec-benchmarks/part2a/parsec-dedup.yaml
```

Please note that, for Part 2a, you should use the job templates contained in the **parsec-benchmarks/part2a** folder. **blackscholes**, **canneal**, **ferret** and **frequemine** use the *simlarge* dataset, while **dedup**, **radix**, and **vips** use the *native* dataset. This is specified in the startup command for the container in the template file.

Make sure that the interference has properly started **before** running the **PARSEC** job. One way to see if the interference and the **PARSEC** job has started refers to **ssh**-ing into the VM and using the **htop** command to inspect running processes. You should see an image like below:

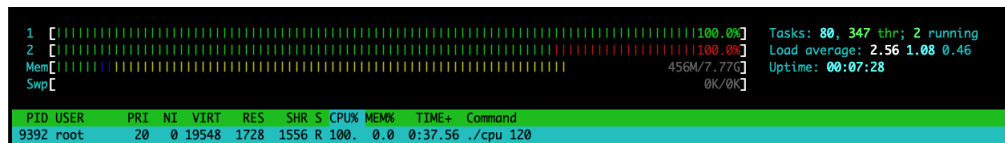

You can get information on submitted jobs using:

```
$ kubectl get jobs
```

In order to get the output of the **PARSEC** job, you will have to collect the logs of its pods. To do so, you will have to run the following commands.

```
$ kubectl logs $(kubectl get pods --selector=job-name=<job_name> \
--output=jsonpath='{.items[*].metadata.name}')
```

Note that the job name needs to match the one you get from **kubectl get jobs**.

**Run experiments sequentially and wait for one benchmark to finish before you spin up the next one.** Once you are done with running one experiment, make sure to terminate the started jobs. You can terminate them all together using:

```
$ kubectl delete jobs --all
$ kubectl delete pods --all
```

Alternatively, you can do so one-by-one using the following command:

```
$ kubectl delete job <job_name>
```

**IMPORTANT: you must delete your cluster when you are not using it! Otherwise, you will easily use up all of your cloud credits!** When you are ready to work on the project, you can easily re-launch the cluster with the instructions above. To delete your cluster, use the command:

```
$ kops delete cluster part2a.k8s.local --yes
```

### 2.1.2 PARSEC Parallel Behavior

For the second half of Part 2, you will have to look into the parallel behavior of **PARSEC**, more specifically, how does the performance of various jobs in **PARSEC** change as more threads are added (more specifically 1, 2, 4 and 8 threads). For this part of the study, no interference is used.

You will first have to spawn a cluster as in section 2.1.1, however, this time use the **part2b.yaml** file we provided (make sure to update the file with values for your GCP project and configBase). Once more, this will be a single node cluster with an 8 CPU VM. You will have to vary the number of threads for each **PARSEC** job. To do so, change the value of the **-n** parameter in the relevant **yaml** files. The corresponding **.yaml** files are in **parsec-benchmarks/part2b** folder of the GitHub repo. Note that, for Part 2b, all of the jobs use the *native* dataset.

Other relevant instructions for this task can be found in section 2.1.1.

**IMPORTANT: you must delete your cluster when you are not using it! Otherwise, you will easily use up all of your cloud credits!** When you are ready to work on the project, you can easily re-launch the cluster with the instructions above. To delete your cluster, use the command:

```
$ kops delete cluster part2b.k8s.local --yes
```

## 2.2 Notes

- Writing a script to automatize the data collection for Parts 1 and 2 is not mandatory and will not affect the grading. However, using automation scripts will be required for Parts 3 and 4, thus we encourage you to practice this approach in order to save time in the future.
- Parts 3 and 4 of the project are more resource-demanding and more costly in comparison to Parts 1 and 2 so make sure to plan your budget (usage of redeemed cloud credits) accordingly.

### 3 FAQ


- When running **kops create**:
  - if you get the following error: **failed to create file as already exists: gs://cca-eth-2023-group-XXX-ethzid/part1.k8s.local/config. error: error creating cluster: file already exists**, you need to delete the contents of your Google Cloud storage bucket, the recreate it with the following commands:

```
$ gsutil rm -r gs://cca-eth-2023-group-XXX-ethzid/  
$ gsutil mb gs://cca-eth-2023-group-XXX-ethzid/
```
  - if you get the following error: **Error: error creating cluster: error writing Cluster "part1.k8s.local": error from acl provider "k8s.io/kops/acl/gce": error querying bucket "...": googleapi: Error 404: The requested project was not found., notFound**, make sure you have set the credentials correctly:


```
$ gcloud auth application-default login
```
- When ssh-ing into a cluster node, if you get an error like **WARNING: REMOTE HOST IDENTIFICATION HAS CHANGED!**

```
...  
Offending ED25519 key in /Users/username/.ssh/known_hosts:9  
...  
Host key verification failed
```


then you need to run **ssh-keygen -R <host>** where **<host>** is the IP address of the server you want to access.
- If **kubectl** commands prompt you for a username and password, or if **kops validate** says **Unauthorized**, first try to re-export the k8s credentials configuration using **kops export kubecfg --admin**. If it still does not work, delete the cluster and recreate it from scratch.
- If for any reason you cannot delete the cluster with the **kops** command do the following:
  - Go to **console.cloud.google.com**
  - Type in the search bar the term “Load balancers”. You should be redirected to a page similar to the one below:

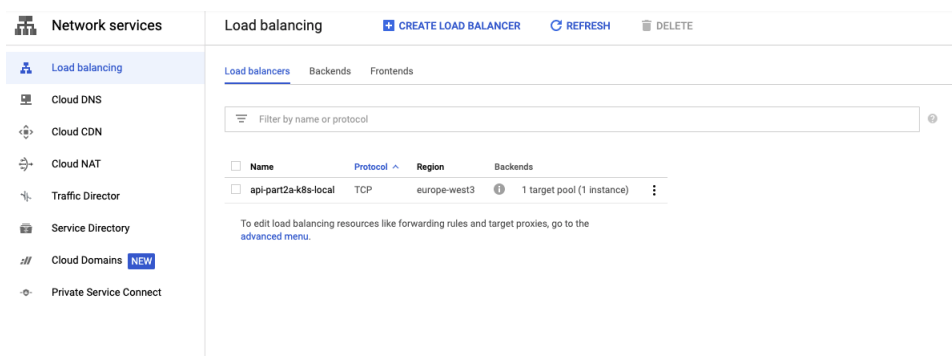


- Select and delete the load balancer.
- Then type in the search bar the term “Instance groups”. You should be redirected to a page similar to the one below:

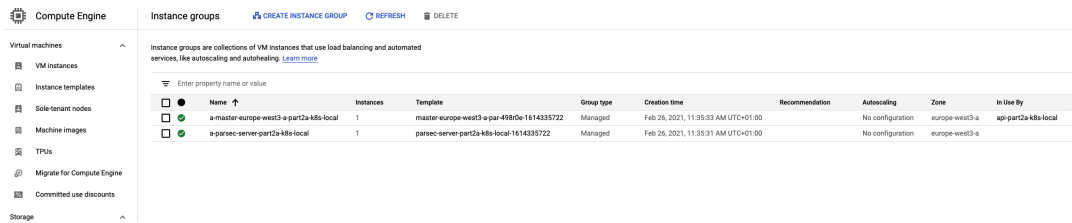

- Select and delete all the instance groups.
- Delete your Google Cloud storage bucket by typing:  
`$ gsutil rm -r gs://cca-eth-2023-group-XXX-ethzid/`
- Also under “External IP addresses” check there are no charges for left over static IPs.
- If your Google Cloud Credits are disappearing even though no charges appear on your Billing Overview, make sure you have unselected “Promotions”
- Go to **console.cloud.google.com**
- Type in the search bar the term “Account Overview”. Select “Go to linked billing account” if prompted. You should be redirected to a page similar to the one below:

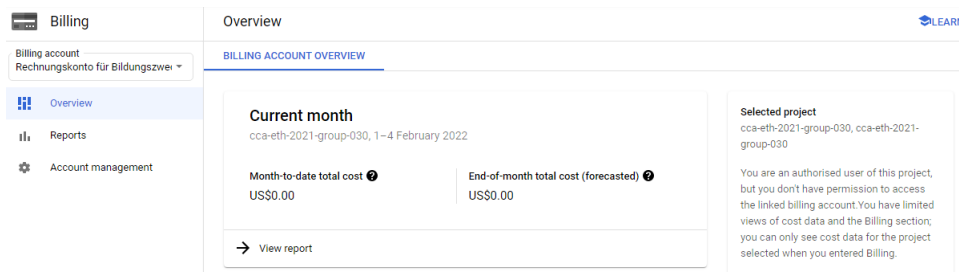

- Click on “View report”.
- Make sure you unclick “Promotions and Other” as shown below and select a reasonable To/From time range:

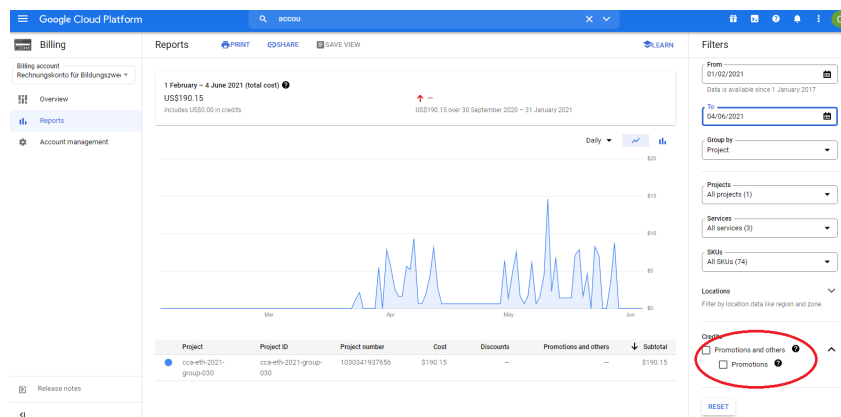

- If you run out of credits for your project, please email [cloud-arch-ta@lists.inf.ethz.ch](mailto:cloud-arch-ta@lists.inf.ethz.ch) to request additional cloud credits.