9:59 86%

new*

new* new* new*

```
1  #include<iostream>
2  using namespace std;
3
4  int main()
5  {
6      char letter;
7      letter = 'A';
8      cout << letter << '\n';
9      letter = 'B';
10     cout << letter << '\n';
11     cin >> letter;
12
13     return 0;
14 }
```

Tab { } : ; "

1 2 3 4 5 6 7 8 9 0

q w e r t y u i o p

a s d f g h j k l

z x c v b n m

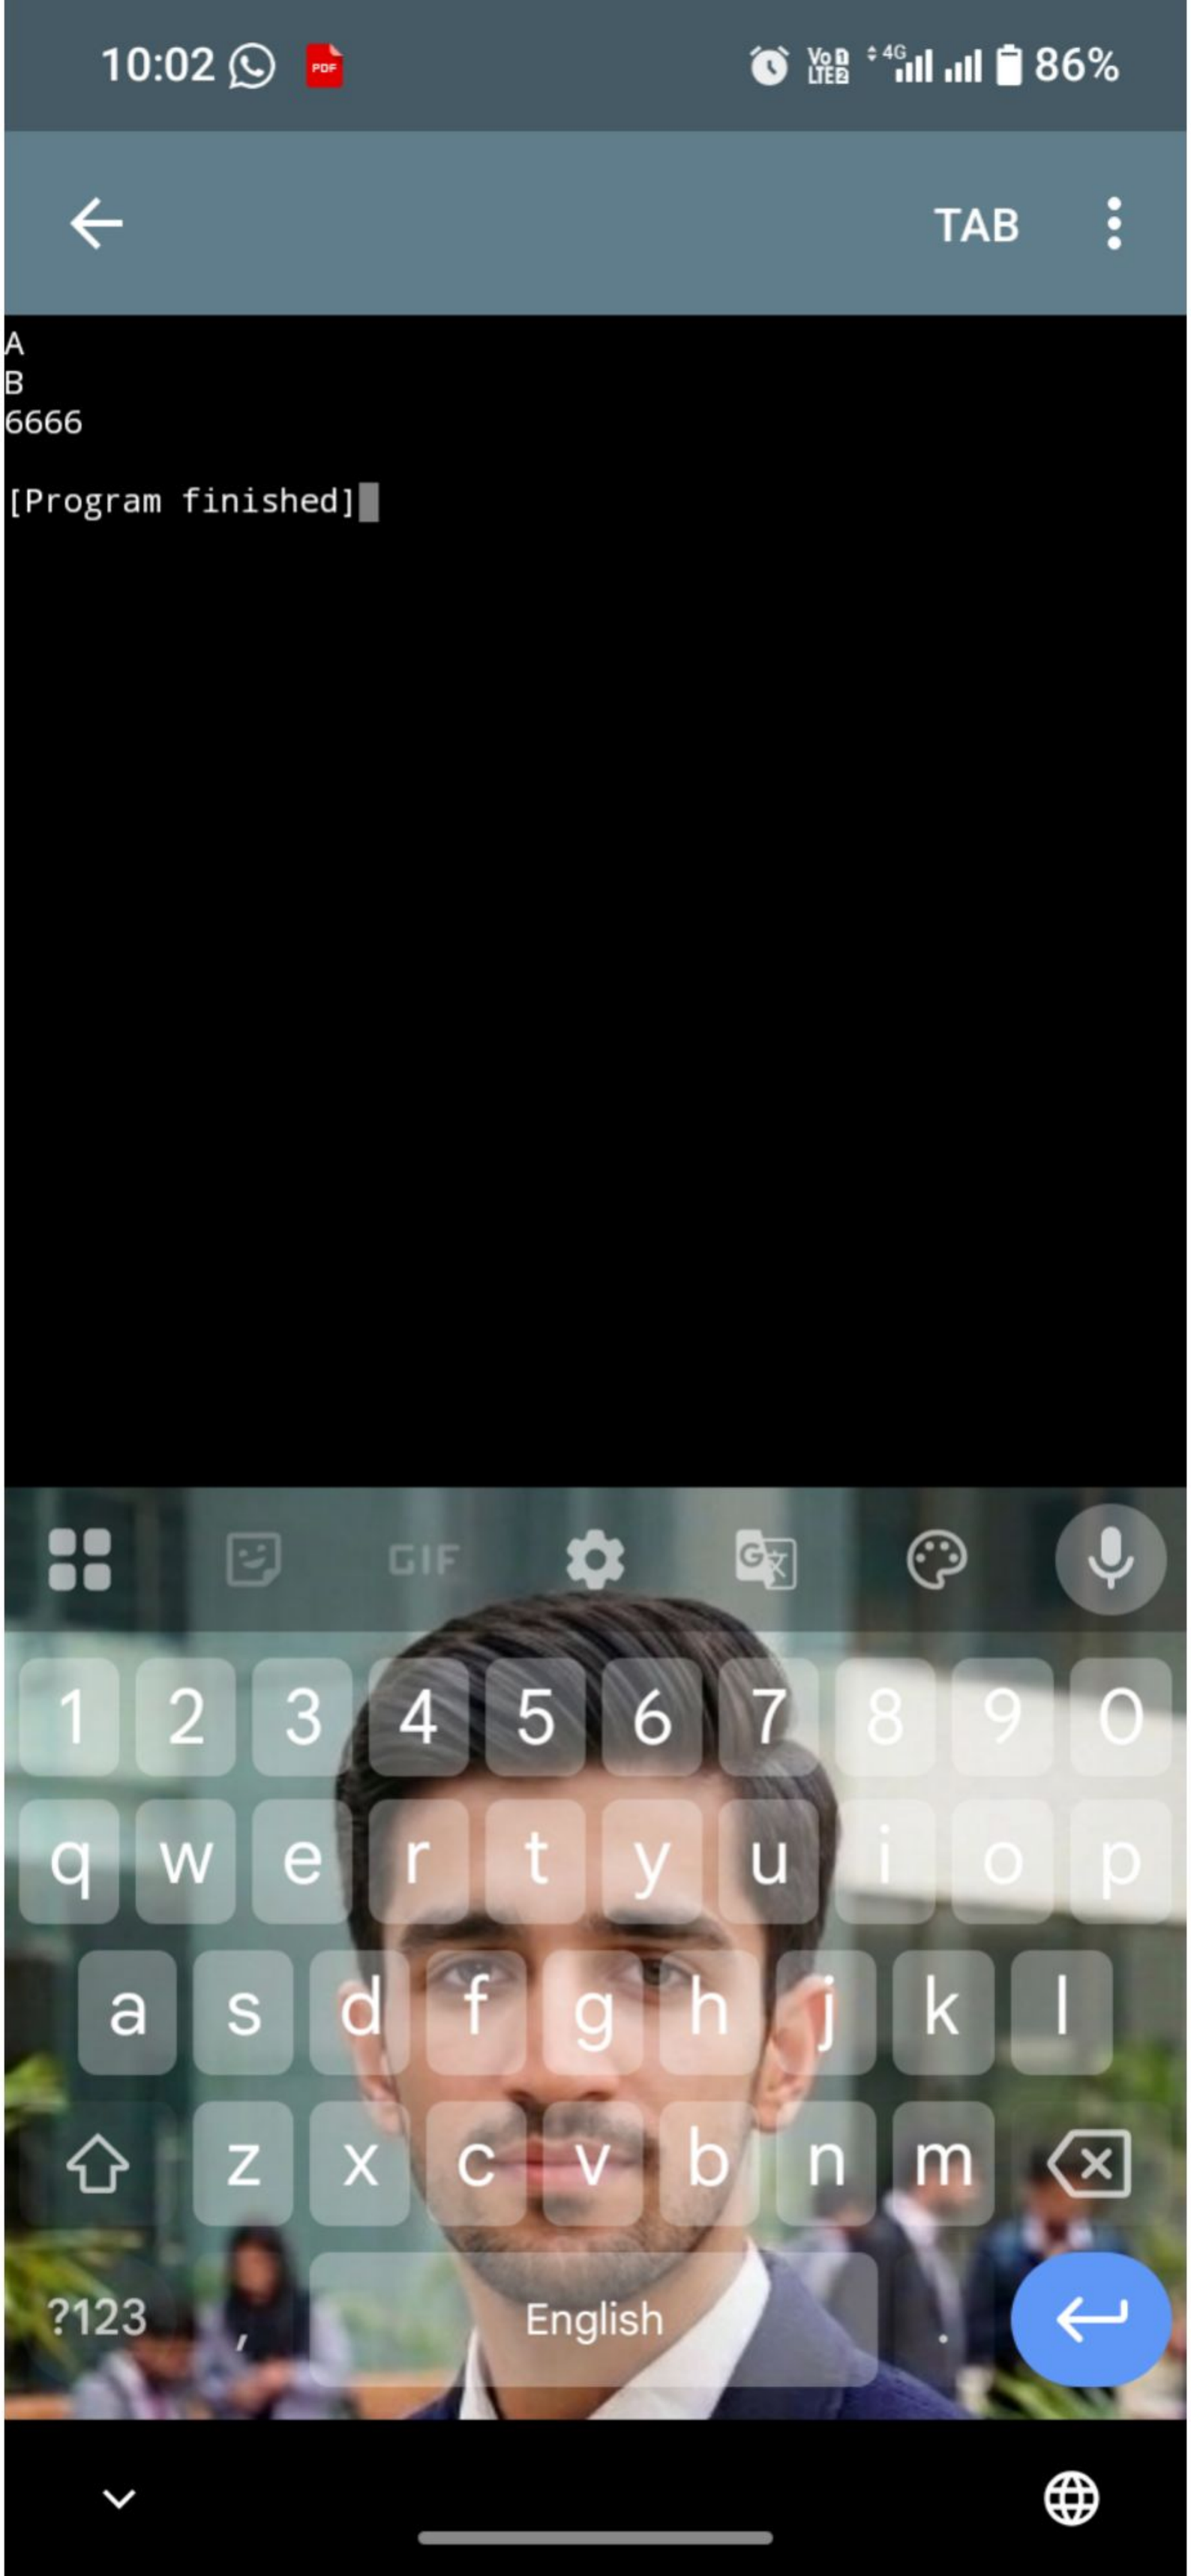
?123 , English .

TAB

A
B

GIF

1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123 , English .


10:02
86%
TAB
A
B
6666
[Program finished]
GIF
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

Date: Day:

TasK01

```
#include<iostream>
using name space Std;
int main ()
{
 char letter;
 letter = 'A';
 cout << letter<< '\n';
 ~~cout~~ letter 'B';
 Cout << letter << '\n';
 Cin >> letter;
 return 0;
}
```

output

```
A
B
```

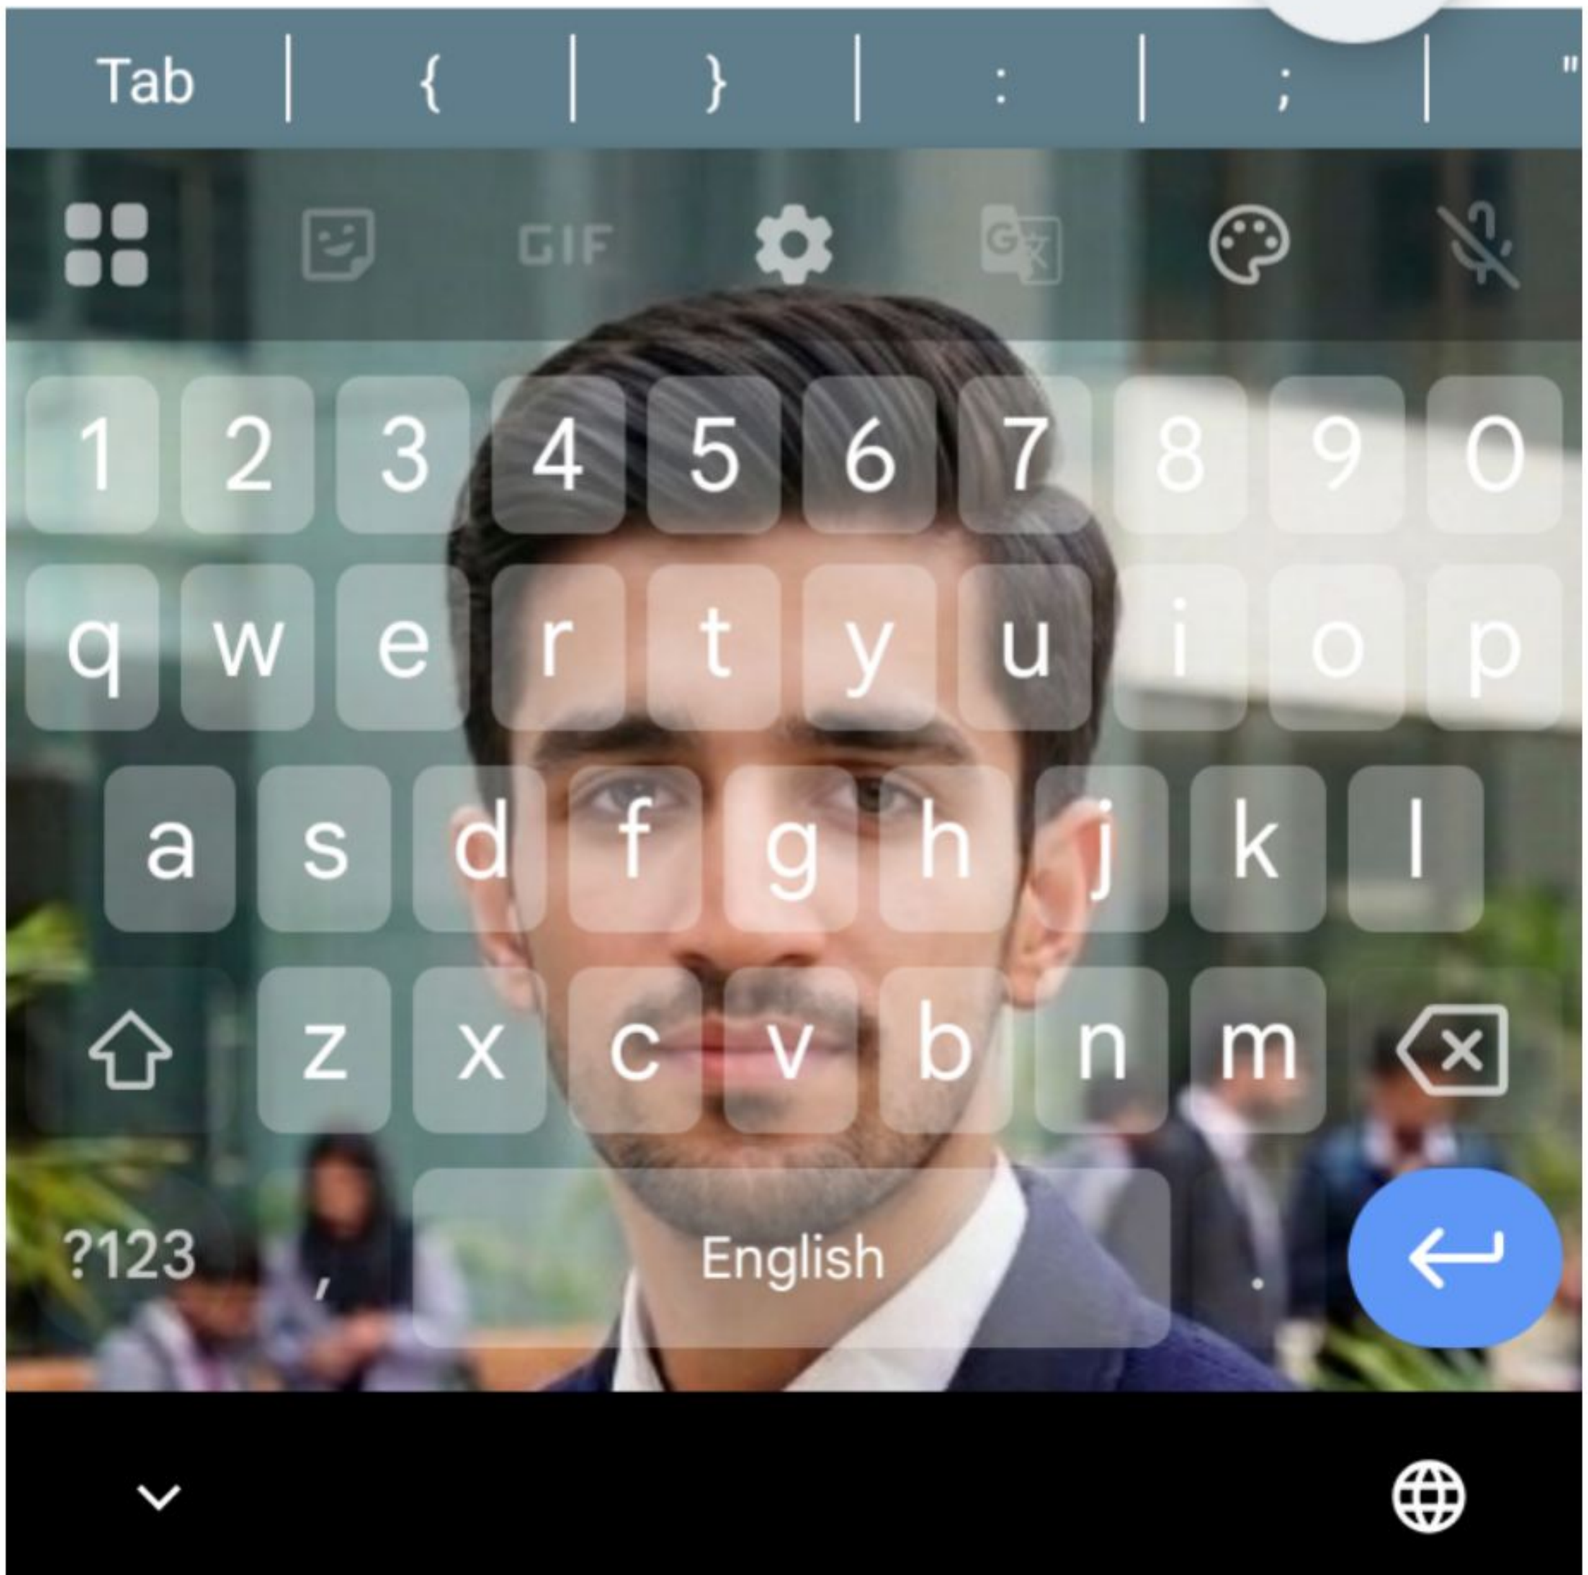
Date:

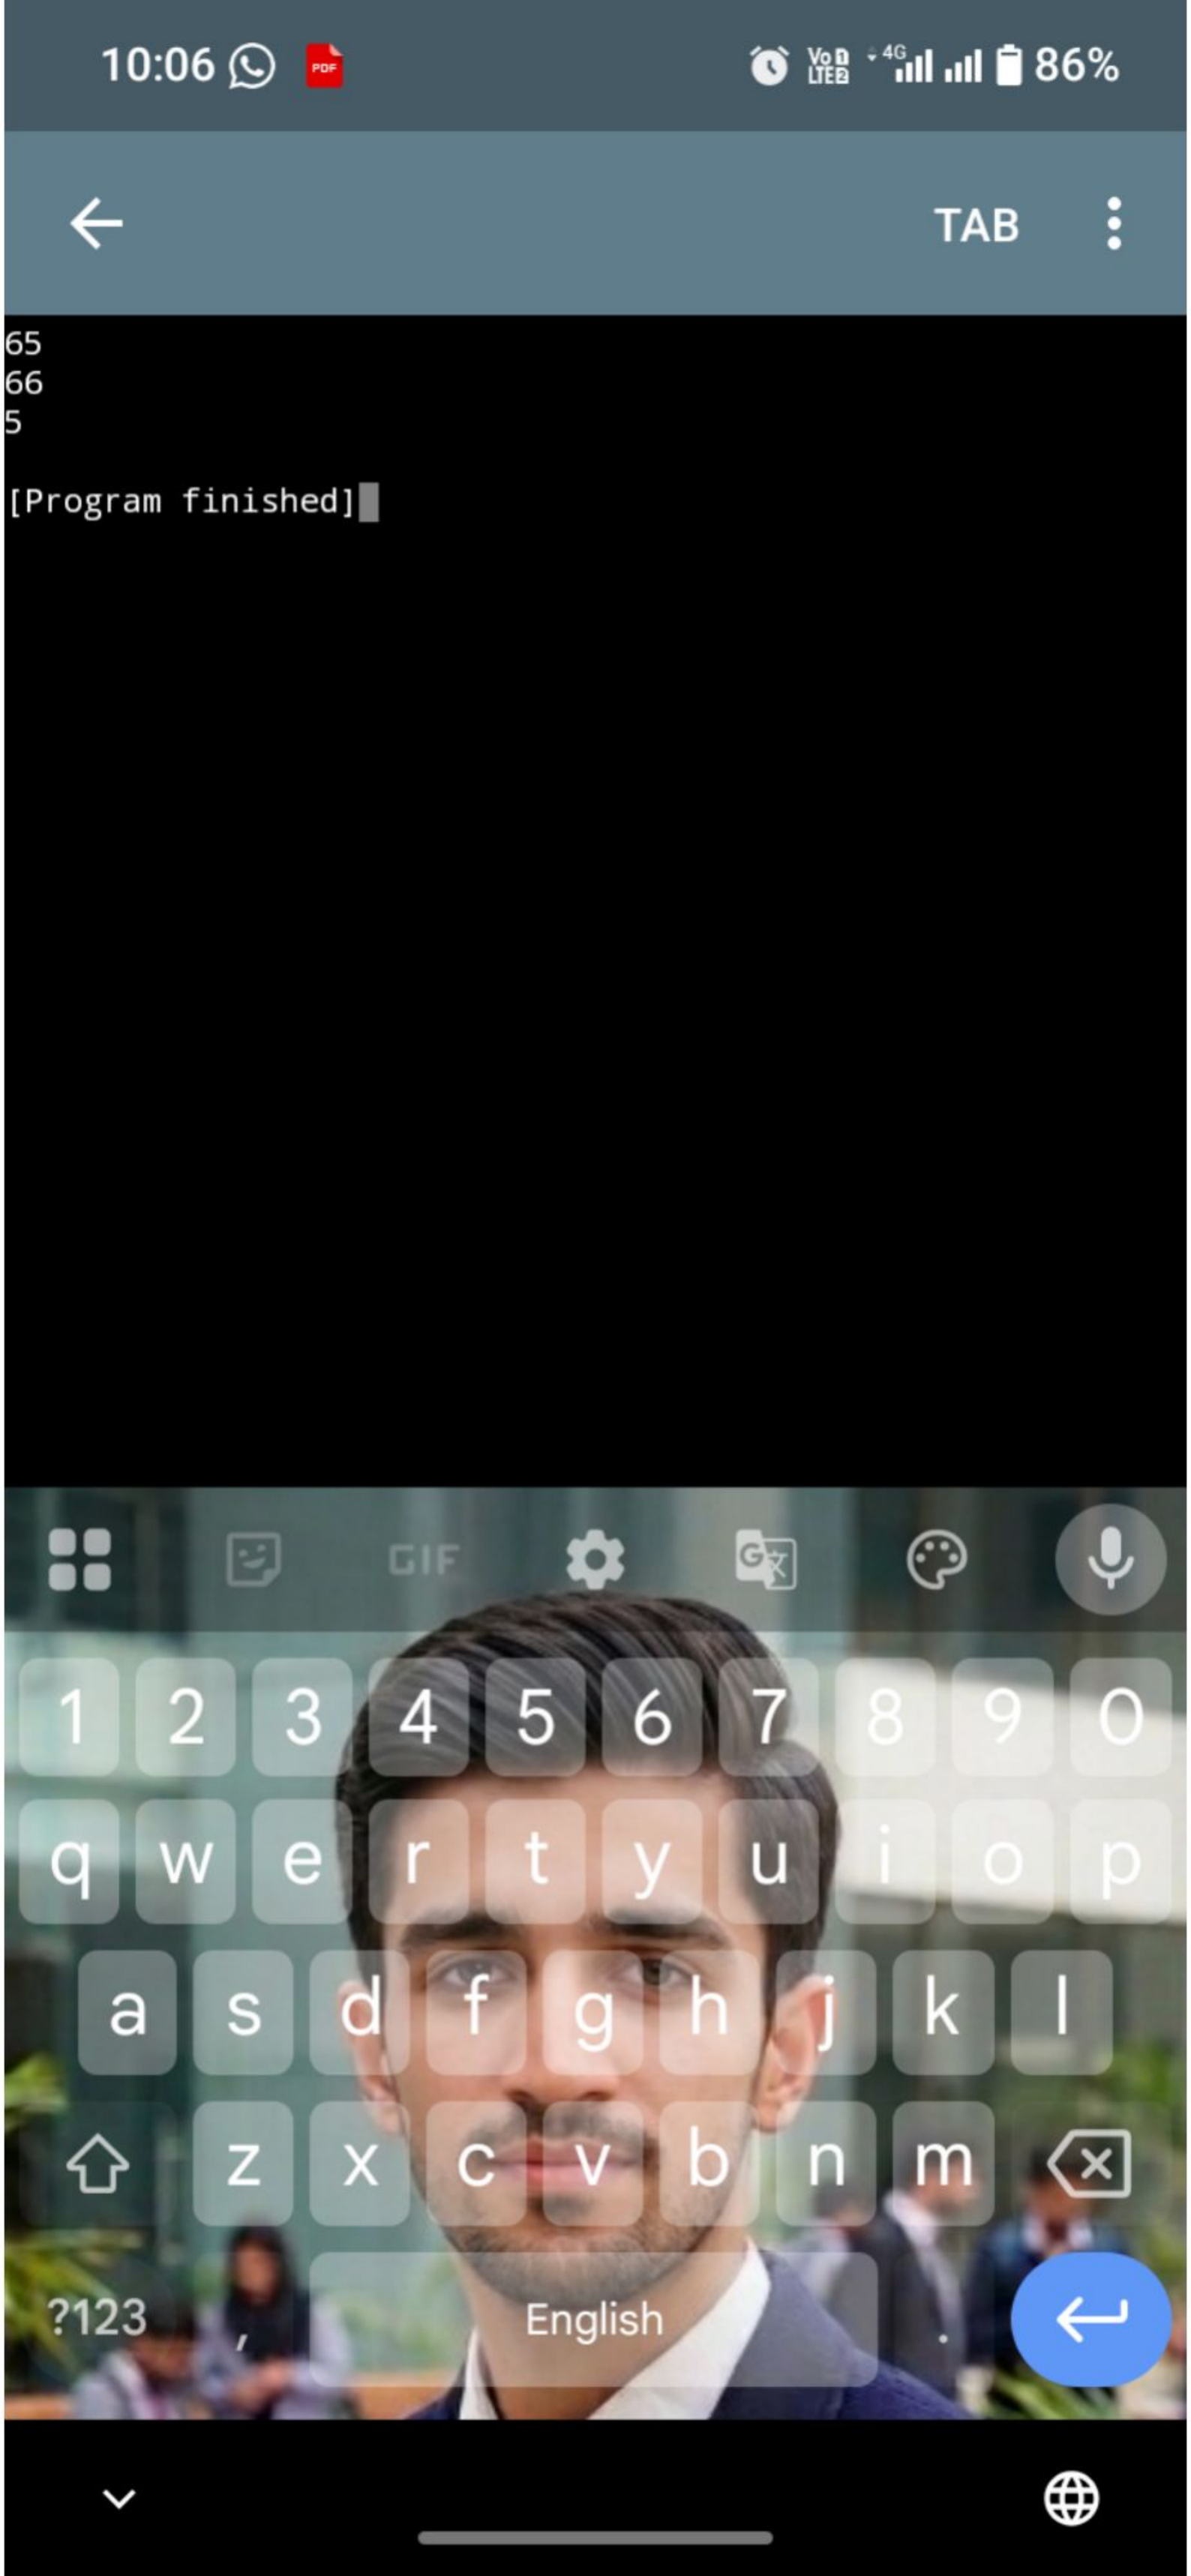
```
#inclu
usin
int
{
 ch
 let
 cou
 le
 co
 ci
 re
```

new*

new* new* new* new*

```
1  #include<iostream>
2  using namespace std;
3
4  int main()
5  {
6      int letter;
7      letter = 'A';
8      cout << letter << '\n';
9      letter = 'B';
10     cout << letter << '\n';
11     cin >> letter;
12
13     return 0;
14 }
```

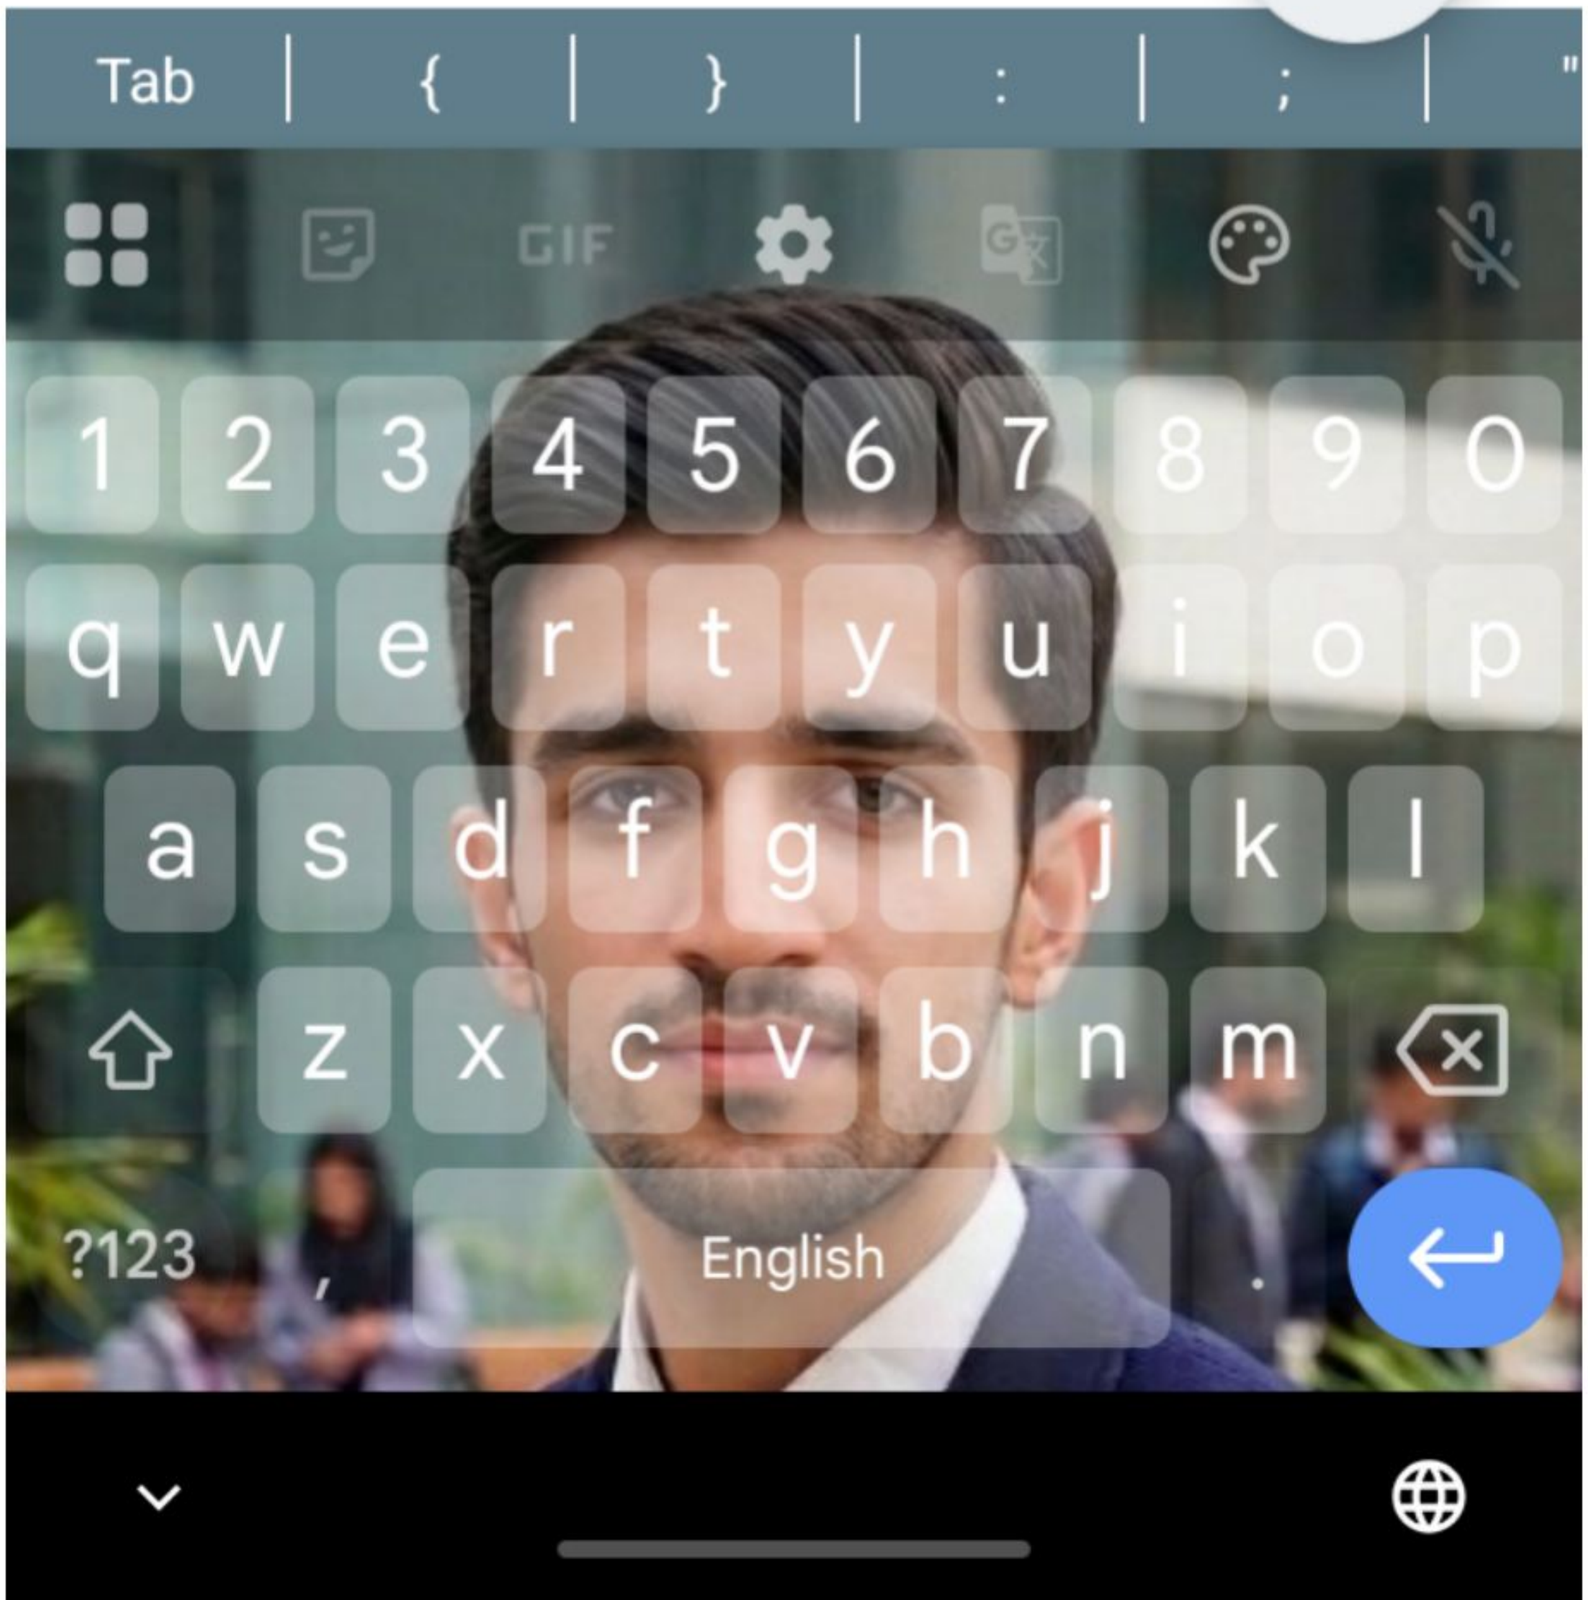



10:06
86%
TAB
65
66
5
[Program finished]
GIF
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

new*

new* new* new*

```
1  #include<iostream>
2  using namespace std;
3
4  int main()
5  {
6      char letter;
7      letter = 65;
8      cout << letter << '\n';
9      letter = 66;
10     cout << letter << '\n';
11     cin >> letter;
12
13     return 0;
14 }
```



10:19 85%

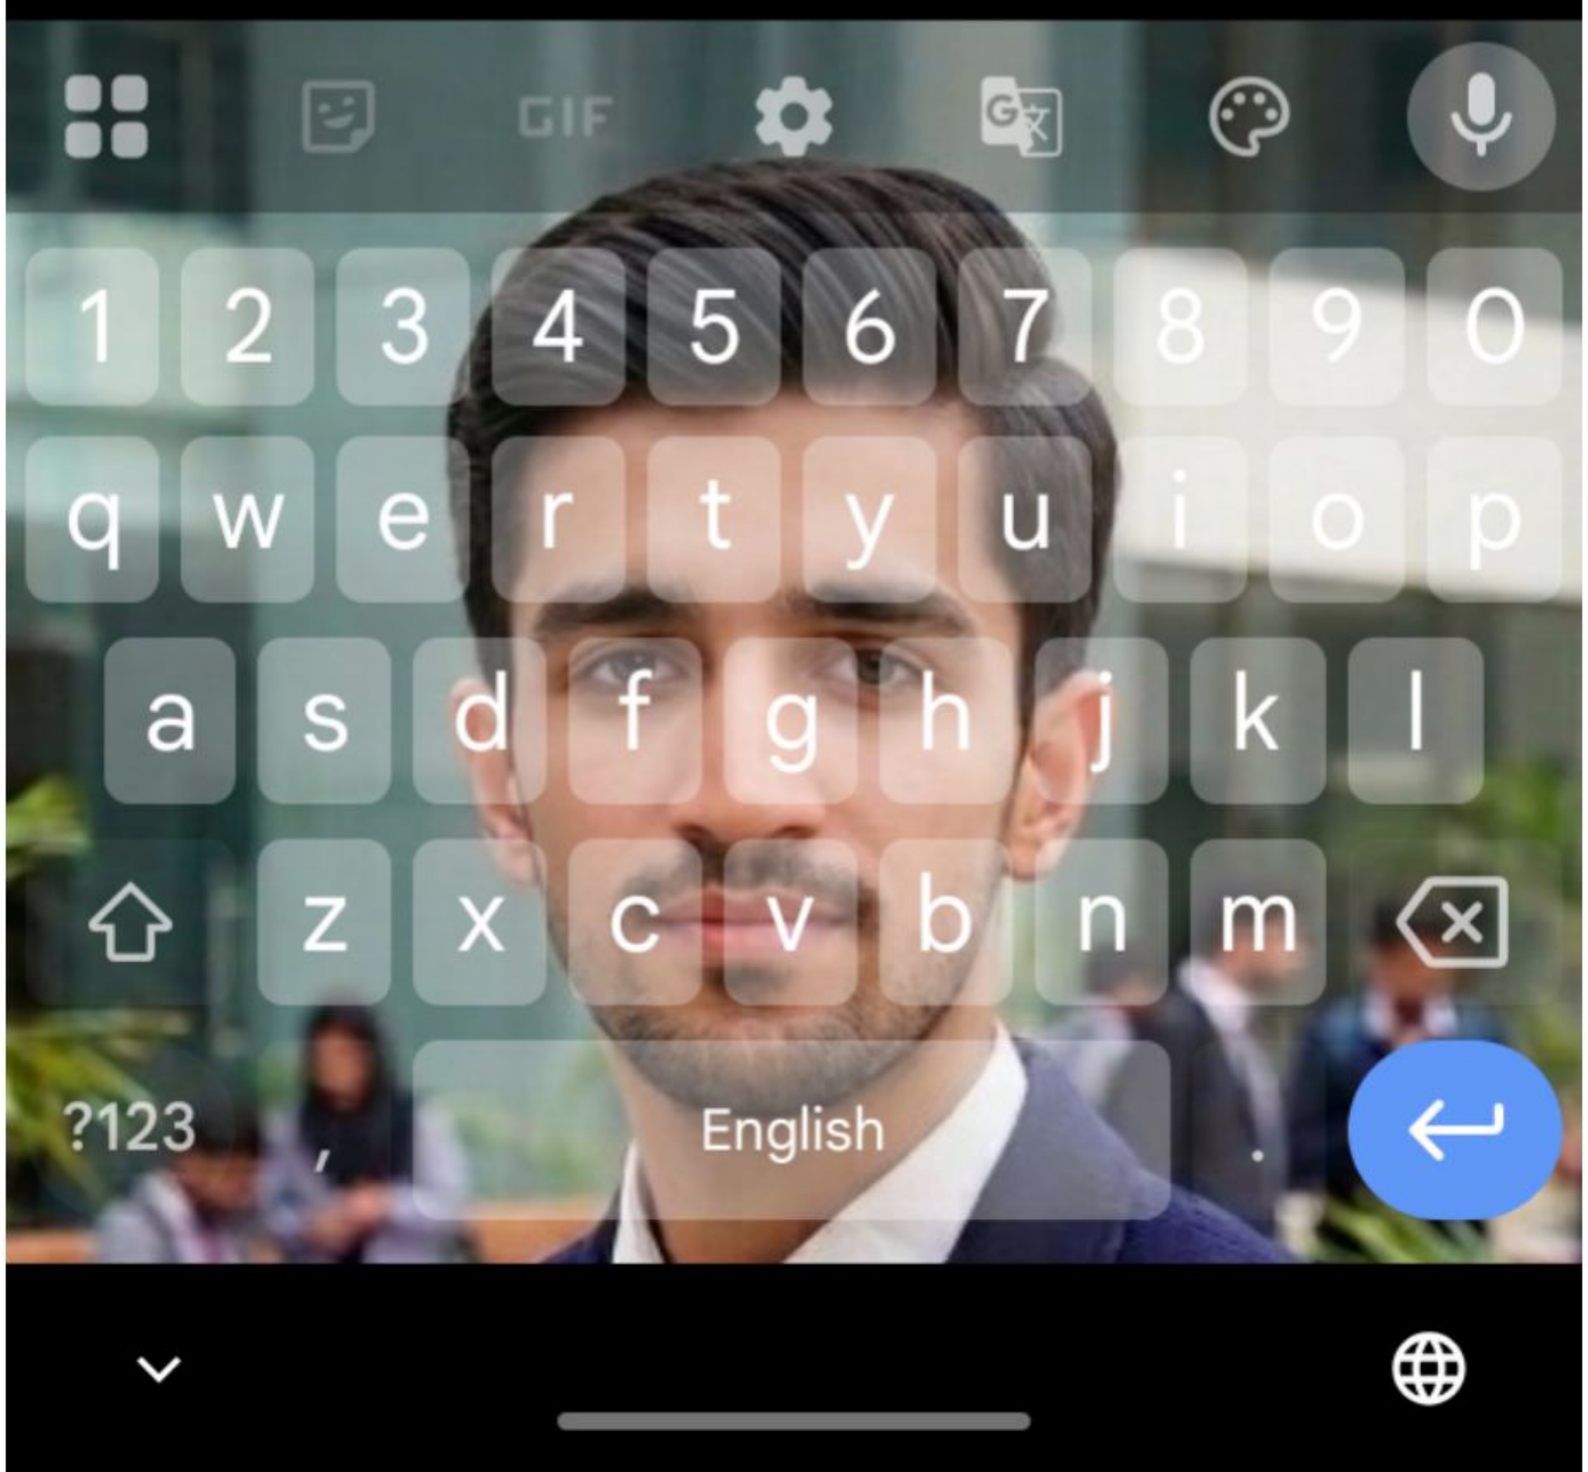
TAB

```
Enter two integers: 10



3
10 + 3 = 13
10 - 3 = 7
10 * 3 = 30
10 / 3 = 3
10 % 3 = 1

[Program finished]
```



```
#include<iostream>
using namespace std;
int main ()
{

int letter;
letter='A';
cout<< letter<<'\n';
letter='B';
cout<<letter<<'\n';
cin>>letter;
return 0;
}
```

output

```
65
66
5
```

Date: Day:

```
#include<iostream>
using namespace std;
int main()
{
 char letter;
 letter = 65;
 cout<<letter<<'\n';
 letter = 66;
 cout<< letter<<'\n';
 cin>> letter;
 return 0;
}
```

Out Put

```
A' = 65
B' = 66
```

Task 038-

```
#include "Stdafx.h"
#include<iostream>
using namespace std;
int main
{
int val1;
int val2;
int val3;
cout<<"Please enter your 3 numbers:";
cin>> val1>> val2>> val3;
cout<<val3 <<"\n"<<val2<<"\n"<<
val1<<"\n";
cout<<val3<<"\n"<<val2<<"\n"<<val1
<<"\n";
system("Pause");
return 0;
}
```

output

```
Please enter your 3 numbers:
5
10
15
15
10
5
```

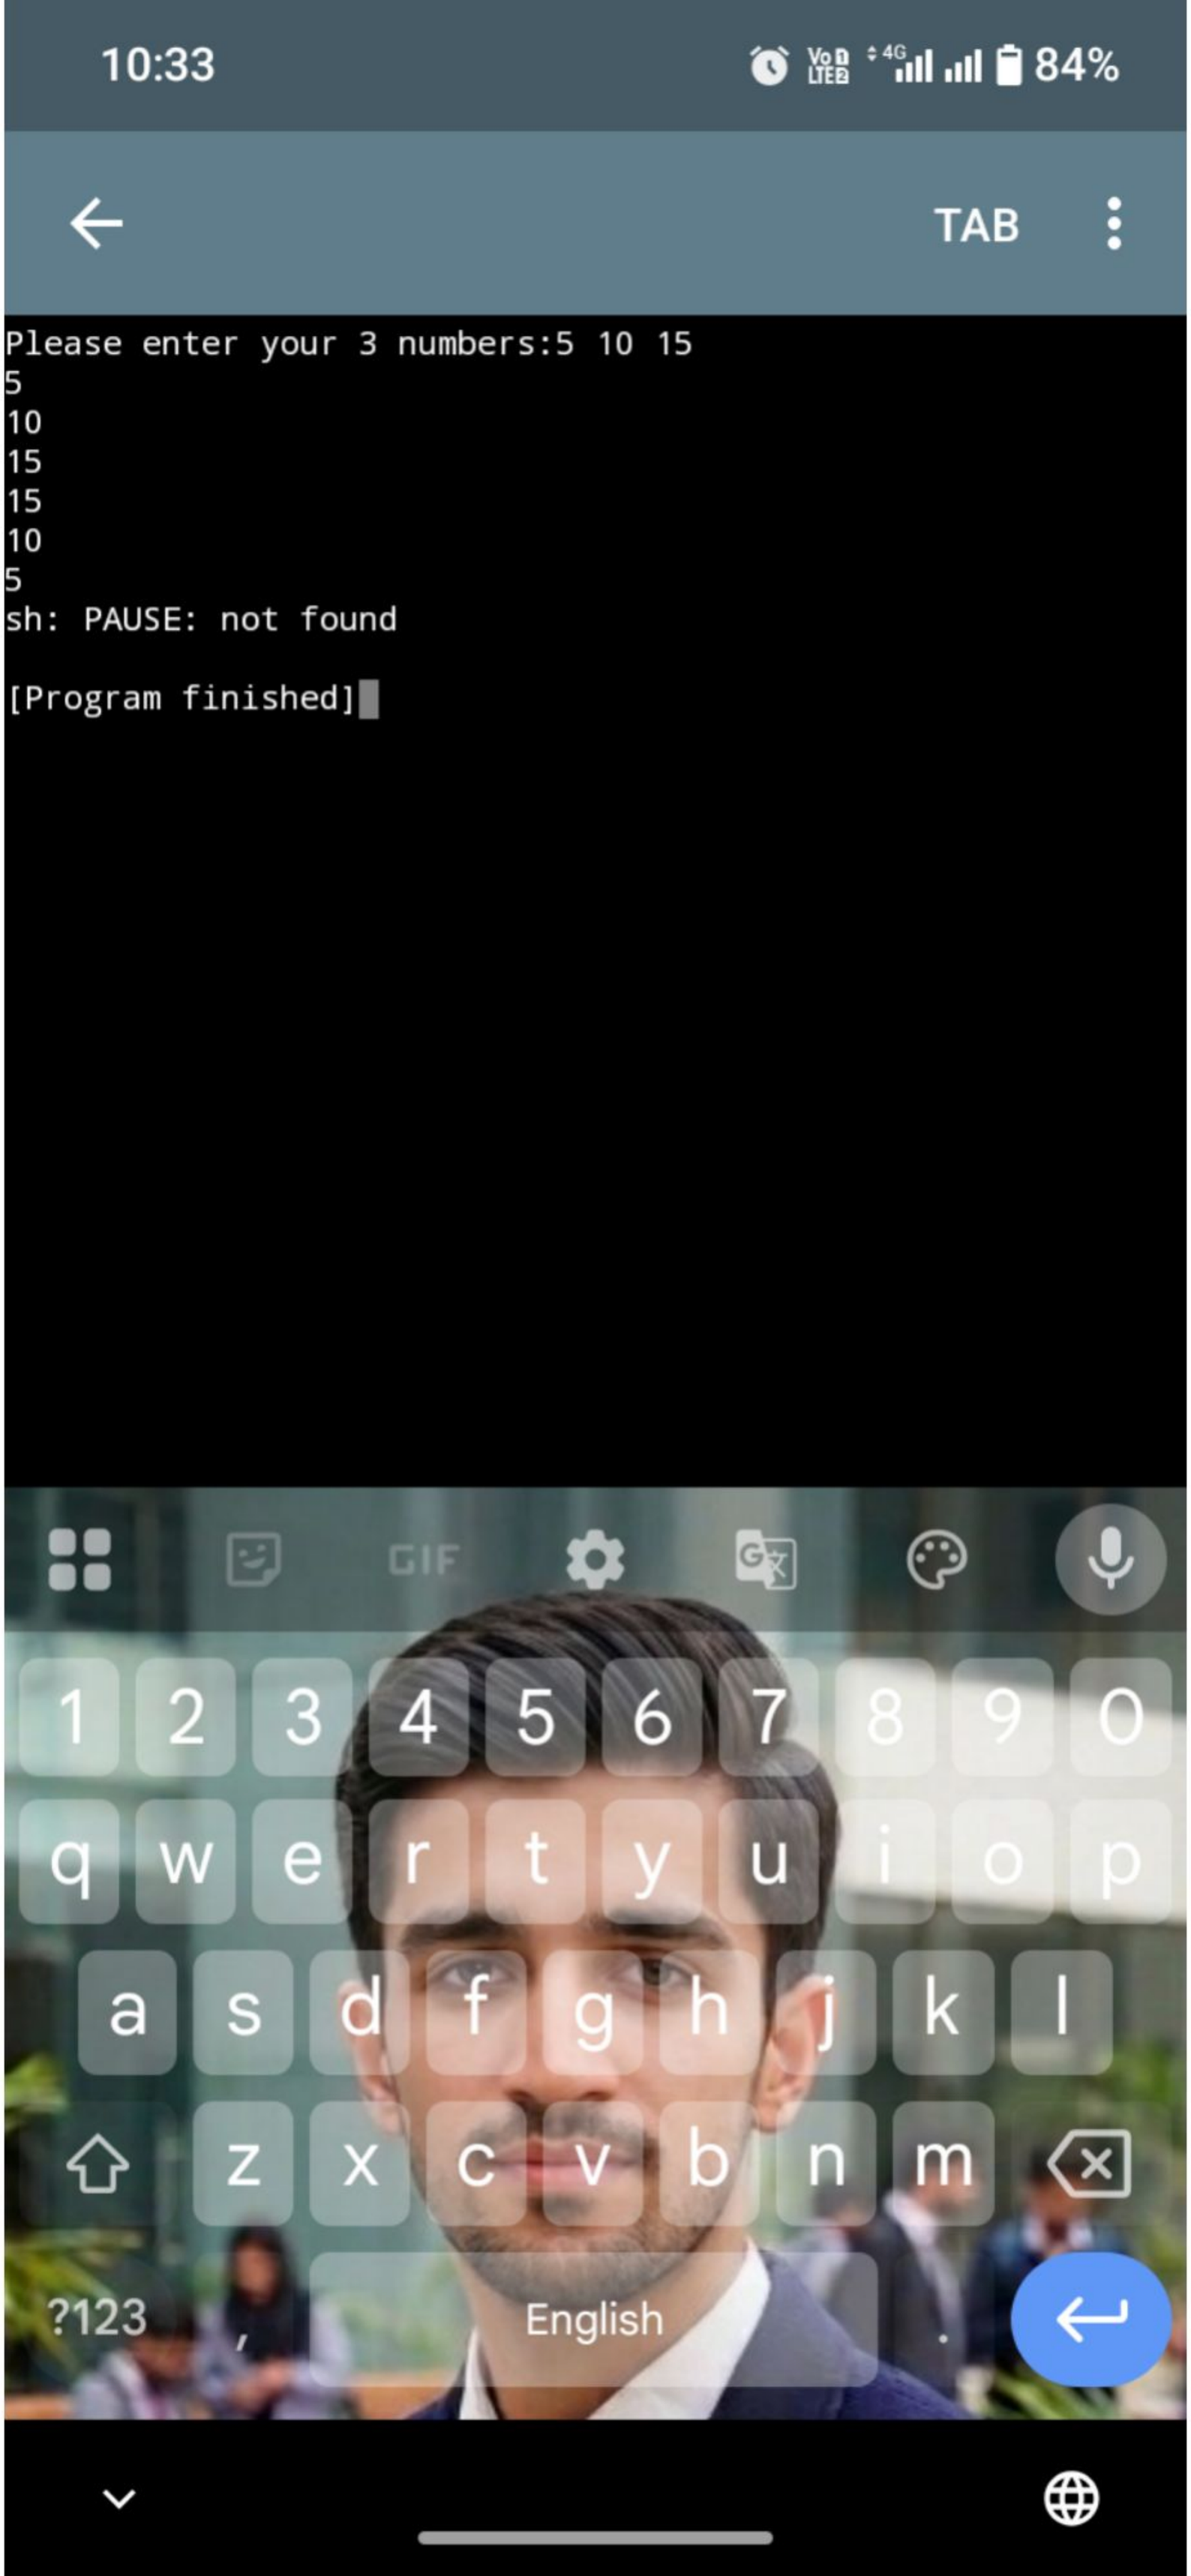
10:33 84%

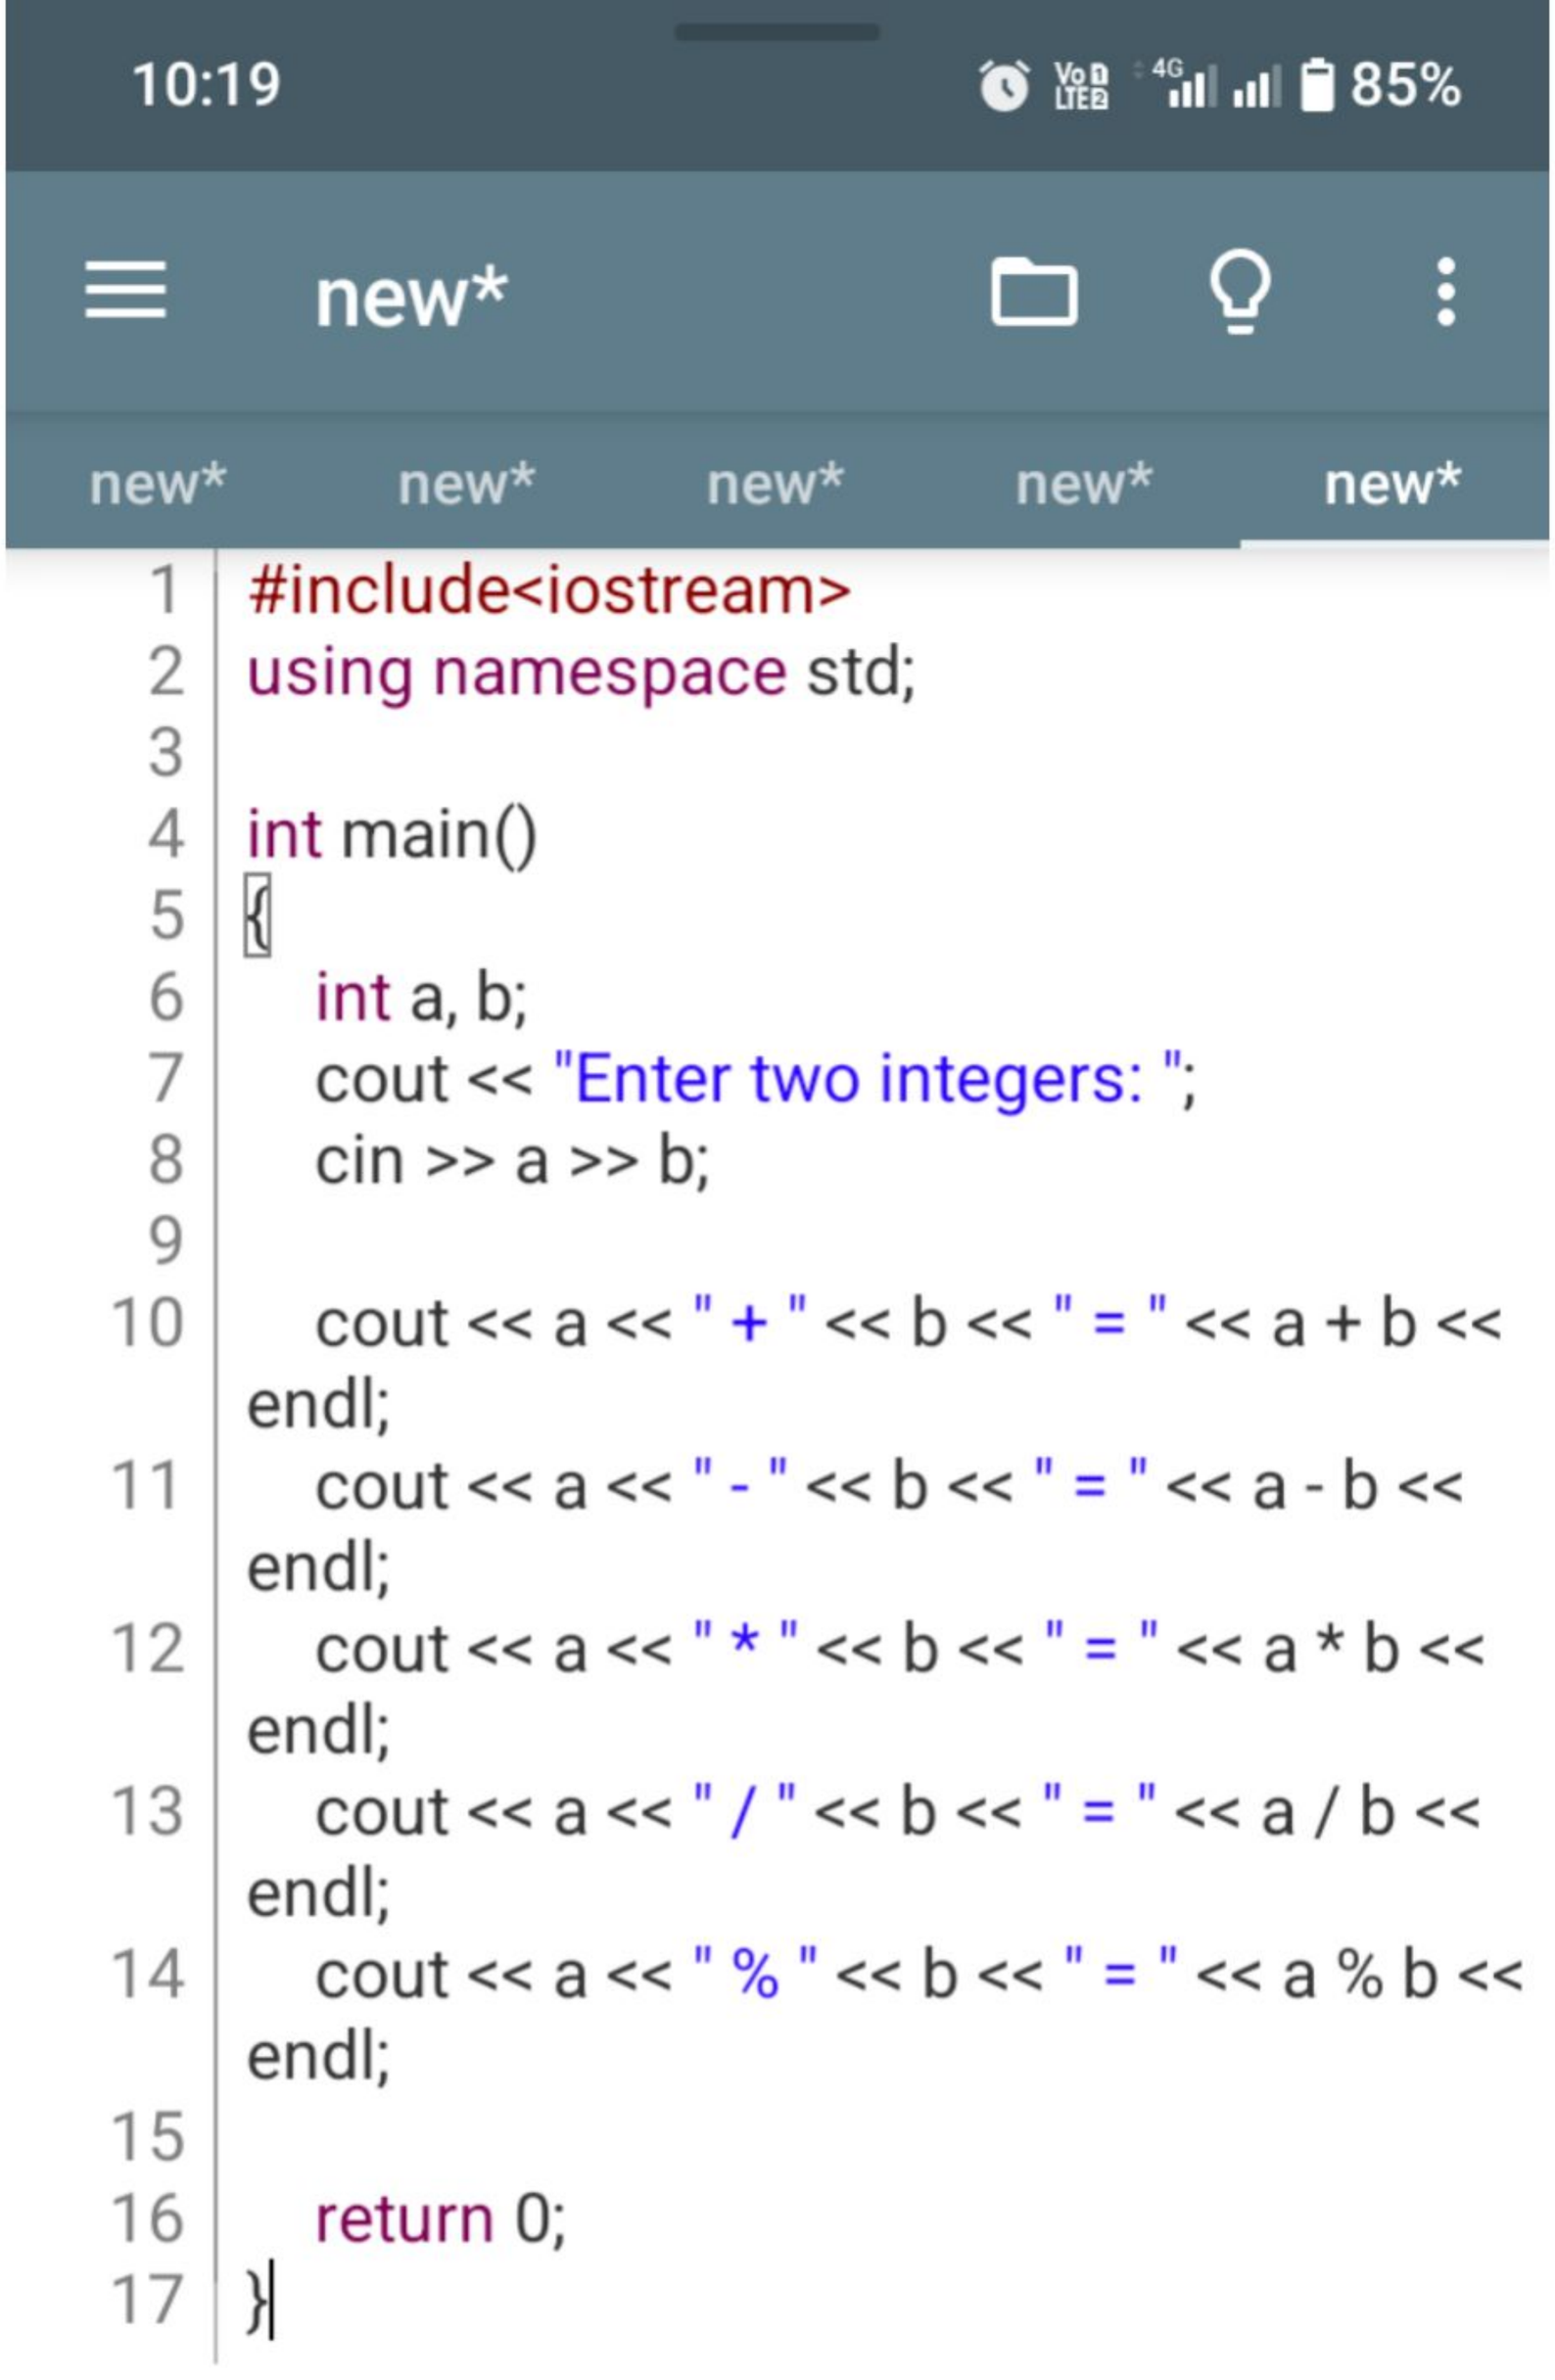
new*

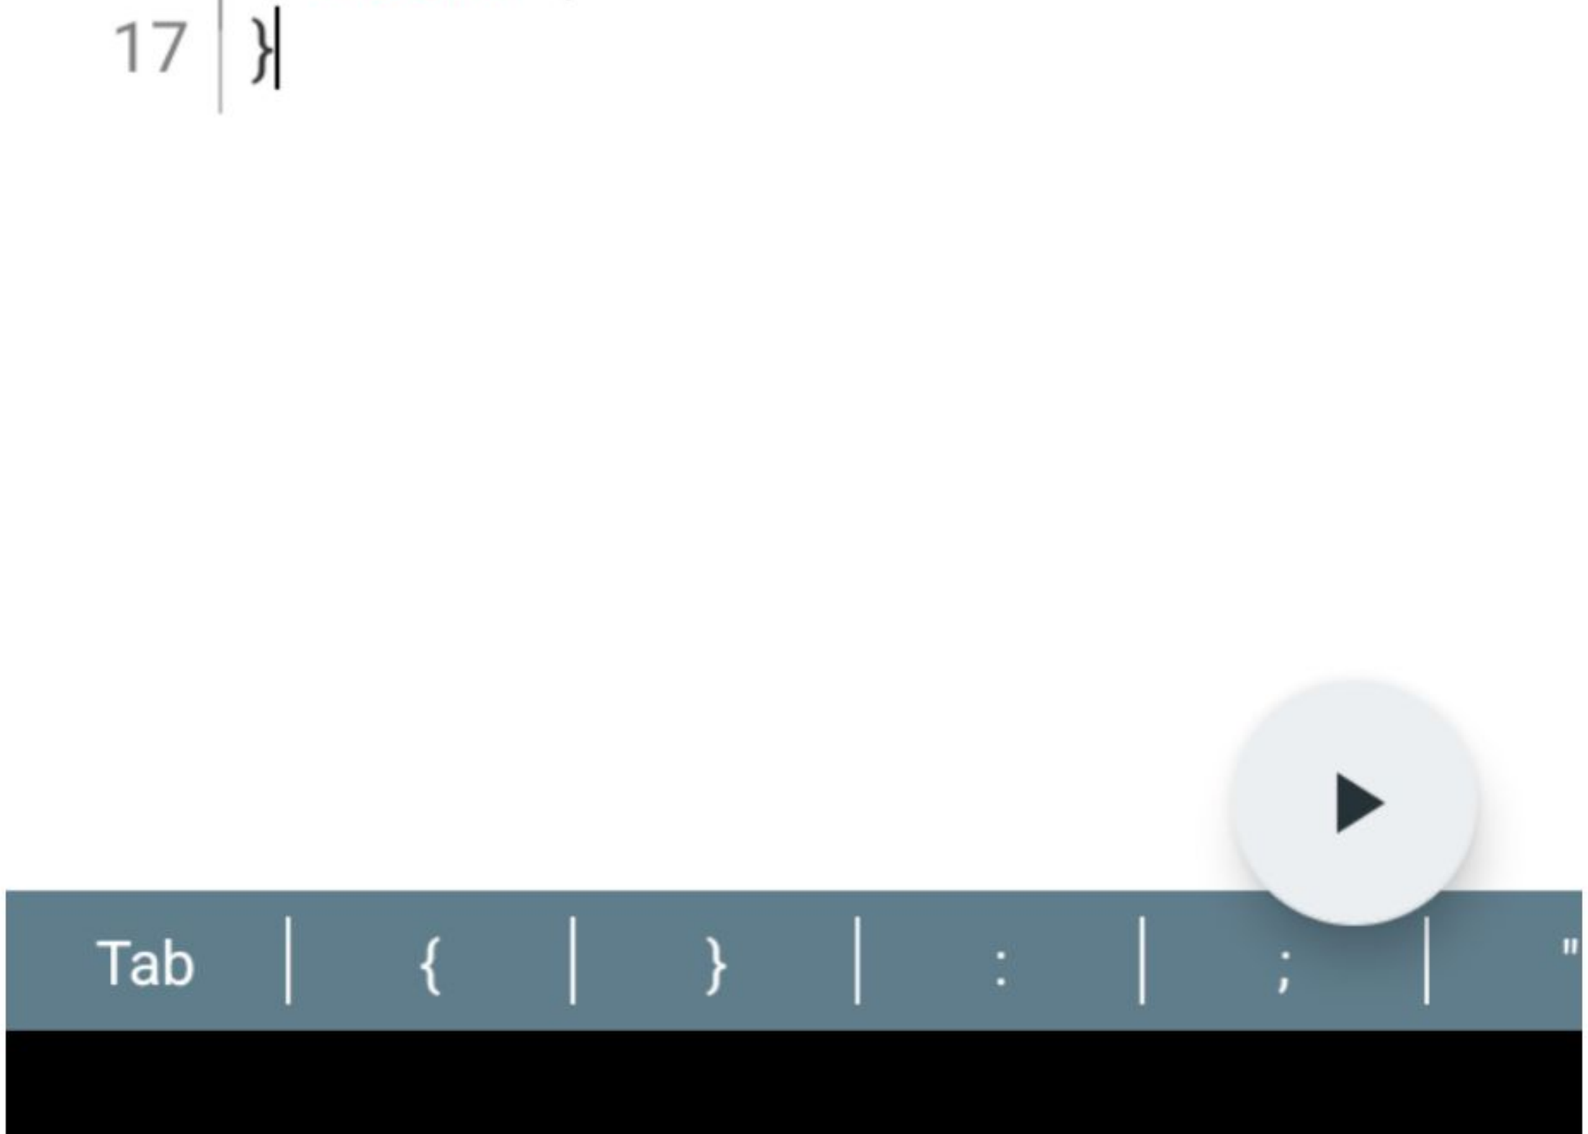
new* new* new* new* new*

```
1  #include "stdafx.h"
2  #include<iostream>
3  using namespace std;
4
5  int main()
6  {
7      int val1;
8      int val2;
9      int val3;
10     cout << "Please enter your 3 numbers:";
11     cin >> val1 >> val2 >> val3;
12
13     cout << val1 << "\n" << val2 << "\n" <<
   val3 << "\n";
14
15     cout << val3 << "\n" << val2 << "\n" <<
   val1 << "\n";
16     system("PAUSE");
17     return 0;
18 }
```

Tab | { | } | : | ; | "


10:33
84%
TAB
Please enter your 3 numbers:5 10 15
5
10
15
15
10
5
sh: PAUSE: not found
[Program finished]
GIF
English

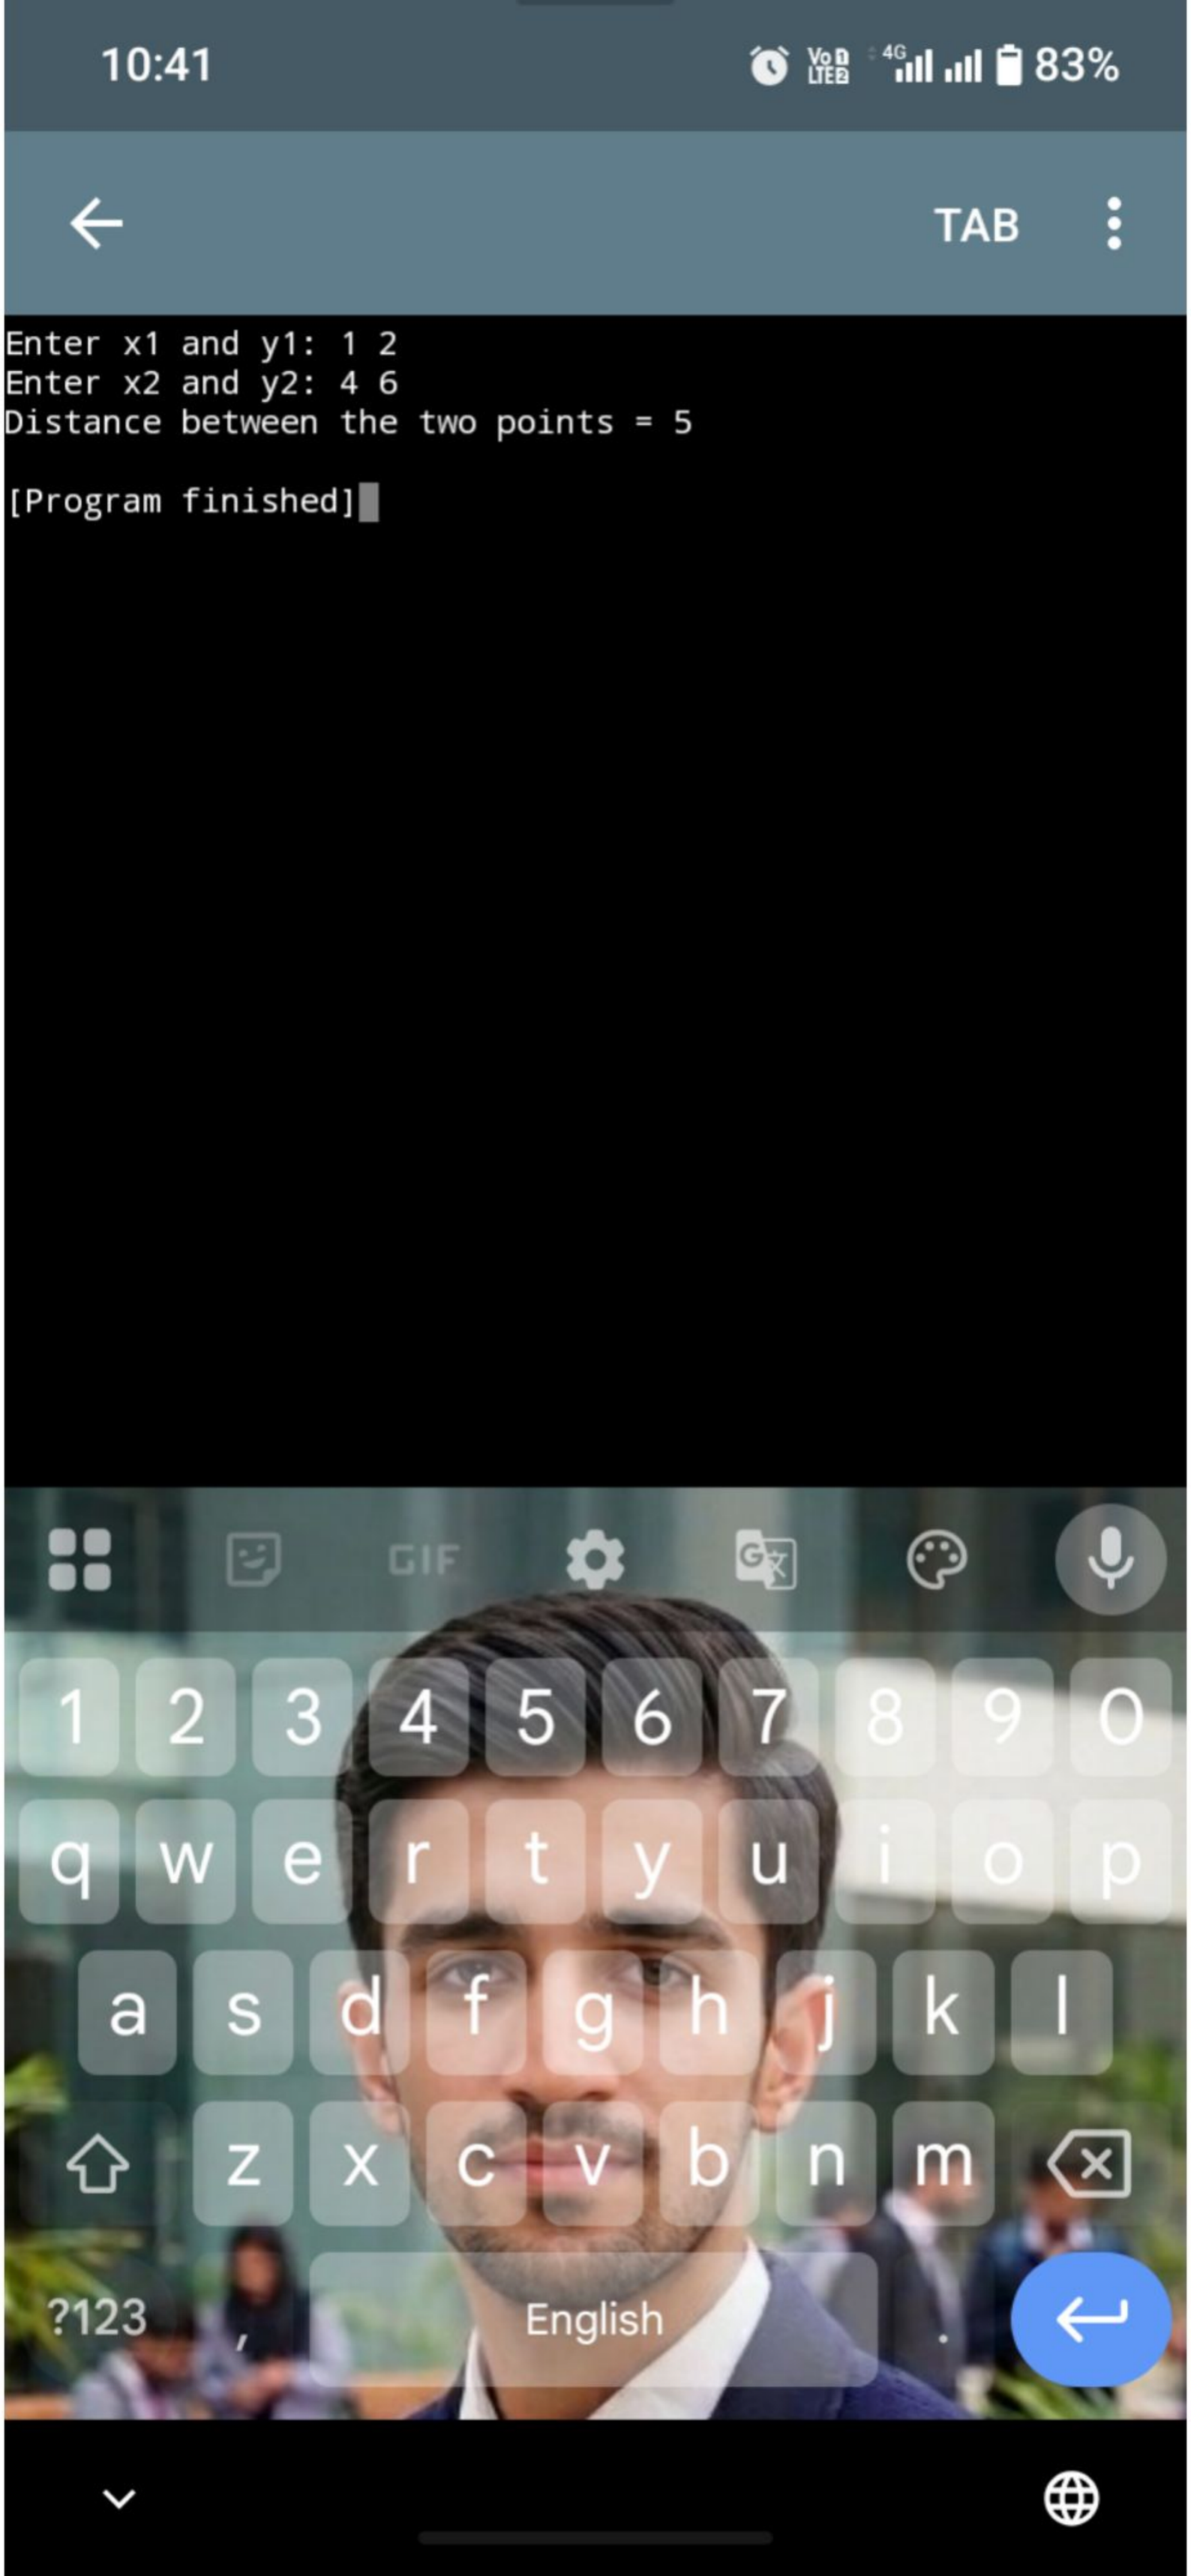

10:19
85%
new*
new*
new*
new*
new*
new*
1 #include<iostream>
2 using namespace std;
3
4 int main()
5 {
6 int a, b;
7 cout << "Enter two integers: ";
8 cin >> a >> b;
9
10 cout << a << " + " << b << " = " << a + b << endl;
11 cout << a << " - " << b << " = " << a - b << endl;
12 cout << a << " * " << b << " = " << a * b << endl;
13 cout << a << " / " << b << " = " << a / b << endl;
14 cout << a << " % " << b << " = " << a % b << endl;
15
16 return 0;
17 }


Tab
{
}
:
;
"

Date: Day:

TASK 04:-

```
#include<iostream>
#include<cmath>
using namespace std;
int main()
{
double x1, y1, x2, y2 distance;
cout<<"Enter x1 and y1:";
cin>>x1>>y1;
cout<<"Enter x2 and y2:";
cin>>x2>>y2;
distance=sqrt(pow(x2-x1,2)+pow(y2-y1,
2));
cout<<"distance b/w the two Points="
<<distance<<endl;
return 0;
}
```


10:41
83%
TAB
Enter x1 and y1: 1 2
Enter x2 and y2: 4 6
Distance between the two points = 5
[Program finished]
GIF
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

10:40 83%

new*

new* new* new* new* new*

```cpp
#include<iostream>
#include<cmath>
using namespace std;

int main()
{
    double x1, y1, x2, y2, distance;

    cout << "Enter x1 and y1: ";
    cin >> x1 >> y1;
    cout << "Enter x2 and y2: ";
    cin >> x2 >> y2;

    distance = sqrt(pow(x2 - x1, 2) + pow(y2 - y1, 2));

    cout << "Distance between the two points = " << distance << endl;

    return 0;
}
```

Tab { } : ; "

TaSK06

```
#include<iostream>
using namespace std;
int main ()
{
double item1 = 12.95, item2 = 24.95,
item3=6.95, item4 = 14.95, item5 = 3.95
double subtotal, tax, total;
const double TAX-RATE = 0.06;
subtotal = item1+ item2+ item3+item4
+item5;
 tax=subtotal* TAX-RATE =0.06;
 total=subtotal+tax;
cout<<"price of item1 = $"<<item1<<endl;
cout<<"price of item2 = $"<<item2<<endl;
cout<<"price of item3 = $"<<item3<<endl;
cout<<"price of item4 = $"<<item4<<endl;
cout<<"price of item5 = $"<<item5<<endl;
cout<<"subtotal = $"<< subtotal<<endl;
cout<<"sales Tax (6%) = $"<<tax<<endl;
cout<<"Total = $"<<total<<endl;
 return 0;
}
```

TAB

```
Price of item 1 = $12.95
Price of item 2 = $24.95
Price of item 3 = $6.95
Price of item 4 = $14.95
Price of item 5 = $3.95
Subtotal = $63.75
Sales Tax (6%) = $3.825
Total = $67.575

[Program finished]
```

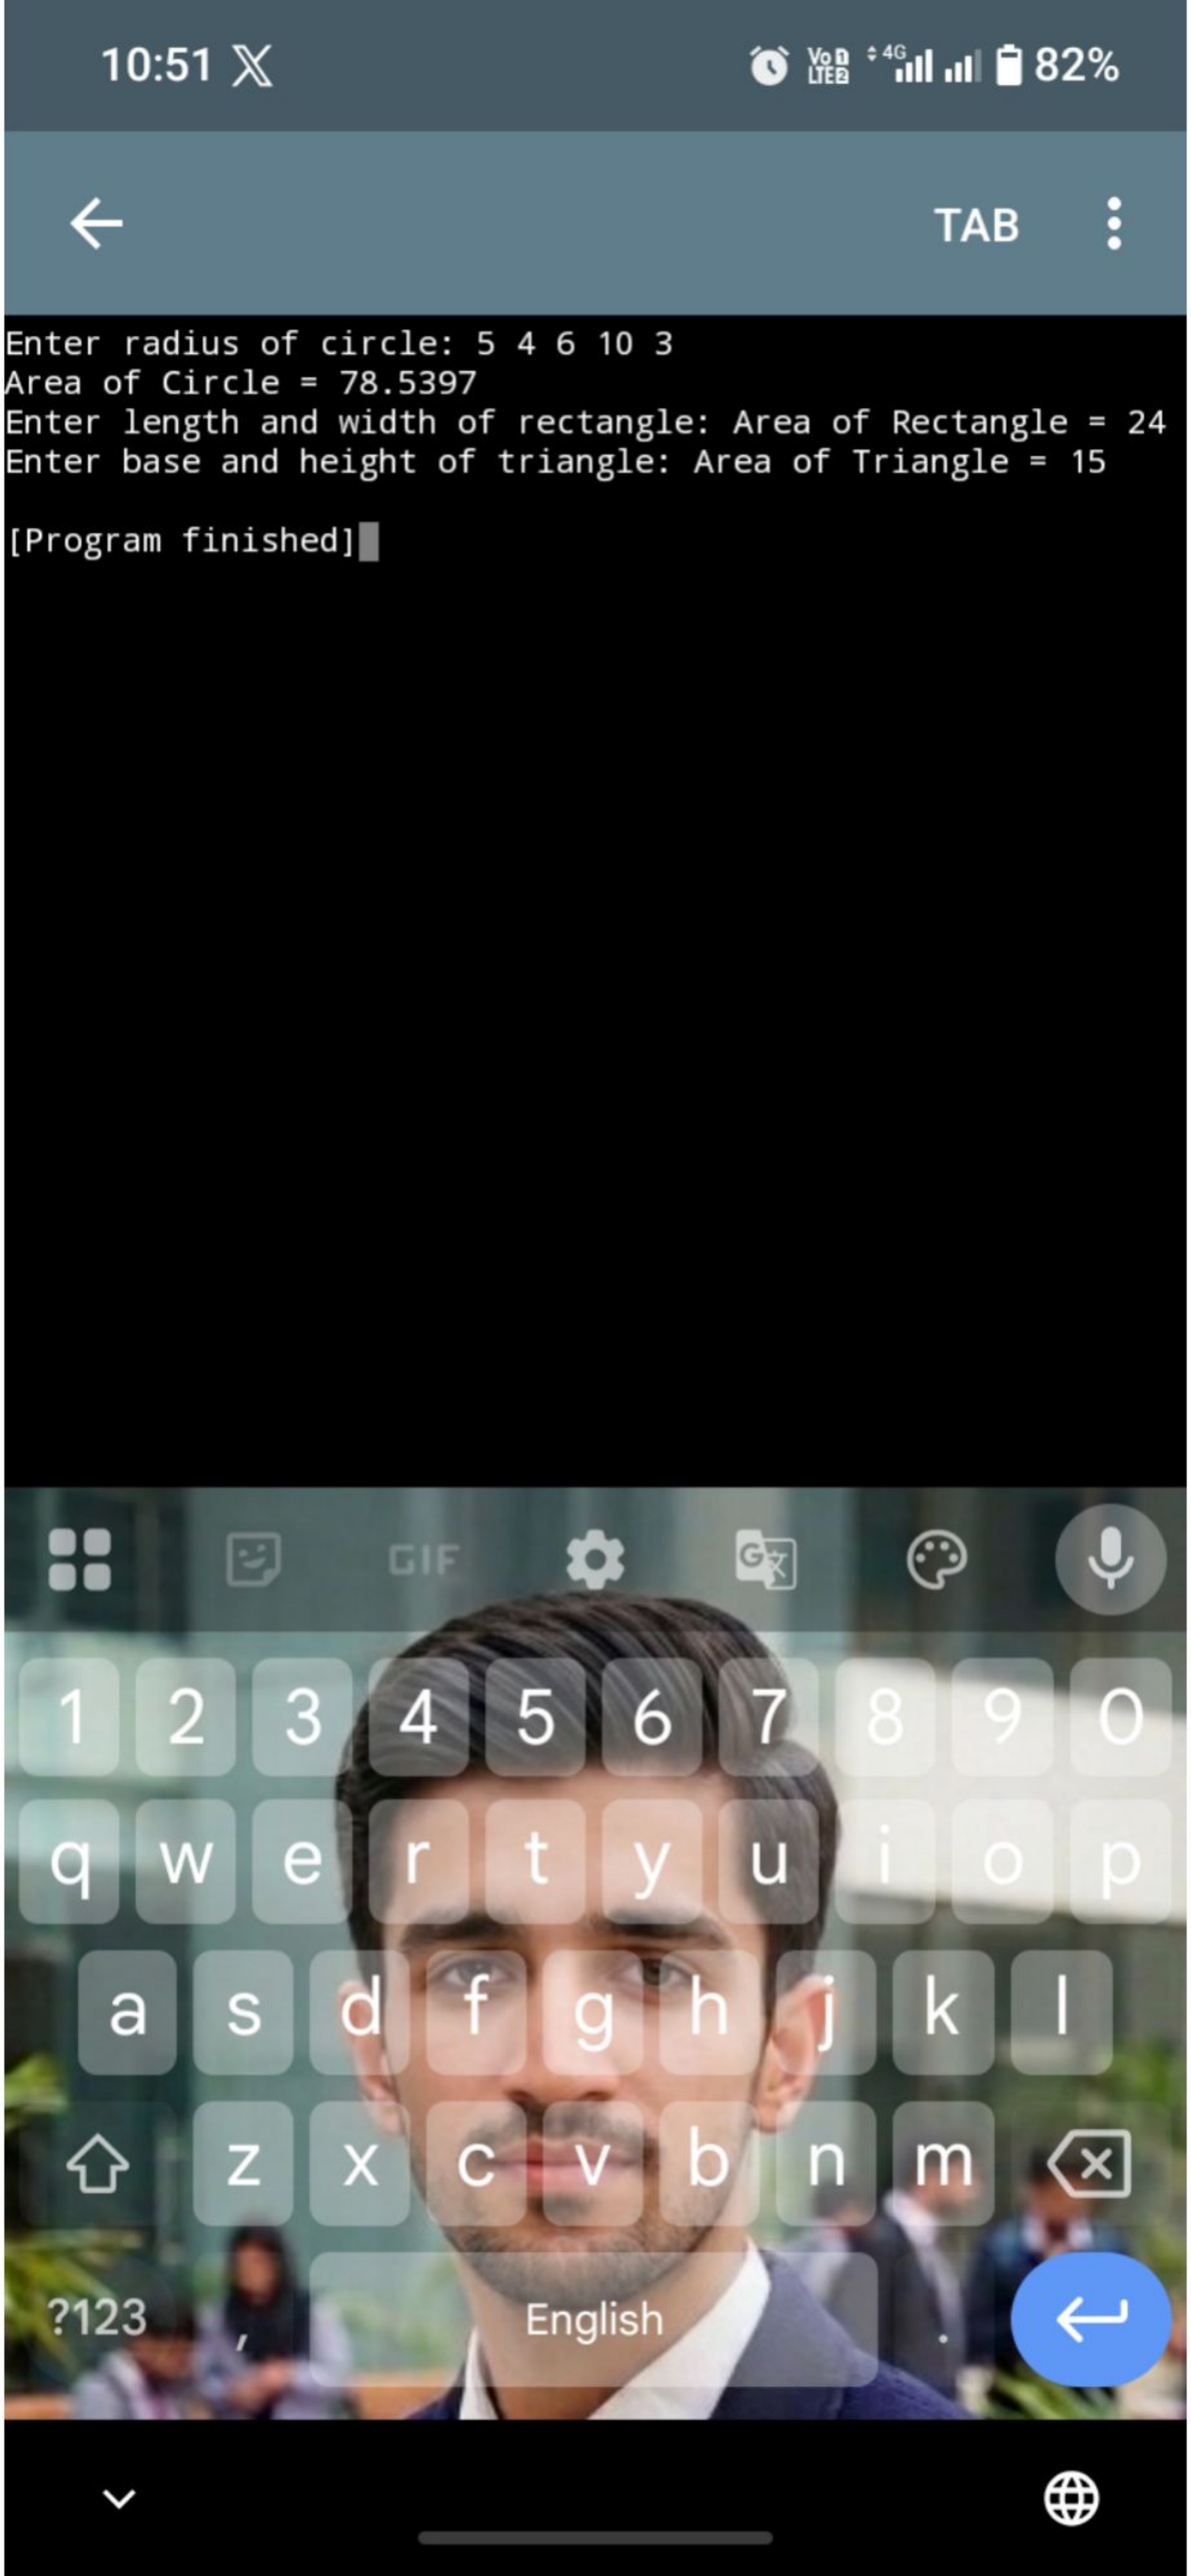
11:01 82%

new*

new* new* new* new* new*

```
1  #include<iostream>
2  using namespace std;
3
4  int main()
5  {
6     double item1 = 12.95, item2 = 24.95,
item3 = 6.95, item4 = 14.95, item5 = 3.95;
7     double subtotal, tax, total;
8     const double TAX_RATE = 0.06;
9
10    subtotal = item1 + item2 + item3 +
item4 + item5;
11    tax = subtotal * TAX_RATE;
12    total = subtotal + tax;
13
14    cout << "Price of item 1 = $" << item1 <<
endl;
15    cout << "Price of item 2 = $" << item2 <<
endl;
16    cout << "Price of item 3 = $" << item3 <<
endl;
17    cout << "Price of item 4 = $" << item4 <<
endl;
18    cout << "Price of item 5 = $" << item5 <<
endl;
19    cout << "Subtotal = $" << subtotal <<
endl;
20    cout << "Sales Tax (6%) = $" << tax <<
endl;
21    cout << "Total = $" << total << e
22
23    return 0;
```

Tab | { | } | : | ; | "


10:51
82%
TAB
Enter radius of circle: 5 4 6 10 3
Area of Circle = 78.5397
Enter length and width of rectangle: Area of Rectangle = 24
Enter base and height of triangle: Area of Triangle = 15
[Program finished]
GIF
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

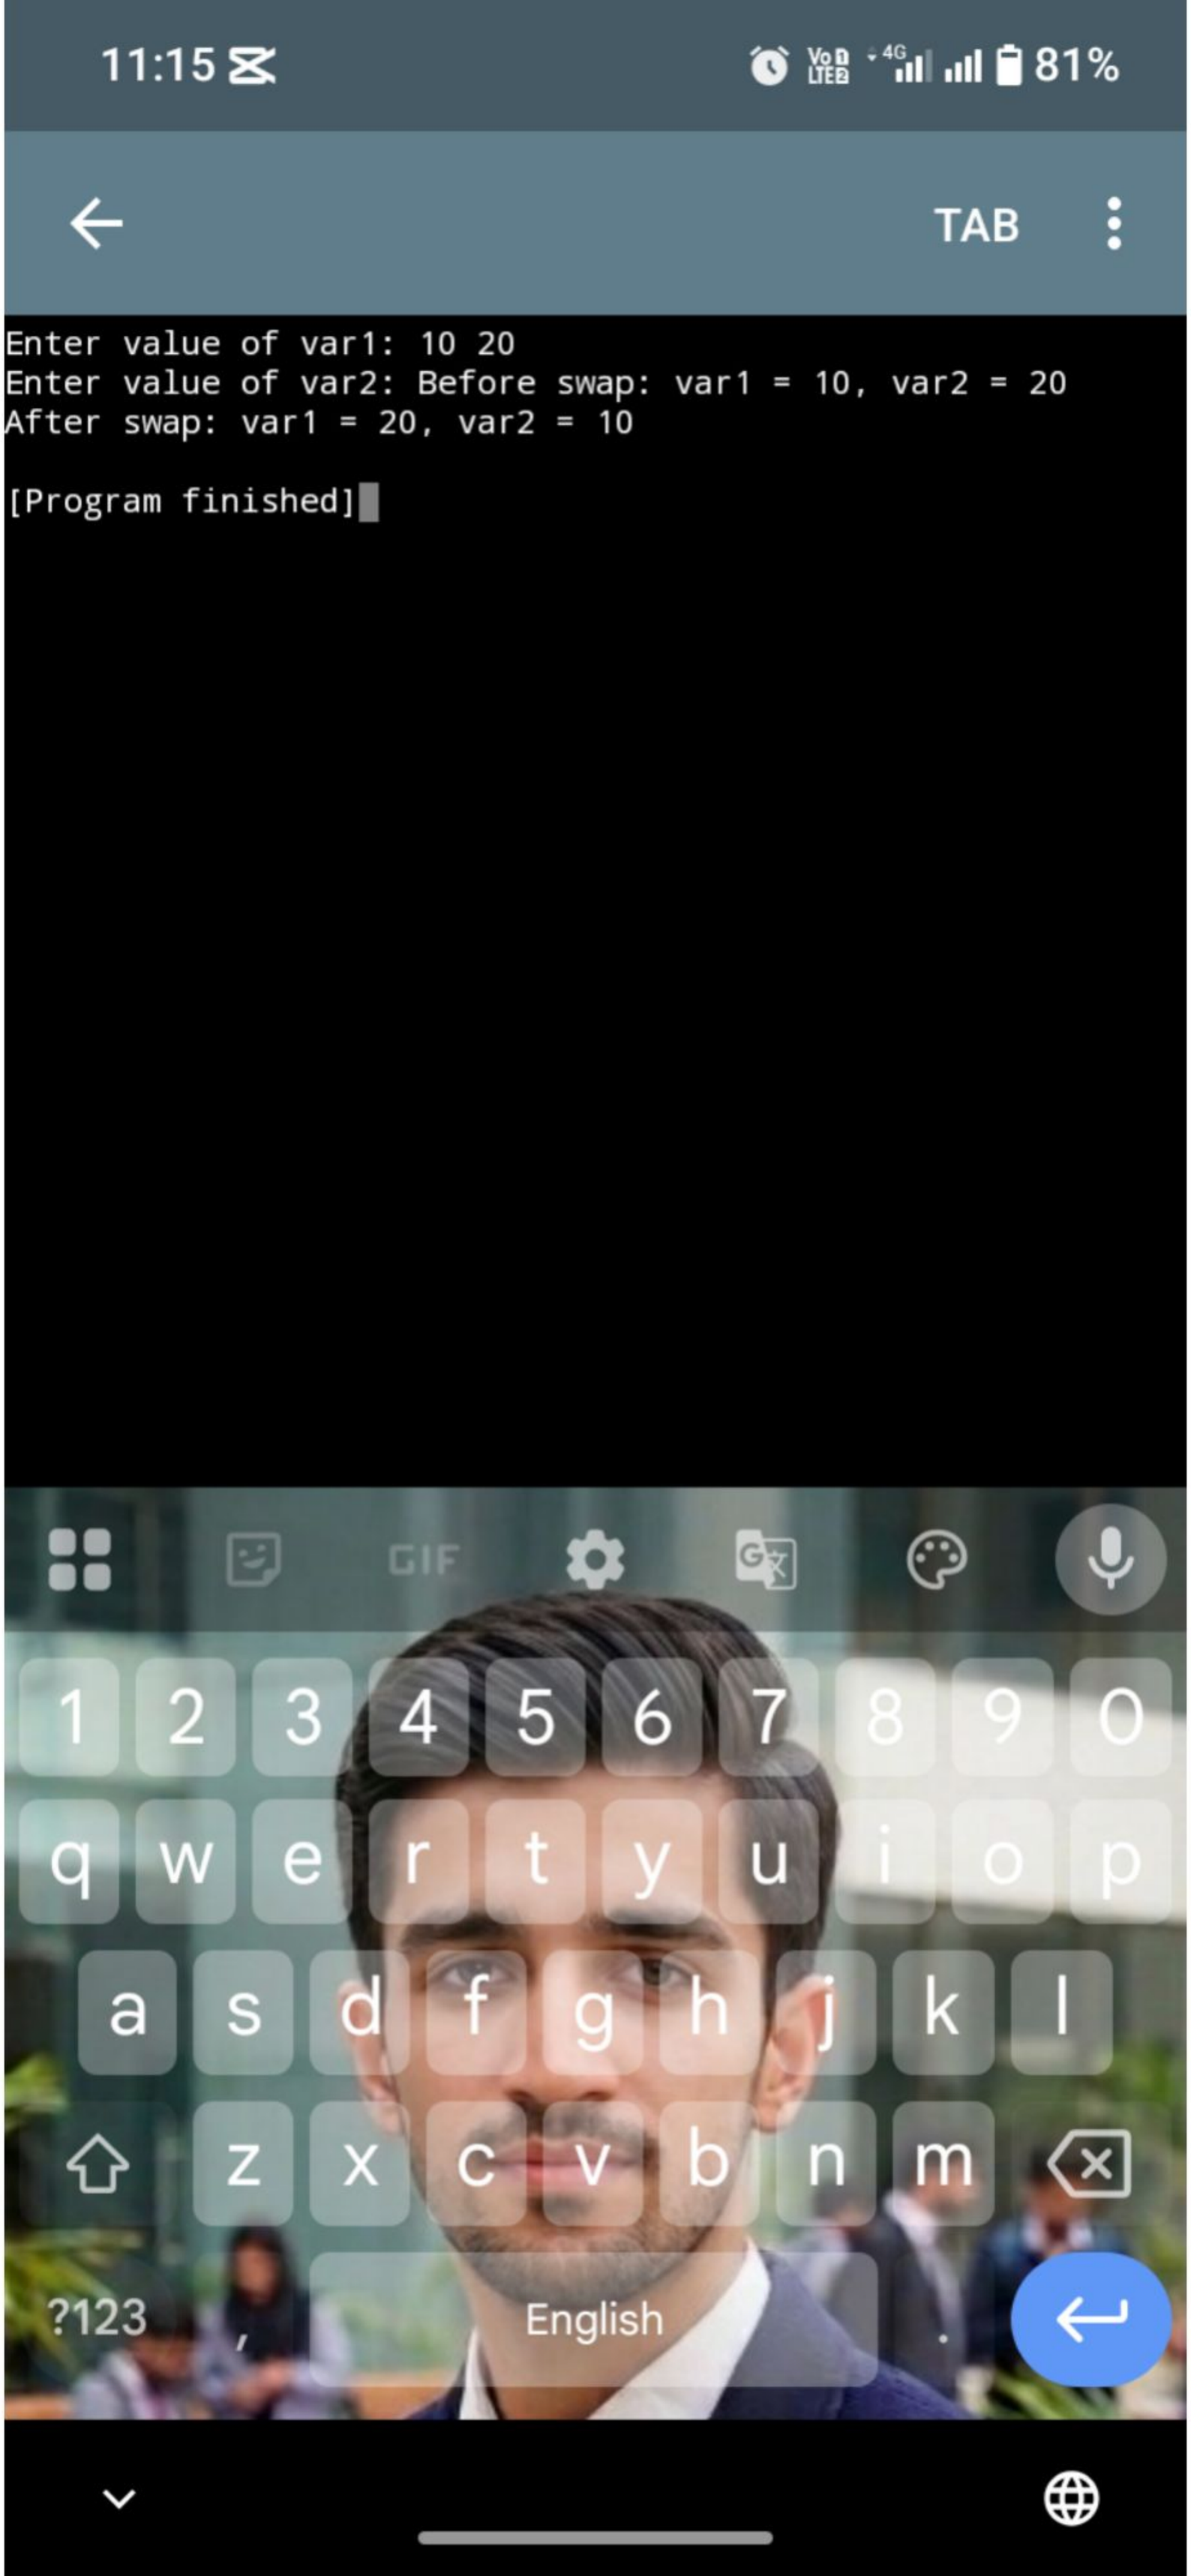
10:50 𝕏 Vo LTE1 4G LTE2 83%

new*

new* new* new* new* new*

```
1  #include<iostream>
2  using namespace std;
3
4  int main()
5  {
6      const double PI = 3.14159;
7      double r, length, width, base, height;
8
9      cout << "Enter radius of circle: ";
10     cin >> r;
11     cout << "Area of Circle = " << PI * r * r <<
   endl;
12
13     cout << "Enter length and width of
   rectangle: ";
14     cin >> length >> width;
15     cout << "Area of Rectangle = " << length
   * width << endl;
16
17     cout << "Enter base and height of
   triangle: ";
18     cin >> base >> height;
19     cout << "Area of Triangle = " << base *
   height * 0.5 << endl;
20
21     return 0;
22 }
```

Tab | { | } | : | ; | "


11:15
81%
TAB
Enter value of var1: 10 20
Enter value of var2: Before swap: var1 = 10, var2 = 20
After swap: var1 = 20, var2 = 10
[Program finished]
GIF
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

Bonus task:-

```
#include<iostream>
using namespace std;
int main ()
{
int num d1, d2, d3, d4, d5;
cout<<"Enter a five-digit integer:";
cin >> num;
 d1 = num / 10000;
d2 = (num / 1000) % 10;
d3 = (num /100) % 10;
d4 = (num /10) % 10;
d5 = num % 10;
cout<<d1<<" "<<d2<<" "<<d3
<<" "<<d4<<" "<<d5<<endl;
return 0;
}
```

TAB

```
Enter a five-digit integer: 4 2 3 3 9
0   0   0   0   4

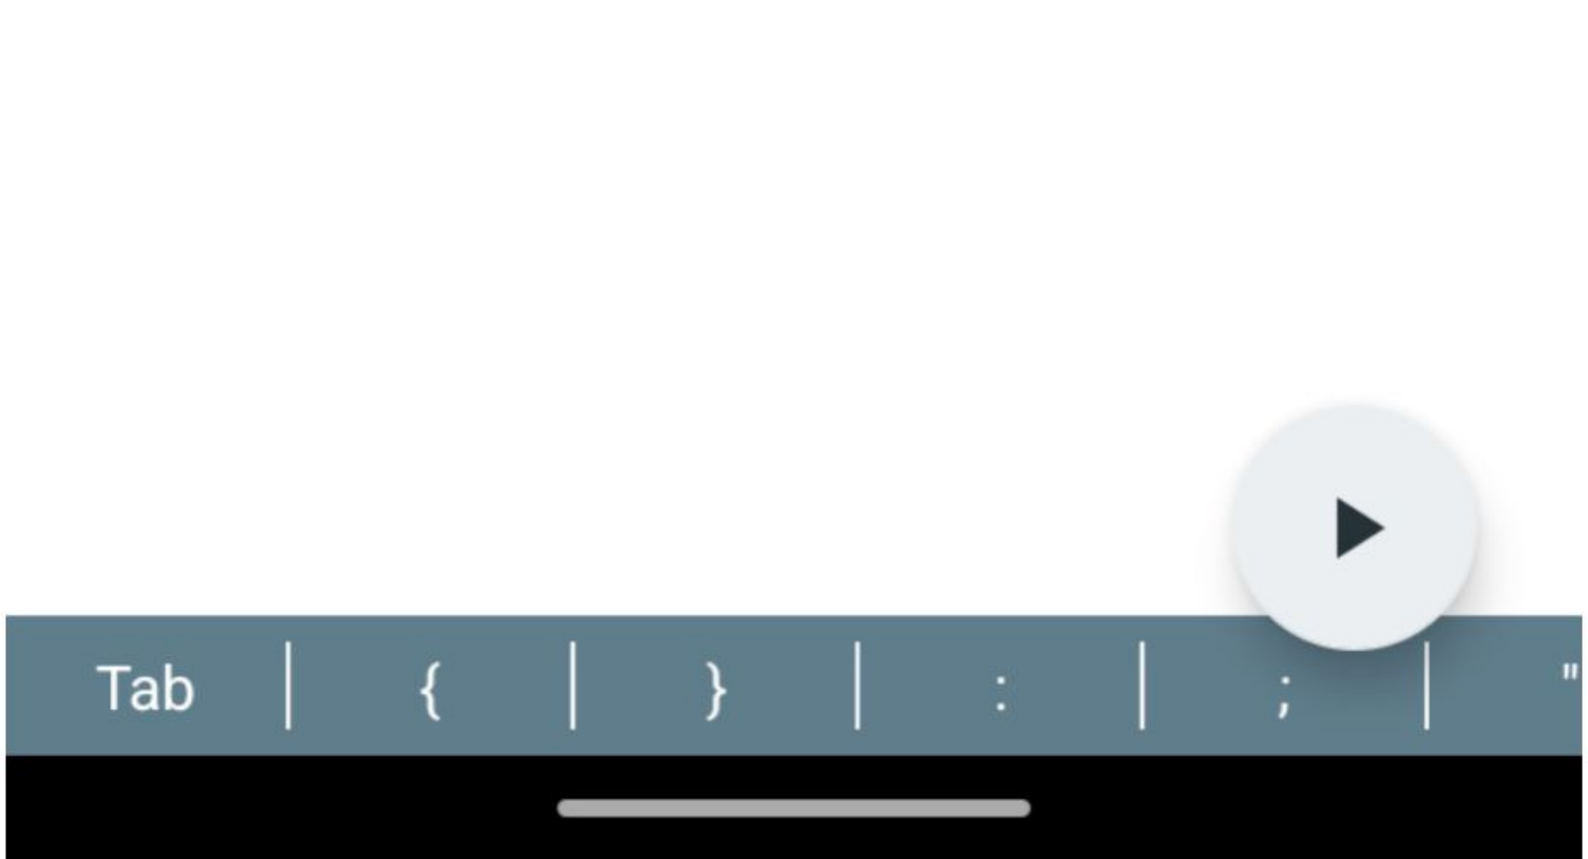
[Program finished]
```



new*

new* new* new* new* new*

```
1  #include<iostream>
2  using namespace std;
3
4  int main()
5  {
6      int num, d1, d2, d3, d4, d5;
7
8      cout << "Enter a five-digit integer: ";
9      cin >> num;
10
11     d1 = num / 10000;
12     d2 = (num / 1000) % 10;
13     d3 = (num / 100) % 10;
14     d4 = (num / 10) % 10;
15     d5 = num % 10;
16
17     cout << d1 << "   " << d2 << "   " << d3 << "
   " << d4 << "   " << d5 << endl;
18
19     return 0;
20 }
```



11:18 PDF 80%

new*

new* new* new* new* new*

```
1  #include<iostream>
2  using namespace std;
3
4  int main()
5  {
6      char small, upper;
7
8      cout << "Enter an alphabet in small caps
   (a-z): ";
9      cin >> small;
10
11     upper = small - 32;
12
13     cout << "Upper case: " << upper << endl;
14
15     return 0;
16 }
```

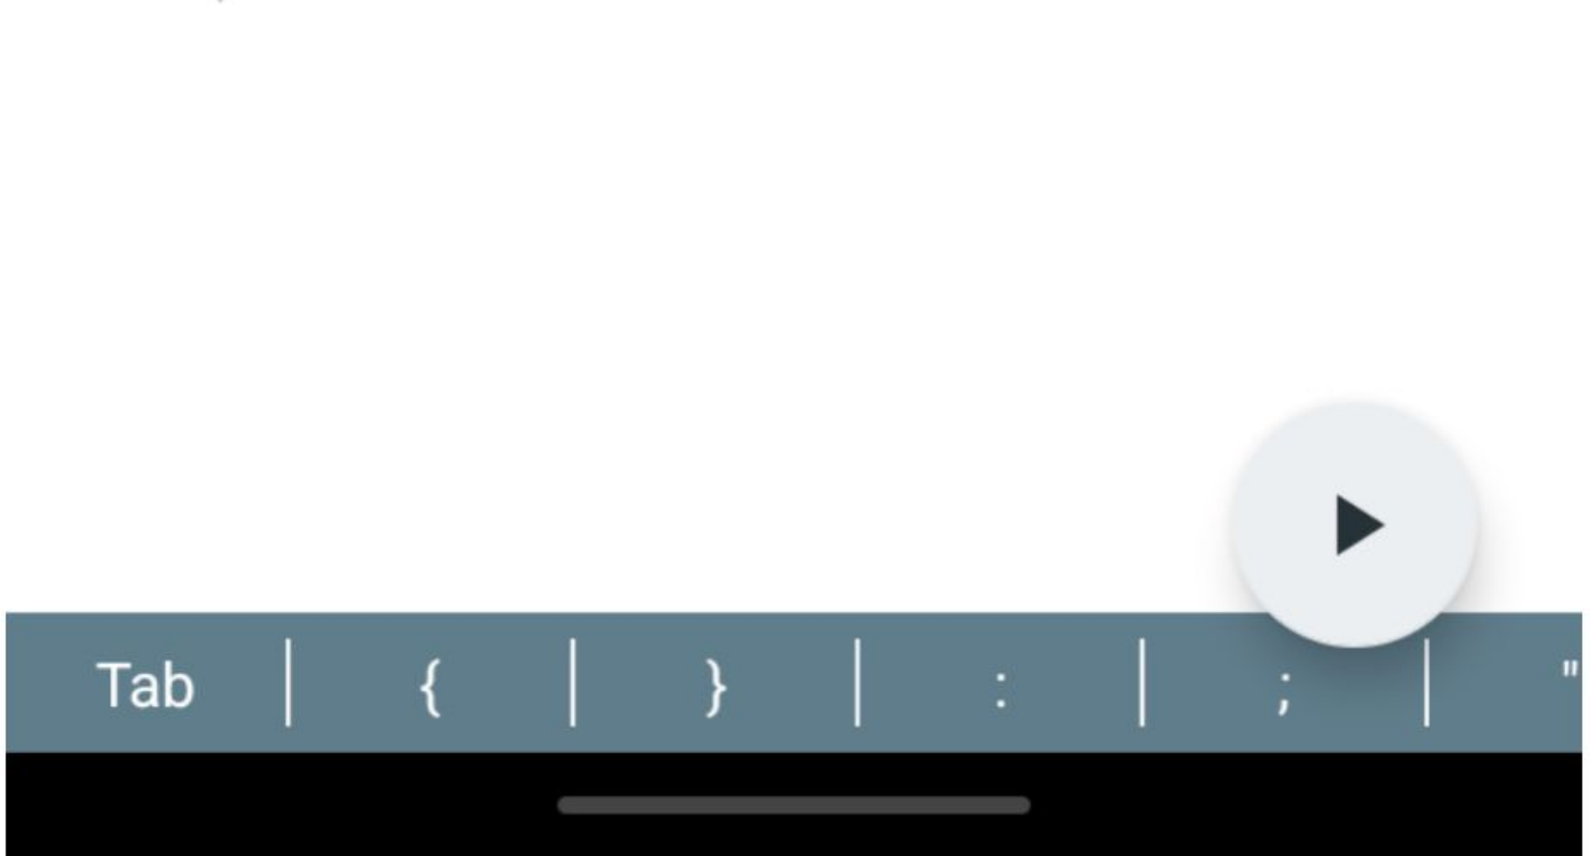
Tab | { | } | : | ; | "

Home task :-

```
#include<iostream>
using namespace std;
int main ()
{
int var1, var2, temp;
cout<<" Enter value of var1: ";
cin>>var1;
cout<<"Enter value of var2:";
cin>>var2;
cout<<"Before swap: var1=" << var1
<<", var2 =" <<var2<<endl;
temp=var1;
var1 = var2;
var2 = temp;
cout<<"After swap; var1=" <<var1
<<", var2 =" << var2<<endl;
return 0;
}
```




```
1  #include<iostream>
2  using namespace std;
3
4  int main()
5  {
6      int var1, var2, temp;
7
8      cout << "Enter value of var1: ";
9      cin >> var1;
10     cout << "Enter value of var2: ";
11     cin >> var2;
12
13     cout << "Before swap: var1 = " << var1
<< ", var2 = " << var2 << endl;
14
15     temp = var1;
16     var1 = var2;
17     var2 = temp;
18
19     cout << "After swap: var1 = " << var1 << ",
 var2 = " << var2 << endl;
20
21     return 0;
22 }
```



TAB

```
Enter an alphabet in small caps (a-z): G
Upper case: '

[Program finished]
```