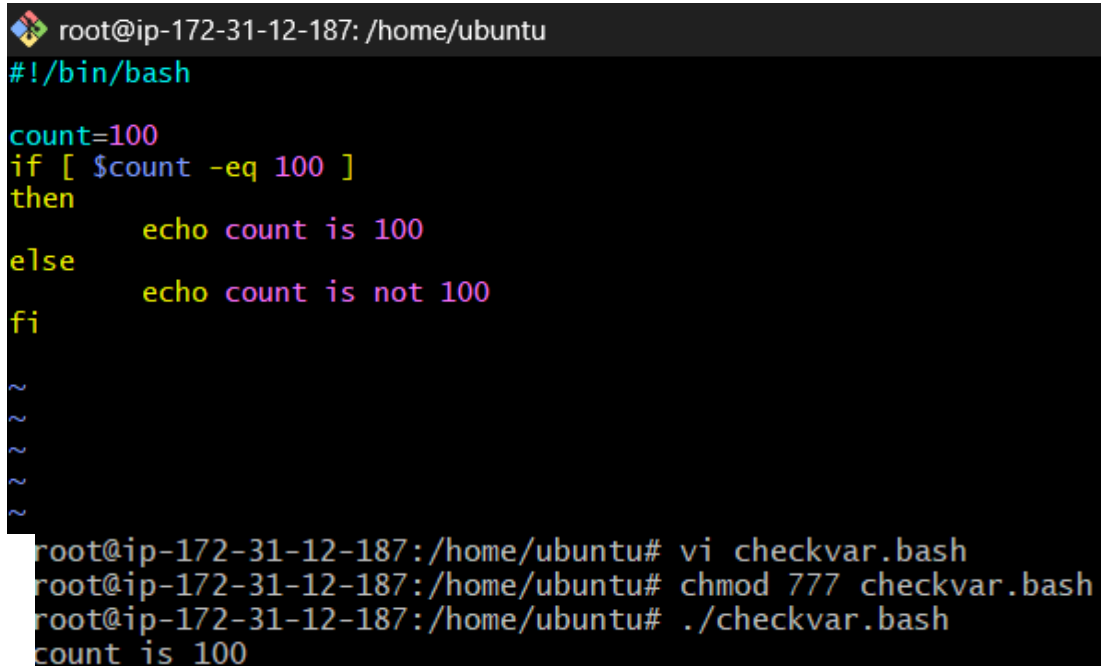


If-then Scripts:

Check the variable

```
#!/bin/bash

count=100
if [ $count -eq 100 ]
then
    echo Count is 100
else
    echo Count is not 100
fi
```

A terminal window screenshot showing the execution of a script. The prompt is root@ip-172-31-12-187: /home/ubuntu. The script content is displayed in color: count=100 (pink), if [\$count -eq 100] (yellow), then (yellow), echo count is 100 (yellow), else (yellow), echo count is not 100 (yellow), and fi (yellow). Below the script, there are four tilde (~) characters. Then, the user runs 'vi checkvar.bash', 'chmod 777 checkvar.bash', and './checkvar.bash'. The output of the script is 'count is 100'.

```
root@ip-172-31-12-187: /home/ubuntu
#!/bin/bash

count=100
if [ $count -eq 100 ]
then
    echo count is 100
else
    echo count is not 100
fi

~
~
~
~

root@ip-172-31-12-187:/home/ubuntu# vi checkvar.bash
root@ip-172-31-12-187:/home/ubuntu# chmod 777 checkvar.bash
root@ip-172-31-12-187:/home/ubuntu# ./checkvar.bash
count is 100
```

Check if a file error.txt exist

```
#!/bin/bash

clear
if [ -e /home/iafzal/error.txt ]

    then
        echo "File exist"
    else
        echo "File does not exist"
fi
```

```
root@ip-172-31-12-187: /home/ubuntu
#!/bin/bash

clear
if [ -e /home/iafzal/erroe.txt ]
then
    echo "file exist"
else
    echo "file does not exist"
fi|
~
```

```
root@ip-172-31-12-187: /home/ubuntu
file does not exist
root@ip-172-31-12-187:/home/ubuntu# |
```

Check if a variable value is met

```
#!/bin/bash

a=`date | awk '{print $1}'`

if [ "$a" == Mon ]

then
    echo Today is $a
else
    echo Today is not Monday
Fi
```

```
root@ip-172-31-12-187: /home/ubuntu
#!/bin/bash

a='date | awk '{print $1}''

if [ "$a" == Mon ]

then
    echo today is $a
else
    echo today is not monday
fi
```

```
oot@ip-172-31-12-187:/home/ubuntu# vi valuemet.bash
oot@ip-172-31-12-187:/home/ubuntu# chmod 777 valuemet.bash
ommand 'chmos' not found, did you mean:
  command 'chmod' from deb coreutils-from-gnu (0.0.0~ubuntu25)
  command 'chmod' from deb coreutils-from-utils (0.0.0~ubuntu25)
  command 'chmod' from deb coreutils-from-busybox (0.0.0~ubuntu25)
  command 'chmod' from deb coreutils-from-toybox (0.0.0~ubuntu25)
  command 'chmls' from deb fp-utils-3.2.2 (3.2.2+dfsg-49)
  command 'chaos' from deb emboss (6.6.0+dfsg-18)
ry: apt install <deb name>
oot@ip-172-31-12-187:/home/ubuntu# chmod 777 valuemet.bash
oot@ip-172-31-12-187:/home/ubuntu# ./valuemet.bash
/valuemet.bash: line 3: }: command not found
oday is not monday
oot@ip-172-31-12-187:/home/ubuntu#
```

Check the response and then output

```
#!/bin/bash

clear
echo
echo "What is your name?"
echo
read a
echo

echo Hello $a sir
echo

echo "Do you like working in IT? (y/n)"
read Like
echo

if [ "$Like" == y ]
then
echo You are cool

elif [ "$Like" == n ]
then
echo You should try IT, it's a good field
echo
Fi
```

```

root@ip-172-31-12-187: /home/ubuntu
#!/bin/bash

clear
echo
echo "what is your name?"
echo
read Asif
echo

echo Hello @asif sir
echo

echo "do you like working in IT? (y/n)"
read like
echo

if [ "$like" == y ]
then
    echo you are cool
elif [ "$like" == n ]
then
    echo you should try IT, its good field
echo
fi
~

```

```

root@ip-172-31-12-187: /home/ubuntu

what is your name?

asif

Hello @asif sir

do you like working in IT? (y/n)
y

you are cool
root@ip-172-31-12-187: /home/ubuntu# |

```

Other If statements

If the output is either Monday or Tuesday

```
if [ "$a" = Monday ] || [ "$a" = Tuesday ]
```

Test if the error.txt file exist and its size is greater than zero

```
if test -s error.txt
```

```
if [ $? -eq 0 ]
```

If input is equal to zero (0)

<code>if [-e /export/home/filename]</code>	If file is there
<code>if ["\$a" != ""]</code>	If variable does not match
<code>if [error_code != "0"]</code>	If file not equal to zero (0)

Comparisons:

<code>-eq</code>	equal to for numbers
<code>==</code>	equal to for letters
<code>-ne</code>	not equal to
<code>!=</code>	not equal to for letters
<code>-lt</code>	less than
<code>-le</code>	less than or equal to
<code>-gt</code>	greater than
<code>-ge</code>	greater than or equal to

File Operations:

<code>-s</code>	file exists and is not empty
<code>-f</code>	file exists and is not a directory
<code>-d</code>	directory exists
<code>-x</code>	file is executable
<code>-w</code>	file is writable
<code>-r</code>	file is readable