# Assignment 5 | Strategy Pattern

Astana IT University | ShP-2216 Software Design Patterns | 2026-2027

**Student:** Sabyr Aslan **Group:** SE-2528 **Option B:** Calculator

## 1. Introduction

The chosen domain is a calculator. Its algorithm family consists of addition, subtraction and multiplication of two double operands. Each operation implements CalculationStrategy.calculate(left, right). Calculator stores that interface and delegates to it; Main supplies and replaces the concrete strategy [1, 2]. This removes arithmetic selection branches from the context.

The application contains six Java files. The context needs only a constructor, setStrategy and calculate; each concrete strategy implements one method. No menu, factory, strategy registry or external library is needed.

## 2. UML class diagram

The complete diagram appears on the next page. It follows the Strategy structure on Refactoring.Guru, the website listed in the assignment [2]. It describes this implementation and is rendered locally with PlantUML. Editable source and SVG/PNG exports are included in docs/. The Markdown report also embeds the complete PlantUML source.


The solid arrow is a navigable association: each calculator has exactly one active strategy; one strategy may be shared by zero or more calculators. It is not a lifetime-owning composition, because the client creates and supplies strategies.

Dashed hollow triangles mean interface realization; dashed open arrows show the client's creation/configuration dependencies. Main is in the default package; all five domain types are in com.aitu.sdp.calculator. Implicit constructors and the standard-library Objects dependency are omitted.

The diagram includes all application types, the private strategy field, public operation signatures, parameter and return types, runtime replacement, multiplicities and client dependencies. The context knows only the interface; the three algorithm classes never depend on the context.

**Report format:** report.md is the required Markdown submission. This PDF is a visual reading copy.

## 2. UML class diagram (continued)

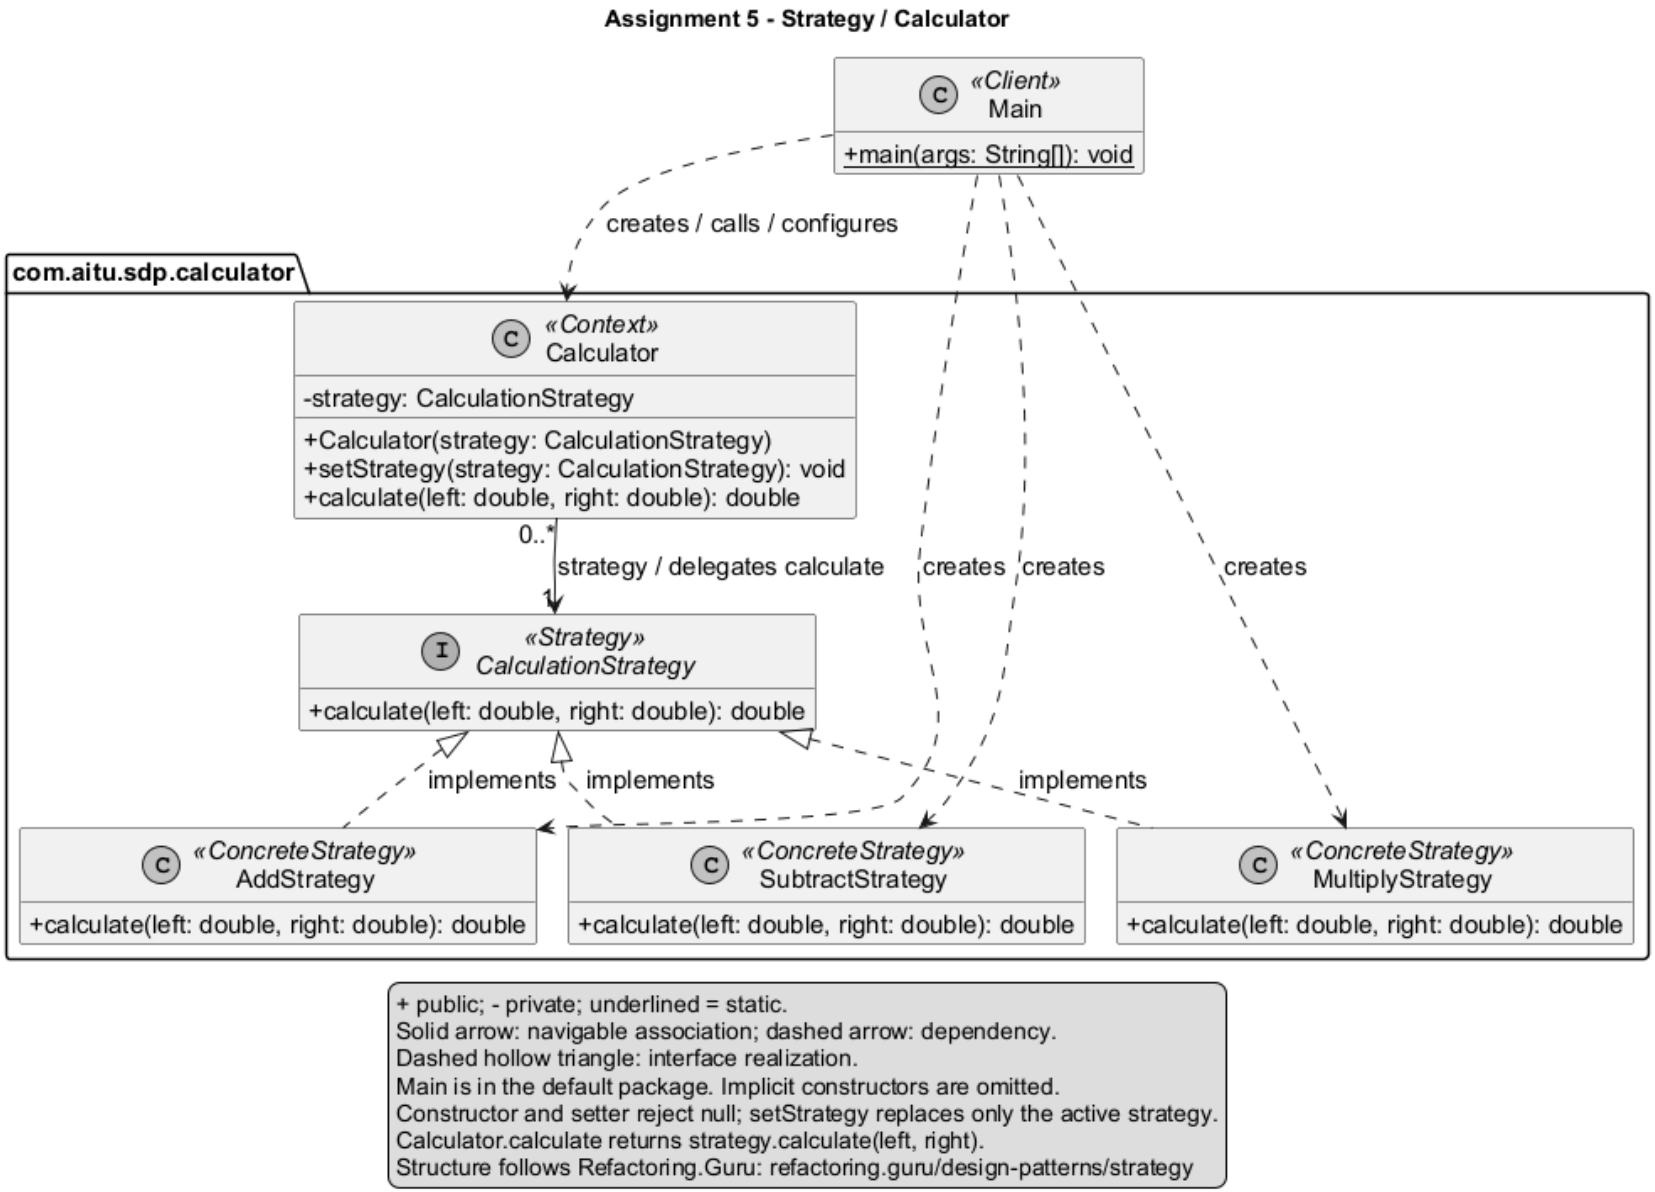

## 3. Clean Code

Annotated excerpts below are taken from the submitted source. Each principle connects a design decision to its practical benefit.

## 3.1 Replace algorithm conditionals with polymorphism

```
return strategy.calculate(left, right);
```

Calculator.calculate delegates through the interface. It has no if, switch, instanceof or concrete-strategy reference. A new algorithm adds no context branch.

## 3.2 Use intention-revealing names

```
calculator.setStrategy(new SubtractStrategy());
```

SubtractStrategy, setStrategy, left and right communicate the operation, replacement and operand order without numeric codes or explanations.

## 3.3 Give each class one responsibility

```
// MultiplyStrategy.calculate(double left, double right)
return left * right;
```

The strategy only multiplies; it handles no input, output or selection. Main demonstrates the operations and Calculator delegates. Each concrete strategy method has one executable statement.

## 3.4 Keep the context algorithm-agnostic

```
private CalculationStrategy strategy;

public Calculator(CalculationStrategy strategy) {
    this.strategy = Objects.requireNonNull(strategy, "strategy");
}
```

The private interface-typed field and constructor injection hide the concrete algorithm. The context creates no strategy. Constructor and setter reject null; a rejected setter call preserves the previous strategy.

## 3.5 Extend behavior without editing existing algorithms

```
public final class MultiplyStrategy implements CalculationStrategy {
    @Override
    public double calculate(double left, double right) {
        return left * right;
    }
}
```

Commit bfb73d7 introduced addition and subtraction. Commit c5eb508 added MultiplyStrategy and changed Main and sources.txt only. Calculator, the interface and the previous strategies stayed unchanged; extension.diff records the source comparison.

## 4. Strategy vs. State

This problem selects an arithmetic algorithm, so it calls for Strategy. The client explicitly chooses an operation; the same operands can produce 16, 8 or 48. Strategies do not know each other or initiate transitions. State instead models behavior that depends on an object's lifecycle state, such as a document moving from draft to published [3]. Replacing a strategy changes the calculator's configuration; it does not represent progress through a state machine.

## 5. Conclusion

The same Calculator instance performs addition, subtraction and multiplication after two setStrategy calls. Running Main gives:

```
Add: 12 + 4 = 16.0
Subtract: 12 - 4 = 8.0
Multiply: 12 * 4 = 48.0
```

Compiled with --release 17 -Xlint:all -Werror; executed on Java 17.0.16. The optional verification harness passes 15 checks: arithmetic including negative, zero and exactly representable fractional inputs, operand order, switching back, context identity, null rejection and a new independent implementation. Its source and actual output are in docs/StrategyVerification.java and docs/verification-output.txt.

The benefit is a context that stays unchanged when algorithms are added. The cost is one interface, three small concrete classes and delegation for operations that would otherwise fit in a few expressions. The class count is justified here by the assignment's requirement to demonstrate interchangeable algorithms. The example uses standard double arithmetic, not exact decimal computation.

## 6. GitHub repository

https://github.com/asikxz008/Assigment5-sdp-Aslan

## References

[1] Assignment #5 - Strategy Pattern, ShP-2216, Astana IT University, 2026-2027, Sections 2-5. Supplied assignment instructions.

[2] Refactoring.Guru. Strategy. https://refactoring.guru/design-patterns/strategy. Structure, algorithm delegation and calculator example. Accessed 25 October 2026.

[3] Refactoring.Guru. State. https://refactoring.guru/design-patterns/state. Intent and lifecycle transitions. Accessed 25 October 2026.

Preparation aid: OpenAI ChatGPT/Codex assisted with the implementation example, documentation and verification. This assistance is disclosed for transparency.