


Model construction and prediction

A Learn single-neuron responses



B Retain repeatable differences

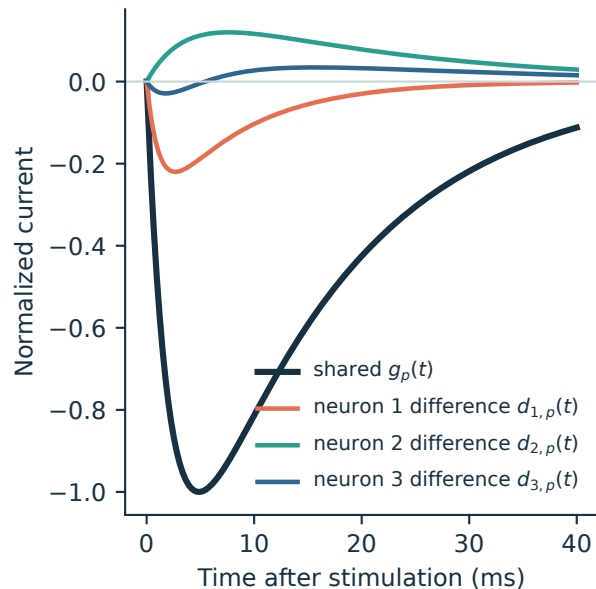

$$\lambda_p = \left[\frac{2 \sum_{s,t} A'_{spt} B'_{spt}}{\sum_{s,t} (A'_{spt})^2 + \sum_{s,t} (B'_{spt})^2} \right] \frac{1}{0}$$

$$r_{s,p}(t) = g_p(t) + \lambda_p d_{s,p}(t)$$

Single-neuron trials only
Group trials do not tune the model

C Predict held-out group responses

