Aspiration ablation: equal recorded motion, different semantic transfer

One completed pair · 125,100 steps per run · 208.5 s · eight rigid-state groups identical at every step

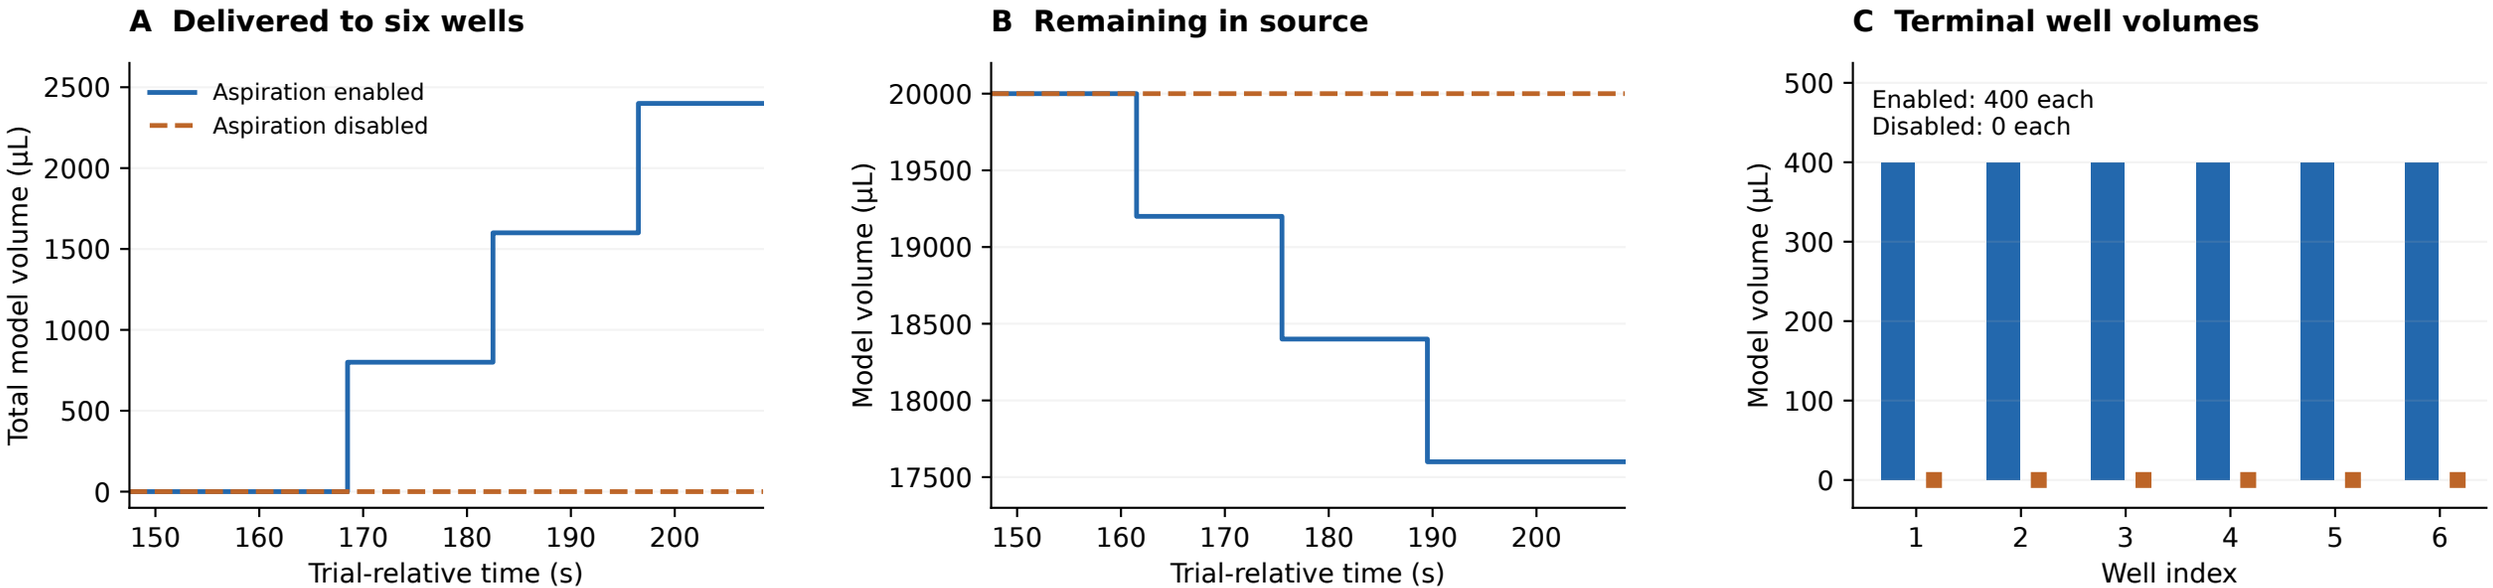

The liquid ledger conserves 20,000 model µL in each run; pre-handoff missing values are left blank.
This is an implementation-level semantic control: liquid does not feed mass or forces back into rigid dynamics.
One pair does not estimate robustness or establish physical-fluid causality. Original task and visual reproduction remain open.